

BlazeLine
Tunable White

Date: _____ Quantity: _____

Company: _____

Project: _____

The BlazeLine Tunable White model offers balanced performance, making it suitable for medium-sized installations. With dual CCT technology, it delivers smooth transitions between color temperatures, providing flexibility and seamless ambiance control for versatile lighting needs.

FEATURES


- LumiMax™: Full power on each channel
- Tunable white: Dual CCT in a single diode
- Optional anti-glare louvers for visual comfort
- Durable aluminum housing
- Various beam angles for precise control

PERFORMANCE AND COMPLIANCE**QUICK SPEC**

Color Options	2200K to 4000K, 1800K to 6000K
Length	609mm [23.98"], 904mm [35.59"], 1194mm [47.01"]
Optics	15°, 30°, 65°, 15°x45°
Power Consumption	18W (609mm), 27W(904mm), 36W (1194mm) 30W (609mm), 45W(904mm), 60W (1194mm)
Voltage	100-277VAC 50/60Hz
Dimming	DALI, DMX, RDM

Noted: - High power version is only available with DALI dimming.

- LumiMax™ only available in RDM and DALI control.

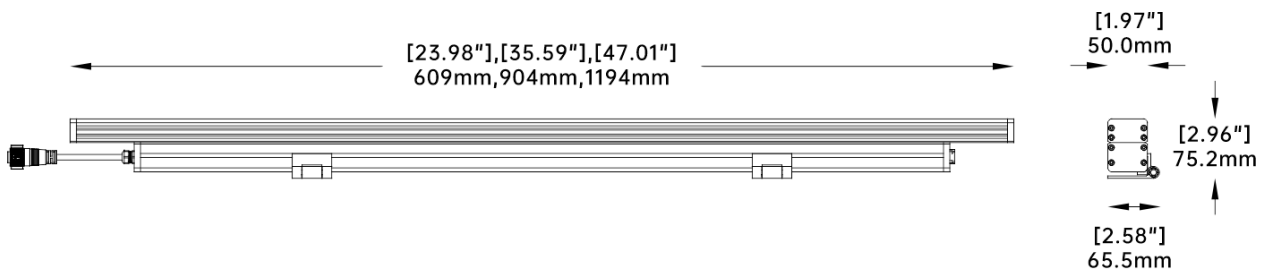DIMENSIONS

Specifications are subject to change due to updates and innovations. Check our website for the latest technical data. The information serves as an estimate and may differ by power supply and installation. All rights reserved.

Sales@luminoscape.com

1/ 11

©2025 Luminoscape Lighting BLTW2501

BlazeLine
Tunable White

PHYSICAL

Housing Material	6063 high density extruded aluminium alloy
Lens Material	Optical grade PMMA
Cover	Silk screen tempered glass
Surface Finishing	Powder coating available in - RAL9001 White - RAL9006 Grey - RAL9011 Black - RAL9023 Dark Grey

ENVIRONMENT

Storage Temperature	- 30°C to 60°C
Operating Temperature	- 20°C to 50°C
Ingress Protection Rating	IP66

MAXIMUM DAISY CHAIN LIMITS

Power/ft	Region	Main Voltage	Max. power	Max. no. of 4 ft fixtures	Max. Cable Length (Leading + Interlink)
9W	US	120V	1080W	30 nos.	20 Meters
9W	EU	220-240V	1980W	55 nos.	30 Meters

Note:
- The actual maximum daisy chain limit may vary based on the gauge of the leading cable and the specific installation conditions. The values provided are recommended guidelines and should be considered as such. Please ensure that all installations comply with local electrical codes and safety standards.

BlazeLine

Tunable White

CABLE CORE COLOR CODING


Cable	Function	Core(US)	Wire Size	Core(EU)	Wire Size
Power lead in	L (live)	Black	16AWG	Brown	1.3mm ²
	N (Neutral)	White	16AWG	Blue	1.3mm ²
	GND (Earth)	Green	16AWG	Yellow/Green	1.3mm ²
Data lead in	DMX+	Purple	20AWG	Purple	0.5mm ²
	DMX-	Pink	20AWG	Grey	0.5mm ²
	DMX GND	Yellow	20AWG	Yellow	0.5mm ²
Power and Data Combined Lead-in /Extension	L (live)	Black	16AWG	Brown	1.3mm ²
	N (Neutral)	White	16AWG	Blue	1.3mm ²
	GND (Earth)	Green	16AWG	Yellow/Green	1.3mm ²
	DMX+	Purple	22AWG	Purple	0.3mm ²
	DMX-	Pink	22AWG	Grey	0.3mm ²
	DMX GND	Yellow	22AWG	Yellow	0.3mm ²

SET BACK DISTANCE

Correct setback distances ensure optimal lighting performance and effective wallwashing results

Recommended Setback Distances for Wallwashers

Set Back Distance	Purpose	Best Use
20mm-50mm	For narrow beams, smooth surfaces, glazing	Focused, intense lighting.
50mm-100mm	Balanced lighting for textured walls.	General wallwashing
100mm-200mm	Wide, even light for large areas.	Enhances textured surfaces

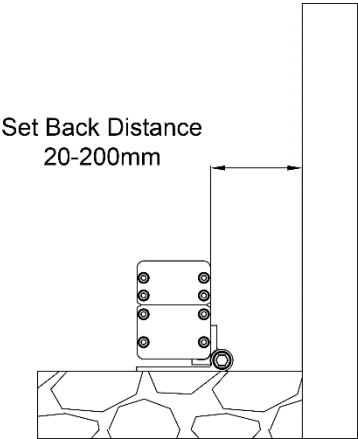

Noted:

- Our recommended setback distances are only guidelines. The actual distance may vary depending on the specific wall texture, height, and lighting effect required for your project. Always adjust based on real-world conditions to achieve the best outcome.




BlazeLine

Tunable White

ANTI-GLARE ACCESSORIES (Order Separately)




Symmetric Louver for BlazeLine Tunable White

ITEM: DLGLS - **LENGTH** - **FINISH**

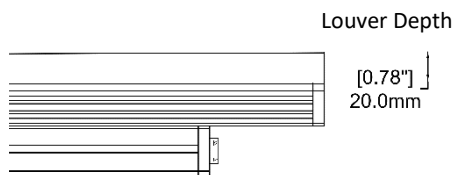

Asymmetric Louver for BlazeLine RGBW Discrete Source

ITEM: DLGLA - **LENGTH** - **FINISH**

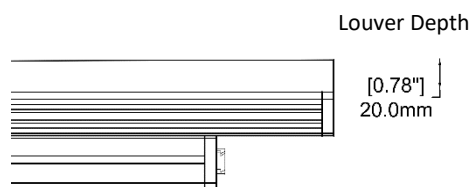



Selection Guide:

LENGTH: 609 – 609mm [23.98"], 904 – 904mm [35.59"], 1194 – 1194mm [47.01"]

FINISH: PW – White, PG – Grey, PB – Black, DG – Dark Grey

Noted: If not specified, the louver will be provided in the same length as the ordered fixture and in black as the default color.



Build in Honey Comb for BlazeLine Series

ITEM: BLHB- **LENGTH**

LENGTH: 609 – 609mm [23.98"], 904 – 904mm [35.59"], 1194 – 1194mm [47.01"]

Noted: The use of a honeycomb lens can reduce lumen efficiency by as much as 45%

Specifications are subject to change due to updates and innovations. Check our website for the latest technical data. The information serves as an estimate and may differ by power supply and installation. All rights reserved.


Sales@luminoscape.com

4/ 11

©2025 Luminoscape Lighting BLTW2501

BlazeLine
Tunable White


MOUNTING ACCESSORIES (Order with Fixture)

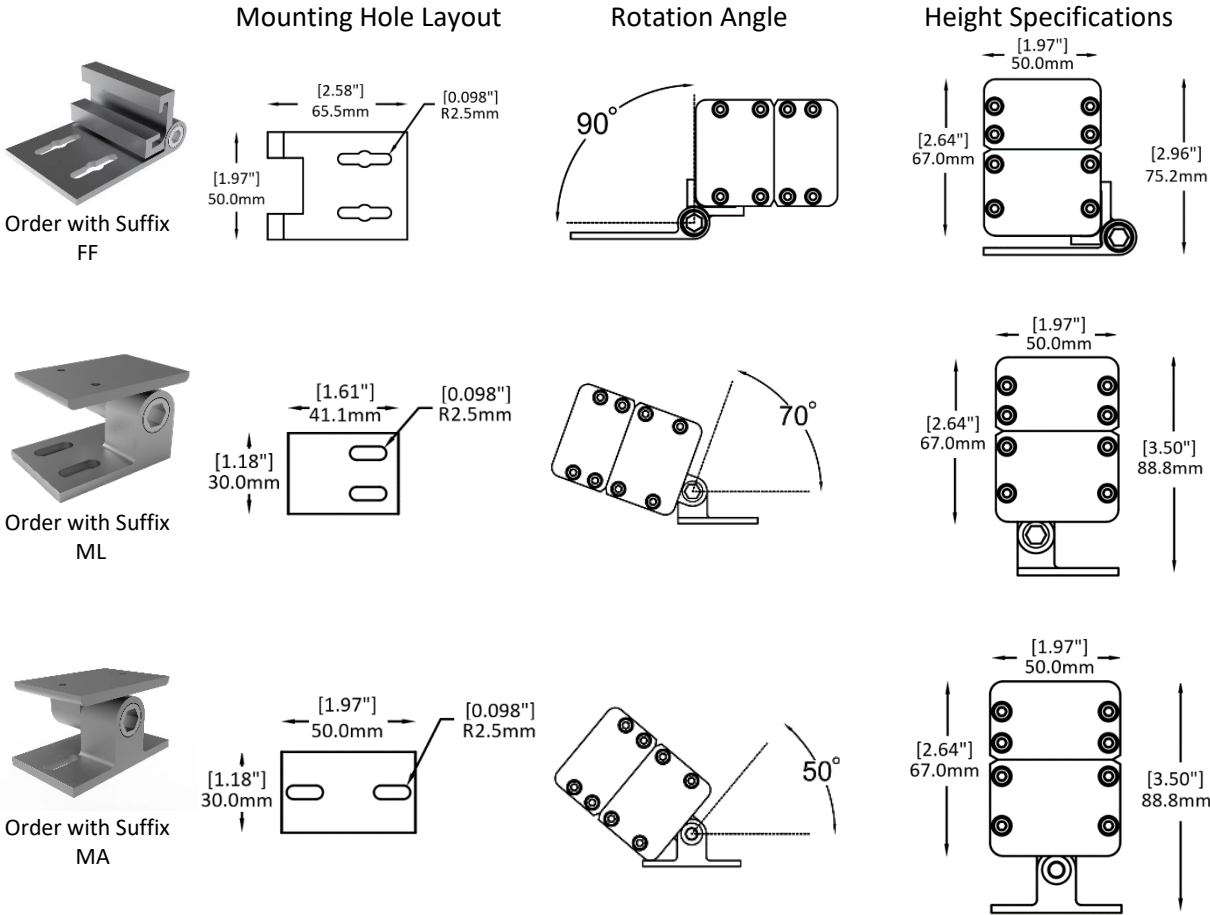


Specifications are subject to change due to updates and innovations. Check our website for the latest technical data. The information serves as an estimate and may differ by power supply and installation. All rights reserved.

BlazeLine
Tunable White**MOUNTING ACCESSORIES (Order Separately)****ITEM:** DLWMB, DLWMB-S

Description: Adjustable Extended Arm Mounting

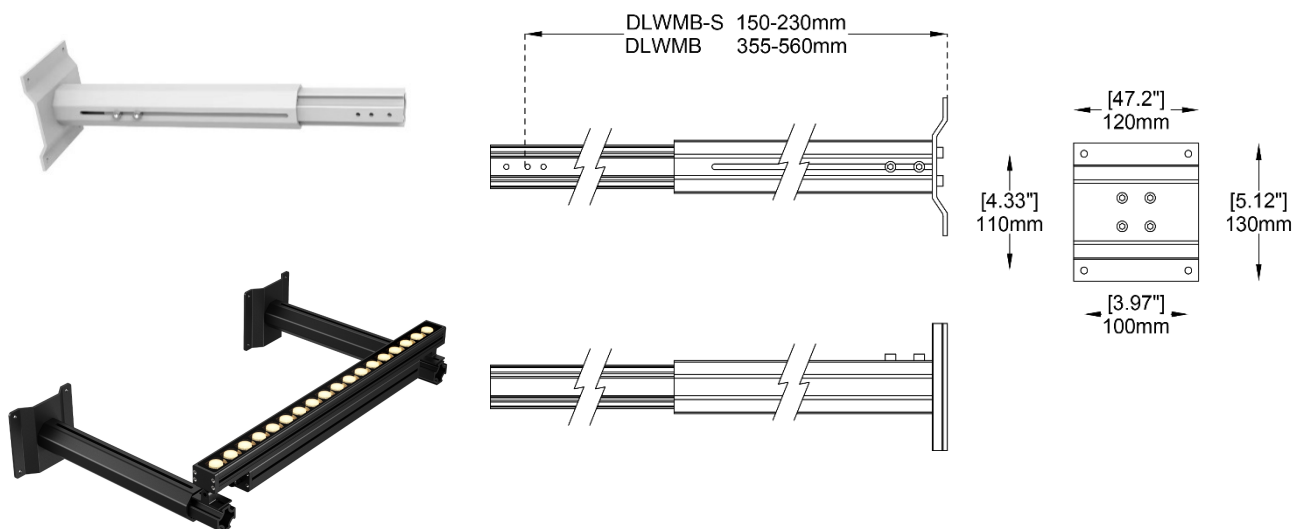**ITEM:** BLMBA-SPIKE

Description: Mounting accessory for landscape lighting application

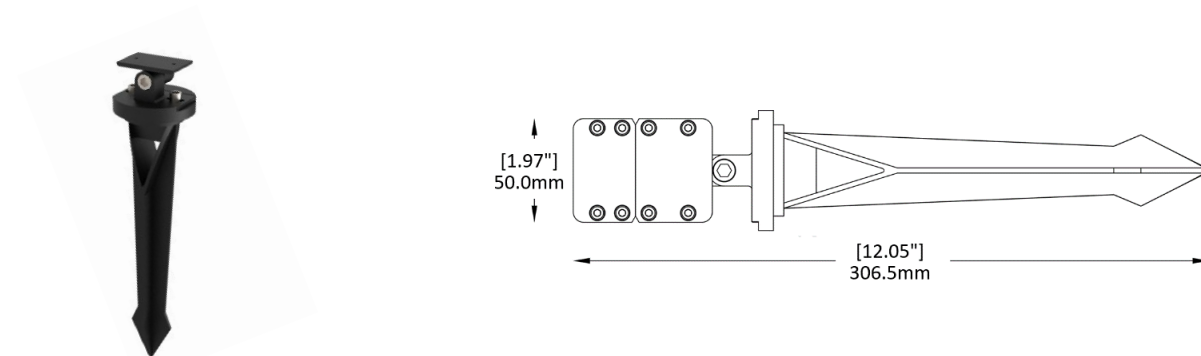

Specifications are subject to change due to updates and innovations. Check our website for the latest technical data. The information serves as an estimate and may differ by power supply and installation. All rights reserved.

BlazeLine


Tunable White

CABLING & CONNECTIVITY (Order Separately)

Leading Cable Set


Function: Power and Signal Combined T-joint

ITEM: AC-LEADIN-336




Function: Power Lead-in

ITEM: ECACF-LENGTH-3pin-AREA



Function: Signal Lead-in

ITEM: ECDCF(SHIELD)-LENGTH-3pin



LENGTH: 300–300mm[0.98'], 2000–2000mm[6.56'], 6000–6000mm[19.66'], 15000–15000mm[49.21']

AREA: EU–Europe, US– USA

Interlink Cable

Function: Power and Data Combined Extension

ITEM: ECACL-LENGTH-6pin



LENGTH: 300–300mm[0.98'], 2000–2000mm[6.56'], 6000–6000mm[19.66']

BlazeLine


Tunable White

TERMINATION & JUNCTIONS (Order Separately)

Power Booster

Function: Power Injector

ITEM: AC-P-INJECT-636



DMX Terminator

Function: DMX Terminator

ITEM: DMX-Term-AC-6pin



End Cap

Dim: DALI

Function: IP Rated End Cap

ITEM: ENDCAP-AC-6PIN



FIXTURE SPACING AND CABLE MANAGEMENT



Parameter	Specification
Default Spacing	Nominal 20mm (± tolerance)
Extended Spacing Options	1, Use Standard Interlink Cable Length (300mm, 2000mm, 6000mm)
	2, Customize Interlink Cable Length
	3, Customize Loop-in Cable


Note: The **default nominal spacing between lighting fixtures is 20mm**. Extended spacing options are available through, **standard interlink cables, custom interlink cables or customized loop-in cables**. Proper planning of spacing and cable lengths is essential to ensure seamless installation and optimal performance.

Specifications are subject to change due to updates and innovations. Check our website for the latest technical data. The information serves as an estimate and may differ by power supply and installation. All rights reserved.


BlazeLine

Tunable White


DMX and RDM Control Accessories (Order Separately)



Item: MR-WT25
Brand: MR Technology
Function: DMX Address Writer and Tester
Description: A portable, handheld device supporting DMX 512 and RDM protocols, allowing for DMX channel programming, testing, and control with a USB Type-C power supply.



Item: DMXcat™
Brand: City Theatrical
Function: RDM Address Writer and Tester
Description: A compact, battery-powered tool for DMX and RDM control via Bluetooth, supporting DMX testing, RDM monitoring, and DIP switch configuration through a smartphone app.

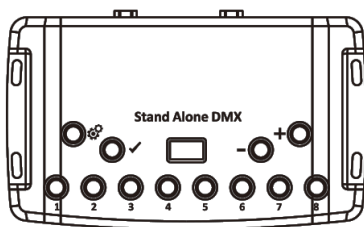

Item: LPSA 512
Brand: Chromateq
Function: DMX Controller
Description: The Chromateq LPSA512 is a compact DMX interface with 512 channels, offering scene storage and playback without a computer. It supports real-time clock and IR control, ideal for smaller setups.

BlazeLine
Tunable White**PARTCODE BUILDER**EXAMPLE CODE: **BL-TW.12.2240.15.DMX-FF-PG-US**

Series	Length	CCT	Optic	Control	Mounting Option	Finish	Area
BL-TW BlazeLine Tunable White	06 609mm	2240 2200K - 4000K	15 15°	DMX DMX	FF BLFF: Adjustable Flip Flop Mounting	PW White	EU EUROPE
	09 904mm	1860 1800K - 6000K	30 30°	RDM RDM	MA BLMBA: Adjustable Mounting	PG Grey	US USA
	12 1194mm		65 65°	DALI DALI	ML BLMBA-L: L-Shape Adjustable Mounting	DG Dark Grey	
			1545 15°x45°	LM LumiMax™		PB Black	

Remarks:

- LumiMax™ is set to the DALI version by default
- LumiMax™ is not accessible in the DMX version
- Customized optic available
- Customized marine-grade coating available
- Customized RAL color coating available

Luminoscape regularly enhances its optics for ongoing product improvement. Luminoscape reserves the right to modify the optics without prior notice. For repeated or project orders requiring the same optic and control; kindly include the relevant Luminoscape invoice number (LS-INVxxxxx) in the purchase order.

BlazeLine

Tunable White

Statement of Limited Warranty

Disclaimer of Warranty:

Luminoscape products are tested and manufactured to meet the highest quality standards. We offer a limited warranty that covers defects in materials and workmanship for a period of 5 years from the date of purchase for standard products, and 3 years for inground and customized products. For customized products, please consult your sales representative for confirmation of warranty terms. The determination of whether a product is defective will be made by Luminoscape. Should any product be deemed defective in materials or workmanship, Luminoscape will, at its discretion, repair or replace the product at no charge. Luminoscape reserves the right to use similar, new, repaired, or remanufactured products or parts as part of this limited warranty process.

This warranty is expressly limited to the repair or replacement of the product. In no case shall the total remedy exceed the purchase price of the defective product. Luminoscape shall not be liable for any incidental or consequential damages arising from or related to the use of the products.

Warranty Period:

Luminoscape provides a standard warranty of 5 years for our products. For inground and customized orders, the warranty period is 3 years. In exceptional cases, further details regarding the warranty period may be discussed with your sales representative.

Warranty Protection:

This limited warranty does not apply where

- Products that have been improperly modified, adjusted, repaired or any alterations.
- Products that are damaged due to improper installation or connection not in accordance with the product wiring diagram.
- Products that have been improperly modified, adjusted, repaired or any alterations.
- Damage from any "Acts of God" includes floods, lightning, landslides, earthquakes, tornadoes, hurricanes and wildfires.
- Damage results from electrical power surges and spikes.
- Products used in an inappropriate environmental conditions (temperature, humidity, moisture, etc.) outside the normal specified range.
- Electrical power surges and spikes.
- Products are damaged due to chemical exposure or corrosion.
- Products have exceeded their operational lifespan as specified in the product documentation.
- Please consult your sales representative for any specific warranty questions or concerns.

Remark: No distributor or supplier of Luminoscape has the authority to modify or amend this Limited Warranty. This warranty may not be transferred or assigned by the original end user.