

Nuit 100
Static White

Date: _____ Quantity: _____

Company: _____

Project: _____


The Nuit 100 Spot Projector is designed for impactful uplighting that draws attention to trees and focal points in expansive environments. Its 100mm diameter projects a strong, targeted beam. Featuring a surface-mounted spike for easy installation, it also offers various beam angles and dimming capabilities, making it perfect for versatile landscape lighting.

FEATURES

- Versatile design with inground spike for installation
- Honeycomb accessory reduces glare effectively
- Durable aluminum housing ensures long-lasting

PERFORMANCE AND COMPLIANCE**QUICK SPEC**

Color Temperature	COB 2700K, 3000K, 3500K, 4000K, 5000K, 6500K
Dimension	Φ 100 mm x 215.8mm (Body with Anti-glare shield)
Optics	14°, 20°, 30°, 45°
Power Consumption	20W
Voltage	220-240VAC 50/60Hz
Dimming	ON/OFF

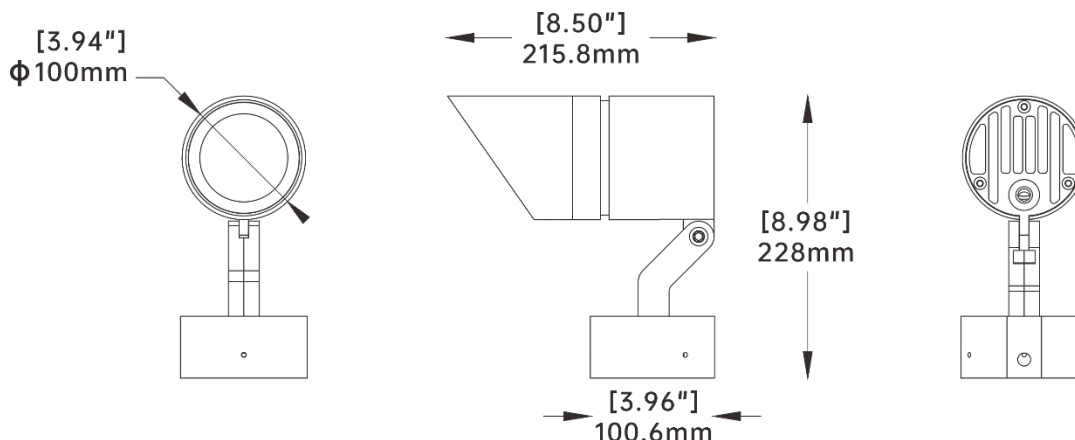DIMENSIONS

Specifications are subject to change due to updates and innovations. Check our website for the latest technical data. The information serves as an estimate and may differ by power supply and installation. All rights reserved.

Sales@luminoscape.com 1 / 6

©2025 Luminoscape Lighting N1002501

Nuit 100
Static White

PERFORMANCE

Color Consistency	3 SDCM
Color Rendering	CRI80
Lumen Maintenance	L70 >50,000hrs @ 25°C
Delivered output	95 lm per watt @300K CCT, CRI80, 14°


Note:
The provided data for color temperature, beam angles, lumen output, and power are typical values. Variations up to 10% may occur due to the fixture’s encapsulation, production tolerances, and component differences. For the most accurate and updated information, please consult the factory for the latest file.

PHYSICAL

Housing Material	Precise machine high density aluminium
Lens Material	Optical grade PMMA
Surface Finishing	Powder coating available in - RAL9011 Black - RAL9023 Dark Grey

MOUNTING ACCESSORIES (Order Separately)

ITEM: NUIT-SPIKE
Description: Nuit Spike for inground application

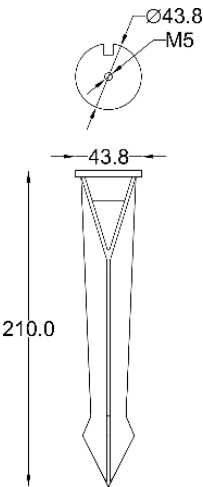


Nuit 100
Static White

CABLE CORE COLOR CODING

CABLE	FUNCTION	CORE(EU)	WIRE SIZE
POWER	L (live)	Brown	1.3mm ²
	N (Neutral)	Blue	1.3mm ²
	GND (Earth)	Yellow/Green	1.3mm ²

BENDING STRENGTH

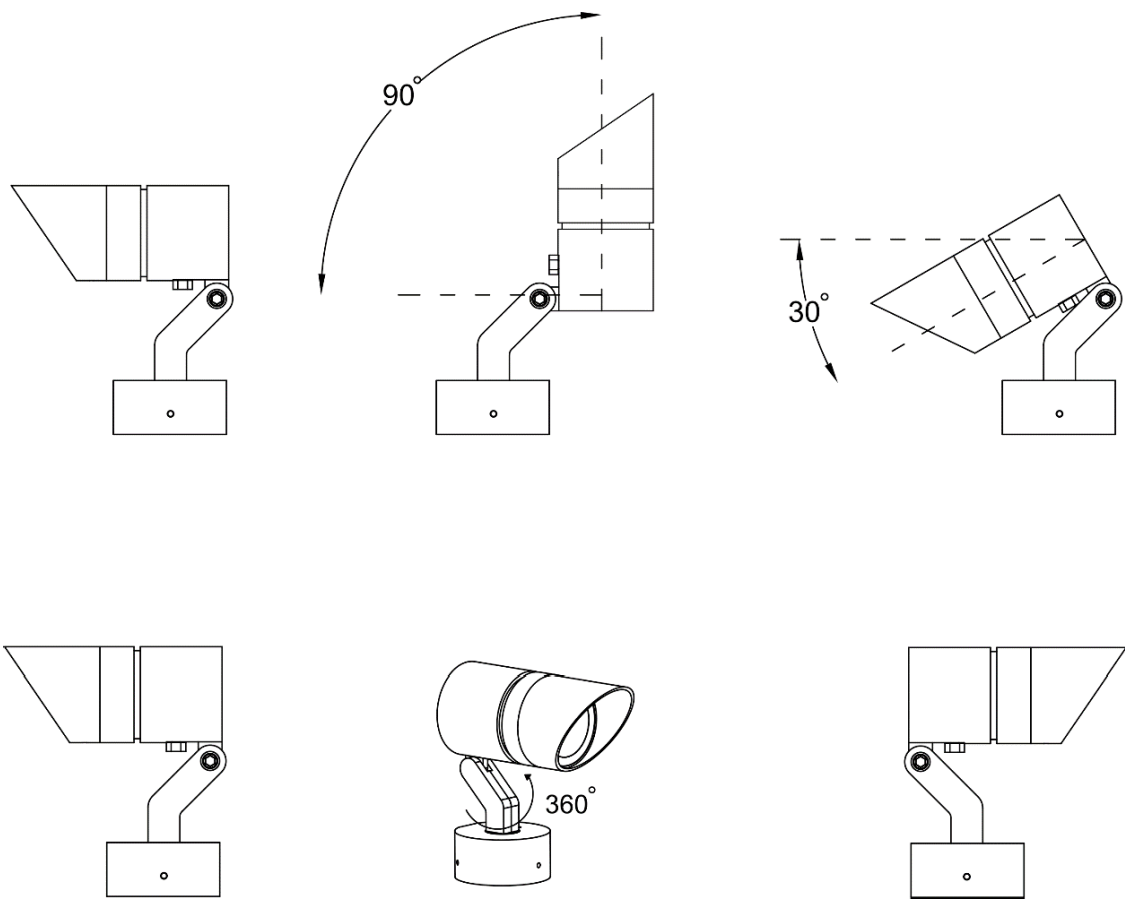

Specifications are subject to change due to updates and innovations. Check our website for the latest technical data. The information serves as an estimate and may differ by power supply and installation. All rights reserved.

Nuit 100

Static White



CONNECTING ACCESSORIES (Order Separately)

ITEM: Paguro 5650/3

Brand: STEAB

Dimming: ON OFF, TRIAC

Description: GEL Box 2ways waterproof IP68 3 pin connectors

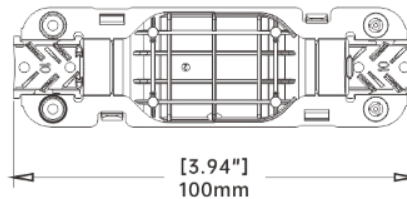

For more details, please visit <https://www.steab.it/catalogo/paguro-5695-3/?lang=en>

Nuit 100
Static White

PARTCODE BUILDER

EXAMPLE CODE: NUIT.100.27.30.ONOF-DG-EU

Series	Diameter	CCT	Optic	Control	Finish	Area
NUIT Nuit Spot Projector	100 100mm	27 2700K	14 14°	ONOF ON/OFF	DG Dark Grey	EU EUROPE
		30 3000K	20 20°		PB BLACK	
		35 3500K	30 30°			
		40 4000K	45 45°			
		50 5000K				
		65 6500K				

Remarks:

- The standard loop in cable is 1 meter long with open terminals
- Customized optic available
- Customized color (RAL) available
- Anti corrosive coating available

Luminoscape regularly enhances its optics for ongoing product improvement. Luminoscape reserves the right to modify the optics without prior notice. For repeated or project orders requiring the same optic and control; kindly include the relevant Luminoscape invoice number (INVxxxxx) in the purchase order.

Nuit 100

Static White

Statement of Limited Warranty

Disclaimer of Warranty:

Luminoscape products are tested and manufactured to meet the highest quality standards. We offer a limited warranty that covers defects in materials and workmanship for a period of 5 years from the date of purchase for standard products, and 3 years for inground and customized products. For customized products, please consult your sales representative for confirmation of warranty terms. The determination of whether a product is defective will be made by Luminoscape. Should any product be deemed defective in materials or workmanship, Luminoscape will, at its discretion, repair or replace the product at no charge. Luminoscape reserves the right to use similar, new, repaired, or remanufactured products or parts as part of this limited warranty process.

This warranty is expressly limited to the repair or replacement of the product. In no case shall the total remedy exceed the purchase price of the defective product. Luminoscape shall not be liable for any incidental or consequential damages arising from or related to the use of the products.

Warranty Period:

Luminoscape provides a standard warranty of 5 years for our products. For inground and customized orders, the warranty period is 3 years. In exceptional cases, further details regarding the warranty period may be discussed with your sales representative.

Warranty Protection:

This limited warranty does not apply where

- Products that have been improperly modified, adjusted, repaired or any alterations.
- Products that are damaged due to improper installation or connection not in accordance with the product wiring diagram.
- Products that have been improperly modified, adjusted, repaired or any alterations.
- Damage from any "Acts of God" includes floods, lightning, landslides, earthquakes, tornadoes, hurricanes and wildfires.
- Damage results from electrical power surges and spikes.
- Products used in an inappropriate environmental conditions (temperature, humidity, moisture, etc.) outside the normal specified range.
- Electrical power surges and spikes.
- Products are damaged due to chemical exposure or corrosion.
- Products have exceeded their operational lifespan as specified in the product documentation.
- Please consult your sales representative for any specific warranty questions or concerns.

Remark: No distributor or supplier of Luminoscape has the authority to modify or amend this Limited Warranty. This warranty may not be transferred or assigned by the original end user.