

Nuit 80
Static White



Date: _____ Quantity: _____
Company: _____
Project: _____

The Nuit 80 Spot Projector delivers robust accent lighting to showcase trees and larger outdoor features. With an 80mm diameter, it combines elegance and power, casting a concentrated light on key areas. Its built-in surface-mounted spike ensures straightforward installation, while multiple beam angles and dimming settings enhance adaptability for diverse designs.

FEATURES

- Versatile design with inground spike for installation
- Honeycomb accessory reduces glare effectively
- Durable aluminum housing ensures long-lasting


PERFORMANCE AND COMPLIANCE



QUICK SPEC

Color Temperature	COB 2700K, 3000K, 3500K, 4000K, 5000K, 6500K
Dimension	Φ 80 mm x 172.5mm (Body with Anti-glare shield)
Optics	17°, 35°, 50°
Power Consumption	15W
Voltage	220-240VAC 50/60Hz
Dimming	ON/OFF

DIMENSIONS

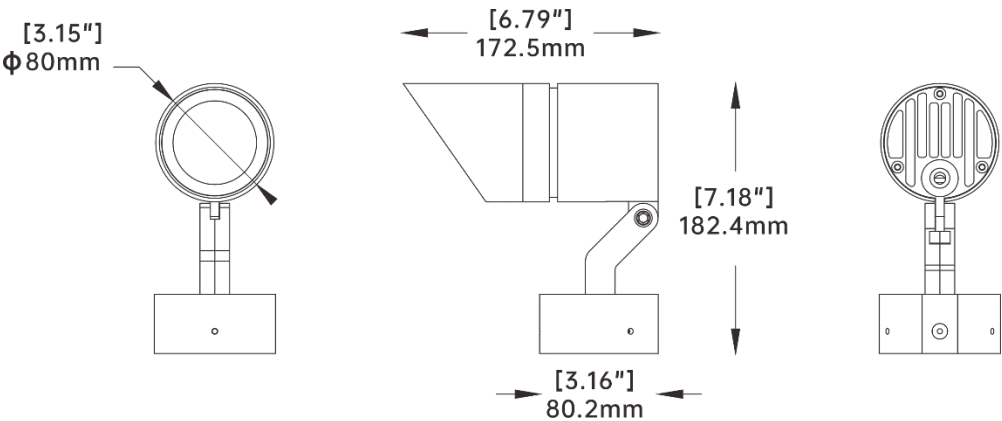

Specifications are subject to change due to updates and innovations. Check our website for the latest technical data. The information serves as an estimate and may differ by power supply and installation. All rights reserved.

Nuit 80
Static White

PERFORMANCE

Color Consistency	3 SDCM
Color Rendering	CRI80
Lumen Maintenance	L70 >50,000hrs @ 25°C
Delivered output	95 lm per watt @300K CCT, CRI80, 17°


Note:

PHYSICAL

Housing Material	Precise machine high density aluminium
Lens Material	Optical grade PMMA
Surface Finishing	Powder coating available in - RAL9011 Black - RAL9023 Dark Grey

MOUNTING ACCESSORIES (Order Separately)

ITEM: NUIT-SPIKE
Description: Nuit Spike for inground application

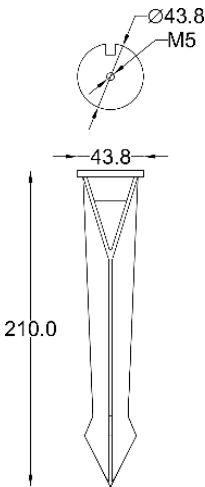


Specifications are subject to change due to updates and innovations. Check our website for the latest technical data. The information serves as an estimate and may differ by power supply and installation. All rights reserved.

Nuit 80
Static White

CABLE CORE COLOR CODING

CABLE	FUNCTION	CORE(EU)	WIRE SIZE
POWER	L (live)	Brown	1.3mm ²
	N (Neutral)	Blue	1.3mm ²
	GND (Earth)	Yellow/Green	1.3mm ²



BENDING STRENGTH

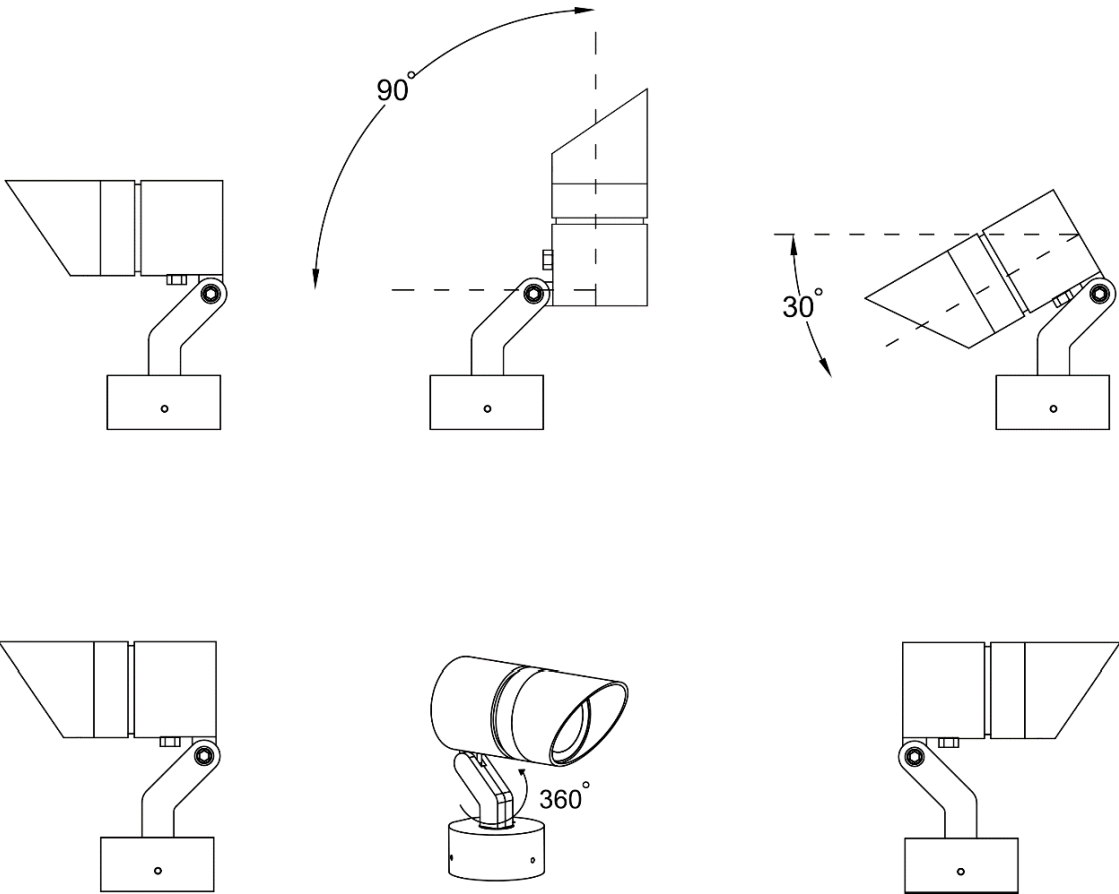

Specifications are subject to change due to updates and innovations. Check our website for the latest technical data. The information serves as an estimate and may differ by power supply and installation. All rights reserved.

Nuit 80

Static White

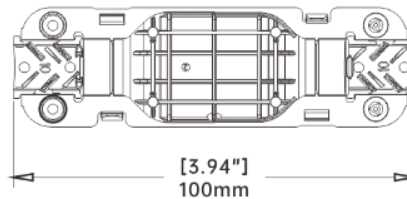CONNECTING ACCESSORIES (Order Separately)**ITEM:** Paguro 5650/3**Brand:** STEAB**Dimming:** ON OFF, TRIAC**Description:** GEL Box 2ways waterproof IP68 3 pin connectors

For more details, please visit <https://www.steab.it/catalogo/paguro-5695-3/?lang=en>

Nuit 80
Static White

PARTCODE BUILDER

EXAMPLE CODE: NUIT.80.27.35.ONOF-DG-EU

Series	Diameter	CCT	Optic	Control	Finish	Area
NUIT Nuit Spot Projector	80 80mm	27 2700K	17 17°	ONOF ON/OFF	DG Dark Grey	EU EUROPE
		30 3000K	35 35°		PB BLACK	
		35 3500K	50 50°			
		40 4000K				
		50 5000K				
		65 6500K				

Remarks:

- The standard loop in cable is 1 meter long with open terminals
- Customized optic available
- Customized marine-grade coating available
- Customized RAL color coating available

Luminoscape regularly enhances its optics for ongoing product improvement. Luminoscape reserves the right to modify the optics without prior notice. For repeated or project orders requiring the same optic and control; kindly include the relevant Luminoscape invoice number (LS-INVxxxxx) in the purchase order.

Nuit 80

Static White

Statement of Limited Warranty

Disclaimer of Warranty:

Luminoscape products are tested and manufactured to meet the highest quality standards. We offer a limited warranty that covers defects in materials and workmanship for a period of 5 years from the date of purchase for standard products, and 3 years for inground and customized products. For customized products, please consult your sales representative for confirmation of warranty terms. The determination of whether a product is defective will be made by Luminoscape. Should any product be deemed defective in materials or workmanship, Luminoscape will, at its discretion, repair or replace the product at no charge. Luminoscape reserves the right to use similar, new, repaired, or remanufactured products or parts as part of this limited warranty process.

This warranty is expressly limited to the repair or replacement of the product. In no case shall the total remedy exceed the purchase price of the defective product. Luminoscape shall not be liable for any incidental or consequential damages arising from or related to the use of the products.

Warranty Period:

Luminoscape provides a standard warranty of 5 years for our products. For inground and customized orders, the warranty period is 3 years. In exceptional cases, further details regarding the warranty period may be discussed with your sales representative.

Warranty Protection:

This limited warranty does not apply where

- Products that have been improperly modified, adjusted, repaired or any alterations.
- Products that are damaged due to improper installation or connection not in accordance with the product wiring diagram.
- Products that have been improperly modified, adjusted, repaired or any alterations.
- Damage from any "Acts of God" includes floods, lightning, landslides, earthquakes, tornadoes, hurricanes and wildfires.
- Damage results from electrical power surges and spikes.
- Products used in an inappropriate environmental conditions (temperature, humidity, moisture, etc.) outside the normal specified range.
- Electrical power surges and spikes.
- Products are damaged due to chemical exposure or corrosion.
- Products have exceeded their operational lifespan as specified in the product documentation.
- Please consult your sales representative for any specific warranty questions or concerns.

Remark: No distributor or supplier of Luminoscape has the authority to modify or amend this Limited Warranty. This warranty may not be transferred or assigned by the original end user.