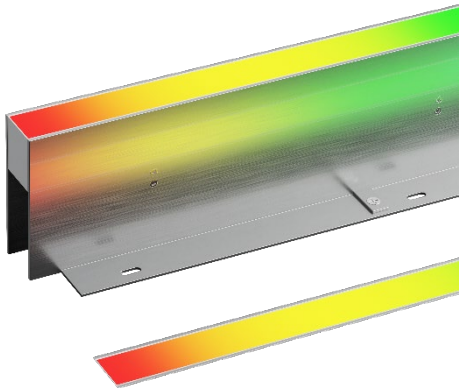


ScapeDirect

Static White and RGBW combined Source



Date: _____ Quantity: _____
Company: _____
Project: _____

ScapeDirect is a durable, direct-view lighting solution designed for drive-over and walk-over applications. With a trimless design for seamless in-ground integration, and available in both static white and RGBW combined chip versions, it delivers bright, uniform illumination, perfect for outdoor architectural and landscape projects.

FEATURES

- 316 Stainless Steel for durability
- IP67 and IK10 rated projection
- Anti-UV flat acrylic diffusion
- Seamless pixel spacing for uniformity
- Multiple color temperature options available

PERFORMANCE AND COMPLIANCE



QUICK SPEC

Color Temperature	1800K, 2700K, 3000K, 3500K, 4000K, 5000K. 5700K, 6500K
Color Options	RGB Triple trip, Adjustable White with 1800K, 2700K, 3000K, 3500K, 4000K, 5000K. 5700K, 6500K
Length	590mm [23.23"], 1000mm [39.37"]
Optics	110°
Power Consumption	7W (590mm), 12W (1000mm)
Voltage	24VDC
Dimming	Static White: ON/OFF, 0-10V, DALI, TRIAC, DMX, RDM RGBW: DMX, RDM
Max Static Load	500kg
Max Impact speed	20Km/hr

Noted: Due to the nature of the material used in this product, the color temperature(CCT) may vary significantly. The listed CCT is a normal value, and a variation of about 10% should be expected.


PHYSICAL

Housing Material	316 stainless steel
Mounting Sleeve	316 stainless steel
Diffused Characteristic	Flat Acrylic Diffusion (Anti UV and Anti Yellow)

ScapeDirect

Static White and RGBW combined Source

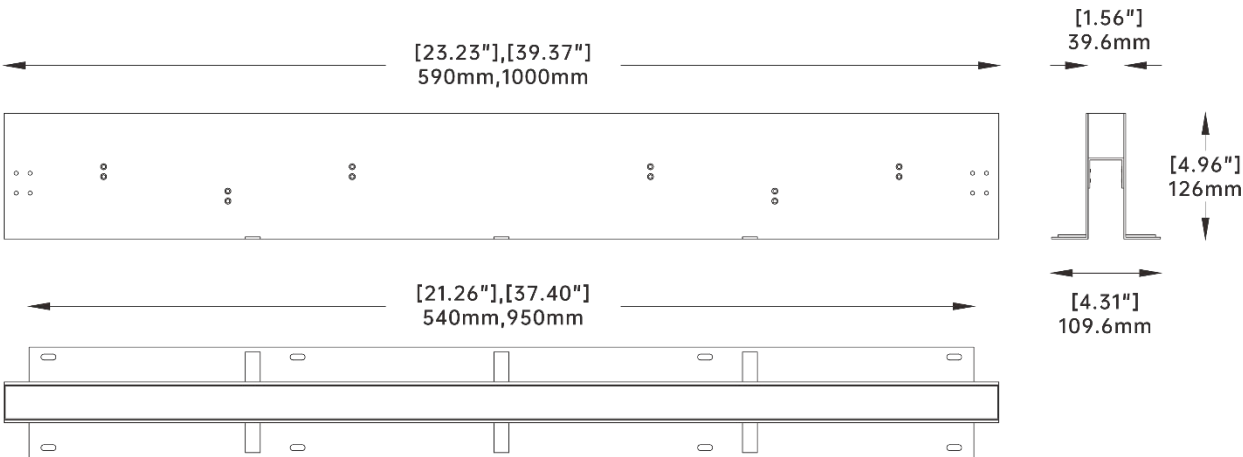DIMENSIONS








CABLE CORE COLOR CODING

Cable	Diming	Function	Core(EU)	Wire Size
Power	ON/OFF	DC+	Brown	1.0mm ²
		DC-	Blue	1.0mm ²
Power and Data	DMX, RDM	DC+	Brown	1.0mm ²
		DC-	Blue	1.0mm ²
		DMX+	Purple	0.5mm ²
		DMX-	Grey	0.5mm ²
		DMX GND	Yellow	0.5mm ²


ScapeDirect

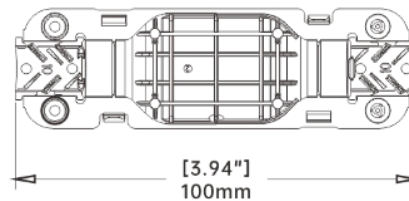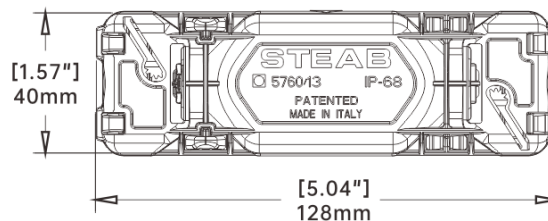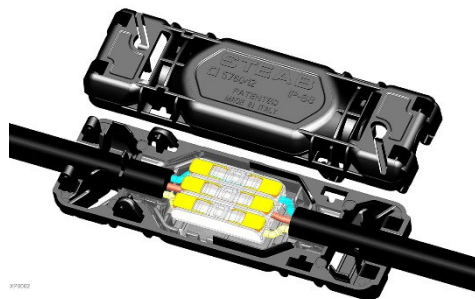Static White and RGBW combined Source


CONNECTING ACCESSORIES –DMX/RDM (Order Separately)**ITEM:** Paguro 5650/3**Brand:** STEAB**Dimming Type:** ON/OFF**Description:** GEL Box 2ways waterproof IP68 3 pin connectorsFor more details, please visit <https://www.steab.it/catalogo/paguro-5695-3/?lang=en>**ITEM:** Paguro 5760/13**Brand:** STEAB**Dimming Type :** DMX, RDM**Description:** 2-Way Gel-Filled IP68 Waterproof 6-Pin ConnectorFor more details, please visit <https://www.steab.it/catalogo/quick-paguro-5760-13-3/?lang=en>

ScapeDirect

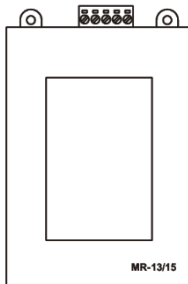
Static White and RGBW combined Source

DMX and RDM Control Accessories (Order Separately)

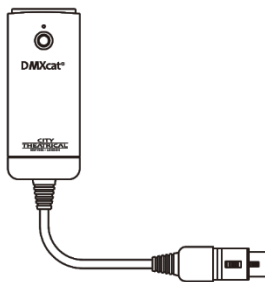Item: MR-WT25
Brand: MR Technology
Function: DMX Address Writer and Tester
Description: A portable, handheld device supporting DMX512 and RDM protocols, allowing for DMX channel programming, testing, and control with a USB Type-C power supply.



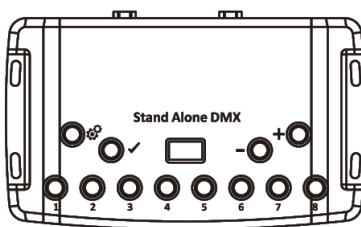Item: DMXcat™
Brand: City Theatrical
Function: RDM Address Writer and Tester
Description: A compact, battery-powered tool for DMX and RDM control via Bluetooth, supporting DMX testing, RDM monitoring, and DIP switch configuration through a smartphone app.




Item: LPSA 512
Brand: Chromateq
Function: DMX Controller
Description: The Chromateq LPSA512 is a compact DMX interface with 512 channels, offering scene storage and playback without a computer. It supports real-time clock and IR control, ideal for smaller setups.

ScapeDirect

Static White and RGBW combined Source

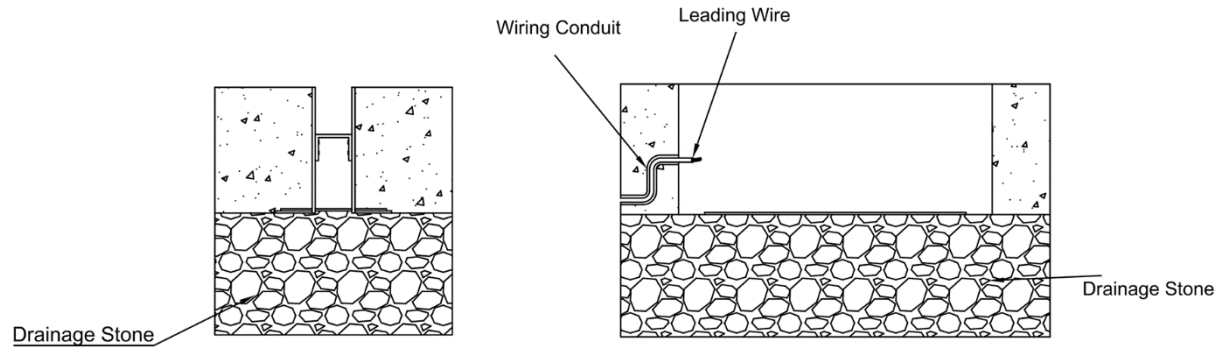INSTALLATION PREPARATION



Remarks:

- Ensure adequate drainage during installation; failure to do so will void the warranty.
- Ensure that the wire is connected with sealed or gel-filled connectors
- Use stainless steel screws for mounting the trim.
- Ensure the top side is level with the ground surface

ScapeDirect

Static White and RGBW combined Source

PARTCODE BUILDEREXAMPLE CODE: **SG-RGBW.05.30.110.DMX-STC-EU**

Series	Length	White CCT	Optic	Control	Finish	Area
SG-SW	05	18	110	NA	STC	EU
ScapeDirect	590mm	1800K	110°	ON/OFF	Stainless Steel Color	Europe
Static White	10	27		010V		
	1000mm	2700K		0-10V		
SG-RGBW		30		DALI		
ScapeDirect		3000K		DALI		
RGBW		35		TRI		
		3500K		TRIAC		
		40		DMX		
		4000K		DMX		
		50		RDM		
		5000K		RDM		
		57				
		5700K				
		65				
		6500K				

Remarks:

- The standard loop in cable is 1 meter long with open terminals
- Due to the nature of the material used in this product, the color temperature(CCT) may vary significantly. The listed CCT is a normal value, and a variation of about 10% should be expected

Luminoscape regularly enhances its optics for ongoing product improvement. Luminoscape reserves the right to modify the optics without prior notice. For repeated or project orders requiring the same optic and control; kindly include the relevant Luminoscape invoice number (INVxxxxx) in the purchase order.

ScapeDirect

Static White and RGBW combined Source

Statement of Limited Warranty**Disclaimer of Warranty:**

Luminoscape products are tested and manufactured to meet the highest quality standards. We offer a limited warranty that covers defects in materials and workmanship for a period of 5 years from the date of purchase for standard products, and 3 years for inground and customized products. For customized products, please consult your sales representative for confirmation of warranty terms. The determination of whether a product is defective will be made by Luminoscape. Should any product be deemed defective in materials or workmanship, Luminoscape will, at its discretion, repair or replace the product at no charge. Luminoscape reserves the right to use similar, new, repaired, or remanufactured products or parts as part of this limited warranty process.

This warranty is expressly limited to the repair or replacement of the product. In no case shall the total remedy exceed the purchase price of the defective product. Luminoscape shall not be liable for any incidental or consequential damages arising from or related to the use of the products.

Warranty Period:

Luminoscape provides a standard warranty of 5 years for our products. For inground and customized orders, the warranty period is 3 years. In exceptional cases, further details regarding the warranty period may be discussed with your sales representative.

Warranty Protection:

This limited warranty does not apply where

- Products that have been improperly modified, adjusted, repaired or any alterations.
- Products that are damaged due to improper installation or connection not in accordance with the product wiring diagram.
- Products that have been improperly modified, adjusted, repaired or any alterations.
- Damage from any "Acts of God" includes floods, lightning, landslides, earthquakes, tornadoes, hurricanes and wildfires.
- Damage results from electrical power surges and spikes.
- Products used in an inappropriate environmental conditions (temperature, humidity, moisture, etc.) outside the normal specified range.
- Electrical power surges and spikes.
- Products are damaged due to chemical exposure or corrosion.
- Products have exceeded their operational lifespan as specified in the product documentation.
- Please consult your sales representative for any specific warranty questions or concerns.

Remark: No distributor or supplier of Luminoscape has the authority to modify or amend this Limited Warranty. This warranty may not be transferred or assigned by the original end user.