

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	23170.2 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	18.4V x 18.3H
	At 50% of Imax	9.5V x 9.4H
	At 90% of Imax	3.7V x 3.6H

Beam Flux	Total	1000.8 lumens per klm.
	To 10% of Imax	695.9 lumens per klm.
	To 50% of Imax	366.9 lumens per klm.
	To 90% of Imax	77.1 lumens per klm.

Upward LOR	2.2 %
Downward LOR	97.9 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Aurora Max-618mm-RGBW 6500K-10D-Rev1	TYPE:RGBW-6500K	WEIGHT:
SPEC.:10 DEG	DIM.:618mm	SERIAL No.:IES001760
MFR.:	SUR.:	Shielding Angle:

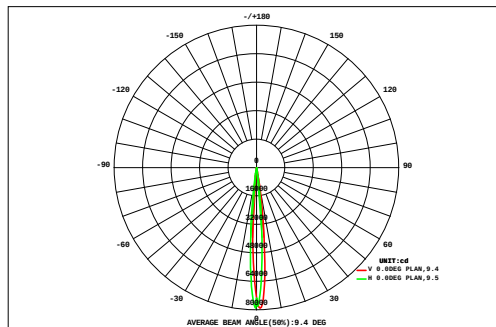

DATA OF LAMP		Eff:57.31lm/W	
MODEL		Imax(cd)	79010
NOMINAL POWER(W)	59.6	AVAILABILITY(%)	69.5
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	2371
NOMINAL FLUX(lm)	3410	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	3410
TEST VOLTAGE(V)	220	q @50%(H,V)	9,9DEG

		AREA FLUX DIAGRAM																UNIT:lm				F t	F a
		0.62	0.65	0.68	0.72	0.78	0.86	0.94	1.00	1.04	1.04	1.01	0.94	0.86	0.79	0.72	0.68	0.65	0.62	14.6	0.00		
VERTICAL (DEG)	18	0.64	0.67	0.73	0.81	0.94	1.09	1.26	1.40	1.49	1.49	1.42	1.27	1.11	0.96	0.83	0.74	0.67	0.64	18.2	0.00		
	16	0.66	0.71	0.81	0.96	1.20	1.51	1.85	2.16	2.37	2.38	2.20	1.89	1.56	1.25	1.01	0.84	0.72	0.66	24.7	0.00		
	14	0.68	0.77	0.92	1.19	1.62	2.27	3.17	3.97	4.46	4.51	4.10	3.31	2.40	1.74	1.30	0.99	0.80	0.69	38.9	0.00		
	12	0.72	0.84	1.08	1.50	2.25	3.68	5.68	7.98	9.77	9.91	8.31	6.08	4.13	2.59	1.71	1.23	0.92	0.75	69.1	17.3		
	10	0.75	0.92	1.27	1.85	3.13	5.67	10.4	16.5	20.6	20.9	17.3	11.8	7.01	3.97	2.31	1.54	1.12	0.84	128	93.4		
	8	0.79	1.01	1.44	2.26	4.12	8.51	17.5	31.2	40.6	41.3	33.3	21.3	12.1	6.19	3.50	2.08	1.37	0.96	230	198		
	6	0.82	1.08	1.58	2.66	5.27	11.5	24.1	45.6	65.6	66.7	52.6	34.2	20.6	11.1	5.41	2.79	1.64	1.09	354	328		
	4	0.83	1.10	1.63	2.89	5.82	12.8	27.9	52.3	81.3	88.1	75.5	55.6	32.9	16.4	7.52	3.47	1.88	1.20	469	445		
	2	0.83	1.13	1.72	3.19	6.68	15.2	33.2	61.9	88.1	92.2	83.2	60.7	35.6	17.3	7.87	3.60	1.91	1.21	515	490		
	0	0.83	1.15	1.80	3.46	7.35	16.8	35.5	56.8	72.3	72.7	62.4	45.4	26.8	13.4	6.32	3.13	1.73	1.12	429	402		
	-2	0.80	1.10	1.72	3.20	6.34	13.0	23.8	36.9	46.1	46.1	37.7	27.6	16.7	8.81	4.66	2.46	1.48	0.99	279	251		
	-4	0.73	1.00	1.50	2.46	4.44	7.84	13.6	19.6	24.3	24.2	19.5	14.3	9.13	5.33	3.20	1.85	1.23	0.86	155	121		
-6	0.65	0.87	1.22	1.78	2.77	4.40	6.78	9.56	11.2	11.1	9.47	6.74	4.67	3.20	2.04	1.39	0.99	0.73	79.5	24.9			
-8	0.56	0.72	0.96	1.32	1.81	2.52	3.47	4.51	5.17	5.16	4.46	3.41	2.55	1.91	1.42	1.05	0.80	0.62	42.4	0.00			
-10	0.48	0.60	0.76	0.98	1.27	1.61	1.97	2.32	2.55	2.54	2.30	1.94	1.58	1.29	1.02	0.81	0.64	0.52	25.2	0.00			
-12	0.42	0.50	0.61	0.74	0.91	1.10	1.28	1.43	1.51	1.51	1.42	1.27	1.08	0.90	0.75	0.63	0.53	0.44	17.0	0.00			
-14	0.36	0.42	0.50	0.58	0.68	0.78	0.88	0.96	1.00	1.00	0.95	0.87	0.77	0.67	0.58	0.51	0.44	0.38	12.3	0.00			
-16																							
-18																							
		-18	-16	-14	-12	-10	-8	-6	-4	HORIZONTAL (DEG)				4	6	8	10	12	14	16	18		
F t		12.2	15.2	20.9	32.6	57.4	111	213	356	479	493	417	299	181	97.9	52.2	29.8	19.5	14.3	2902	---		
F a		0.00	0.00	0.00	0.00	0.00	72.6	184	329	452	465	390	269	146	59.2	4.94	0.00	0.00	0.00	---	2371		

one-half-peak spread: U:4.4,D:5.1 , L:4.7,R:4.8


NEMA Beam Type: Type 2

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-09-22

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:Aurora Max-618mm-RGBW 6500K-10D-Rev1	TYPE:RGBW-6500K	WEIGHT:
SPEC.:10 DEG	DIM.:618mm	SERIAL No.:IES001760
MFR.:	SUR.:	Shielding Angle:

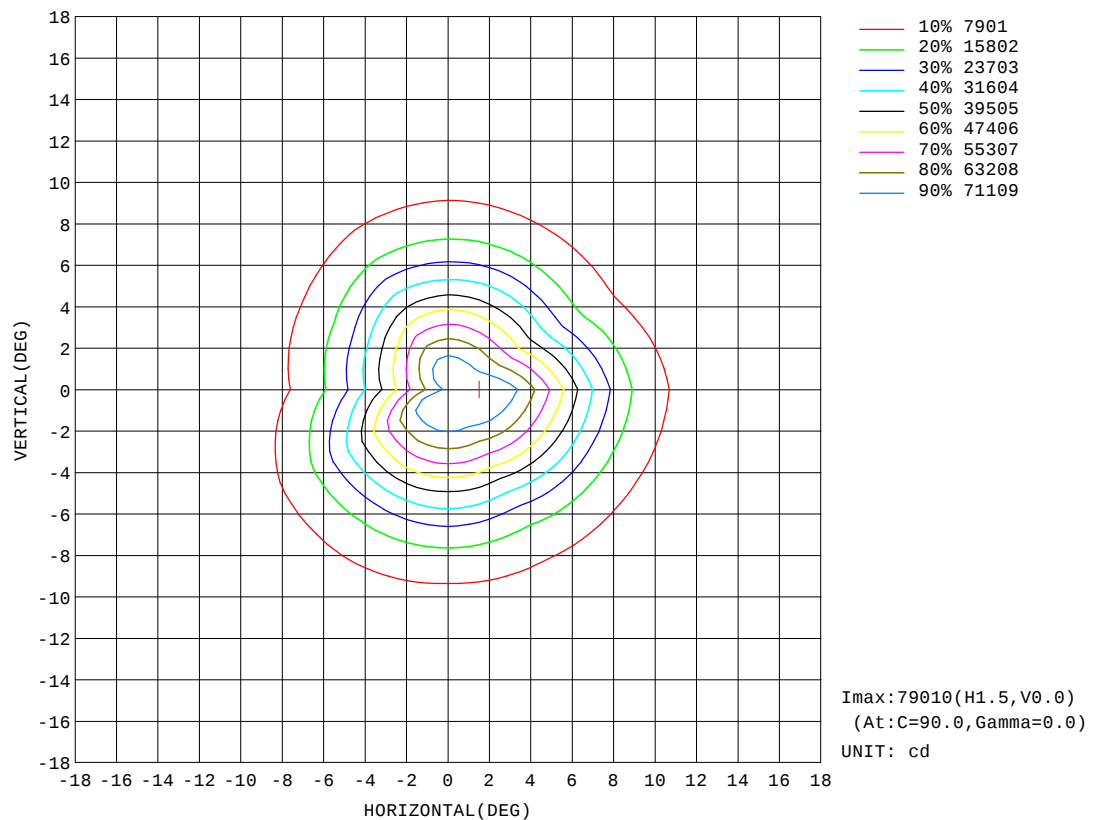


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-09-22

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Aurora Max-618mm-RGBW 6500K-10D-Rev1	TYPE:RGBW-6500K	WEIGHT:
SPEC.:10 DEG	DIM.:618mm	SERIAL No.:IES001760
MFR.:	SUR.:	Shielding Angle:

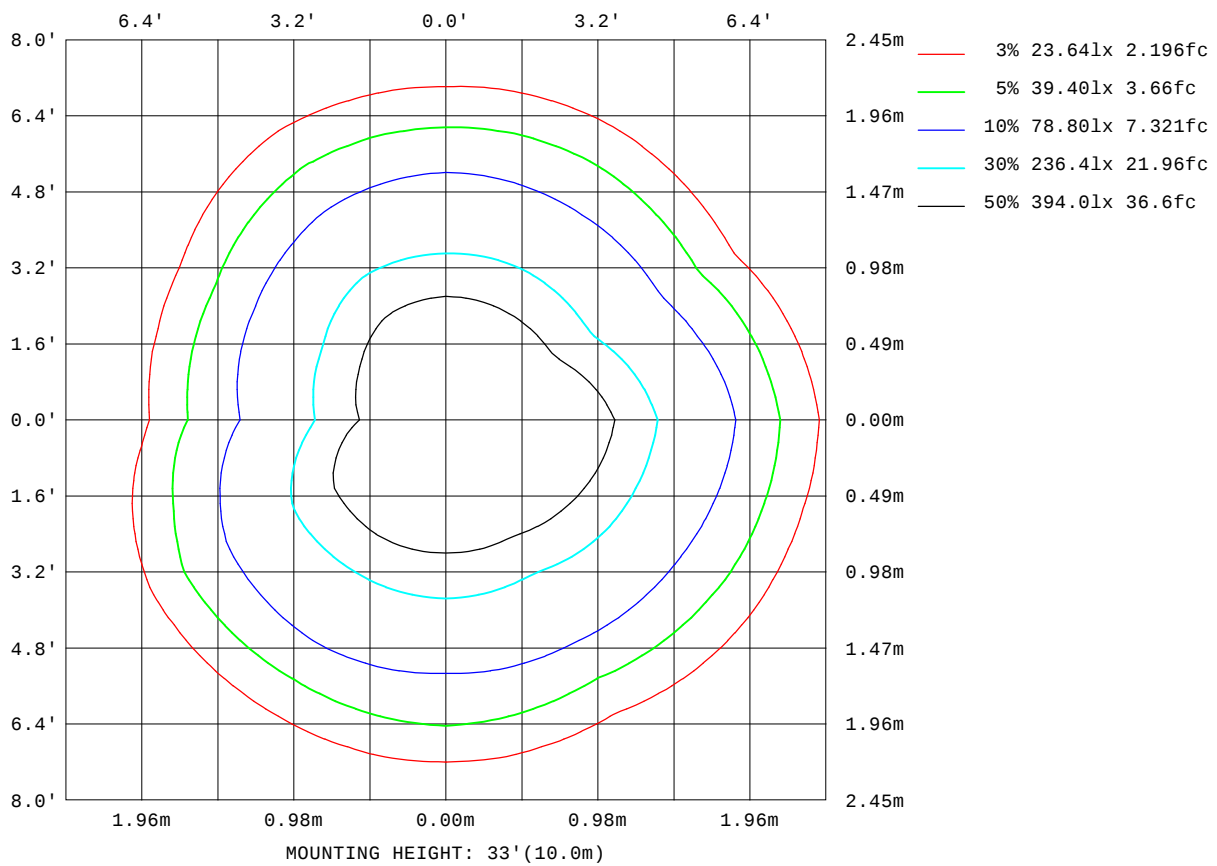

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-09-22

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

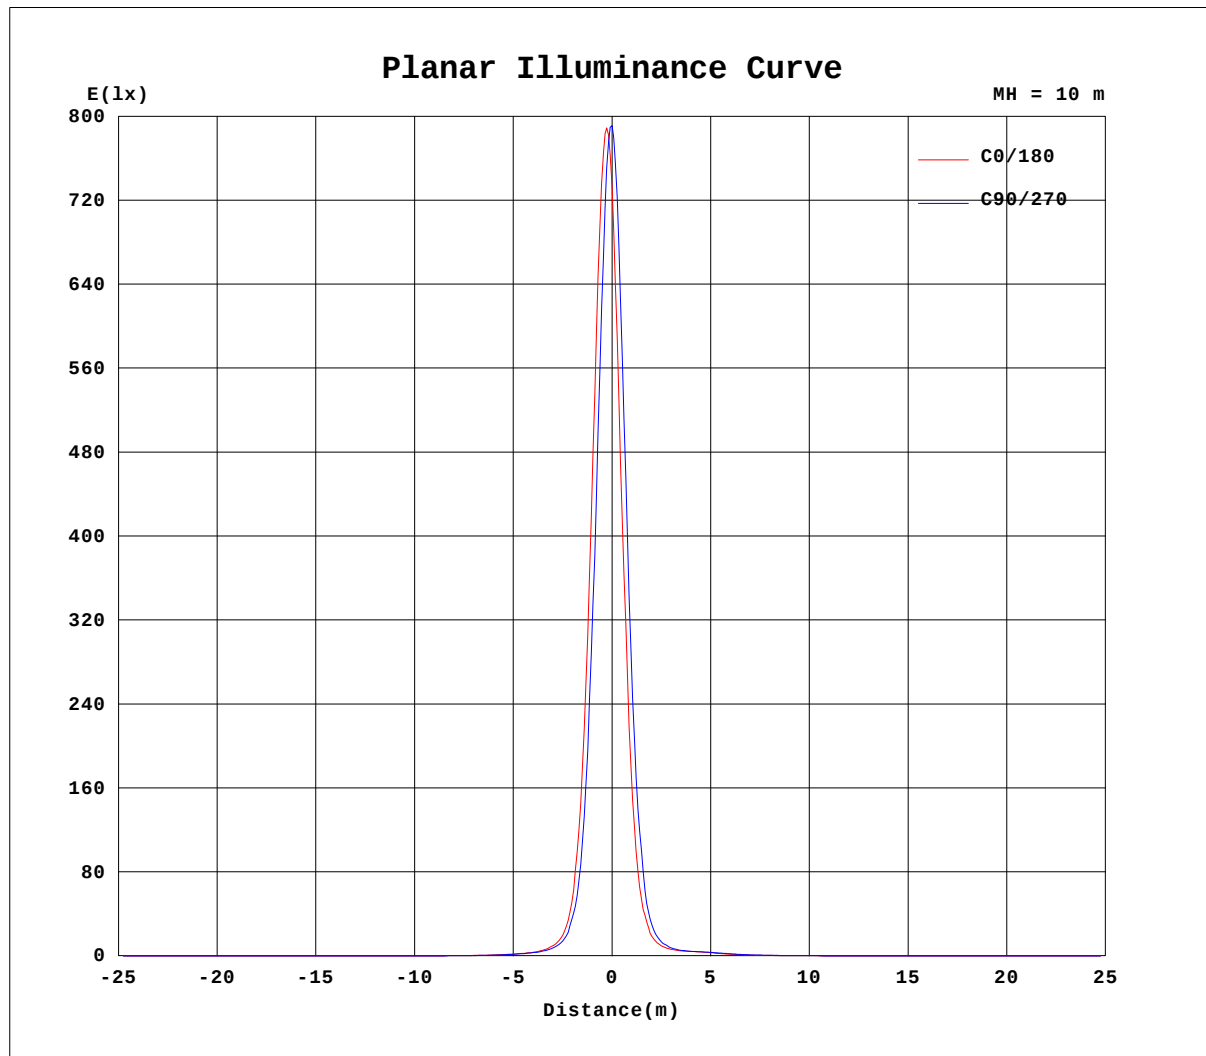


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-09-22

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Aurora Max-618mm-RGBW 6500K-10D-Rev1	TYPE:RGBW-6500K	WEIGHT:
SPEC.:10 DEG	DIM.:618mm	SERIAL No.:IES001760
MFR.:	SUR.:	Shielding Angle:

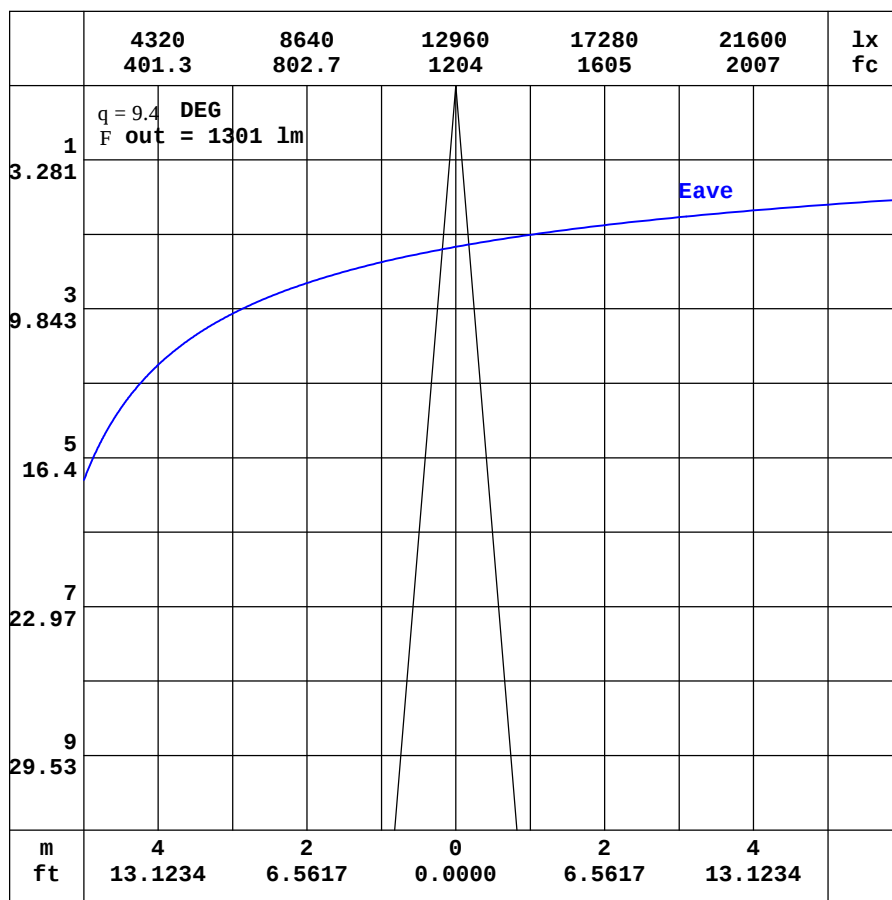

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

$H(b)$ Range:-90 - 90DEG
 $H(b)$ Interval: 0.5DEG
 Test Speed: LOW
 Temperature:25.3DEG
 Operators:Fan
 Test Date:2023-09-22

$V(B)$ Range:-180 - 180DEG
 $V(B)$ Interval: 0.5DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:8.630m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Aurora Max-618mm-RGBW 6500K-10D-Rev1	TYPE:RGBW-6500K	WEIGHT:
SPEC.:10 DEG	DIM.:618mm	SERIAL No.:IES001760
MFR.:	SUR.:	Shielding Angle:

Table--1
UNIT: ×10cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	1.08	0.82	0.78	0.80	0.80	0.82	0.92	1.32	2.06	2.69	2.93	2.91	2.60	2.19	1.86	1.64	1.36	1.17	1.34
-170	1.08	0.82	0.78	0.79	0.78	0.76	0.78	1.01	1.49	1.92	2.10	2.14	2.11	2.11	2.26	2.42	2.49	2.64	2.62
-160	1.08	0.83	0.77	0.79	0.77	0.72	0.67	0.69	0.88	1.09	1.19	1.21	1.29	1.61	1.91	2.17	2.37	2.47	2.50
-150	1.08	0.84	0.77	0.78	0.77	0.71	0.61	0.51	0.45	0.41	0.37	0.57	0.80	1.03	1.25	1.43	1.56	1.64	1.65
-140	1.08	0.85	0.76	0.77	0.77	0.73	0.64	0.50	0.33	0.22	0.22	0.26	0.35	0.47	0.59	0.69	0.77	0.82	0.82
-130	1.08	0.87	0.77	0.76	0.76	0.75	0.71	0.61	0.49	0.38	0.29	0.24	0.21	0.21	0.21	0.23	0.25	0.26	0.26
-120	1.08	0.90	0.79	0.75	0.75	0.75	0.73	0.71	0.69	0.64	0.58	0.51	0.45	0.39	0.35	0.32	0.30	0.29	0.29
-110	1.08	0.93	0.82	0.77	0.74	0.73	0.73	0.73	0.73	0.73	0.73	0.73	0.73	0.72	0.71	0.71	0.70	0.70	0.70
-100	1.08	0.97	0.87	0.80	0.75	0.72	0.70	0.71	0.71	0.72	0.72	0.72	0.73	0.73	0.73	0.73	0.73	0.73	0.73
-90	1.08	1.01	0.93	0.85	0.77	0.70	0.62	0.62	0.63	0.63	0.63	0.63	0.64	0.63	0.63	0.62	0.62	0.61	0.61
-80	1.08	1.05	1.00	0.92	0.83	0.72	0.58	0.55	0.54	0.52	0.51	0.49	0.48	0.47	0.46	0.46	0.45	0.44	0.44
-70	1.08	1.10	1.07	1.04	0.93	0.77	0.59	0.54	0.57	0.61	0.66	0.71	0.77	0.82	0.87	0.91	0.94	0.96	0.97
-60	1.08	1.14	1.20	1.16	1.06	0.94	0.82	0.77	0.90	1.05	1.20	1.35	1.50	1.64	1.76	1.86	1.93	1.97	1.99
-50	1.08	1.19	1.31	1.31	1.26	1.24	1.24	1.25	1.40	1.67	1.95	2.24	2.52	2.79	3.04	3.24	3.39	3.49	3.52
-40	1.08	1.24	1.42	1.47	1.52	1.62	1.78	1.96	2.09	2.38	2.84	3.32	3.85	4.44	5.06	5.66	6.18	6.55	6.69
-30	1.08	1.32	1.53	1.66	1.81	2.08	2.44	2.86	3.24	3.53	3.82	4.72	5.92	7.54	9.63	12.2	14.7	16.5	17.2
-20	1.08	1.38	1.64	1.84	2.11	2.56	3.18	3.91	4.64	5.40	6.31	7.50	9.44	14.0	20.5	28.4	37.4	46.4	50.9
-10	1.08	1.43	1.74	2.01	2.39	3.01	3.90	4.96	6.12	7.61	9.63	13.1	20.0	29.5	39.1	66.8	151	387	609
0	1.08	1.46	1.83	2.16	2.62	3.38	4.48	5.84	7.43	9.61	12.7	18.6	32.3	49.8	58.2	92.0	343	2211	7325
10	1.08	1.46	1.82	2.14	2.58	3.30	4.38	5.71	7.25	9.33	12.2	17.3	28.5	45.1	55.1	67.8	131	352	526
20	1.08	1.44	1.78	2.09	2.47	3.09	4.03	5.24	6.60	8.31	10.5	13.6	19.2	29.4	42.6	51.8	55.7	59.8	62.6
30	1.08	1.39	1.73	2.00	2.32	2.79	3.51	4.50	5.64	6.89	8.42	10.3	12.5	15.6	20.1	26.3	32.1	36.1	37.7
40	1.08	1.33	1.65	1.90	2.15	2.47	2.93	3.59	4.45	5.39	6.36	7.42	8.61	9.88	11.1	12.2	13.1	13.9	14.2
50	1.08	1.29	1.57	1.78	1.97	2.19	2.45	2.79	3.25	3.87	4.54	5.19	5.80	6.39	6.92	7.38	7.75	7.98	8.07
60	1.08	1.25	1.47	1.64	1.78	1.92	2.08	2.25	2.43	2.64	2.91	3.24	3.62	3.98	4.29	4.53	4.71	4.82	4.87
70	1.08	1.21	1.33	1.49	1.59	1.68	1.76	1.84	1.94	2.04	2.13	2.20	2.27	2.34	2.40	2.45	2.50	2.53	2.54
80	1.08	1.15	1.22	1.29	1.37	1.45	1.51	1.55	1.59	1.62	1.65	1.67	1.70	1.72	1.74	1.75	1.76	1.77	1.78
90	1.08	1.10	1.12	1.13	1.15	1.17	1.18	1.20	1.21	1.23	1.24	1.26	1.27	1.28	1.28	1.29	1.29	1.30	1.30
100	1.08	1.05	1.01	0.97	0.93	0.90	0.87	0.85	0.83	0.82	0.82	0.81	0.81	0.80	0.80	0.80	0.80	0.81	0.81
110	1.08	0.99	0.91	0.84	0.80	0.79	0.79	0.79	0.80	0.82	0.83	0.83	0.83	0.84	0.84	0.84	0.84	0.84	0.85
120	1.08	0.95	0.84	0.79	0.79	0.80	0.81	0.82	0.81	0.80	0.79	0.79	0.79	0.80	0.81	0.82	0.83	0.84	0.84
130	1.08	0.91	0.80	0.78	0.80	0.81	0.81	0.80	0.80	0.81	0.86	0.92	1.00	1.11	1.25	1.40	1.52	1.59	1.60
140	1.08	0.88	0.78	0.79	0.81	0.81	0.80	0.81	0.87	1.01	1.27	1.66	2.08	2.43	2.66	2.79	2.86	2.89	2.90
150	1.08	0.85	0.78	0.80	0.81	0.80	0.81	0.89	1.12	1.59	2.19	2.64	2.86	2.96	3.02	3.05	3.07	3.09	3.09
160	1.08	0.84	0.78	0.80	0.80	0.80	0.85	1.05	1.55	2.25	2.74	2.94	3.01	3.06	3.10	3.17	3.29	3.35	3.39
170	1.08	0.83	0.78	0.80	0.80	0.81	0.90	1.23	1.92	2.59	2.90	2.97	2.91	2.84	2.81	2.83	2.85	2.94	3.12
180	1.08	0.82	0.78	0.80	0.80	0.82	0.92	1.32	2.06	2.69	2.93	2.91	2.60	2.19	1.86	1.64	1.36	1.17	1.33

H_b Range:-90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Aurora Max-618mm-RGBW 6500K-10D-Rev1	TYPE:RGBW-6500K	WEIGHT:
SPEC.:10 DEG	DIM.:618mm	SERIAL No.:IES001760
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: ×10cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	1.32	1.52	1.66	1.70	1.60	1.35	0.99	0.63	0.37	0.24	0.28	0.44	0.63	0.74	0.74	0.71	0.62	0.45
-170	2.49	2.34	2.23	2.00	1.66	1.30	0.92	0.59	0.34	0.24	0.29	0.45	0.64	0.74	0.74	0.71	0.62	0.45
-160	2.42	2.26	1.99	1.69	1.35	1.01	0.70	0.43	0.27	0.24	0.33	0.51	0.67	0.75	0.74	0.71	0.62	0.45
-150	1.59	1.48	1.31	1.09	0.85	0.62	0.41	0.27	0.24	0.29	0.42	0.59	0.71	0.75	0.73	0.70	0.61	0.45
-140	0.79	0.72	0.62	0.50	0.38	0.28	0.23	0.24	0.30	0.42	0.57	0.68	0.74	0.74	0.72	0.68	0.59	0.45
-130	0.25	0.24	0.22	0.21	0.22	0.25	0.30	0.39	0.50	0.61	0.70	0.74	0.74	0.73	0.71	0.66	0.57	0.45
-120	0.30	0.32	0.35	0.39	0.45	0.52	0.60	0.66	0.71	0.73	0.74	0.74	0.73	0.71	0.68	0.63	0.55	0.45
-110	0.71	0.71	0.72	0.73	0.74	0.74	0.74	0.74	0.74	0.73	0.73	0.72	0.70	0.68	0.64	0.59	0.52	0.45
-100	0.73	0.73	0.72	0.72	0.72	0.72	0.71	0.71	0.70	0.69	0.67	0.65	0.63	0.60	0.57	0.53	0.49	0.45
-90	0.60	0.59	0.59	0.58	0.57	0.57	0.55	0.54	0.53	0.51	0.50	0.48	0.48	0.47	0.47	0.46	0.46	0.45
-80	0.42	0.41	0.40	0.38	0.37	0.35	0.33	0.32	0.31	0.30	0.30	0.30	0.32	0.34	0.37	0.40	0.42	0.45
-70	0.95	0.91	0.87	0.81	0.75	0.69	0.63	0.56	0.49	0.42	0.36	0.31	0.27	0.27	0.29	0.34	0.40	0.45
-60	1.96	1.91	1.82	1.71	1.57	1.43	1.28	1.12	0.97	0.81	0.66	0.51	0.40	0.32	0.27	0.29	0.37	0.45
-50	3.49	3.38	3.22	3.01	2.75	2.48	2.19	1.89	1.61	1.33	1.07	0.83	0.61	0.44	0.31	0.27	0.34	0.45
-40	6.55	6.18	5.66	5.05	4.48	3.93	3.39	2.86	2.36	1.91	1.53	1.18	0.86	0.58	0.39	0.27	0.32	0.45
-30	16.5	14.7	12.2	9.84	7.86	6.24	4.99	4.03	3.21	2.52	1.97	1.51	1.11	0.74	0.46	0.28	0.31	0.45
-20	46.1	37.0	29.0	21.6	15.2	10.4	7.28	5.31	4.01	3.07	2.35	1.79	1.31	0.87	0.53	0.30	0.30	0.45
-10	380	165	74.8	40.4	25.4	15.9	9.86	6.54	4.66	3.44	2.61	1.97	1.44	0.96	0.57	0.32	0.29	0.45
0	5418	1046	165	59.3	31.4	19.2	11.2	7.10	4.90	3.56	2.69	2.05	1.50	1.01	0.59	0.33	0.29	0.45
10	371	145	72.1	53.0	41.1	25.5	14.5	9.14	6.39	4.60	3.37	2.48	1.76	1.16	0.70	0.40	0.32	0.45
20	59.8	55.6	52.1	44.6	32.2	21.2	13.7	9.53	6.98	5.07	3.72	2.71	1.89	1.23	0.77	0.46	0.36	0.45
30	36.4	32.6	27.0	21.0	16.2	12.8	10.6	8.74	6.65	4.97	3.71	2.69	1.87	1.24	0.81	0.51	0.41	0.45
40	13.9	13.2	12.2	11.1	9.99	8.78	7.59	6.45	5.45	4.43	3.33	2.42	1.72	1.20	0.83	0.55	0.45	0.45
50	8.00	7.78	7.42	6.96	6.42	5.82	5.22	4.61	3.99	3.37	2.72	2.05	1.54	1.15	0.82	0.60	0.48	0.45
60	4.83	4.72	4.55	4.32	4.05	3.71	3.34	2.97	2.64	2.35	2.10	1.75	1.41	1.09	0.83	0.64	0.52	0.45
70	2.52	2.48	2.42	2.34	2.25	2.16	2.08	1.99	1.89	1.81	1.72	1.57	1.31	1.07	0.87	0.69	0.55	0.45
80	1.76	1.75	1.73	1.71	1.68	1.66	1.63	1.61	1.58	1.56	1.54	1.50	1.29	1.08	0.89	0.72	0.57	0.45
90	1.30	1.30	1.30	1.30	1.30	1.30	1.30	1.30	1.31	1.31	1.32	1.32	1.18	1.03	0.89	0.74	0.60	0.45
100	0.80	0.80	0.80	0.80	0.80	0.81	0.82	0.84	0.86	0.90	0.95	1.00	0.97	0.92	0.85	0.75	0.61	0.45
110	0.84	0.84	0.84	0.84	0.84	0.83	0.82	0.81	0.79	0.78	0.78	0.79	0.80	0.81	0.80	0.74	0.63	0.45
120	0.83	0.82	0.81	0.80	0.80	0.80	0.80	0.81	0.82	0.81	0.79	0.77	0.76	0.76	0.76	0.73	0.64	0.45
130	1.55	1.44	1.29	1.14	1.02	0.93	0.86	0.83	0.81	0.81	0.80	0.79	0.77	0.75	0.74	0.73	0.64	0.45
140	2.88	2.83	2.73	2.53	2.20	1.77	1.34	1.04	0.89	0.81	0.77	0.78	0.78	0.76	0.74	0.72	0.64	0.45
150	3.09	3.07	3.05	3.01	2.93	2.74	2.34	1.74	1.10	0.78	0.69	0.72	0.76	0.77	0.74	0.72	0.64	0.45
160	3.35	3.28	3.18	3.12	3.06	3.00	2.56	1.91	1.20	0.73	0.59	0.63	0.72	0.76	0.75	0.72	0.64	0.45
170	3.05	3.00	3.08	2.94	2.62	2.26	1.86	1.42	0.94	0.56	0.45	0.53	0.67	0.75	0.75	0.71	0.63	0.45
180	1.32	1.52	1.66	1.70	1.60	1.35	0.99	0.63	0.37	0.24	0.28	0.44	0.63	0.74	0.74	0.71	0.62	0.45

H_(b) Range: -90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature: 25.3DEG

Operators: Fan

Test Date: 2023-09-22

V(B) Range: -180 - 180DEG

V(B) Interval: 0.5DEG

Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity: 65.0%

Test Distance: 8.630m [K=1.0000]

Remarks: