

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	22943.6 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	18.6V x 18.4H
	At 50% of Imax	9.6V x 9.6H
	At 90% of Imax	3.7V x 3.7H

Beam Flux	Total	1001.0 lumens per klm.
	To 10% of Imax	693.2 lumens per klm.
	To 50% of Imax	362.2 lumens per klm.
	To 90% of Imax	69.0 lumens per klm.

Upward LOR	2.2 %
Downward LOR	97.9 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Aurora Max-618mm-RGBW ALL-10D-Rev1	TYPE:RGBW W=6500K	WEIGHT:
SPEC.:10 DEG	DIM.:618mm	SERIAL No.:IES001756
MFR.:	SUR.:	Shielding Angle:

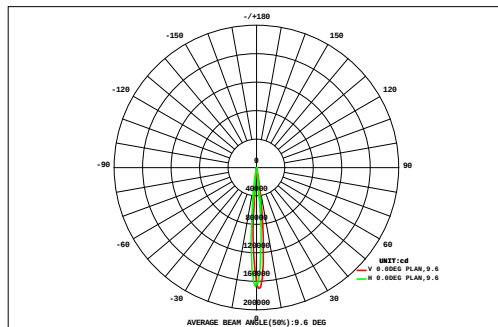

DATA OF LAMP		Eff:38.62lm/W	
MODEL		Imax(cd)	169943
NOMINAL POWER(W)	193.2	AVAILABILITY(%)	69.0
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	5107
NOMINAL FLUX(lm)	7407	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	7407
TEST VOLTAGE(V)	220	q @50%(H,V)	10,10DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm				F t	F a
	18	16	14	12	10	8	6	4	2	0	2	4	6	8	10	12	14	16	18			
	1.36	1.43	1.50	1.59	1.73	1.89	2.05	2.19	2.28	2.28	2.20	2.07	1.90	1.74	1.59	1.49	1.41	1.35	32.1	0.00		
	1.41	1.49	1.61	1.80	2.07	2.40	2.73	3.03	3.21	3.22	3.06	2.77	2.43	2.10	1.82	1.62	1.48	1.39	39.6	0.00		
	1.46	1.58	1.79	2.13	2.64	3.37	4.10	4.71	5.11	5.14	4.78	4.16	3.44	2.74	2.21	1.83	1.59	1.45	54.2	0.00		
	1.52	1.71	2.05	2.64	3.62	4.96	6.64	8.47	9.82	9.94	8.75	6.97	5.24	3.85	2.83	2.17	1.76	1.53	84.5	0.00		
	1.59	1.87	2.40	3.35	4.95	7.79	12.2	17.0	20.0	20.4	17.8	13.1	8.81	5.64	3.76	2.64	2.00	1.63	147	35.0		
	1.69	2.08	2.80	4.18	7.03	12.9	22.9	35.7	43.4	44.2	37.6	25.8	15.5	8.83	5.09	3.34	2.39	1.82	277	201		
	1.78	2.29	3.28	5.22	10.0	19.3	38.5	64.5	84.4	85.9	69.1	46.3	25.6	14.1	7.74	4.49	2.91	2.05	487	416		
	1.86	2.46	3.71	6.23	12.6	26.4	54.5	98.7	138	140	112	73.4	43.5	23.1	11.8	5.97	3.48	2.29	760	700		
	1.89	2.53	3.95	6.74	14.0	31.3	64.7	118	175	186	160	116	67.9	33.5	15.7	7.50	3.96	2.49	1011	952		
	1.90	2.60	4.13	7.26	15.8	35.9	74.2	135	187	198	177	127	73.1	35.8	16.3	7.74	4.06	2.51	1105	1043		
	1.88	2.63	4.19	7.61	16.5	38.0	74.9	122	156	159	136	96.3	56.8	28.6	13.4	6.58	3.73	2.36	926	867		
	1.78	2.48	3.91	6.87	13.9	29.2	51.8	80.5	102	103	84.2	60.1	37.5	19.1	9.83	5.28	3.23	2.13	616	554		
	1.63	2.22	3.41	5.41	9.65	17.3	29.5	44.1	54.8	55.1	44.8	31.9	20.4	11.8	6.66	4.15	2.67	1.87	347	272		
	1.43	1.90	2.69	4.01	6.10	10.2	15.5	21.2	26.0	26.1	21.4	15.8	11.0	6.90	4.55	3.12	2.18	1.60	182	67.5		
	1.23	1.59	2.12	2.90	4.05	5.66	8.02	10.4	11.8	11.8	10.4	8.04	5.78	4.29	3.19	2.33	1.76	1.37	96.8	0.00		
	1.06	1.33	1.68	2.16	2.78	3.57	4.49	5.35	5.90	5.90	5.34	4.48	3.56	2.86	2.26	1.79	1.44	1.15	57.1	0.00		
	0.92	1.11	1.36	1.65	2.01	2.42	2.86	3.27	3.54	3.54	3.27	2.85	2.41	2.02	1.69	1.42	1.17	0.98	38.5	0.00		
	0.80	0.94	1.10	1.31	1.53	1.75	1.98	2.17	2.28	2.28	2.16	1.97	1.75	1.52	1.32	1.13	0.98	0.85	27.8	0.00		
-18	-16	-14	-12	-10	-8	-6	-4	HORIZONTAL (DEG)				4	6	8	10	12	14	16	18			
F t	27.2	34.2	47.7	73.1	131	254	472	776	1031	1061	899	639	387	209	112	64.6	42.2	30.8	6289	---		
F a	0.00	0.00	0.00	0.00	0.00	168	407	716	974	1004	838	572	306	123	0.00	0.00	0.00	0.00	---	5107		

one-half-peak spread: U:4.6,D:5.0 , L:5.0,R:4.6


NEMA Beam Type: Type 2

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-09-22

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:Aurora Max-618mm-RGBW ALL-10D-Rev1	TYPE:RGBW W=6500K	WEIGHT:
SPEC.:10 DEG	DIM.:618mm	SERIAL No.:IES001756
MFR.:	SUR.:	Shielding Angle:

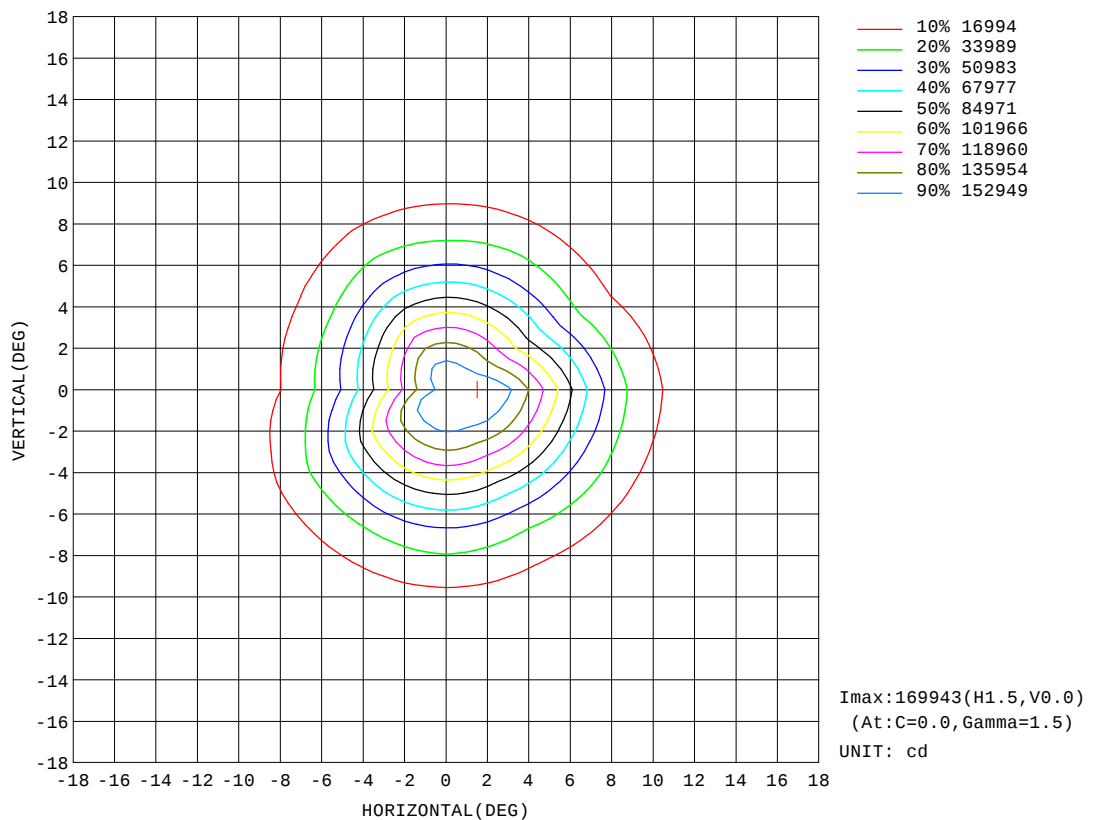


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Aurora Max-618mm-RGBW ALL-10D-Rev1	TYPE:RGBW W=6500K	WEIGHT:
SPEC.:10 DEG	DIM.:618mm	SERIAL No.:IES001756
MFR.:	SUR.:	Shielding Angle:

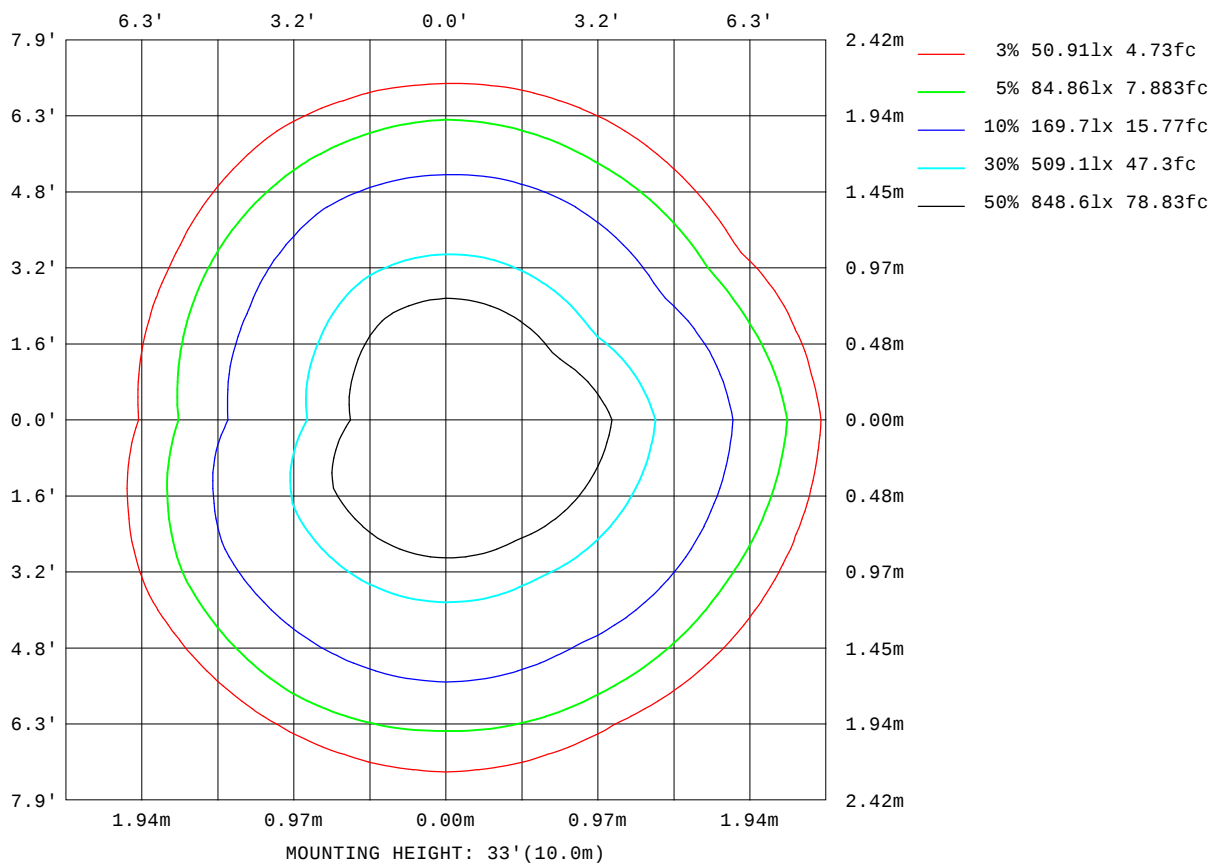

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-09-22

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

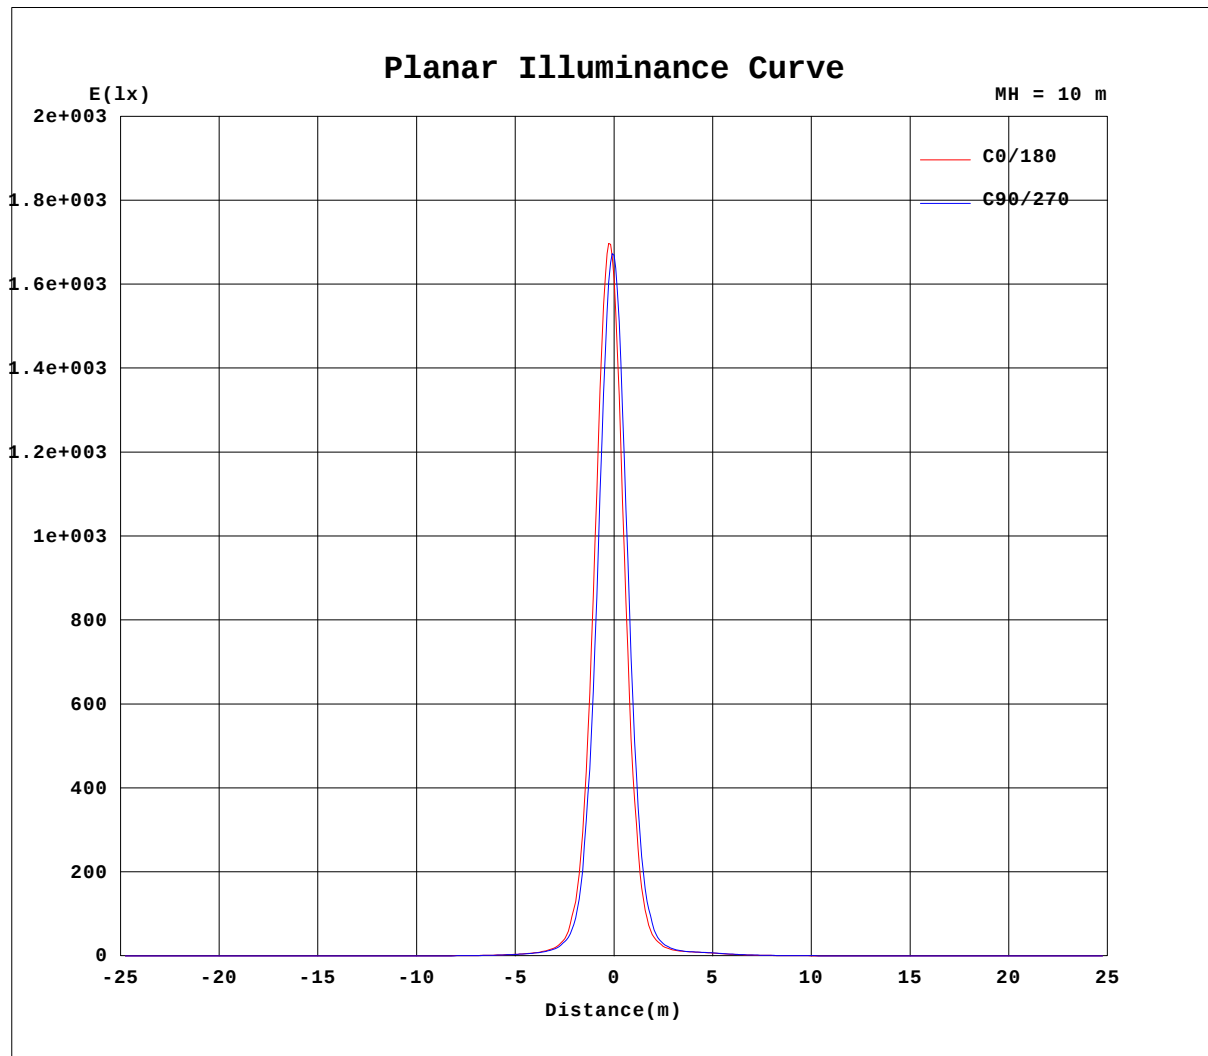


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-09-22

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Aurora Max-618mm-RGBW ALL-10D-Rev1	TYPE:RGBW W=6500K	WEIGHT:
SPEC.:10 DEG	DIM.:618mm	SERIAL No.:IES001756
MFR.:	SUR.:	Shielding Angle:

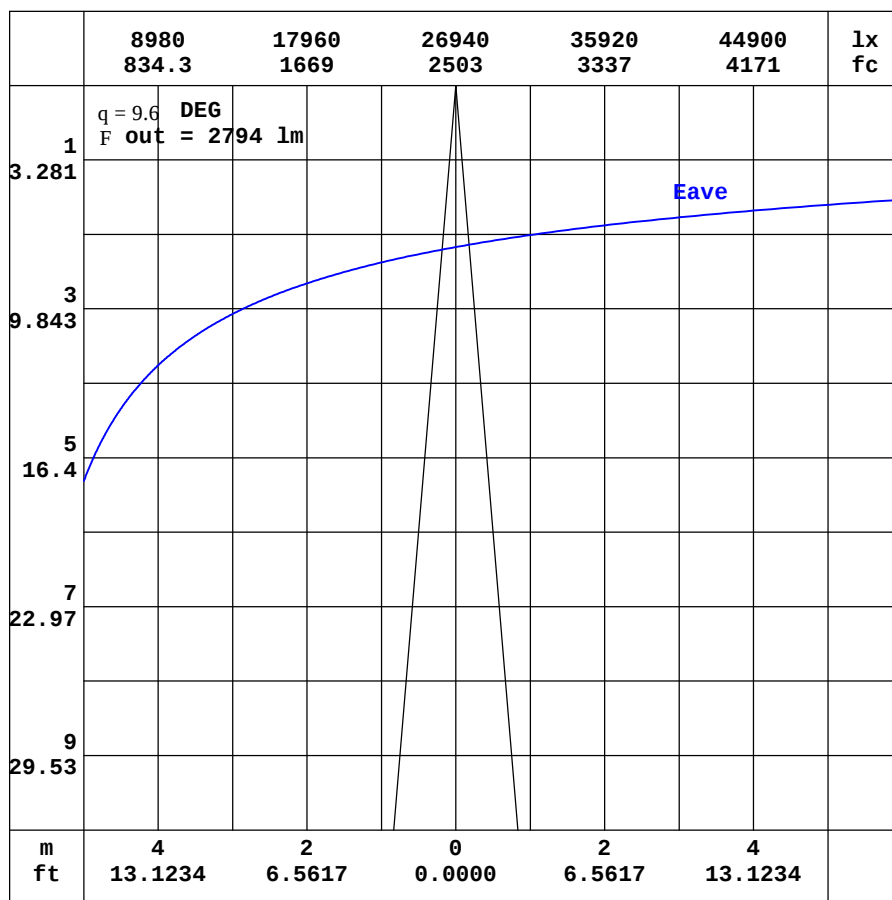

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-09-22

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Aurora Max-618mm-RGBW ALL-10D-Rev1	TYPE:RGBW W=6500K	WEIGHT:
SPEC.:10 DEG	DIM.:618mm	SERIAL No.:IES001756
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: ×100cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.25	0.19	0.17	0.18	0.18	0.18	0.20	0.28	0.44	0.59	0.64	0.64	0.58	0.48	0.41	0.36	0.30	0.26	0.29
-170	0.25	0.19	0.17	0.18	0.17	0.17	0.17	0.22	0.32	0.42	0.46	0.47	0.46	0.46	0.49	0.52	0.54	0.57	0.57
-160	0.25	0.19	0.17	0.17	0.17	0.16	0.15	0.15	0.19	0.24	0.26	0.26	0.28	0.35	0.41	0.47	0.51	0.53	0.54
-150	0.25	0.19	0.17	0.17	0.17	0.16	0.13	0.11	0.10	0.09	0.08	0.12	0.17	0.22	0.27	0.31	0.34	0.35	0.36
-140	0.25	0.19	0.17	0.17	0.17	0.16	0.14	0.11	0.07	0.05	0.05	0.06	0.08	0.10	0.13	0.15	0.17	0.18	0.18
-130	0.25	0.20	0.17	0.17	0.16	0.16	0.15	0.13	0.10	0.08	0.06	0.05	0.05	0.05	0.05	0.05	0.05	0.06	0.06
-120	0.25	0.20	0.18	0.16	0.16	0.16	0.16	0.15	0.15	0.14	0.12	0.11	0.10	0.08	0.08	0.07	0.07	0.06	0.06
-110	0.25	0.21	0.19	0.17	0.16	0.16	0.15	0.16	0.16	0.16	0.16	0.16	0.16	0.15	0.15	0.15	0.15	0.15	0.15
-100	0.25	0.22	0.20	0.18	0.17	0.16	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.16	0.16	0.16	0.16	0.16	0.16
-90	0.25	0.23	0.21	0.19	0.17	0.15	0.13	0.13	0.13	0.13	0.13	0.14	0.14	0.13	0.13	0.13	0.13	0.13	0.13
-80	0.25	0.24	0.23	0.21	0.19	0.16	0.12	0.12	0.12	0.11	0.11	0.11	0.10	0.10	0.10	0.10	0.10	0.10	0.10
-70	0.25	0.25	0.24	0.24	0.21	0.17	0.13	0.12	0.12	0.13	0.15	0.16	0.17	0.18	0.19	0.20	0.21	0.22	0.22
-60	0.25	0.26	0.27	0.26	0.24	0.21	0.18	0.17	0.20	0.23	0.27	0.30	0.33	0.36	0.39	0.41	0.43	0.44	0.44
-50	0.25	0.27	0.30	0.29	0.28	0.27	0.27	0.27	0.31	0.37	0.43	0.49	0.56	0.62	0.67	0.72	0.75	0.78	0.79
-40	0.25	0.29	0.32	0.33	0.34	0.36	0.39	0.43	0.46	0.52	0.62	0.73	0.85	0.98	1.12	1.25	1.38	1.47	1.50
-30	0.25	0.30	0.35	0.37	0.40	0.46	0.54	0.63	0.72	0.78	0.84	1.03	1.30	1.67	2.15	2.73	3.30	3.75	3.96
-20	0.25	0.32	0.37	0.41	0.47	0.57	0.71	0.87	1.03	1.20	1.39	1.66	2.07	3.12	4.57	6.30	8.35	10.5	11.6
-10	0.25	0.33	0.39	0.45	0.53	0.67	0.87	1.10	1.36	1.69	2.15	2.95	4.50	6.60	8.64	14.7	34.0	93.9	143
0	0.25	0.34	0.41	0.48	0.58	0.75	1.00	1.30	1.66	2.14	2.88	4.27	7.30	11.1	13.0	21.3	77.3	521	1612
10	0.25	0.33	0.41	0.47	0.57	0.73	0.97	1.27	1.62	2.08	2.73	3.89	6.36	10.0	12.2	15.1	29.4	72.4	118
20	0.25	0.33	0.40	0.46	0.55	0.68	0.89	1.16	1.47	1.85	2.35	3.03	4.25	6.47	9.33	11.3	12.3	13.1	13.8
30	0.25	0.32	0.39	0.45	0.51	0.62	0.78	1.00	1.25	1.54	1.88	2.28	2.77	3.43	4.43	5.72	6.93	7.81	8.15
40	0.25	0.31	0.37	0.42	0.48	0.55	0.65	0.80	0.98	1.19	1.41	1.64	1.89	2.16	2.42	2.68	2.89	3.04	3.09
50	0.25	0.30	0.36	0.40	0.44	0.48	0.54	0.62	0.72	0.85	1.00	1.14	1.27	1.40	1.51	1.61	1.70	1.75	1.77
60	0.25	0.29	0.34	0.37	0.40	0.43	0.46	0.50	0.54	0.58	0.64	0.71	0.79	0.87	0.93	0.99	1.02	1.05	1.06
70	0.25	0.28	0.31	0.34	0.36	0.38	0.39	0.41	0.43	0.45	0.47	0.48	0.50	0.51	0.52	0.53	0.54	0.55	0.55
80	0.25	0.27	0.28	0.30	0.31	0.33	0.34	0.35	0.36	0.36	0.36	0.37	0.37	0.38	0.38	0.38	0.39	0.39	0.39
90	0.25	0.26	0.26	0.26	0.26	0.27	0.27	0.27	0.28	0.28	0.28	0.28	0.29	0.29	0.29	0.29	0.29	0.29	0.29
100	0.25	0.24	0.23	0.22	0.21	0.20	0.20	0.19	0.19	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.18
110	0.25	0.23	0.21	0.19	0.18	0.17	0.17	0.17	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.18
120	0.25	0.22	0.19	0.18	0.17	0.18	0.18	0.18	0.18	0.18	0.17	0.17	0.17	0.18	0.18	0.18	0.18	0.18	0.18
130	0.25	0.21	0.18	0.17	0.18	0.18	0.18	0.18	0.17	0.18	0.19	0.20	0.22	0.24	0.28	0.31	0.34	0.35	0.35
140	0.25	0.20	0.17	0.17	0.18	0.18	0.18	0.18	0.19	0.22	0.28	0.36	0.45	0.53	0.58	0.61	0.62	0.63	0.63
150	0.25	0.19	0.17	0.18	0.18	0.18	0.18	0.20	0.24	0.34	0.47	0.57	0.62	0.65	0.66	0.66	0.67	0.67	0.67
160	0.25	0.19	0.17	0.18	0.18	0.18	0.19	0.23	0.33	0.49	0.60	0.64	0.66	0.67	0.67	0.69	0.72	0.73	0.73
170	0.25	0.19	0.17	0.18	0.18	0.18	0.20	0.26	0.41	0.56	0.63	0.65	0.64	0.62	0.61	0.61	0.62	0.63	0.67
180	0.25	0.19	0.17	0.18	0.18	0.18	0.20	0.28	0.44	0.59	0.64	0.64	0.58	0.48	0.41	0.36	0.30	0.26	0.29

H_(b) Range: -90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature: 25.3DEG

Operators: Fan

Test Date: 2023-09-22

V(B) Range: -180 - 180DEG

V(B) Interval: 0.5DEG

Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity: 65.0%

Test Distance: 8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Aurora Max-618mm-RGBW ALL-10D-Rev1	TYPE:RGBW W=6500K	WEIGHT:
SPEC.:10 DEG	DIM.:618mm	SERIAL No.:IES001756
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: ×100cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	0.29	0.33	0.36	0.37	0.35	0.30	0.22	0.14	0.08	0.05	0.06	0.09	0.14	0.16	0.16	0.15	0.14	0.10
-170	0.54	0.51	0.49	0.44	0.37	0.29	0.21	0.13	0.08	0.05	0.06	0.10	0.14	0.16	0.16	0.15	0.14	0.10
-160	0.52	0.49	0.43	0.37	0.30	0.22	0.15	0.10	0.06	0.05	0.07	0.11	0.14	0.16	0.16	0.15	0.14	0.10
-150	0.34	0.32	0.28	0.24	0.19	0.14	0.09	0.06	0.05	0.06	0.09	0.13	0.15	0.16	0.16	0.15	0.13	0.10
-140	0.17	0.15	0.13	0.11	0.08	0.06	0.05	0.05	0.06	0.09	0.12	0.15	0.16	0.16	0.16	0.15	0.13	0.10
-130	0.05	0.05	0.05	0.05	0.05	0.05	0.06	0.08	0.11	0.13	0.15	0.16	0.16	0.16	0.15	0.14	0.13	0.10
-120	0.07	0.07	0.08	0.09	0.10	0.11	0.13	0.14	0.15	0.16	0.16	0.16	0.16	0.15	0.15	0.14	0.12	0.10
-110	0.15	0.15	0.15	0.16	0.16	0.16	0.16	0.16	0.16	0.16	0.16	0.15	0.15	0.15	0.14	0.13	0.12	0.10
-100	0.16	0.16	0.16	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.14	0.14	0.14	0.13	0.12	0.12	0.11	0.10
-90	0.13	0.13	0.13	0.12	0.12	0.12	0.12	0.12	0.11	0.11	0.11	0.11	0.11	0.10	0.10	0.10	0.10	0.10
-80	0.09	0.09	0.09	0.08	0.08	0.08	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.08	0.08	0.09	0.09	0.10
-70	0.21	0.20	0.19	0.18	0.17	0.15	0.14	0.12	0.11	0.09	0.08	0.07	0.06	0.06	0.06	0.08	0.09	0.10
-60	0.44	0.43	0.41	0.38	0.35	0.32	0.29	0.25	0.21	0.18	0.15	0.11	0.09	0.07	0.06	0.07	0.08	0.10
-50	0.78	0.75	0.72	0.67	0.61	0.55	0.49	0.42	0.36	0.29	0.24	0.18	0.13	0.10	0.07	0.06	0.08	0.10
-40	1.47	1.38	1.26	1.12	0.99	0.87	0.75	0.63	0.52	0.42	0.34	0.26	0.19	0.13	0.08	0.06	0.07	0.10
-30	3.77	3.32	2.75	2.21	1.75	1.38	1.10	0.89	0.71	0.56	0.43	0.33	0.24	0.16	0.10	0.06	0.07	0.10
-20	10.5	8.35	6.49	4.86	3.41	2.30	1.60	1.17	0.88	0.67	0.52	0.39	0.28	0.19	0.11	0.07	0.07	0.10
-10	94.5	37.0	16.5	8.94	5.64	3.53	2.17	1.44	1.02	0.75	0.57	0.43	0.31	0.21	0.12	0.07	0.07	0.10
0	1116	205	34.8	12.9	6.89	4.19	2.48	1.56	1.07	0.78	0.59	0.44	0.32	0.21	0.13	0.07	0.06	0.10
10	76.8	32.1	15.8	11.5	8.91	5.53	3.17	2.00	1.40	1.01	0.73	0.54	0.38	0.25	0.15	0.09	0.07	0.10
20	13.1	12.2	11.3	9.65	6.98	4.61	2.97	2.09	1.53	1.11	0.81	0.59	0.41	0.27	0.17	0.10	0.08	0.10
30	7.87	7.05	5.87	4.60	3.55	2.82	2.32	1.92	1.46	1.08	0.80	0.58	0.40	0.27	0.18	0.11	0.09	0.10
40	3.04	2.90	2.68	2.42	2.17	1.92	1.66	1.41	1.18	0.96	0.72	0.53	0.37	0.26	0.18	0.12	0.10	0.10
50	1.75	1.70	1.62	1.52	1.40	1.27	1.13	1.00	0.87	0.73	0.59	0.45	0.33	0.25	0.18	0.13	0.11	0.10
60	1.05	1.02	0.99	0.94	0.88	0.81	0.73	0.65	0.57	0.51	0.46	0.38	0.31	0.24	0.18	0.14	0.12	0.10
70	0.55	0.54	0.53	0.51	0.49	0.47	0.45	0.43	0.41	0.39	0.37	0.34	0.29	0.24	0.19	0.15	0.12	0.10
80	0.38	0.38	0.38	0.37	0.37	0.36	0.36	0.35	0.35	0.34	0.34	0.33	0.29	0.24	0.20	0.16	0.13	0.10
90	0.29	0.29	0.29	0.29	0.29	0.29	0.29	0.29	0.29	0.30	0.30	0.30	0.26	0.23	0.20	0.17	0.13	0.10
100	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.19	0.20	0.21	0.22	0.22	0.21	0.19	0.17	0.14
110	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.17	0.17	0.17	0.17	0.18	0.18	0.18	0.18	0.16	0.14
120	0.18	0.18	0.18	0.18	0.17	0.17	0.18	0.18	0.18	0.18	0.17	0.17	0.17	0.17	0.17	0.16	0.14	0.10
130	0.34	0.32	0.28	0.25	0.22	0.20	0.19	0.18	0.18	0.18	0.17	0.17	0.17	0.16	0.16	0.16	0.14	0.10
140	0.62	0.61	0.59	0.55	0.48	0.38	0.29	0.23	0.19	0.18	0.17	0.17	0.17	0.17	0.16	0.16	0.14	0.10
150	0.67	0.67	0.66	0.65	0.63	0.59	0.51	0.38	0.24	0.17	0.15	0.15	0.16	0.17	0.16	0.16	0.14	0.10
160	0.72	0.71	0.69	0.67	0.66	0.65	0.55	0.41	0.26	0.16	0.13	0.14	0.15	0.17	0.16	0.16	0.14	0.10
170	0.65	0.65	0.66	0.63	0.57	0.49	0.41	0.31	0.20	0.12	0.10	0.11	0.14	0.16	0.16	0.16	0.14	0.10
180	0.29	0.33	0.36	0.37	0.35	0.30	0.22	0.14	0.08	0.05	0.06	0.09	0.14	0.16	0.16	0.15	0.14	0.10

H_b Range: -90 - 90DEGH_b Interval: 0.5DEG

Test Speed: LOW

Temperature: 25.3DEG

Operators: Fan

Test Date: 2023-09-22

V(B) Range: -180 - 180DEG

V(B) Interval: 0.5DEG

Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity: 65.0%

Test Distance: 8.630m [K=1.0000]

Remarks: