

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	21604.3 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	19.2V x 19.0H
	At 50% of Imax	9.9V x 9.8H
	At 90% of Imax	3.8V x 3.8H

Beam Flux	Total	1000.9 lumens per klm.
	To 10% of Imax	696.0 lumens per klm.
	To 50% of Imax	369.2 lumens per klm.
	To 90% of Imax	76.8 lumens per klm.

Upward LOR	2.1 %
Downward LOR	98.0 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Aurora Max-618mm-RGBW BLUE-10D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:10 DEG	DIM.:618mm	SERIAL No.:IES001759
MFR.:	SUR.:	Shielding Angle:

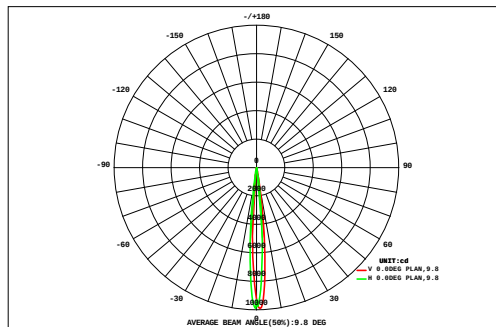

DATA OF LAMP		Eff:7.70lm/W	
MODEL		Imax(cd)	9910
NOMINAL POWER(W)	59.6	AVAILABILITY(%)	69.5
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	318.6
NOMINAL FLUX(lm)	458.7	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	458.7
TEST VOLTAGE(V)	220	q @50%(H,V)	10,10DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		F t	F a
	0.08	0.09	0.09	0.10	0.11	0.12	0.14	0.15	0.15	0.16	0.15	0.14	0.12	0.11	0.10	0.09	0.09	0.08	2.09	0.00
18	0.08	0.09	0.09	0.10	0.11	0.12	0.14	0.15	0.15	0.16	0.15	0.14	0.12	0.11	0.10	0.09	0.09	0.08	2.09	0.00
16	0.09	0.09	0.10	0.12	0.14	0.16	0.18	0.20	0.22	0.22	0.20	0.18	0.16	0.14	0.12	0.10	0.09	0.09	2.60	0.00
14	0.09	0.10	0.12	0.14	0.17	0.22	0.27	0.32	0.35	0.35	0.33	0.28	0.22	0.18	0.15	0.12	0.10	0.09	3.61	0.00
12	0.10	0.11	0.13	0.17	0.23	0.35	0.46	0.57	0.64	0.65	0.58	0.47	0.36	0.25	0.19	0.14	0.11	0.10	5.63	0.00
10	0.10	0.12	0.16	0.22	0.34	0.52	0.81	1.15	1.37	1.39	1.19	0.87	0.58	0.38	0.25	0.18	0.13	0.11	9.84	2.97
8	0.11	0.13	0.18	0.27	0.45	0.82	1.48	2.27	2.82	2.86	2.38	1.66	1.02	0.57	0.34	0.22	0.16	0.12	17.8	13.5
6	0.11	0.15	0.21	0.33	0.59	1.24	2.40	4.23	5.36	5.43	4.45	2.90	1.65	0.92	0.51	0.30	0.20	0.14	31.1	27.5
4	0.12	0.15	0.23	0.39	0.76	1.59	3.26	6.00	8.47	8.60	6.87	4.53	2.76	1.56	0.80	0.40	0.24	0.16	46.9	43.3
2	0.12	0.16	0.23	0.41	0.83	1.78	3.82	6.81	10.3	11.1	9.55	7.15	4.35	2.24	1.10	0.50	0.27	0.17	60.9	57.8
0	0.12	0.16	0.25	0.45	0.94	2.11	4.52	8.05	11.1	11.6	10.6	7.82	4.71	2.37	1.15	0.52	0.28	0.17	66.9	63.6
-2	0.12	0.16	0.26	0.49	1.04	2.35	4.77	7.41	9.28	9.30	8.07	5.97	3.68	1.86	0.92	0.46	0.25	0.16	56.6	53.3
-4	0.11	0.16	0.25	0.45	0.90	1.81	3.26	4.89	6.10	6.11	4.99	3.74	2.33	1.26	0.66	0.37	0.21	0.14	37.8	34.0
-6	0.10	0.14	0.21	0.37	0.62	1.13	1.84	2.70	3.36	3.35	2.69	1.95	1.31	0.76	0.46	0.28	0.18	0.12	21.6	17.3
-8	0.09	0.12	0.17	0.26	0.41	0.64	1.00	1.34	1.58	1.57	1.34	1.00	0.68	0.46	0.31	0.20	0.14	0.11	11.4	5.35
-10	0.08	0.10	0.14	0.19	0.26	0.37	0.51	0.64	0.74	0.74	0.64	0.50	0.37	0.29	0.21	0.15	0.12	0.09	6.13	0.00
-12	0.07	0.09	0.11	0.14	0.18	0.23	0.29	0.36	0.40	0.40	0.35	0.29	0.23	0.18	0.15	0.12	0.09	0.08	3.76	0.00
-14	0.06	0.07	0.09	0.11	0.13	0.16	0.18	0.21	0.22	0.22	0.21	0.18	0.16	0.13	0.11	0.09	0.08	0.06	2.47	0.00
-16	0.05	0.06	0.07	0.08	0.10	0.11	0.13	0.14	0.15	0.15	0.14	0.13	0.11	0.10	0.09	0.07	0.06	0.05	1.80	0.00
-18	0.05	0.06	0.07	0.08	0.10	0.11	0.13	0.14	0.15	0.15	0.14	0.13	0.11	0.10	0.09	0.07	0.06	0.05	1.80	0.00
	-18	-16	-14	-12	-10	-8	-6	-4	HORIZONTAL (DEG)	4	6	8	10	12	14	16	18			
F t	1.72	2.17	3.00	4.68	8.19	15.7	29.3	47.4	62.7	64.2	54.7	39.8	24.8	13.8	7.59	4.33	2.81	2.04	389	---
F a	0.00	0.00	0.00	0.00	0.62	10.7	25.4	43.8	59.2	60.7	51.0	36.0	20.9	8.78	1.34	0.00	0.00	0.00	---	319

one-half-peak spread: U:4.7,D:5.2 , L:4.9,R:4.9


NEMA Beam Type: Type 2

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-09-22

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:Aurora Max-618mm-RGBW BLUE-10D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:10 DEG	DIM.:618mm	SERIAL No.:IES001759
MFR.:	SUR.:	Shielding Angle:

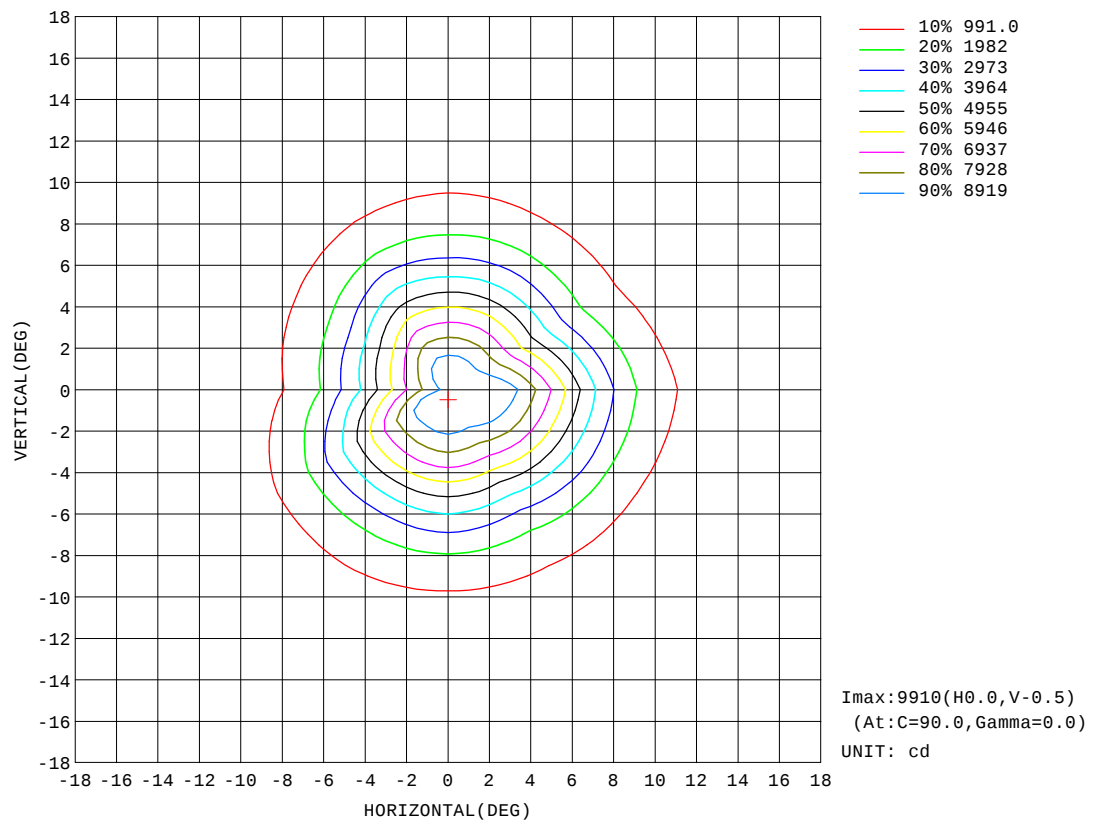


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Aurora Max-618mm-RGBW BLUE-10D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:10 DEG	DIM.:618mm	SERIAL No.:IES001759
MFR.:	SUR.:	Shielding Angle:

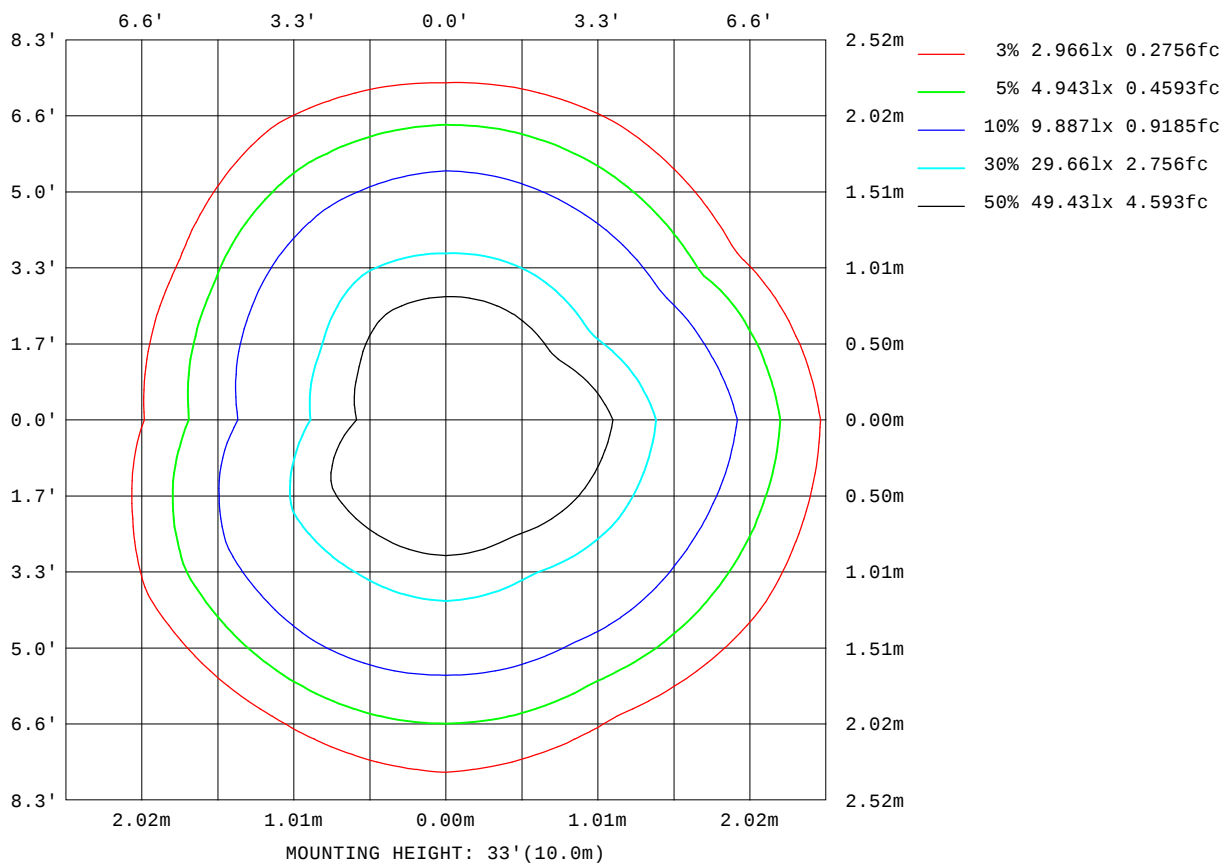

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

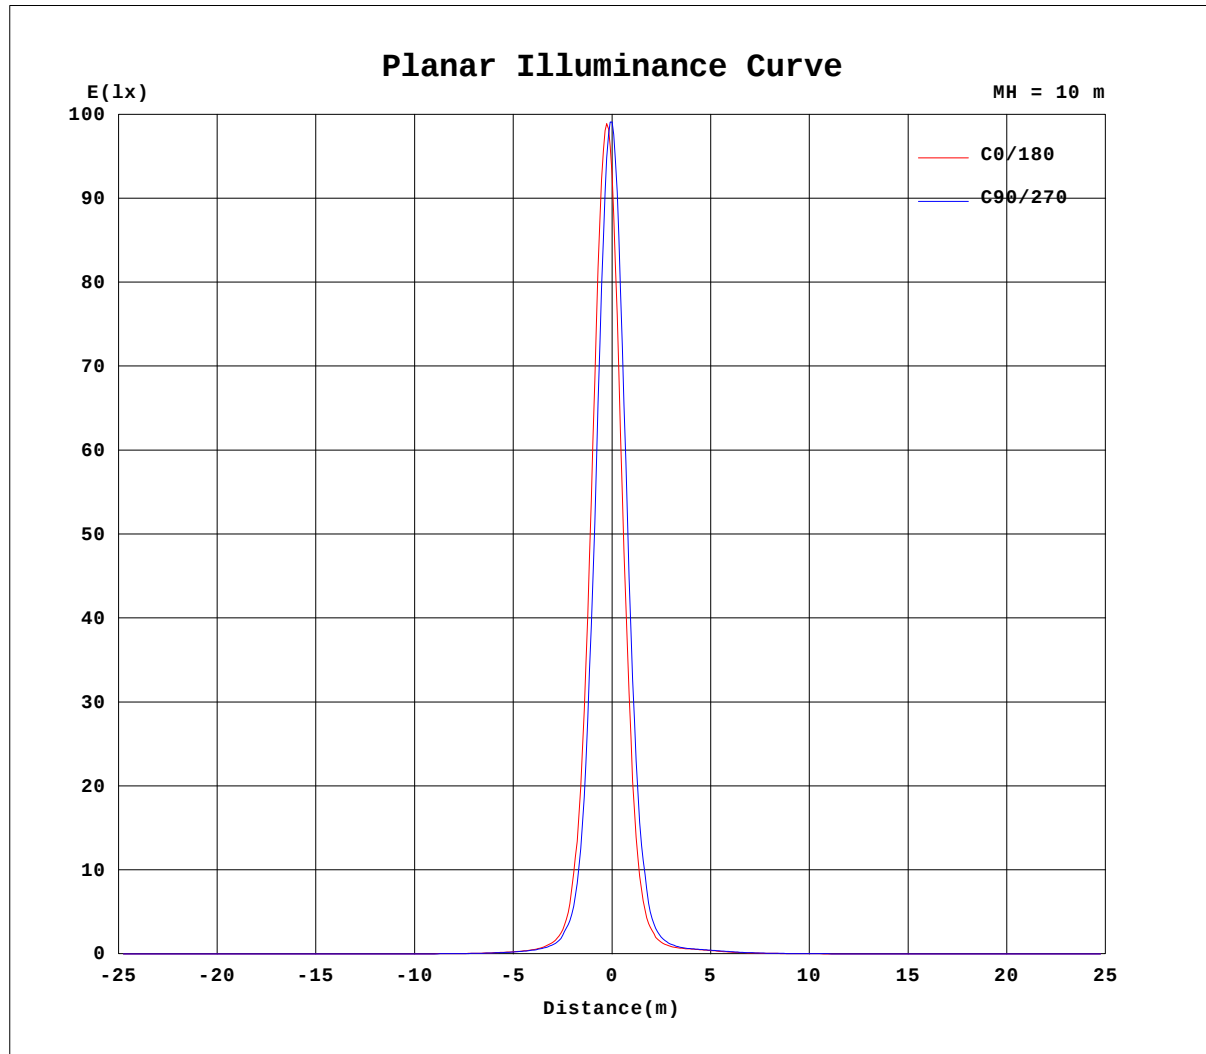


H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-09-22

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Aurora Max-618mm-RGBW BLUE-10D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:10 DEG	DIM.:618mm	SERIAL No.:IES001759
MFR.:	SUR.:	Shielding Angle:

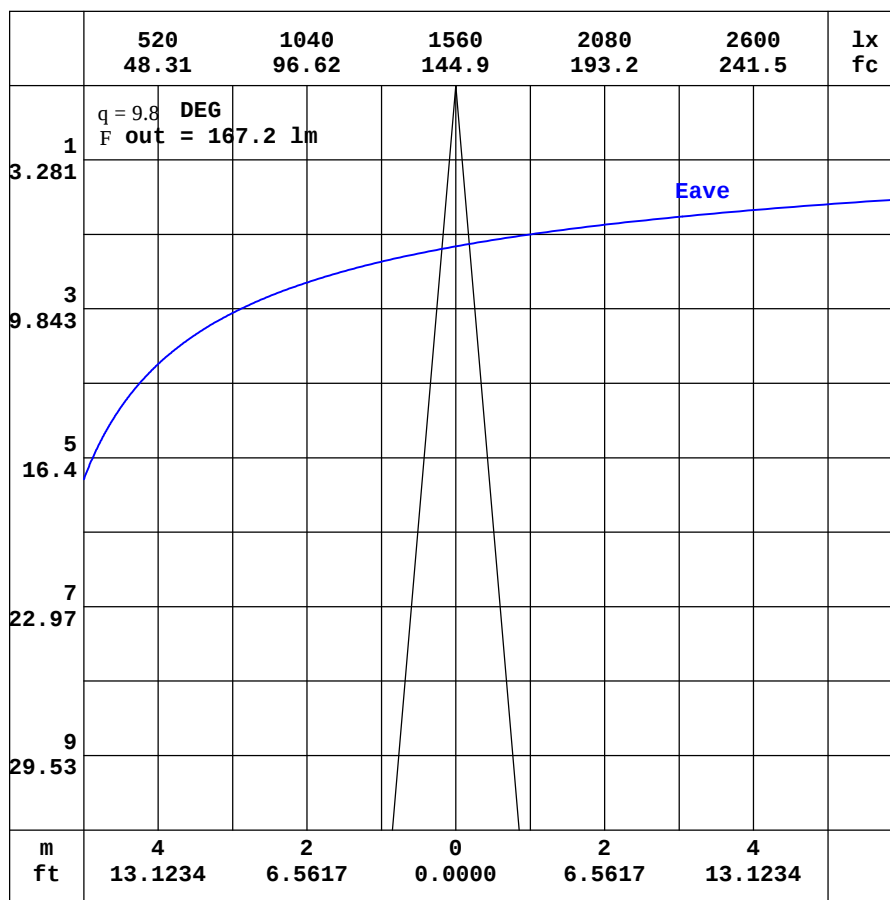

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

$H(b)$ Range:-90 - 90DEG
 $H(b)$ Interval: 0.5DEG
 Test Speed: LOW
 Temperature:25.3DEG
 Operators:Fan
 Test Date:2023-09-22

$V(B)$ Range:-180 - 180DEG
 $V(B)$ Interval: 0.5DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:8.630m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Aurora Max-618mm-RGBW BLUE-10D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:10 DEG	DIM.:618mm	SERIAL No.:IES001759
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	2.11	1.27	1.05	1.06	1.06	1.10	1.24	1.75	2.69	3.51	3.82	3.76	3.40	2.88	2.50	2.24	1.92	1.75	1.99
-170	2.11	1.27	1.03	1.03	1.02	0.99	1.03	1.33	1.93	2.49	2.73	2.77	2.76	2.79	3.00	3.19	3.33	3.60	3.58
-160	2.11	1.28	1.01	1.00	0.97	0.91	0.85	0.89	1.13	1.40	1.52	1.55	1.67	2.11	2.52	2.88	3.18	3.35	3.43
-150	2.11	1.31	0.99	0.98	0.94	0.86	0.74	0.60	0.55	0.50	0.44	0.69	1.00	1.32	1.61	1.85	2.06	2.19	2.23
-140	2.11	1.35	0.98	0.95	0.91	0.84	0.71	0.54	0.32	0.23	0.24	0.29	0.40	0.55	0.70	0.86	0.98	1.06	1.08
-130	2.11	1.43	1.02	0.92	0.88	0.83	0.75	0.61	0.48	0.37	0.28	0.24	0.23	0.22	0.23	0.25	0.28	0.31	0.32
-120	2.11	1.52	1.12	0.91	0.86	0.81	0.76	0.71	0.68	0.65	0.59	0.53	0.47	0.41	0.36	0.33	0.30	0.29	0.28
-110	2.11	1.63	1.25	1.01	0.86	0.79	0.74	0.72	0.72	0.72	0.72	0.72	0.72	0.73	0.73	0.72	0.71	0.70	0.70
-100	2.11	1.75	1.43	1.18	0.98	0.83	0.73	0.72	0.71	0.71	0.71	0.71	0.71	0.71	0.72	0.72	0.73	0.73	0.73
-90	2.11	1.87	1.62	1.38	1.13	0.89	0.64	0.64	0.63	0.63	0.62	0.62	0.61	0.61	0.62	0.62	0.62	0.62	0.62
-80	2.11	1.97	1.78	1.54	1.26	0.97	0.64	0.60	0.59	0.58	0.57	0.57	0.57	0.56	0.55	0.54	0.53	0.52	0.50
-70	2.11	2.08	1.92	1.74	1.44	1.09	0.73	0.64	0.70	0.79	0.87	0.97	1.05	1.13	1.20	1.26	1.31	1.33	1.33
-60	2.11	2.17	2.12	1.89	1.58	1.29	1.09	1.03	1.24	1.46	1.69	1.92	2.14	2.35	2.52	2.66	2.77	2.83	2.84
-50	2.11	2.26	2.26	2.04	1.80	1.68	1.68	1.72	1.95	2.35	2.77	3.19	3.62	4.03	4.39	4.68	4.91	5.05	5.08
-40	2.11	2.35	2.39	2.21	2.10	2.21	2.44	2.71	2.92	3.36	4.03	4.76	5.55	6.42	7.35	8.26	9.00	9.55	9.74
-30	2.11	2.47	2.53	2.40	2.47	2.82	3.35	3.95	4.51	4.96	5.45	6.78	8.57	11.0	14.1	17.8	21.4	24.2	25.3
-20	2.11	2.58	2.67	2.62	2.87	3.48	4.35	5.37	6.41	7.53	8.87	10.7	13.7	20.4	29.8	41.0	54.4	67.9	74.7
-10	2.11	2.66	2.81	2.83	3.24	4.10	5.33	6.79	8.42	10.5	13.4	18.3	27.7	41.0	55.7	96.2	217	560	884
0	2.11	2.73	2.95	3.03	3.55	4.59	6.11	7.96	10.2	13.1	17.4	25.5	42.9	65.8	80.2	131	455	3140	9277
10	2.11	2.72	2.93	3.01	3.50	4.49	5.97	7.77	9.90	12.7	16.6	23.5	38.0	59.5	74.6	96.7	187	482	811
20	2.11	2.70	2.90	2.97	3.37	4.19	5.48	7.13	8.98	11.3	14.3	18.5	25.8	39.2	56.3	69.0	76.6	84.4	89.6
30	2.11	2.64	2.87	2.91	3.18	3.79	4.77	6.12	7.66	9.35	11.5	14.0	17.0	21.2	27.4	35.4	42.8	48.1	50.2
40	2.11	2.57	2.83	2.87	2.99	3.37	3.99	4.90	6.05	7.32	8.66	10.1	11.8	13.5	15.2	16.7	18.0	18.9	19.3
50	2.11	2.53	2.78	2.82	2.84	3.01	3.34	3.80	4.44	5.27	6.19	7.09	7.95	8.79	9.52	10.1	10.6	10.9	11.1
60	2.11	2.46	2.71	2.77	2.76	2.77	2.87	3.07	3.31	3.60	3.97	4.44	4.95	5.45	5.86	6.19	6.42	6.57	6.63
70	2.11	2.38	2.57	2.71	2.71	2.69	2.65	2.65	2.70	2.78	2.87	2.96	3.05	3.15	3.25	3.33	3.40	3.45	3.47
80	2.11	2.28	2.42	2.53	2.62	2.66	2.67	2.66	2.63	2.60	2.57	2.53	2.50	2.50	2.50	2.50	2.51	2.51	2.51
90	2.11	2.15	2.19	2.23	2.28	2.32	2.36	2.39	2.42	2.45	2.49	2.52	2.55	2.56	2.57	2.57	2.58	2.59	2.60
100	2.11	2.00	1.88	1.75	1.63	1.52	1.42	1.33	1.25	1.19	1.15	1.11	1.08	1.07	1.07	1.07	1.07	1.08	1.09
110	2.11	1.84	1.56	1.33	1.17	1.09	1.06	1.05	1.04	1.04	1.04	1.04	1.04	1.03	1.04	1.04	1.05	1.06	1.07
120	2.11	1.69	1.32	1.10	1.05	1.05	1.05	1.05	1.04	1.03	1.02	1.01	1.01	1.03	1.04	1.05	1.05	1.05	1.05
130	2.11	1.56	1.16	1.05	1.05	1.05	1.05	1.04	1.03	1.04	1.09	1.18	1.30	1.44	1.63	1.82	1.98	2.07	2.08
140	2.11	1.45	1.07	1.05	1.05	1.05	1.05	1.05	1.11	1.29	1.63	2.14	2.68	3.14	3.45	3.63	3.71	3.75	3.75
150	2.11	1.37	1.05	1.06	1.05	1.05	1.07	1.15	1.44	2.05	2.82	3.39	3.70	3.86	3.95	4.01	4.04	4.04	4.04
160	2.11	1.32	1.05	1.06	1.06	1.06	1.12	1.37	2.01	2.90	3.54	3.79	3.90	3.98	4.07	4.20	4.38	4.46	4.52
170	2.11	1.29	1.05	1.06	1.06	1.08	1.19	1.61	2.49	3.36	3.77	3.84	3.78	3.71	3.73	3.78	3.83	3.95	4.24
180	2.11	1.27	1.05	1.06	1.06	1.10	1.24	1.75	2.69	3.51	3.82	3.76	3.40	2.88	2.50	2.24	1.92	1.75	2.00

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-09-22

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Aurora Max-618mm-RGBW BLUE-10D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:10 DEG	DIM.:618mm	SERIAL No.:IES001759
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	2.01	2.27	2.37	2.36	2.16	1.78	1.28	0.79	0.43	0.25	0.29	0.46	0.66	0.75	0.74	0.69	0.59	0.41
-170	3.46	3.23	3.05	2.76	2.26	1.74	1.21	0.75	0.42	0.26	0.30	0.48	0.67	0.75	0.74	0.70	0.59	0.41
-160	3.30	3.07	2.71	2.28	1.82	1.35	0.92	0.55	0.33	0.28	0.35	0.53	0.70	0.75	0.73	0.69	0.59	0.41
-150	2.15	1.98	1.74	1.44	1.12	0.80	0.53	0.35	0.29	0.30	0.44	0.61	0.73	0.75	0.73	0.69	0.58	0.41
-140	1.03	0.92	0.78	0.61	0.45	0.34	0.28	0.28	0.32	0.44	0.58	0.70	0.74	0.74	0.72	0.67	0.57	0.41
-130	0.30	0.28	0.26	0.25	0.25	0.27	0.33	0.41	0.53	0.63	0.71	0.74	0.75	0.74	0.71	0.65	0.55	0.41
-120	0.30	0.33	0.37	0.42	0.49	0.56	0.63	0.68	0.73	0.74	0.75	0.75	0.74	0.72	0.68	0.62	0.52	0.41
-110	0.71	0.72	0.73	0.73	0.74	0.74	0.74	0.74	0.74	0.75	0.75	0.74	0.72	0.68	0.64	0.57	0.50	0.41
-100	0.73	0.73	0.72	0.72	0.71	0.70	0.70	0.71	0.71	0.70	0.69	0.67	0.63	0.60	0.56	0.51	0.46	0.41
-90	0.61	0.59	0.58	0.56	0.55	0.53	0.53	0.52	0.51	0.51	0.50	0.50	0.48	0.47	0.45	0.44	0.42	0.41
-80	0.49	0.48	0.47	0.45	0.42	0.39	0.37	0.35	0.33	0.32	0.30	0.29	0.32	0.33	0.35	0.37	0.38	0.41
-70	1.31	1.26	1.19	1.11	1.02	0.93	0.84	0.73	0.62	0.51	0.42	0.32	0.28	0.28	0.28	0.31	0.36	0.41
-60	2.80	2.72	2.59	2.42	2.22	2.01	1.79	1.55	1.33	1.10	0.87	0.65	0.48	0.35	0.28	0.28	0.33	0.41
-50	5.03	4.87	4.63	4.31	3.93	3.54	3.10	2.67	2.24	1.84	1.46	1.12	0.80	0.54	0.34	0.28	0.30	0.41
-40	9.53	8.98	8.21	7.29	6.44	5.62	4.82	4.04	3.32	2.68	2.12	1.62	1.16	0.76	0.47	0.29	0.29	0.41
-30	24.2	21.4	17.8	14.4	11.4	8.96	7.14	5.73	4.54	3.55	2.76	2.09	1.51	0.99	0.58	0.31	0.28	0.41
-20	67.6	54.1	42.0	31.4	22.1	15.1	10.5	7.63	5.73	4.35	3.31	2.48	1.79	1.18	0.68	0.35	0.28	0.41
-10	552	254	108	58.7	36.8	23.1	14.3	9.46	6.70	4.92	3.69	2.75	1.98	1.31	0.75	0.38	0.28	0.41
0	6911	1406	240	85.8	45.5	27.7	16.4	10.3	7.09	5.11	3.82	2.86	2.06	1.36	0.78	0.39	0.27	0.41
10	511	209	103	72.9	55.1	34.6	20.1	12.8	8.94	6.44	4.69	3.42	2.40	1.56	0.92	0.50	0.35	0.41
20	84.6	76.7	69.5	58.7	42.7	28.5	18.5	13.1	9.59	6.97	5.11	3.70	2.56	1.67	1.02	0.59	0.42	0.41
30	48.4	43.5	36.3	28.6	22.1	17.5	14.4	11.8	9.03	6.75	5.04	3.64	2.53	1.67	1.08	0.68	0.49	0.41
40	19.0	18.0	16.7	15.2	13.6	12.0	10.3	8.74	7.37	5.98	4.50	3.27	2.32	1.61	1.12	0.78	0.56	0.41
50	10.9	10.6	10.2	9.52	8.77	7.93	7.09	6.25	5.40	4.55	3.66	2.77	2.07	1.56	1.16	0.88	0.62	0.41
60	6.57	6.42	6.18	5.87	5.48	5.02	4.52	4.01	3.55	3.17	2.84	2.37	1.94	1.57	1.27	1.00	0.69	0.41
70	3.43	3.37	3.28	3.16	3.03	2.89	2.78	2.67	2.56	2.47	2.43	2.32	2.01	1.75	1.45	1.09	0.74	0.41
80	2.50	2.50	2.50	2.50	2.50	2.52	2.54	2.57	2.61	2.66	2.72	2.74	2.37	1.98	1.57	1.17	0.77	0.41
90	2.60	2.59	2.59	2.59	2.59	2.59	2.61	2.64	2.66	2.69	2.72	2.74	2.35	1.96	1.58	1.19	0.80	0.41
100	1.08	1.08	1.07	1.07	1.08	1.10	1.17	1.26	1.37	1.51	1.68	1.85	1.76	1.62	1.41	1.14	0.80	0.41
110	1.07	1.06	1.06	1.06	1.06	1.05	1.05	1.05	1.04	1.06	1.10	1.16	1.20	1.22	1.19	1.06	0.80	0.41
120	1.05	1.04	1.04	1.03	1.03	1.03	1.03	1.03	1.03	1.04	1.03	1.00	0.98	0.98	1.00	0.96	0.77	0.41
130	2.01	1.88	1.69	1.50	1.34	1.20	1.11	1.05	1.03	1.03	1.02	0.97	0.93	0.89	0.89	0.89	0.75	0.41
140	3.73	3.68	3.55	3.30	2.86	2.29	1.74	1.34	1.13	1.01	0.95	0.94	0.91	0.87	0.83	0.82	0.72	0.41
150	4.05	4.05	4.02	3.95	3.82	3.57	3.03	2.25	1.40	0.97	0.84	0.85	0.87	0.84	0.80	0.78	0.69	0.41
160	4.48	4.40	4.25	4.12	4.02	3.90	3.31	2.46	1.53	0.90	0.70	0.73	0.81	0.82	0.78	0.75	0.66	0.41
170	4.11	4.06	4.14	3.90	3.45	2.97	2.41	1.82	1.18	0.67	0.51	0.59	0.73	0.78	0.76	0.72	0.63	0.41
180	2.01	2.27	2.37	2.36	2.16	1.78	1.28	0.79	0.43	0.25	0.29	0.46	0.66	0.75	0.74	0.69	0.59	0.41

H_(b) Range: -90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-09-22

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: