

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	22013.5 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	18.9V x 18.7H
	At 50% of Imax	9.8V x 9.7H
	At 90% of Imax	3.8V x 3.7H

Beam Flux	Total	1000.7 lumens per klm.
	To 10% of Imax	699.3 lumens per klm.
	To 50% of Imax	374.6 lumens per klm.
	To 90% of Imax	75.0 lumens per klm.

Upward LOR	2.2 %
Downward LOR	97.9 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Aurora Max-618mm-RGBW GREEN-10D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:10 DEG	DIM.:618mm	SERIAL No.:IES001758
MFR.:	SUR.:	Shielding Angle:

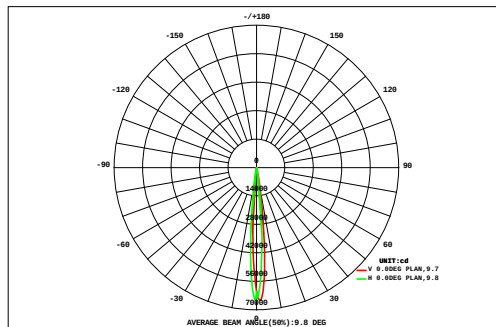

DATA OF LAMP		Eff:51.63lm/W	
MODEL		Imax(cd)	65248
NOMINAL POWER(W)	57.5	AVAILABILITY(%)	69.6
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	2062
NOMINAL FLUX(lm)	2964	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	2964
TEST VOLTAGE(V)	220	q @50%(H,V)	10,10DEG

		AREA FLUX DIAGRAM																UNIT:lm				F t	F a
		0.54	0.57	0.60	0.65	0.71	0.78	0.85	0.91	0.94	0.95	0.91	0.85	0.78	0.71	0.65	0.60	0.57	0.54	13.1	0.00		
VERTICAL (DEG)	18	0.56	0.60	0.65	0.73	0.85	0.99	1.14	1.27	1.36	1.37	1.28	1.15	1.00	0.86	0.74	0.66	0.60	0.56	16.4	0.00		
	16	0.58	0.64	0.73	0.87	1.08	1.37	1.67	1.95	2.13	2.15	1.98	1.71	1.40	1.13	0.91	0.75	0.65	0.58	22.3	0.00		
	14	0.61	0.69	0.83	1.07	1.46	2.03	2.83	3.59	4.04	4.09	3.71	2.96	2.15	1.57	1.17	0.89	0.72	0.62	35.1	0.00		
	12	0.64	0.75	0.97	1.36	2.01	3.35	5.25	7.20	8.74	8.86	7.51	5.63	3.76	2.31	1.54	1.09	0.82	0.67	62.5	17.5		
	10	0.68	0.83	1.14	1.68	2.84	5.16	9.39	14.7	18.1	18.4	15.4	10.6	6.36	3.58	2.07	1.39	1.00	0.75	114	87.0		
	8	0.71	0.91	1.31	2.04	3.72	7.72	15.6	26.9	34.9	35.5	28.8	18.8	10.8	5.59	3.15	1.88	1.23	0.86	200	176		
	6	0.74	0.97	1.43	2.39	4.80	10.5	21.2	39.1	55.2	56.1	44.9	29.6	18.2	10.0	4.89	2.51	1.48	0.98	305	283		
	4	0.74	0.99	1.47	2.53	5.32	11.6	24.5	44.6	67.7	73.0	63.1	47.2	28.6	14.9	6.86	3.14	1.69	1.08	399	377		
	2	0.75	1.01	1.55	2.82	6.09	13.5	29.0	52.3	73.0	76.3	69.3	51.5	30.9	15.7	7.20	3.26	1.73	1.09	437	416		
	0	0.75	1.03	1.63	3.13	6.68	15.0	30.8	48.3	60.8	61.1	53.0	39.3	23.5	12.2	5.78	2.80	1.57	1.01	368	348		
	-2	0.72	0.99	1.54	2.90	5.75	11.6	20.9	32.0	39.9	40.0	32.8	24.2	15.0	8.05	4.28	2.21	1.35	0.90	245	221		
	-4	0.66	0.90	1.35	2.23	4.03	7.02	12.1	17.5	21.4	21.4	17.5	12.8	8.24	4.95	2.83	1.68	1.11	0.77	139	110		
-6	0.59	0.78	1.10	1.61	2.51	3.99	6.05	8.55	10.1	10.1	8.51	6.04	4.29	2.88	1.85	1.26	0.90	0.66	71.8	26.5			
-8	0.50	0.65	0.87	1.19	1.64	2.29	3.16	4.13	4.77	4.76	4.11	3.12	2.31	1.74	1.29	0.95	0.72	0.56	38.8	0.00			
-10	0.43	0.54	0.69	0.88	1.14	1.46	1.80	2.12	2.34	2.33	2.11	1.78	1.45	1.16	0.92	0.73	0.59	0.47	22.9	0.00			
-12	0.38	0.45	0.55	0.67	0.82	0.98	1.16	1.30	1.38	1.38	1.30	1.15	0.97	0.81	0.69	0.57	0.48	0.40	15.5	0.00			
-14	0.33	0.38	0.45	0.53	0.61	0.71	0.80	0.87	0.91	0.91	0.87	0.79	0.70	0.61	0.53	0.46	0.40	0.34	11.2	0.00			
-16	-18	-16	-14	-12	-10	-8	-6	-4	HORIZONTAL (DEG)				4	6	8	10	12	14	16	18			
-18	F t	10.9	13.7	18.9	29.3	52.1	100	188	307	408	419	357	259	160	88.8	47.3	26.8	17.6	12.8	2517	---		
	F a	0.00	0.00	0.00	0.00	4.00	69.2	162	283	385	395	334	234	134	55.7	6.64	0.00	0.00	0.00	---	2062		

one-half-peak spread: U:4.7,D:5.2 , L:4.9,R:4.9


NEMA Beam Type: Type 2

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-09-22

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:Aurora Max-618mm-RGBW GREEN-10D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:10 DEG	DIM.:618mm	SERIAL No.:IES001758
MFR.:	SUR.:	Shielding Angle:

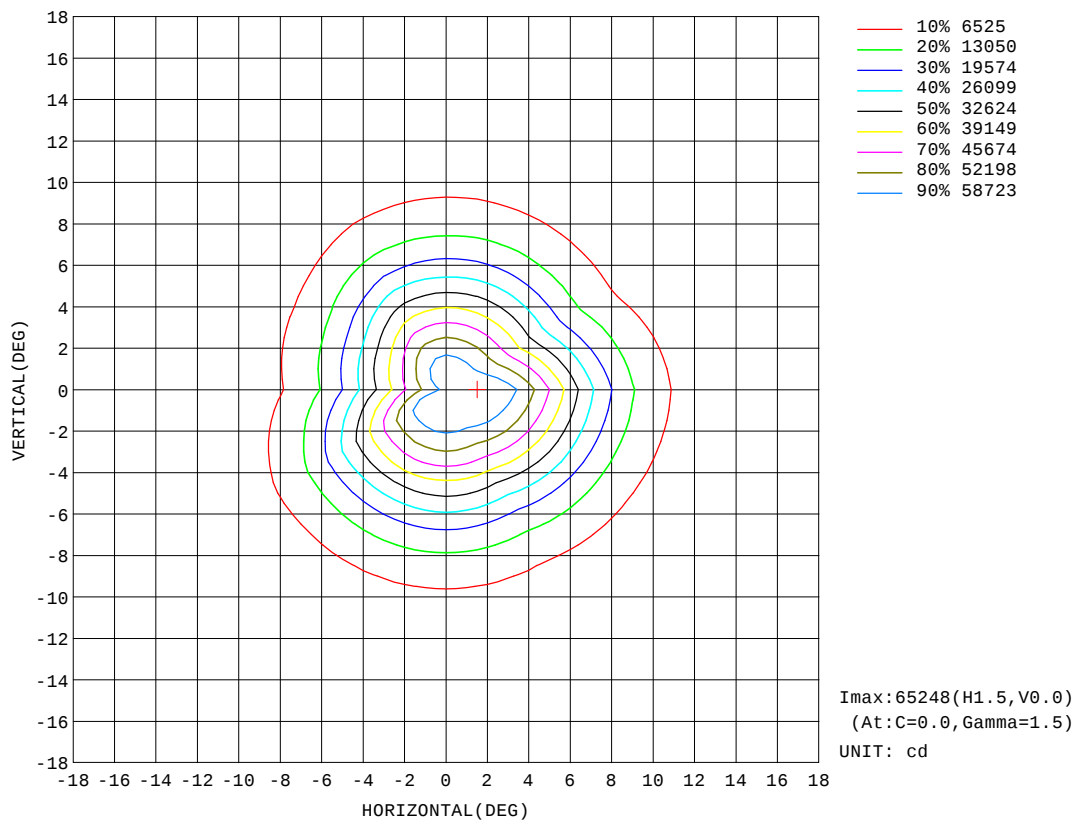


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Aurora Max-618mm-RGBW GREEN-10D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:10 DEG	DIM.:618mm	SERIAL No.:IES001758
MFR.:	SUR.:	Shielding Angle:

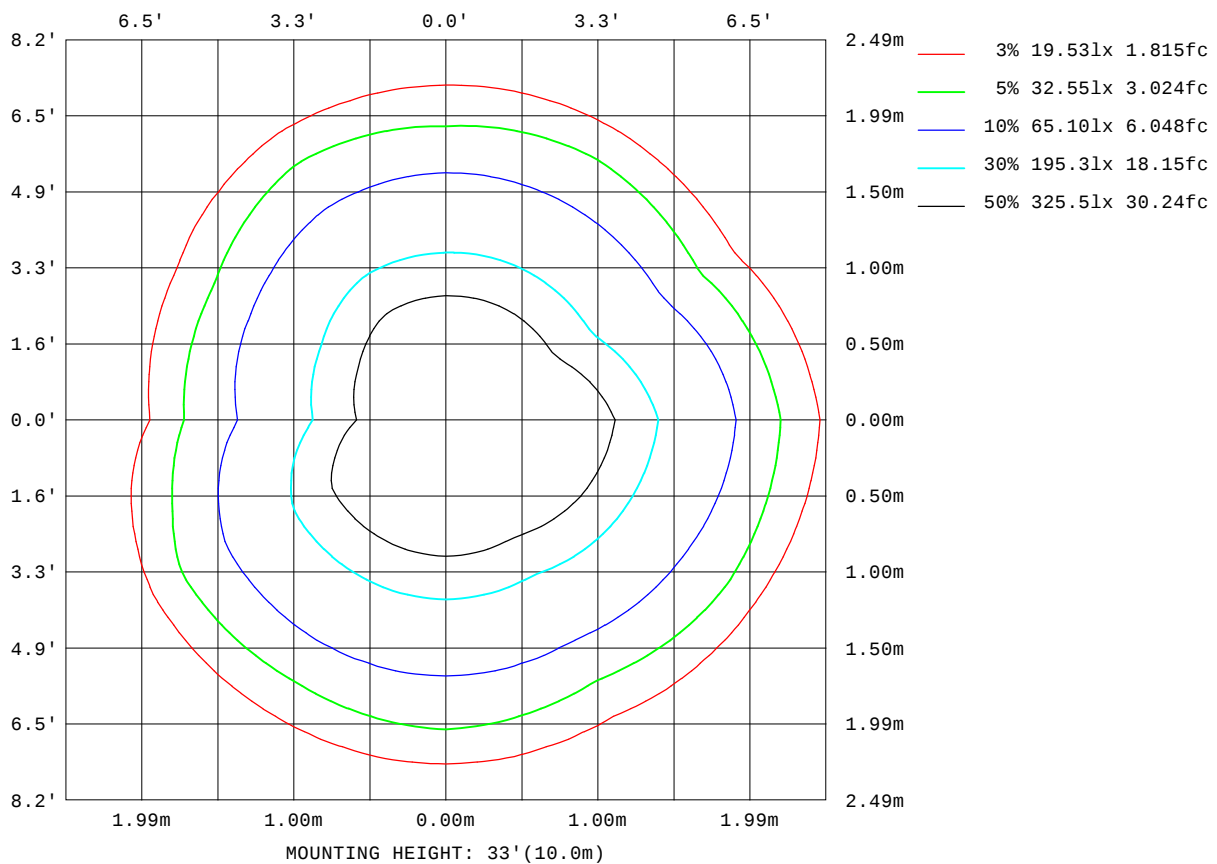

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

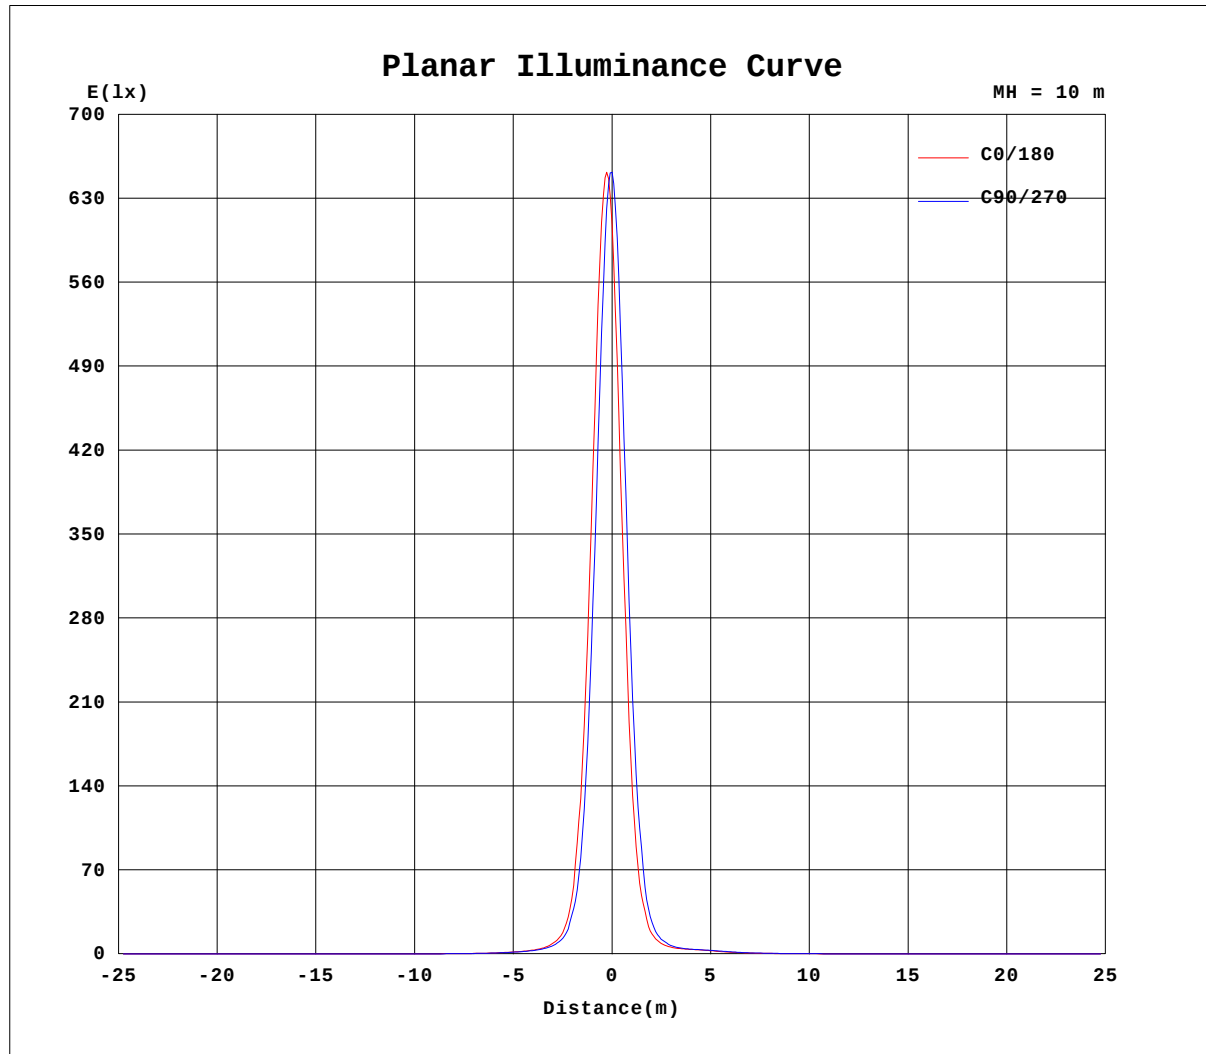


H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-09-22

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Aurora Max-618mm-RGBW GREEN-10D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:10 DEG	DIM.:618mm	SERIAL No.:IES001758
MFR.:	SUR.:	Shielding Angle:

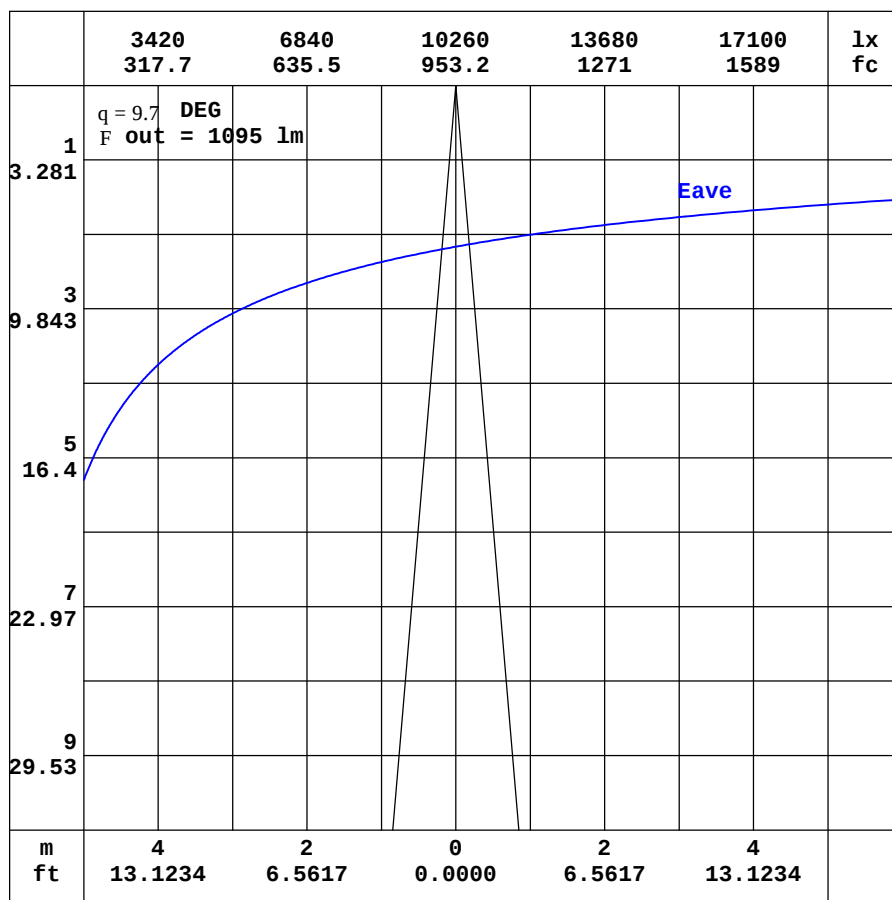

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

$H(b)$ Range:-90 - 90DEG
 $H(b)$ Interval: 0.5DEG
 Test Speed: LOW
 Temperature:25.3DEG
 Operators:Fan
 Test Date:2023-09-22

$V(B)$ Range:-180 - 180DEG
 $V(B)$ Interval: 0.5DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:8.630m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Aurora Max-618mm-RGBW GREEN-10D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:10 DEG	DIM.:618mm	SERIAL No.:IES001758
MFR.:	SUR.:	Shielding Angle:

Table--1
UNIT: ×10cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.94	0.72	0.68	0.70	0.70	0.71	0.80	1.15	1.79	2.33	2.53	2.52	2.26	1.91	1.63	1.44	1.20	1.04	1.19
-170	0.94	0.71	0.68	0.69	0.68	0.66	0.68	0.88	1.29	1.66	1.82	1.86	1.83	1.83	1.95	2.09	2.15	2.27	2.26
-160	0.94	0.72	0.67	0.68	0.67	0.62	0.58	0.61	0.76	0.94	1.03	1.05	1.11	1.39	1.65	1.87	2.05	2.13	2.15
-150	0.94	0.72	0.67	0.67	0.66	0.61	0.53	0.44	0.39	0.36	0.32	0.49	0.69	0.90	1.08	1.24	1.35	1.42	1.43
-140	0.94	0.73	0.66	0.66	0.66	0.62	0.54	0.42	0.28	0.19	0.19	0.23	0.31	0.41	0.51	0.60	0.67	0.71	0.71
-130	0.94	0.75	0.66	0.65	0.65	0.63	0.59	0.51	0.41	0.32	0.25	0.20	0.18	0.18	0.19	0.20	0.22	0.23	0.23
-120	0.94	0.77	0.68	0.64	0.64	0.63	0.62	0.59	0.57	0.53	0.48	0.43	0.38	0.33	0.30	0.27	0.26	0.25	0.25
-110	0.94	0.80	0.71	0.65	0.63	0.62	0.61	0.61	0.61	0.61	0.61	0.61	0.61	0.60	0.59	0.59	0.58	0.58	0.59
-100	0.94	0.83	0.75	0.68	0.64	0.61	0.59	0.59	0.59	0.60	0.60	0.60	0.60	0.60	0.60	0.60	0.61	0.61	0.61
-90	0.94	0.87	0.80	0.73	0.66	0.59	0.52	0.52	0.52	0.52	0.52	0.53	0.53	0.52	0.52	0.52	0.51	0.51	0.50
-80	0.94	0.91	0.86	0.79	0.71	0.61	0.49	0.47	0.45	0.44	0.43	0.42	0.41	0.41	0.40	0.39	0.39	0.38	0.38
-70	0.94	0.95	0.92	0.90	0.80	0.66	0.50	0.46	0.49	0.53	0.58	0.63	0.68	0.73	0.77	0.80	0.83	0.84	0.84
-60	0.94	0.99	1.03	1.00	0.91	0.81	0.72	0.68	0.80	0.93	1.07	1.21	1.34	1.46	1.56	1.65	1.71	1.74	1.75
-50	0.94	1.03	1.12	1.12	1.09	1.08	1.08	1.10	1.24	1.48	1.74	1.99	2.25	2.49	2.71	2.89	3.03	3.11	3.13
-40	0.94	1.07	1.22	1.27	1.32	1.41	1.56	1.72	1.86	2.12	2.53	2.96	3.43	3.96	4.51	5.04	5.52	5.86	5.99
-30	0.94	1.14	1.32	1.43	1.57	1.80	2.13	2.51	2.86	3.13	3.40	4.20	5.27	6.73	8.62	10.9	13.3	14.9	15.6
-20	0.94	1.19	1.41	1.59	1.83	2.22	2.77	3.41	4.07	4.77	5.58	6.66	8.46	12.6	18.5	25.5	33.8	42.3	46.7
-10	0.94	1.23	1.50	1.74	2.07	2.61	3.39	4.32	5.37	6.69	8.47	11.5	17.5	26.2	35.3	60.3	136	353	561
0	0.94	1.26	1.57	1.86	2.26	2.92	3.89	5.08	6.49	8.41	11.1	16.4	28.2	43.4	51.7	82.9	306	1959	6080
10	0.94	1.26	1.56	1.84	2.23	2.86	3.80	4.97	6.34	8.17	10.7	15.2	24.7	39.2	48.4	60.9	119	324	474
20	0.94	1.24	1.53	1.80	2.14	2.68	3.50	4.57	5.78	7.28	9.22	11.9	16.8	25.6	37.0	45.1	49.4	53.6	56.5
30	0.94	1.20	1.49	1.73	2.01	2.42	3.05	3.93	4.93	6.04	7.38	9.00	10.9	13.6	17.6	22.7	27.9	31.5	32.9
40	0.94	1.15	1.43	1.64	1.87	2.15	2.55	3.14	3.91	4.73	5.58	6.51	7.55	8.65	9.72	10.7	11.5	12.1	12.3
50	0.94	1.12	1.36	1.53	1.70	1.90	2.14	2.44	2.85	3.39	3.98	4.55	5.09	5.61	6.07	6.47	6.79	6.98	7.05
60	0.94	1.08	1.27	1.41	1.54	1.66	1.81	1.96	2.13	2.32	2.56	2.85	3.18	3.49	3.75	3.95	4.10	4.19	4.22
70	0.94	1.04	1.15	1.29	1.37	1.45	1.52	1.60	1.69	1.77	1.85	1.92	1.98	2.04	2.09	2.14	2.17	2.20	2.20
80	0.94	1.00	1.05	1.11	1.18	1.25	1.30	1.34	1.37	1.40	1.43	1.45	1.47	1.49	1.50	1.52	1.53	1.53	1.53
90	0.94	0.95	0.96	0.98	0.99	1.00	1.01	1.02	1.04	1.05	1.06	1.08	1.09	1.09	1.10	1.10	1.10	1.11	1.11
100	0.94	0.90	0.87	0.84	0.80	0.78	0.75	0.74	0.72	0.71	0.71	0.70	0.70	0.70	0.70	0.70	0.70	0.70	0.70
110	0.94	0.86	0.78	0.73	0.70	0.69	0.69	0.69	0.70	0.71	0.72	0.72	0.73	0.73	0.73	0.73	0.73	0.73	0.73
120	0.94	0.82	0.73	0.69	0.68	0.69	0.71	0.71	0.71	0.70	0.69	0.69	0.69	0.70	0.71	0.72	0.72	0.73	0.73
130	0.94	0.78	0.69	0.68	0.70	0.70	0.70	0.69	0.69	0.71	0.75	0.80	0.88	0.97	1.10	1.22	1.33	1.39	1.39
140	0.94	0.76	0.68	0.69	0.70	0.70	0.70	0.71	0.76	0.88	1.11	1.44	1.80	2.10	2.29	2.41	2.47	2.50	2.50
150	0.94	0.74	0.68	0.70	0.70	0.70	0.71	0.78	0.97	1.38	1.89	2.28	2.47	2.56	2.61	2.64	2.66	2.67	2.67
160	0.94	0.73	0.68	0.70	0.70	0.70	0.74	0.91	1.34	1.94	2.36	2.54	2.61	2.65	2.68	2.74	2.85	2.90	2.93
170	0.94	0.72	0.68	0.70	0.70	0.71	0.78	1.07	1.66	2.24	2.51	2.57	2.52	2.46	2.44	2.44	2.46	2.53	2.68
180	0.94	0.72	0.68	0.70	0.70	0.71	0.80	1.15	1.79	2.33	2.53	2.52	2.26	1.91	1.63	1.44	1.20	1.04	1.18

H_b Range:-90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Aurora Max-618mm-RGBW GREEN-10D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:10 DEG	DIM.:618mm	SERIAL No.:IES001758
MFR.:	SUR.:	Shielding Angle:

Table--2
UNIT: ×10cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	1.17	1.33	1.45	1.48	1.39	1.17	0.86	0.55	0.32	0.21	0.24	0.37	0.53	0.62	0.62	0.59	0.52	0.38
-170	2.14	2.01	1.92	1.73	1.44	1.13	0.80	0.51	0.30	0.21	0.24	0.38	0.54	0.62	0.62	0.59	0.52	0.38
-160	2.09	1.95	1.73	1.46	1.17	0.88	0.60	0.38	0.24	0.21	0.28	0.42	0.56	0.62	0.61	0.59	0.51	0.38
-150	1.38	1.28	1.13	0.95	0.74	0.54	0.36	0.24	0.20	0.24	0.36	0.49	0.59	0.62	0.61	0.58	0.51	0.38
-140	0.69	0.63	0.54	0.44	0.33	0.25	0.20	0.20	0.26	0.35	0.47	0.57	0.62	0.62	0.60	0.57	0.49	0.38
-130	0.22	0.21	0.19	0.19	0.19	0.21	0.26	0.33	0.42	0.51	0.58	0.61	0.62	0.61	0.59	0.55	0.48	0.38
-120	0.26	0.27	0.30	0.33	0.38	0.44	0.50	0.55	0.59	0.61	0.62	0.62	0.61	0.59	0.57	0.53	0.46	0.38
-110	0.59	0.59	0.60	0.61	0.61	0.62	0.62	0.62	0.61	0.61	0.60	0.60	0.58	0.56	0.53	0.49	0.44	0.38
-100	0.61	0.60	0.60	0.60	0.60	0.60	0.59	0.59	0.58	0.57	0.56	0.54	0.52	0.50	0.47	0.44	0.41	0.38
-90	0.50	0.49	0.49	0.48	0.48	0.47	0.46	0.45	0.44	0.43	0.42	0.40	0.40	0.39	0.39	0.39	0.38	0.38
-80	0.37	0.35	0.34	0.33	0.31	0.30	0.29	0.27	0.26	0.26	0.25	0.25	0.27	0.29	0.31	0.33	0.35	0.38
-70	0.83	0.80	0.76	0.72	0.66	0.61	0.55	0.49	0.43	0.37	0.32	0.27	0.23	0.23	0.24	0.28	0.33	0.38
-60	1.73	1.69	1.62	1.52	1.40	1.27	1.14	1.00	0.86	0.72	0.59	0.45	0.35	0.27	0.23	0.24	0.31	0.38
-50	3.10	3.02	2.87	2.68	2.46	2.22	1.96	1.69	1.43	1.18	0.95	0.73	0.54	0.38	0.26	0.23	0.29	0.38
-40	5.86	5.52	5.04	4.50	4.00	3.50	3.03	2.56	2.11	1.71	1.35	1.04	0.75	0.51	0.33	0.23	0.27	0.38
-30	15.0	13.3	10.9	8.81	7.01	5.56	4.45	3.60	2.87	2.24	1.74	1.32	0.96	0.64	0.40	0.24	0.26	0.38
-20	42.1	33.7	26.3	19.5	13.7	9.33	6.50	4.73	3.58	2.73	2.08	1.56	1.13	0.75	0.45	0.26	0.25	0.38
-10	348	151	67.8	36.8	22.9	14.4	8.85	5.84	4.15	3.06	2.30	1.72	1.24	0.83	0.49	0.27	0.24	0.38
0	4561	974	149	53.7	28.6	17.4	10.1	6.35	4.37	3.16	2.37	1.77	1.28	0.86	0.51	0.28	0.24	0.38
10	343	130	64.6	46.7	35.9	22.4	12.8	8.04	5.64	4.05	2.96	2.15	1.51	1.00	0.60	0.34	0.27	0.38
20	53.5	49.1	45.3	38.6	28.0	18.5	11.9	8.36	6.13	4.45	3.26	2.35	1.63	1.07	0.66	0.39	0.31	0.38
30	31.7	28.3	23.3	18.3	14.2	11.2	9.25	7.64	5.82	4.35	3.24	2.34	1.62	1.08	0.70	0.43	0.34	0.38
40	12.1	11.5	10.7	9.74	8.74	7.68	6.64	5.65	4.77	3.87	2.91	2.11	1.50	1.04	0.72	0.47	0.38	0.38
50	6.99	6.80	6.49	6.09	5.63	5.10	4.57	4.04	3.50	2.95	2.37	1.79	1.34	1.00	0.71	0.51	0.41	0.38
60	4.19	4.11	3.97	3.77	3.54	3.25	2.93	2.60	2.30	2.05	1.83	1.52	1.22	0.94	0.72	0.55	0.44	0.38
70	2.19	2.16	2.11	2.05	1.97	1.89	1.81	1.74	1.65	1.57	1.49	1.36	1.13	0.93	0.74	0.59	0.47	0.38
80	1.53	1.51	1.50	1.48	1.46	1.44	1.42	1.39	1.37	1.35	1.33	1.30	1.11	0.93	0.77	0.62	0.49	0.38
90	1.11	1.11	1.11	1.12	1.12	1.12	1.12	1.12	1.13	1.13	1.13	1.14	1.01	0.88	0.76	0.63	0.50	0.38
100	0.70	0.70	0.70	0.70	0.70	0.70	0.71	0.73	0.75	0.78	0.81	0.85	0.83	0.79	0.72	0.63	0.52	0.38
110	0.73	0.73	0.73	0.73	0.73	0.72	0.71	0.70	0.69	0.68	0.68	0.68	0.68	0.69	0.68	0.63	0.53	0.38
120	0.72	0.72	0.71	0.70	0.70	0.70	0.70	0.71	0.71	0.70	0.69	0.67	0.65	0.65	0.64	0.62	0.53	0.38
130	1.35	1.26	1.13	1.00	0.89	0.81	0.75	0.72	0.70	0.70	0.70	0.68	0.66	0.64	0.63	0.61	0.54	0.38
140	2.49	2.44	2.35	2.18	1.91	1.53	1.17	0.91	0.78	0.70	0.66	0.67	0.67	0.65	0.62	0.60	0.54	0.38
150	2.67	2.66	2.64	2.60	2.53	2.37	2.02	1.51	0.96	0.68	0.60	0.61	0.65	0.65	0.63	0.60	0.54	0.38
160	2.90	2.84	2.76	2.70	2.65	2.59	2.21	1.66	1.04	0.63	0.51	0.54	0.61	0.64	0.62	0.60	0.53	0.38
170	2.62	2.59	2.66	2.55	2.26	1.96	1.62	1.23	0.81	0.48	0.38	0.45	0.57	0.63	0.62	0.60	0.53	0.38
180	1.17	1.33	1.45	1.48	1.39	1.17	0.86	0.55	0.32	0.21	0.24	0.37	0.53	0.62	0.62	0.59	0.52	0.38

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks: