

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		23002.8 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	18.4V x 18.4H
	At 50% of Imax	9.6V x 9.5H
	At 90% of Imax	3.7V x 3.7H
Beam Flux	Total	1001.0 lumens per klm.
	To 10% of Imax	695.2 lumens per klm.
	To 50% of Imax	367.9 lumens per klm.
	To 90% of Imax	76.8 lumens per klm.
	Upward LOR	2.2 %
	Downward LOR	97.9 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(B) Range:-90 - 90DEG
H(B) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Aurora Max-618mm-RGBW RED-10D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:10 DEG	DIM.:618mm	SERIAL No.:IES001757
MFR.:	SUR.:	Shielding Angle:

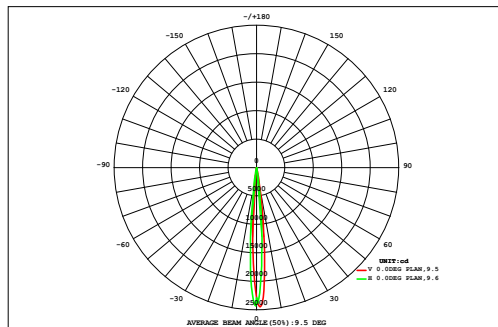

DATA OF LAMP		Eff:23.37lm/W	
MODEL		Imax(cd)	24452
NOMINAL POWER(W)	45.5	AVAILABILITY(%)	69.4
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	738.1
NOMINAL FLUX(lm)	1063	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1063
TEST VOLTAGE(V)	220	q @50%(H,V)	10,10DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		F t	F a
	0.20	0.20	0.21	0.23	0.24	0.27	0.29	0.31	0.33	0.33	0.32	0.30	0.27	0.25	0.23	0.21	0.20	0.20	4.58	0.00
18	0.20	0.21	0.23	0.25	0.30	0.35	0.39	0.44	0.46	0.46	0.44	0.40	0.35	0.30	0.26	0.23	0.21	0.20	5.70	0.00
16	0.21	0.22	0.25	0.31	0.38	0.48	0.58	0.68	0.74	0.75	0.69	0.60	0.49	0.40	0.32	0.26	0.23	0.21	7.79	0.00
14	0.22	0.24	0.29	0.38	0.51	0.71	0.97	1.23	1.41	1.43	1.27	1.01	0.76	0.55	0.41	0.31	0.25	0.22	12.2	0.00
12	0.23	0.27	0.34	0.47	0.70	1.12	1.75	2.45	2.92	2.98	2.61	1.89	1.27	0.82	0.54	0.38	0.29	0.24	21.3	5.16
10	0.24	0.29	0.39	0.59	0.99	1.80	3.37	5.21	6.31	6.39	5.41	3.82	2.20	1.29	0.74	0.48	0.35	0.26	40.1	29.2
8	0.25	0.32	0.45	0.72	1.35	2.66	5.41	9.45	12.3	12.5	10.1	6.59	3.65	1.95	1.15	0.67	0.43	0.30	70.4	60.3
6	0.26	0.35	0.50	0.86	1.66	3.54	7.45	14.1	20.2	20.5	16.3	10.5	6.31	3.40	1.74	0.92	0.52	0.34	109	101
4	0.26	0.36	0.52	0.90	1.82	4.18	8.71	16.3	25.1	27.0	23.2	17.1	10.2	5.08	2.34	1.16	0.60	0.37	145	138
2	0.26	0.36	0.55	0.98	2.12	4.94	10.4	19.4	27.2	28.5	25.9	18.9	11.0	5.45	2.44	1.20	0.61	0.38	161	152
0	0.26	0.37	0.57	1.06	2.36	5.41	11.0	17.7	22.5	22.7	19.5	14.2	8.39	4.35	1.99	1.01	0.55	0.35	134	126
-2	0.25	0.35	0.54	0.98	1.98	4.24	7.44	11.5	14.5	14.6	11.8	8.64	5.37	2.91	1.45	0.79	0.47	0.31	88.1	79.8
-4	0.23	0.32	0.47	0.78	1.37	2.46	4.19	6.18	7.66	7.67	6.18	4.43	2.97	1.70	0.98	0.59	0.39	0.27	48.8	38.9
-6	0.20	0.27	0.39	0.57	0.89	1.42	2.12	2.98	3.61	3.61	2.97	2.13	1.53	1.01	0.65	0.44	0.32	0.23	25.3	7.93
-8	0.17	0.22	0.30	0.41	0.58	0.83	1.15	1.44	1.63	1.63	1.43	1.14	0.83	0.61	0.45	0.34	0.25	0.19	13.6	0.00
-10	0.15	0.19	0.24	0.31	0.40	0.51	0.63	0.75	0.83	0.83	0.75	0.62	0.50	0.40	0.32	0.25	0.20	0.16	8.05	0.00
-12	0.13	0.16	0.19	0.23	0.29	0.35	0.41	0.46	0.49	0.49	0.45	0.40	0.34	0.28	0.24	0.20	0.16	0.14	5.39	0.00
-14	0.11	0.13	0.16	0.18	0.21	0.25	0.28	0.31	0.32	0.32	0.30	0.28	0.24	0.21	0.18	0.16	0.14	0.12	3.90	0.00
-16	0.11	0.13	0.16	0.18	0.21	0.25	0.28	0.31	0.32	0.32	0.30	0.28	0.24	0.21	0.18	0.16	0.14	0.12	3.90	0.00
-18	0.11	0.13	0.16	0.18	0.21	0.25	0.28	0.31	0.32	0.32	0.30	0.28	0.24	0.21	0.18	0.16	0.14	0.12	3.90	0.00
	-18	-16	-14	-12	-10	-8	-6	-4	HORIZONTAL (DEG)	4	6	8	10	12	14	16	18			
F t	3.82	4.84	6.61	10.2	18.1	35.5	66.5	111	149	153	130	93.0	56.7	31.0	16.4	9.62	6.18	4.48	905	---
F a	0.00	0.00	0.00	0.00	0.00	23.3	57.4	102	140	144	121	83.5	46.0	19.4	1.50	0.00	0.00	0.00	---	738

one-half-peak spread: U:4.6,D:5.0 , L:4.8,R:4.8


NEMA Beam Type: Type 2

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:Aurora Max-618mm-RGBW RED-10D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:10 DEG	DIM.:618mm	SERIAL No.:IES001757
MFR.:	SUR.:	Shielding Angle:

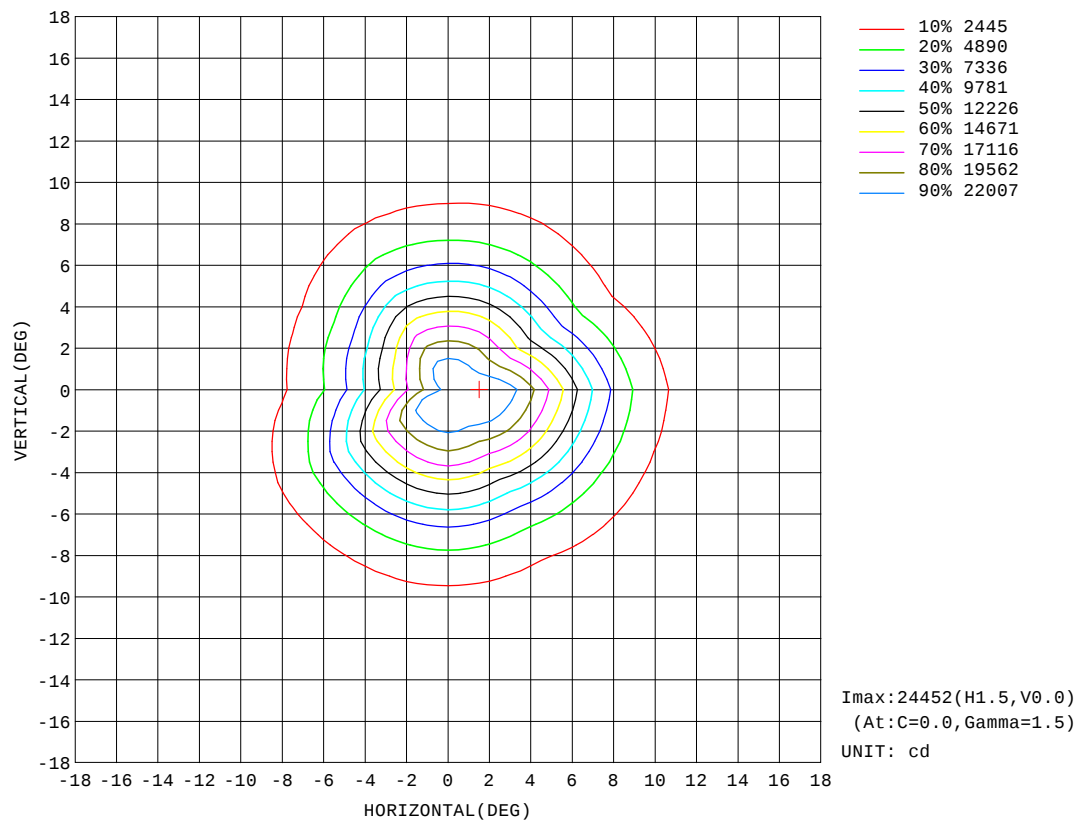


H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Aurora Max-618mm-RGBW RED-10D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:10 DEG	DIM.:618mm	SERIAL No.:IES001757
MFR.:	SUR.:	Shielding Angle:

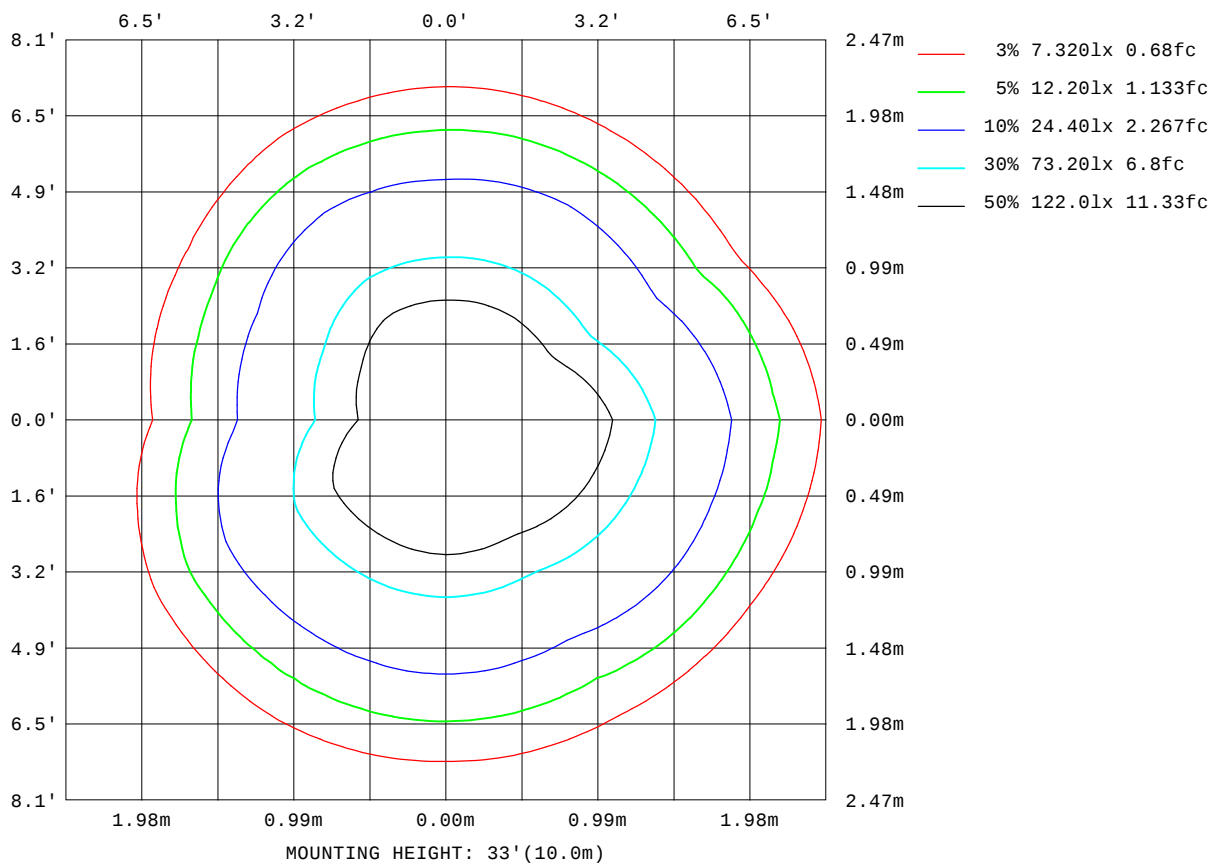

H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

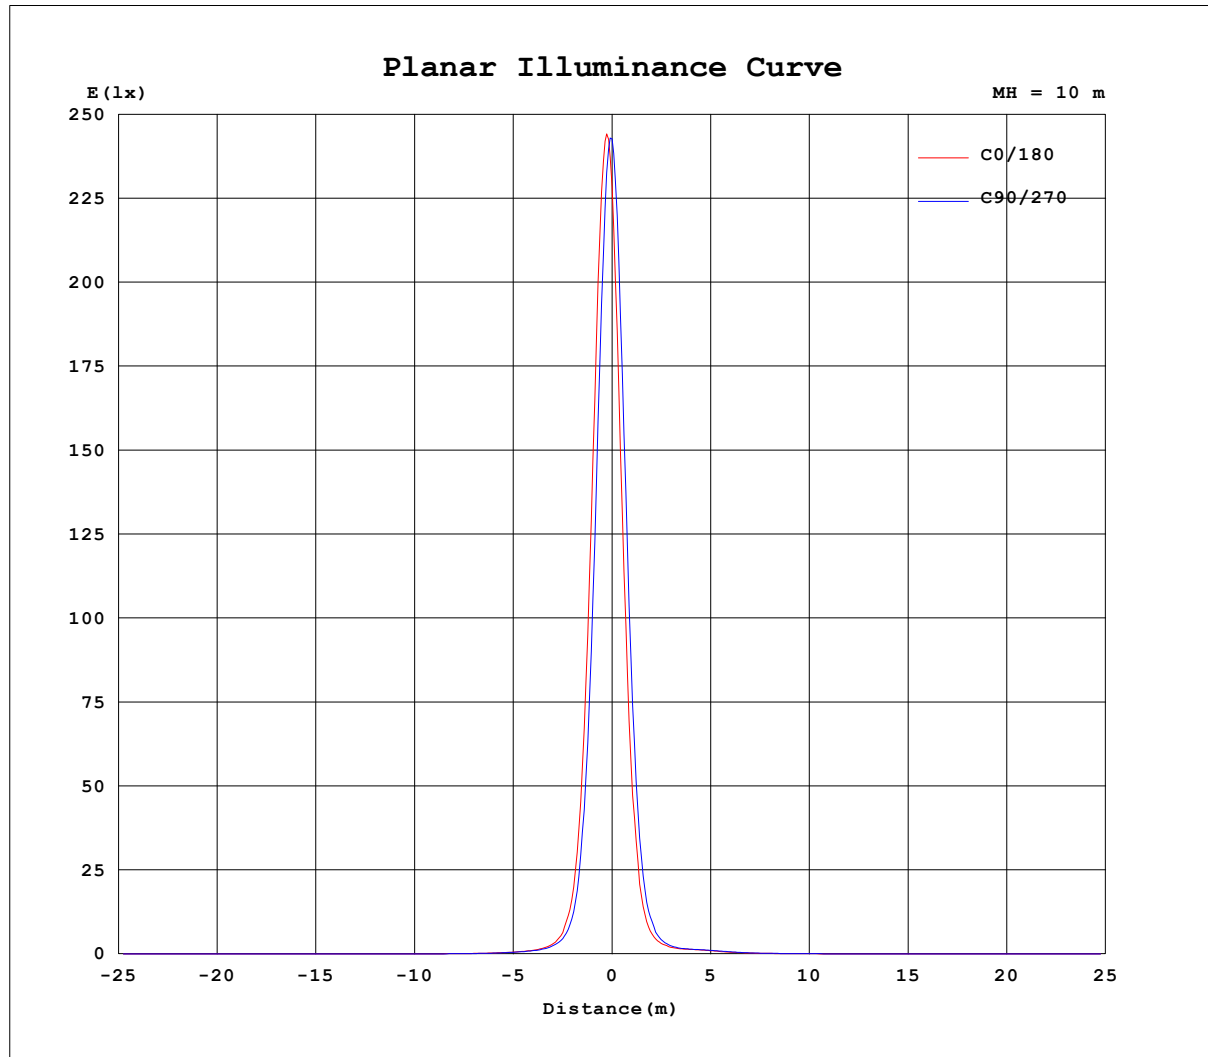


H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Aurora Max-618mm-RGBW RED-10D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:10 DEG	DIM.:618mm	SERIAL No.:IES001757
MFR.:	SUR.:	Shielding Angle:

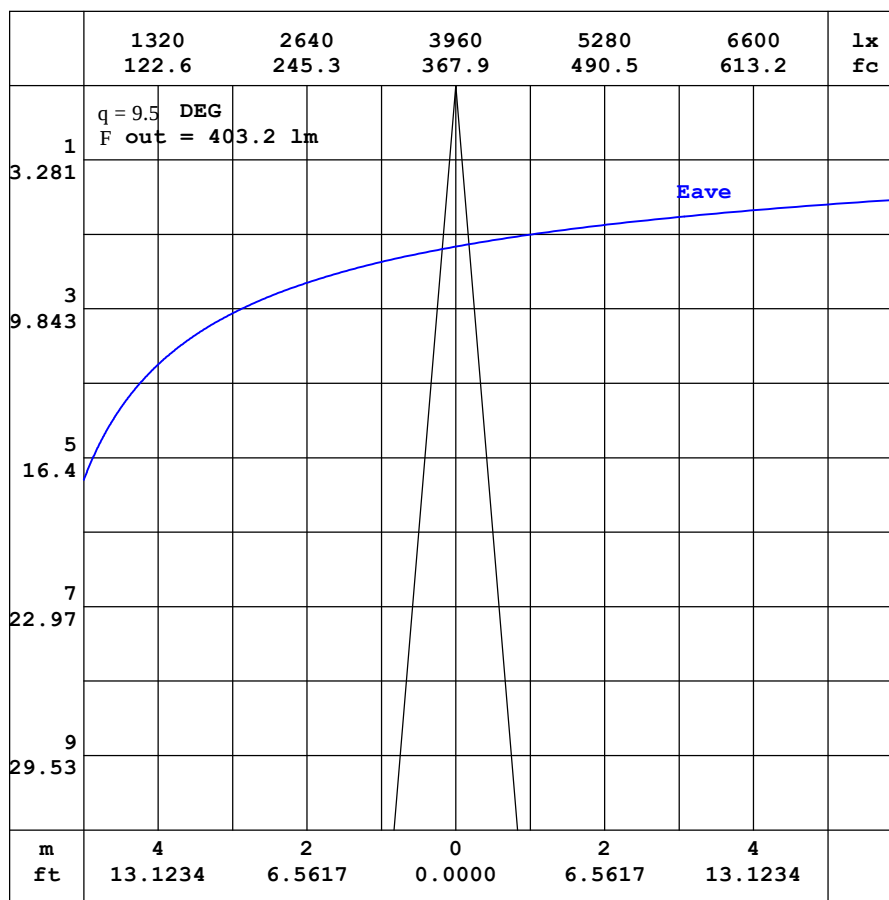

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Aurora Max-618mm-RGBW RED-10D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:10 DEG	DIM.:618mm	SERIAL No.:IES001757
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: ×10cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.35	0.26	0.24	0.25	0.25	0.26	0.29	0.41	0.65	0.85	0.92	0.91	0.82	0.69	0.59	0.52	0.44	0.39	0.44
-170	0.35	0.26	0.24	0.25	0.24	0.24	0.25	0.31	0.46	0.60	0.66	0.67	0.66	0.67	0.72	0.77	0.79	0.85	0.84
-160	0.35	0.26	0.24	0.25	0.24	0.22	0.21	0.21	0.27	0.34	0.36	0.37	0.40	0.50	0.60	0.69	0.76	0.79	0.81
-150	0.35	0.26	0.24	0.24	0.24	0.22	0.19	0.15	0.14	0.12	0.11	0.17	0.24	0.31	0.39	0.45	0.49	0.52	0.52
-140	0.35	0.27	0.24	0.24	0.24	0.23	0.20	0.15	0.09	0.06	0.06	0.07	0.10	0.13	0.17	0.21	0.23	0.25	0.25
-130	0.35	0.28	0.24	0.24	0.24	0.23	0.22	0.19	0.15	0.11	0.09	0.07	0.06	0.06	0.06	0.07	0.07	0.07	0.07
-120	0.35	0.29	0.25	0.24	0.23	0.23	0.23	0.22	0.21	0.20	0.18	0.16	0.14	0.12	0.11	0.10	0.09	0.09	0.08
-110	0.35	0.30	0.26	0.24	0.23	0.23	0.23	0.23	0.23	0.23	0.23	0.23	0.23	0.23	0.22	0.22	0.22	0.22	0.22
-100	0.35	0.31	0.28	0.26	0.24	0.23	0.22	0.22	0.22	0.23	0.23	0.23	0.23	0.23	0.23	0.23	0.23	0.23	0.23
-90	0.35	0.33	0.30	0.27	0.25	0.22	0.19	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.19	0.19	0.19	0.19
-80	0.35	0.34	0.32	0.30	0.27	0.23	0.18	0.17	0.16	0.16	0.15	0.15	0.15	0.14	0.14	0.14	0.14	0.13	0.13
-70	0.35	0.36	0.35	0.34	0.29	0.24	0.18	0.16	0.17	0.18	0.20	0.22	0.23	0.25	0.27	0.28	0.29	0.29	0.30
-60	0.35	0.37	0.39	0.37	0.33	0.29	0.25	0.23	0.28	0.32	0.37	0.42	0.46	0.50	0.54	0.57	0.59	0.61	0.61
-50	0.35	0.39	0.42	0.41	0.39	0.38	0.38	0.38	0.43	0.51	0.60	0.69	0.77	0.85	0.93	0.99	1.04	1.07	1.08
-40	0.35	0.40	0.45	0.46	0.47	0.50	0.55	0.61	0.65	0.74	0.87	1.02	1.18	1.35	1.54	1.73	1.89	2.00	2.05
-30	0.35	0.43	0.49	0.51	0.56	0.64	0.76	0.89	1.01	1.09	1.17	1.44	1.81	2.31	2.97	3.76	4.53	5.15	5.40
-20	0.35	0.45	0.52	0.57	0.65	0.79	0.98	1.21	1.44	1.67	1.95	2.31	2.92	4.35	6.38	8.80	11.7	14.6	15.9
-10	0.35	0.47	0.55	0.63	0.74	0.93	1.21	1.55	1.91	2.37	3.00	4.09	6.26	9.27	12.2	20.7	48.0	125	197
0	0.35	0.48	0.58	0.67	0.81	1.04	1.40	1.82	2.32	3.01	3.97	5.91	10.2	15.8	18.3	30.2	101	701	2284
10	0.35	0.47	0.58	0.67	0.80	1.02	1.36	1.78	2.27	2.92	3.81	5.41	8.92	14.3	17.6	21.4	41.0	105	162
20	0.35	0.47	0.57	0.65	0.77	0.96	1.25	1.63	2.06	2.60	3.29	4.24	5.97	9.18	13.4	16.3	17.5	18.8	19.8
30	0.35	0.45	0.55	0.63	0.72	0.86	1.09	1.41	1.76	2.15	2.63	3.20	3.88	4.83	6.29	8.18	9.96	11.2	11.8
40	0.35	0.43	0.53	0.60	0.67	0.77	0.91	1.12	1.39	1.68	1.98	2.31	2.68	3.07	3.45	3.78	4.07	4.28	4.35
50	0.35	0.42	0.51	0.56	0.62	0.68	0.76	0.87	1.02	1.21	1.42	1.62	1.80	1.98	2.15	2.29	2.40	2.47	2.50
60	0.35	0.40	0.48	0.53	0.57	0.60	0.65	0.70	0.76	0.82	0.91	1.01	1.12	1.24	1.33	1.40	1.46	1.49	1.50
70	0.35	0.39	0.43	0.48	0.51	0.54	0.56	0.58	0.61	0.63	0.66	0.68	0.70	0.72	0.74	0.76	0.77	0.78	0.78
80	0.35	0.38	0.40	0.42	0.44	0.47	0.49	0.50	0.51	0.51	0.52	0.52	0.53	0.53	0.54	0.54	0.55	0.55	0.55
90	0.35	0.36	0.36	0.37	0.37	0.38	0.38	0.39	0.39	0.39	0.40	0.40	0.40	0.41	0.41	0.41	0.41	0.41	0.41
100	0.35	0.34	0.32	0.31	0.30	0.29	0.28	0.27	0.26	0.26	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25
110	0.35	0.32	0.29	0.27	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.26	0.26
120	0.35	0.30	0.26	0.25	0.24	0.25	0.25	0.25	0.25	0.25	0.24	0.24	0.24	0.25	0.25	0.25	0.25	0.26	0.26
130	0.35	0.29	0.25	0.24	0.25	0.25	0.25	0.25	0.25	0.25	0.26	0.28	0.31	0.34	0.39	0.44	0.48	0.50	0.50
140	0.35	0.28	0.24	0.25	0.25	0.25	0.25	0.25	0.27	0.31	0.39	0.52	0.65	0.76	0.83	0.87	0.90	0.90	0.91
150	0.35	0.27	0.24	0.25	0.25	0.25	0.25	0.28	0.35	0.50	0.69	0.83	0.90	0.93	0.95	0.96	0.97	0.97	0.97
160	0.35	0.26	0.24	0.25	0.25	0.25	0.26	0.33	0.48	0.70	0.86	0.92	0.95	0.96	0.98	1.00	1.04	1.06	1.07
170	0.35	0.26	0.24	0.25	0.25	0.25	0.28	0.38	0.60	0.81	0.91	0.93	0.91	0.89	0.89	0.89	0.90	0.93	0.98
180	0.35	0.26	0.24	0.25	0.25	0.26	0.29	0.41	0.65	0.85	0.92	0.91	0.82	0.69	0.59	0.52	0.44	0.39	0.44

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-09-22

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Aurora Max-618mm-RGBW RED-10D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:10 DEG	DIM.:618mm	SERIAL No.:IES001757
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: x10cd

H(°) V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	0.44	0.50	0.55	0.55	0.51	0.43	0.31	0.19	0.11	0.07	0.08	0.14	0.20	0.24	0.24	0.22	0.20	0.14	
-170	0.81	0.76	0.72	0.65	0.53	0.41	0.29	0.18	0.10	0.07	0.09	0.14	0.20	0.24	0.23	0.22	0.20	0.14	
-160	0.78	0.73	0.64	0.54	0.43	0.32	0.21	0.13	0.08	0.07	0.10	0.16	0.21	0.23	0.23	0.22	0.19	0.14	
-150	0.50	0.47	0.41	0.34	0.26	0.19	0.12	0.08	0.07	0.08	0.13	0.18	0.22	0.23	0.23	0.22	0.19	0.14	
-140	0.24	0.22	0.18	0.15	0.11	0.08	0.07	0.07	0.09	0.13	0.17	0.21	0.23	0.23	0.23	0.22	0.19	0.14	
-130	0.07	0.07	0.06	0.06	0.07	0.07	0.09	0.12	0.15	0.19	0.22	0.23	0.23	0.23	0.23	0.21	0.18	0.14	
-120	0.09	0.10	0.11	0.12	0.14	0.16	0.19	0.21	0.22	0.23	0.23	0.23	0.23	0.23	0.23	0.22	0.20	0.17	0.14
-110	0.22	0.22	0.23	0.23	0.23	0.23	0.23	0.23	0.23	0.23	0.23	0.23	0.23	0.22	0.22	0.20	0.19	0.16	0.14
-100	0.23	0.23	0.23	0.23	0.23	0.23	0.22	0.22	0.22	0.22	0.21	0.21	0.20	0.19	0.18	0.17	0.15	0.14	
-90	0.19	0.19	0.18	0.18	0.18	0.18	0.17	0.17	0.16	0.16	0.16	0.15	0.15	0.15	0.15	0.15	0.14	0.14	
-80	0.13	0.13	0.12	0.12	0.11	0.11	0.10	0.10	0.09	0.09	0.09	0.09	0.10	0.11	0.12	0.12	0.13	0.14	
-70	0.29	0.28	0.27	0.25	0.23	0.21	0.19	0.17	0.15	0.13	0.11	0.09	0.08	0.08	0.09	0.10	0.12	0.14	
-60	0.60	0.59	0.56	0.53	0.49	0.44	0.40	0.35	0.30	0.25	0.20	0.15	0.12	0.09	0.08	0.09	0.11	0.14	
-50	1.07	1.04	0.99	0.92	0.85	0.76	0.68	0.59	0.50	0.41	0.33	0.26	0.19	0.13	0.09	0.08	0.11	0.14	
-40	2.01	1.89	1.73	1.54	1.37	1.20	1.04	0.88	0.73	0.59	0.47	0.36	0.26	0.18	0.12	0.08	0.10	0.14	
-30	5.15	4.54	3.77	3.04	2.42	1.91	1.53	1.24	0.99	0.78	0.61	0.46	0.34	0.22	0.14	0.09	0.09	0.14	
-20	14.5	11.5	9.04	6.78	4.75	3.23	2.24	1.63	1.23	0.94	0.72	0.55	0.40	0.26	0.16	0.09	0.09	0.14	
-10	123	53.1	23.4	12.6	7.97	4.98	3.05	2.00	1.42	1.05	0.80	0.60	0.44	0.29	0.17	0.10	0.09	0.14	
0	1669	318	52.9	18.7	9.84	5.96	3.48	2.17	1.50	1.09	0.82	0.62	0.45	0.30	0.18	0.10	0.09	0.14	
10	111	45.8	22.7	16.8	13.0	7.93	4.49	2.81	1.97	1.42	1.03	0.76	0.53	0.35	0.21	0.12	0.10	0.14	
20	18.8	17.5	16.4	14.0	10.0	6.58	4.21	2.95	2.16	1.57	1.15	0.83	0.58	0.38	0.23	0.14	0.11	0.14	
30	11.3	10.1	8.39	6.54	5.03	3.98	3.28	2.71	2.06	1.54	1.15	0.83	0.57	0.38	0.25	0.16	0.12	0.14	
40	4.28	4.07	3.78	3.45	3.09	2.72	2.35	2.00	1.69	1.37	1.03	0.75	0.53	0.37	0.25	0.17	0.14	0.14	
50	2.48	2.41	2.30	2.16	1.99	1.81	1.62	1.43	1.24	1.05	0.84	0.63	0.47	0.35	0.25	0.18	0.15	0.14	
60	1.49	1.46	1.41	1.34	1.25	1.15	1.04	0.92	0.82	0.73	0.65	0.54	0.43	0.34	0.26	0.20	0.16	0.14	
70	0.78	0.77	0.75	0.73	0.70	0.67	0.64	0.61	0.59	0.56	0.53	0.49	0.40	0.33	0.27	0.22	0.17	0.14	
80	0.55	0.54	0.53	0.53	0.52	0.51	0.50	0.50	0.49	0.48	0.48	0.47	0.40	0.34	0.28	0.23	0.18	0.14	
90	0.41	0.41	0.41	0.41	0.41	0.41	0.42	0.42	0.42	0.42	0.42	0.42	0.38	0.33	0.28	0.24	0.19	0.14	
100	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.26	0.27	0.29	0.30	0.32	0.31	0.30	0.27	0.24	0.19	0.14	
110	0.26	0.26	0.26	0.26	0.25	0.25	0.25	0.25	0.24	0.24	0.24	0.25	0.26	0.26	0.26	0.24	0.20	0.14	
120	0.25	0.25	0.25	0.25	0.25	0.24	0.24	0.25	0.25	0.25	0.24	0.24	0.24	0.24	0.24	0.23	0.20	0.14	
130	0.49	0.45	0.40	0.36	0.31	0.29	0.27	0.25	0.25	0.25	0.24	0.24	0.24	0.24	0.23	0.23	0.20	0.14	
140	0.90	0.89	0.85	0.79	0.69	0.55	0.42	0.32	0.27	0.25	0.23	0.24	0.24	0.24	0.23	0.23	0.20	0.14	
150	0.97	0.96	0.96	0.94	0.92	0.86	0.73	0.54	0.34	0.24	0.21	0.22	0.24	0.24	0.23	0.23	0.20	0.14	
160	1.06	1.03	1.00	0.98	0.96	0.93	0.80	0.60	0.37	0.22	0.18	0.19	0.22	0.24	0.23	0.23	0.20	0.14	
170	0.96	0.95	0.97	0.93	0.82	0.71	0.58	0.44	0.29	0.17	0.14	0.16	0.21	0.24	0.23	0.23	0.20	0.14	
180	0.44	0.50	0.55	0.55	0.51	0.43	0.31	0.19	0.11	0.07	0.08	0.14	0.20	0.24	0.24	0.22	0.20	0.14	

H(°) Range:-90 - 90DEG

H(°) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-09-22

V(°) Range:-180 - 180DEG

V(°) Interval: 0.5DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: