

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	10425.4 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	27.6V x 29.1H
	At 50% of Imax	14.3V x 15.1H
	At 90% of Imax	5.5V x 5.8H

Beam Flux	Total	1000.5 lumens per klm.
	To 10% of Imax	735.9 lumens per klm.
	To 50% of Imax	386.0 lumens per klm.
	To 90% of Imax	69.9 lumens per klm.

Upward LOR	2.2 %
Downward LOR	97.8 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Aurora Max-618mm-RGBW ALL-15D-Rev1	TYPE:RGBW W=6500K	WEIGHT:
SPEC.:15 DEG	DIM.:618mm	SERIAL No.:IES001751
MFR.:	SUR.:	Shielding Angle:

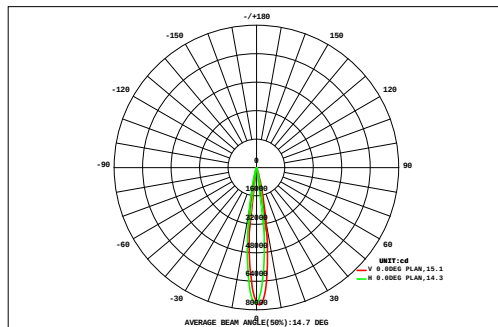

DATA OF LAMP		Eff:38.41lm/W	
MODEL		Imax(cd)	77117
NOMINAL POWER(W)	194.5	AVAILABILITY(%)	73.4
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	5429
NOMINAL FLUX(lm)	7397	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	7397
TEST VOLTAGE(V)	220	q @50%(H,V)	15,14DEG

		AREA FLUX DIAGRAM															UNIT:lm				F t	F a
		1.21	1.46	1.72	1.97	2.21	2.41	2.58	2.69	2.75	2.75	2.69	2.57	2.40	2.20	1.97	1.73	1.48	1.24	38.0	0.00	
VERTICAL (DEG)	27	1.42	1.71	2.02	2.32	2.62	2.90	3.17	3.38	3.48	3.49	3.38	3.16	2.89	2.61	2.32	2.03	1.73	1.45	46.1	0.00	
	24	1.63	1.97	2.33	2.71	3.15	3.68	4.26	4.79	5.07	5.09	4.82	4.30	3.70	3.17	2.72	2.34	1.99	1.66	59.4	0.00	
	21	1.83	2.22	2.65	3.21	4.02	5.27	6.96	8.50	9.33	9.38	8.62	7.10	5.41	4.14	3.28	2.69	2.25	1.86	88.7	0.00	
	18	2.02	2.47	3.05	3.95	5.64	8.72	13.0	17.5	20.3	20.4	17.8	13.5	9.28	6.06	4.17	3.14	2.50	1.98	155	27.8	
	15	2.20	2.73	3.52	5.07	8.43	14.9	25.4	37.4	44.5	44.7	37.9	26.8	16.5	9.52	5.63	3.75	2.73	2.05	294	215	
	12	2.35	2.98	4.10	6.64	12.4	24.5	45.1	71.6	87.7	87.6	72.5	48.8	28.4	15.1	8.21	4.70	3.03	2.12	528	460	
	9	2.46	3.20	4.68	8.35	17.0	35.5	67.7	111	144	143	115	77.3	46.0	24.5	11.8	5.92	3.36	2.17	823	765	
		2.52	3.34	5.07	9.57	20.2	43.3	83.8	138	186	189	160	114	66.7	33.8	15.3	7.02	3.62	2.17	1083	1025	
		2.46	3.32	5.24	10.2	22.1	47.9	92.1	150	195	200	172	121	70.4	35.1	15.8	7.13	3.59	2.10	1156	1103	
		2.26	3.11	5.06	10.0	21.8	46.8	86.8	131	160	159	132	93.3	54.8	27.8	12.9	6.13	3.24	1.97	958	903	
	2.00	2.75	4.40	8.54	17.7	34.8	59.3	86.2	104	103	82.3	58.7	35.5	18.8	9.45	4.80	2.76	1.77	637	577		
	1.69	2.29	3.51	6.28	11.5	20.6	33.6	47.2	56.4	55.1	43.9	31.2	19.7	11.3	6.33	3.59	2.27	1.56	358	285		
	1.38	1.81	2.65	4.15	6.84	11.0	16.7	22.8	26.3	25.6	21.1	14.8	10.1	6.55	4.08	2.66	1.84	1.34	182	68.1		
	1.11	1.46	2.00	2.83	4.08	5.87	8.13	10.4	11.7	11.4	9.73	7.33	5.32	3.86	2.76	2.00	1.50	1.14	92.6	0.00		
	0.94	1.20	1.54	2.00	2.64	3.42	4.28	5.07	5.51	5.42	4.84	4.00	3.16	2.50	1.96	1.55	1.22	0.97	52.2	0.00		
	0.79	0.98	1.22	1.50	1.83	2.20	2.59	2.91	3.06	3.03	2.82	2.48	2.10	1.76	1.47	1.22	1.00	0.81	33.8	0.00		
	0.66	0.81	0.97	1.16	1.36	1.56	1.75	1.90	1.98	1.97	1.87	1.71	1.52	1.32	1.14	0.97	0.82	0.68	24.1	0.00		
	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL (DEG)				6	9	12	15	18	21	24	27		
	F t	30.9	39.8	55.7	90.5	165	315	557	851	1068	1070	894	632	384	210	111	63.4	40.9	29.0	6608	---	
	F a	0.00	0.00	0.00	0.00	49.4	238	492	791	1007	1009	833	569	311	125	4.67	0.00	0.00	0.00	---	5429	


one-half-peak spread: U:7.2,D:7.2 , L:7.4,R:7.4EMA Beam Type: Type 3 x 2 (H x V)

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-22

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:Aurora Max-618mm-RGBW ALL-15D-Rev1	TYPE:RGBW W=6500K	WEIGHT:
SPEC.:15 DEG	DIM.:618mm	SERIAL No.:IES001751
MFR.:	SUR.:	Shielding Angle:

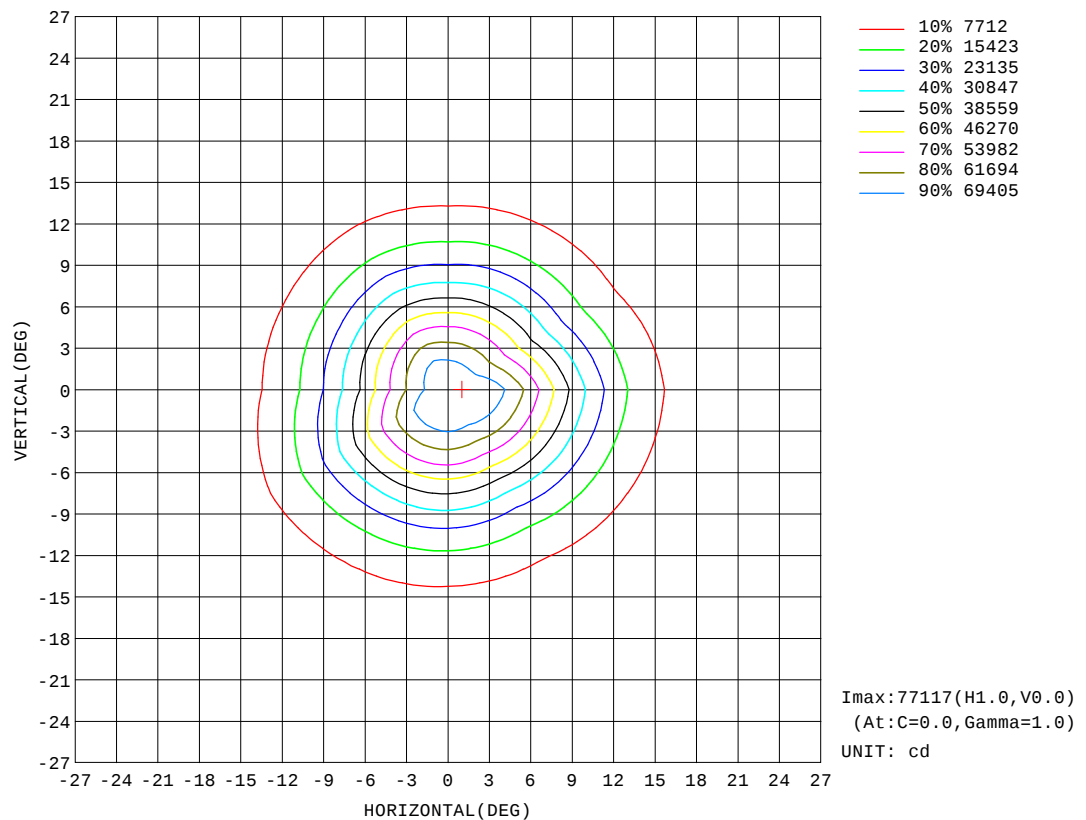


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-09-22

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Aurora Max-618mm-RGBW ALL-15D-Rev1	TYPE:RGBW W=6500K	WEIGHT:
SPEC.:15 DEG	DIM.:618mm	SERIAL No.:IES001751
MFR.:	SUR.:	Shielding Angle:

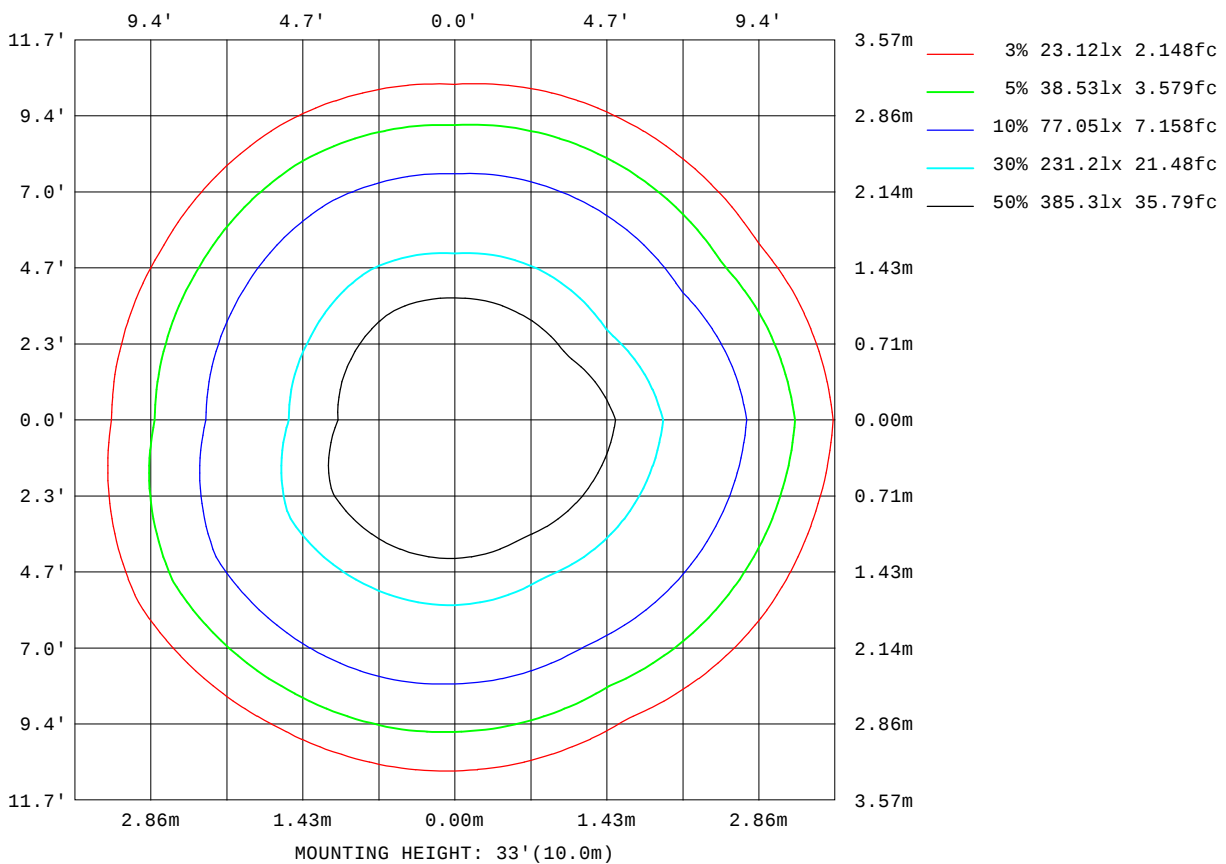

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

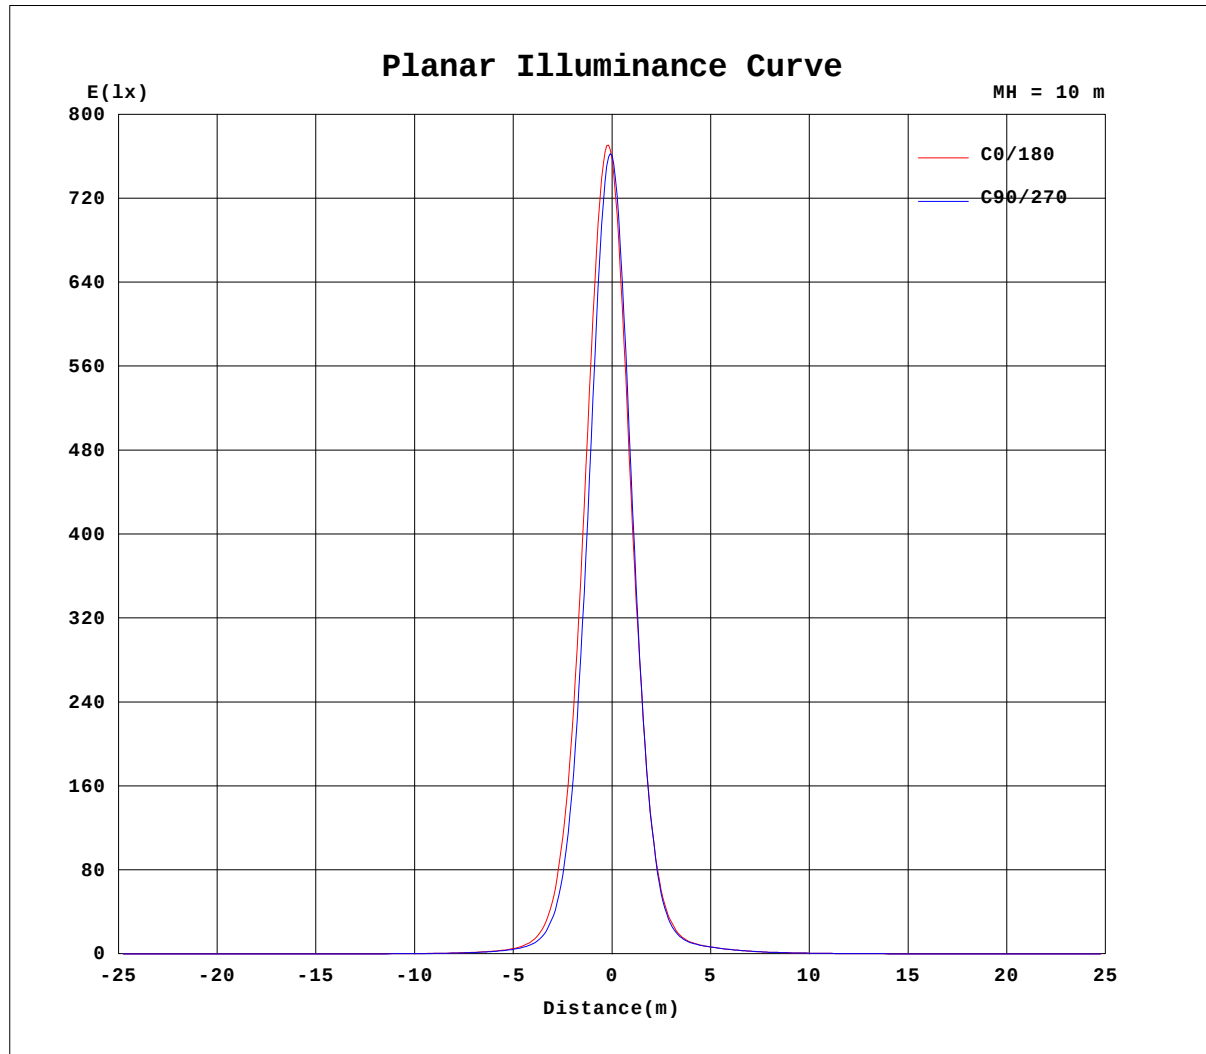


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-09-22

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Aurora Max-618mm-RGBW ALL-15D-Rev1	TYPE:RGBW W=6500K	WEIGHT:
SPEC.:15 DEG	DIM.:618mm	SERIAL No.:IES001751
MFR.:	SUR.:	Shielding Angle:

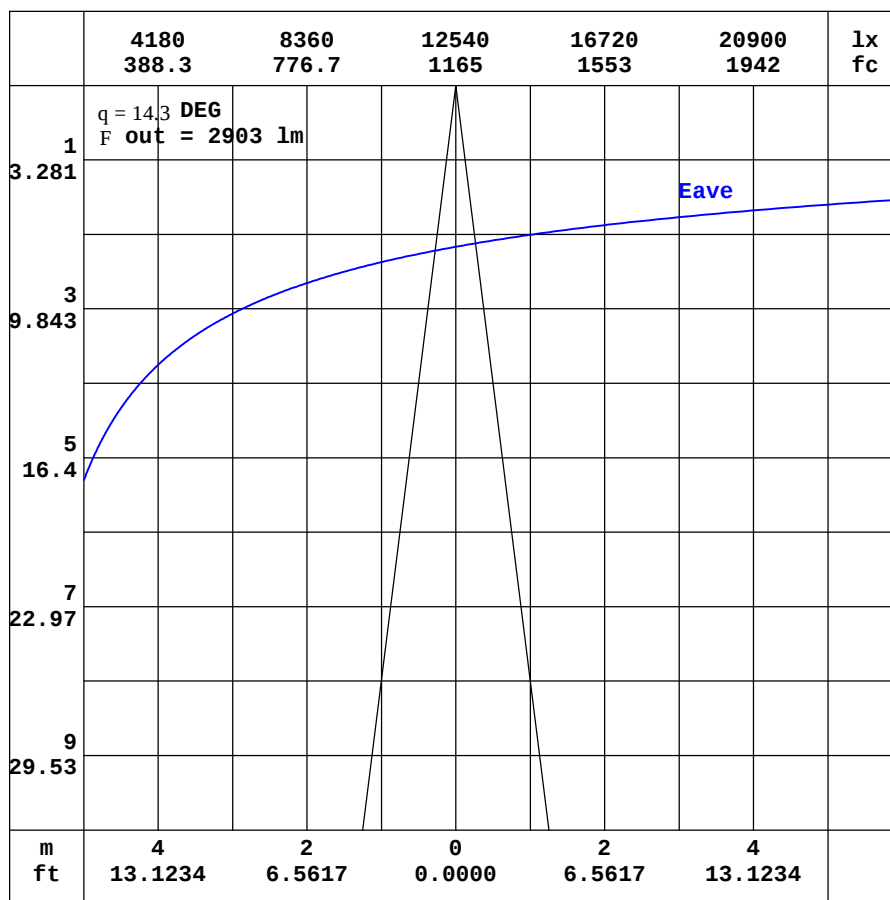

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-09-22

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Aurora Max-618mm-RGBW ALL-15D-Rev1	TYPE:RGBW W=6500K	WEIGHT:
SPEC.:15 DEG	DIM.:618mm	SERIAL No.:IES001751
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: ×10cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	2.64	2.19	1.93	1.85	1.83	1.90	2.22	3.01	4.25	5.46	6.18	6.31	5.91	5.28	4.71	4.28	3.80	3.42	3.75
-170	2.64	2.17	1.91	1.82	1.78	1.76	1.90	2.36	3.14	3.91	4.39	4.56	4.55	4.53	4.61	4.75	4.93	5.14	5.17
-160	2.64	2.17	1.90	1.79	1.73	1.65	1.60	1.70	1.98	2.29	2.47	2.52	2.65	3.32	3.93	4.47	4.91	5.13	5.22
-150	2.64	2.17	1.90	1.78	1.70	1.59	1.42	1.26	1.13	0.99	0.87	1.23	1.68	2.16	2.61	3.01	3.31	3.49	3.54
-140	2.64	2.19	1.91	1.77	1.69	1.59	1.41	1.15	0.83	0.62	0.60	0.68	0.84	1.06	1.29	1.50	1.67	1.77	1.79
-130	2.64	2.21	1.93	1.78	1.69	1.61	1.48	1.29	1.08	0.90	0.75	0.64	0.58	0.57	0.58	0.62	0.65	0.67	0.67
-120	2.64	2.25	1.97	1.79	1.69	1.61	1.54	1.46	1.40	1.32	1.22	1.11	1.01	0.92	0.85	0.79	0.76	0.74	0.73
-110	2.64	2.29	2.02	1.82	1.69	1.60	1.53	1.52	1.52	1.52	1.51	1.50	1.48	1.47	1.45	1.44	1.44	1.44	1.45
-100	2.64	2.34	2.08	1.87	1.69	1.54	1.42	1.44	1.46	1.48	1.50	1.51	1.52	1.53	1.54	1.55	1.55	1.56	1.57
-90	2.64	2.40	2.16	1.92	1.69	1.45	1.21	1.22	1.23	1.24	1.25	1.26	1.27	1.27	1.27	1.26	1.26	1.26	1.26
-80	2.64	2.47	2.26	2.04	1.80	1.60	1.28	1.27	1.29	1.29	1.29	1.28	1.26	1.26	1.26	1.26	1.26	1.26	1.25
-70	2.64	2.54	2.41	2.43	2.22	1.93	1.58	1.53	1.65	1.77	1.90	2.02	2.13	2.25	2.37	2.46	2.52	2.55	2.55
-60	2.64	2.63	2.81	2.77	2.63	2.45	2.29	2.26	2.59	2.96	3.34	3.72	4.06	4.38	4.66	4.89	5.05	5.14	5.15
-50	2.64	2.72	3.08	3.15	3.18	3.26	3.38	3.49	3.90	4.57	5.26	5.96	6.65	7.33	7.95	8.49	8.91	9.16	9.23
-40	2.64	2.87	3.36	3.58	3.86	4.27	4.77	5.28	5.66	6.42	7.59	8.90	10.4	12.0	13.8	15.5	16.9	17.8	18.1
-30	2.64	3.10	3.63	4.04	4.62	5.43	6.42	7.47	8.48	9.39	10.5	13.1	16.6	21.0	26.4	32.5	38.2	42.5	44.1
-20	2.64	3.26	3.89	4.50	5.38	6.62	8.19	9.97	11.9	14.2	17.1	21.0	26.6	38.0	54.9	80.9	121	161	178
-10	2.64	3.37	4.12	4.91	6.07	7.74	9.90	12.5	15.6	19.7	26.0	35.8	50.8	73.2	129	342	911	1820	2337
0	2.64	3.45	4.31	5.25	6.62	8.61	11.3	14.6	18.8	24.5	34.1	49.9	74.1	106	181	519	1841	4814	7574
10	2.64	3.44	4.28	5.19	6.51	8.42	11.0	14.2	18.2	23.5	31.8	45.5	66.4	92.7	132	253	650	1448	1823
20	2.64	3.39	4.19	5.03	6.20	7.88	10.1	12.9	16.4	20.7	26.5	35.1	48.3	66.2	85.9	107	132	159	169
30	2.64	3.27	4.07	4.79	5.76	7.10	8.92	11.2	13.9	17.0	20.7	25.3	31.3	39.2	49.1	59.4	67.7	73.0	74.6
40	2.64	3.09	3.89	4.51	5.24	6.21	7.49	9.11	11.0	13.1	15.5	18.0	20.7	23.5	26.6	29.6	32.0	33.6	34.0
50	2.64	2.97	3.69	4.19	4.71	5.34	6.14	7.12	8.27	9.59	11.0	12.4	13.8	15.1	16.3	17.4	18.1	18.6	18.7
60	2.64	2.89	3.45	3.85	4.21	4.59	5.02	5.52	6.07	6.68	7.35	8.06	8.77	9.45	10.0	10.5	10.8	11.0	11.0
70	2.64	2.81	3.02	3.47	3.72	3.96	4.17	4.39	4.62	4.84	5.06	5.28	5.48	5.66	5.83	5.97	6.06	6.11	6.10
80	2.64	2.73	2.82	2.93	3.08	3.30	3.45	3.57	3.68	3.77	3.85	3.92	3.97	4.01	4.04	4.06	4.08	4.08	4.08
90	2.64	2.65	2.66	2.67	2.68	2.69	2.70	2.71	2.73	2.74	2.76	2.78	2.79	2.79	2.79	2.78	2.78	2.78	2.78
100	2.64	2.56	2.49	2.42	2.35	2.28	2.22	2.17	2.12	2.08	2.05	2.02	2.00	1.98	1.97	1.95	1.95	1.94	1.94
110	2.64	2.48	2.33	2.20	2.09	2.00	1.94	1.91	1.88	1.87	1.86	1.86	1.86	1.85	1.85	1.85	1.84	1.85	1.85
120	2.64	2.41	2.20	2.05	1.94	1.89	1.86	1.85	1.84	1.83	1.82	1.82	1.83	1.85	1.89	1.92	1.95	1.97	1.97
130	2.64	2.34	2.10	1.95	1.88	1.85	1.83	1.83	1.84	1.91	2.03	2.21	2.45	2.72	3.04	3.33	3.56	3.70	3.74
140	2.64	2.29	2.03	1.90	1.85	1.83	1.83	1.90	2.08	2.44	2.98	3.65	4.36	4.98	5.45	5.79	5.98	6.09	6.12
150	2.64	2.24	1.98	1.87	1.84	1.83	1.90	2.13	2.66	3.51	4.50	5.37	5.97	6.32	6.50	6.62	6.68	6.72	6.73
160	2.64	2.22	1.95	1.86	1.83	1.85	2.02	2.51	3.42	4.59	5.59	6.20	6.50	6.61	6.67	6.79	6.99	7.08	7.19
170	2.64	2.20	1.94	1.85	1.83	1.88	2.15	2.85	4.01	5.24	6.06	6.39	6.36	6.18	6.00	5.87	5.81	5.87	5.98
180	2.64	2.19	1.93	1.85	1.83	1.90	2.22	3.01	4.25	5.46	6.18	6.31	5.91	5.28	4.71	4.28	3.80	3.42	3.74

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-09-22

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Aurora Max-618mm-RGBW ALL-15D-Rev1	TYPE:RGBW W=6500K	WEIGHT:
SPEC.:15 DEG	DIM.:618mm	SERIAL No.:IES001751
MFR.:	SUR.:	Shielding Angle:

Table--2
UNIT: ×10cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	3.52	3.81	3.96	3.90	3.59	3.05	2.32	1.59	1.01	0.70	0.68	0.93	1.25	1.49	1.57	1.51	1.33	1.03
-170	4.99	4.85	4.66	4.31	3.70	2.96	2.19	1.48	0.94	0.67	0.69	0.94	1.26	1.50	1.56	1.51	1.33	1.03
-160	5.08	4.81	4.33	3.74	3.06	2.36	1.69	1.13	0.77	0.64	0.75	1.03	1.32	1.52	1.56	1.50	1.32	1.03
-150	3.45	3.23	2.90	2.46	1.97	1.49	1.06	0.76	0.63	0.68	0.89	1.17	1.41	1.54	1.55	1.48	1.30	1.03
-140	1.74	1.62	1.43	1.21	0.97	0.77	0.64	0.61	0.70	0.88	1.12	1.35	1.50	1.56	1.54	1.45	1.27	1.03
-130	0.66	0.64	0.61	0.58	0.57	0.61	0.70	0.84	1.02	1.22	1.38	1.50	1.55	1.55	1.50	1.40	1.24	1.03
-120	0.74	0.77	0.82	0.88	0.97	1.07	1.20	1.31	1.41	1.49	1.53	1.55	1.54	1.51	1.44	1.34	1.20	1.03
-110	1.45	1.45	1.47	1.48	1.50	1.52	1.54	1.55	1.55	1.55	1.53	1.51	1.47	1.42	1.35	1.26	1.15	1.03
-100	1.56	1.56	1.55	1.54	1.53	1.52	1.51	1.49	1.46	1.44	1.40	1.36	1.32	1.27	1.22	1.16	1.09	1.03
-90	1.25	1.23	1.22	1.21	1.20	1.19	1.17	1.15	1.13	1.11	1.09	1.07	1.07	1.06	1.05	1.04	1.04	1.03
-80	1.22	1.19	1.15	1.11	1.07	1.03	1.00	0.96	0.92	0.87	0.82	0.79	0.82	0.85	0.89	0.93	0.98	1.03
-70	2.52	2.46	2.36	2.24	2.09	1.94	1.79	1.64	1.47	1.31	1.16	1.01	0.87	0.79	0.76	0.83	0.92	1.03
-60	5.11	4.99	4.80	4.54	4.23	3.88	3.51	3.12	2.71	2.31	1.92	1.55	1.27	1.01	0.82	0.75	0.87	1.03
-50	9.13	8.85	8.41	7.84	7.19	6.50	5.78	5.05	4.33	3.64	2.97	2.36	1.79	1.35	0.98	0.76	0.83	1.03
-40	17.7	16.7	15.3	13.6	11.9	10.4	8.88	7.48	6.22	5.11	4.12	3.23	2.42	1.71	1.21	0.83	0.79	1.03
-30	42.2	37.6	31.9	26.3	21.2	16.9	13.4	10.7	8.46	6.67	5.26	4.07	3.03	2.10	1.40	0.89	0.77	1.03
-20	153	112	78.4	55.2	39.2	27.9	19.7	14.5	10.8	8.20	6.27	4.77	3.52	2.43	1.56	0.96	0.75	1.03
-10	1677	869	343	132	67.5	41.3	26.8	18.2	12.8	9.37	6.99	5.26	3.85	2.66	1.67	1.02	0.74	1.03
0	6460	3057	947	247	91.9	49.4	30.7	20.1	13.9	9.85	7.28	5.46	3.99	2.74	1.71	1.03	0.74	1.03
10	1469	720	285	140	86.8	57.0	36.6	24.1	16.6	11.9	8.68	6.35	4.54	3.09	1.94	1.17	0.81	1.03
20	160	133	107	86.5	67.6	49.9	34.1	23.8	17.2	12.6	9.23	6.75	4.80	3.25	2.08	1.27	0.89	1.03
30	72.9	67.4	59.1	49.3	39.7	31.7	25.5	20.8	16.0	12.0	8.98	6.60	4.72	3.22	2.16	1.34	0.96	1.03
40	33.5	31.9	29.6	26.5	23.4	20.6	17.9	15.3	12.9	10.5	8.02	5.98	4.35	3.06	2.14	1.39	1.04	1.03
50	18.6	18.1	17.2	16.2	15.0	13.6	12.2	10.8	9.41	8.07	6.63	5.10	3.84	2.87	2.03	1.40	1.11	1.03
60	11.0	10.7	10.4	9.91	9.33	8.66	7.92	7.17	6.45	5.76	5.14	4.24	3.40	2.60	1.95	1.45	1.17	1.03
70	6.08	6.00	5.88	5.70	5.49	5.26	5.02	4.76	4.51	4.26	4.01	3.60	2.97	2.38	1.90	1.52	1.23	1.03
80	4.05	4.02	3.97	3.92	3.86	3.79	3.70	3.60	3.49	3.37	3.27	3.16	2.71	2.30	1.91	1.58	1.28	1.03
90	2.78	2.78	2.78	2.78	2.78	2.78	2.78	2.78	2.79	2.79	2.79	2.79	2.50	2.20	1.91	1.62	1.32	1.03
100	1.94	1.94	1.95	1.96	1.97	1.99	2.02	2.06	2.11	2.17	2.24	2.30	2.19	2.05	1.86	1.63	1.35	1.03
110	1.84	1.84	1.84	1.84	1.84	1.84	1.84	1.84	1.85	1.87	1.90	1.94	1.93	1.89	1.79	1.63	1.37	1.03
120	1.96	1.94	1.91	1.88	1.85	1.83	1.82	1.81	1.81	1.81	1.82	1.81	1.79	1.78	1.73	1.62	1.39	1.03
130	3.67	3.50	3.24	2.94	2.62	2.34	2.11	1.96	1.86	1.82	1.78	1.75	1.73	1.72	1.69	1.60	1.39	1.03
140	6.06	5.92	5.68	5.29	4.75	4.06	3.33	2.69	2.24	1.91	1.71	1.67	1.68	1.68	1.66	1.59	1.39	1.03
150	6.70	6.65	6.57	6.42	6.18	5.72	4.99	4.02	2.80	1.97	1.61	1.54	1.60	1.64	1.63	1.57	1.39	1.03
160	7.11	7.02	6.85	6.71	6.58	6.36	5.38	4.11	2.83	1.88	1.42	1.37	1.48	1.59	1.61	1.55	1.38	1.03
170	6.01	6.11	6.30	6.17	5.63	4.92	4.08	3.12	2.17	1.43	1.10	1.15	1.36	1.54	1.59	1.54	1.36	1.03
180	3.52	3.81	3.96	3.90	3.59	3.05	2.32	1.59	1.01	0.70	0.68	0.93	1.25	1.49	1.57	1.51	1.33	1.03

H_b Range:-90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks: