

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	9928.4 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	28.2V x 29.7H
	At 50% of Imax	14.6V x 15.5H
	At 90% of Imax	5.6V x 5.9H

Beam Flux	Total	1000.5 lumens per klm.
	To 10% of Imax	738.0 lumens per klm.
	To 50% of Imax	388.0 lumens per klm.
	To 90% of Imax	74.4 lumens per klm.

Upward LOR	2.1 %
Downward LOR	97.9 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Aurora Max-618mm-RGBW BLUE-15D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:15 DEG	DIM.:618mm	SERIAL No.:IES001754
MFR.:	SUR.:	Shielding Angle:

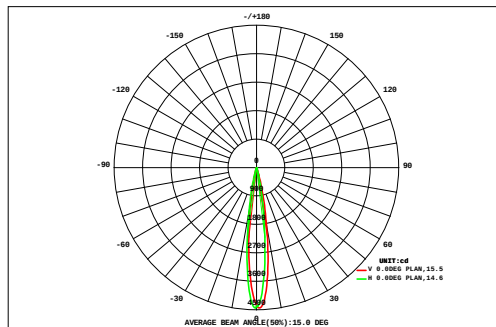

DATA OF LAMP		Eff:7.53lm/W	
MODEL		Imax(cd)	4446
NOMINAL POWER(W)	59.5	AVAILABILITY(%)	73.8
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	330.3
NOMINAL FLUX(lm)	447.8	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	447.8
TEST VOLTAGE(V)	220	q @50%(H,V)	15,15DEG

		AREA FLUX DIAGRAM															UNIT:lm				F t	F a
		0.07	0.09	0.10	0.12	0.13	0.15	0.16	0.16	0.17	0.17	0.16	0.16	0.15	0.13	0.12	0.10	0.09	0.08	2.30	0.00	
VERTICAL (DEG)	27	0.08	0.10	0.12	0.14	0.16	0.18	0.19	0.21	0.22	0.22	0.21	0.19	0.18	0.16	0.14	0.12	0.10	0.09	2.82	0.00	
	24	0.10	0.12	0.14	0.16	0.19	0.23	0.27	0.31	0.33	0.33	0.31	0.27	0.23	0.20	0.17	0.14	0.12	0.10	3.70	0.00	
	21	0.11	0.13	0.16	0.20	0.25	0.33	0.43	0.54	0.61	0.61	0.55	0.44	0.34	0.26	0.20	0.17	0.14	0.11	5.59	0.00	
	18	0.12	0.15	0.19	0.25	0.36	0.54	0.83	1.12	1.30	1.31	1.14	0.86	0.58	0.39	0.27	0.20	0.15	0.12	9.86	2.90	
	15	0.13	0.16	0.22	0.32	0.53	0.94	1.58	2.32	2.80	2.80	2.34	1.67	1.06	0.61	0.37	0.24	0.17	0.13	18.4	13.8	
	12	0.14	0.18	0.25	0.42	0.78	1.52	2.77	4.32	5.35	5.34	4.38	3.02	1.79	0.98	0.53	0.31	0.19	0.13	32.4	28.5	
	9	0.15	0.19	0.29	0.52	1.06	2.18	4.08	6.60	8.58	8.53	6.92	4.73	2.87	1.54	0.76	0.38	0.21	0.14	49.7	46.4	
	6	0.15	0.20	0.31	0.59	1.25	2.62	4.96	8.06	10.9	11.1	9.43	6.77	4.06	2.10	0.98	0.45	0.23	0.14	64.3	61.1	
	3	0.15	0.20	0.32	0.63	1.36	2.89	5.48	8.84	11.4	11.6	10.1	7.17	4.25	2.18	1.00	0.46	0.23	0.13	68.4	65.3	
	0	0.14	0.19	0.31	0.63	1.35	2.85	5.23	7.80	9.44	9.29	7.83	5.59	3.33	1.72	0.82	0.39	0.21	0.12	57.2	54.1	
-9	0.12	0.17	0.28	0.53	1.11	2.15	3.64	5.23	6.22	6.07	4.94	3.58	2.19	1.18	0.60	0.31	0.17	0.11	38.6	35.2		
	-12	0.10	0.14	0.22	0.39	0.74	1.30	2.11	2.94	3.40	3.31	2.71	1.93	1.24	0.72	0.39	0.23	0.14	0.10	22.1	18.2	
	-15	0.09	0.11	0.17	0.26	0.44	0.71	1.08	1.43	1.61	1.56	1.31	0.95	0.65	0.41	0.26	0.17	0.12	0.08	11.4	4.75	
	-18	0.07	0.09	0.13	0.18	0.26	0.38	0.53	0.66	0.73	0.71	0.61	0.47	0.35	0.25	0.17	0.13	0.09	0.07	5.90	0.00	
	-21	0.06	0.08	0.10	0.13	0.17	0.22	0.28	0.32	0.34	0.34	0.31	0.26	0.20	0.16	0.12	0.10	0.08	0.06	3.32	0.00	
-24	0.05	0.06	0.08	0.10	0.12	0.14	0.16	0.18	0.19	0.19	0.18	0.16	0.13	0.11	0.09	0.08	0.06	0.05	2.14	0.00		
	-27	0.04	0.05	0.06	0.07	0.09	0.10	0.11	0.12	0.12	0.12	0.12	0.11	0.10	0.08	0.07	0.06	0.05	0.04	1.53	0.00	
		-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL (DEG)			6	9	12	15	18	21	24	27		
F t	1.88	2.44	3.45	5.64	10.3	19.4	33.9	51.2	63.7	63.6	53.5	38.3	23.7	13.2	7.07	4.03	2.57	1.81	400	---		
F a	0.00	0.00	0.00	0.00	3.86	15.2	30.1	47.7	60.2	60.2	49.9	34.5	19.7	8.20	0.71	0.00	0.00	0.00	---	330		


one-half-peak spread: U:7.2,D:7.5 , L:7.6,R:8.8,EMA Beam Type: Type 3 x 2 (H x V)

H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-09-22

V_b Range: -180 - 180DEG
V_b Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:Aurora Max-618mm-RGBW BLUE-15D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:15 DEG	DIM.:618mm	SERIAL No.:IES001754
MFR.:	SUR.:	Shielding Angle:

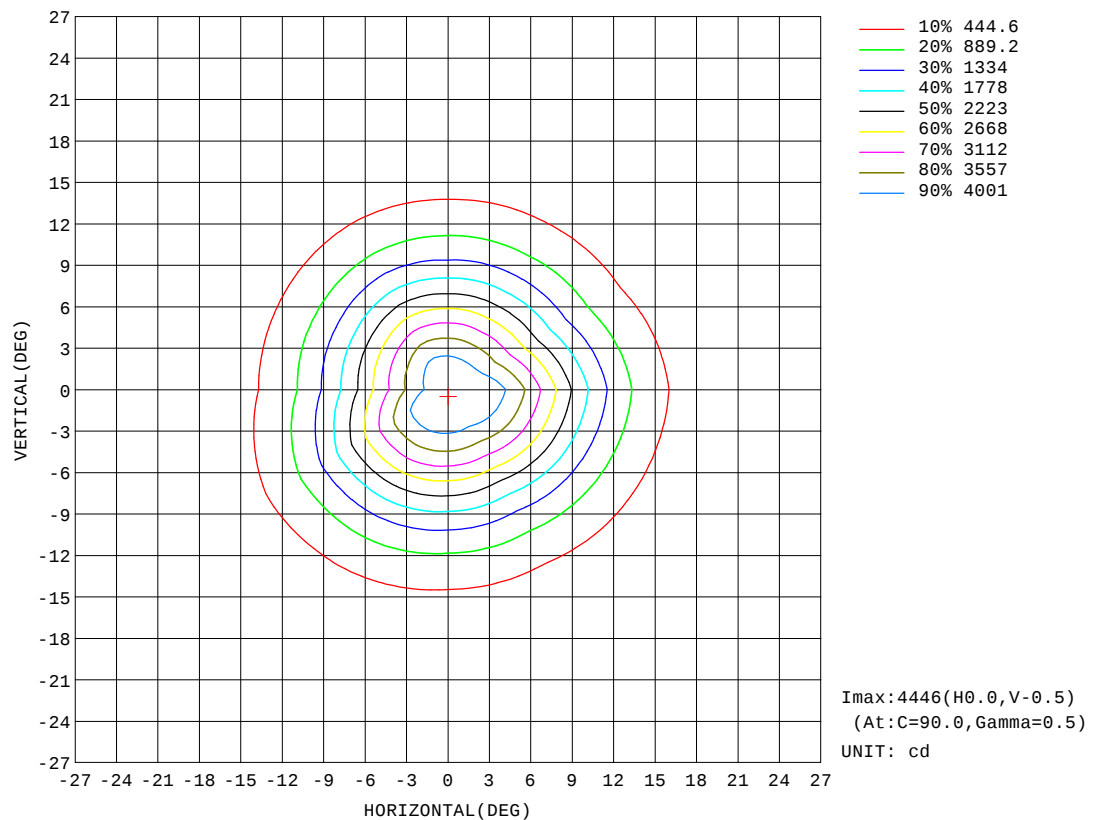


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-09-22

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Aurora Max-618mm-RGBW BLUE-15D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:15 DEG	DIM.:618mm	SERIAL No.:IES001754
MFR.:	SUR.:	Shielding Angle:

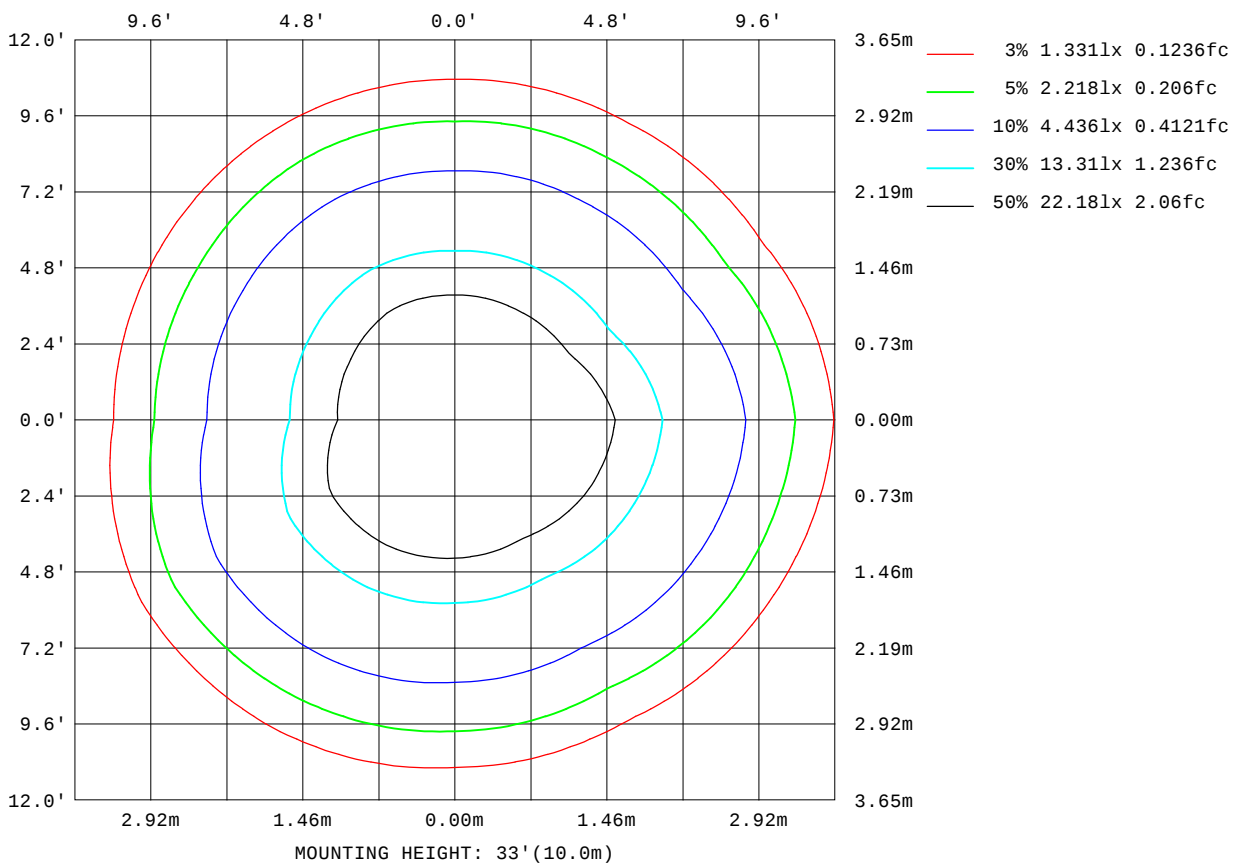

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-09-22

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

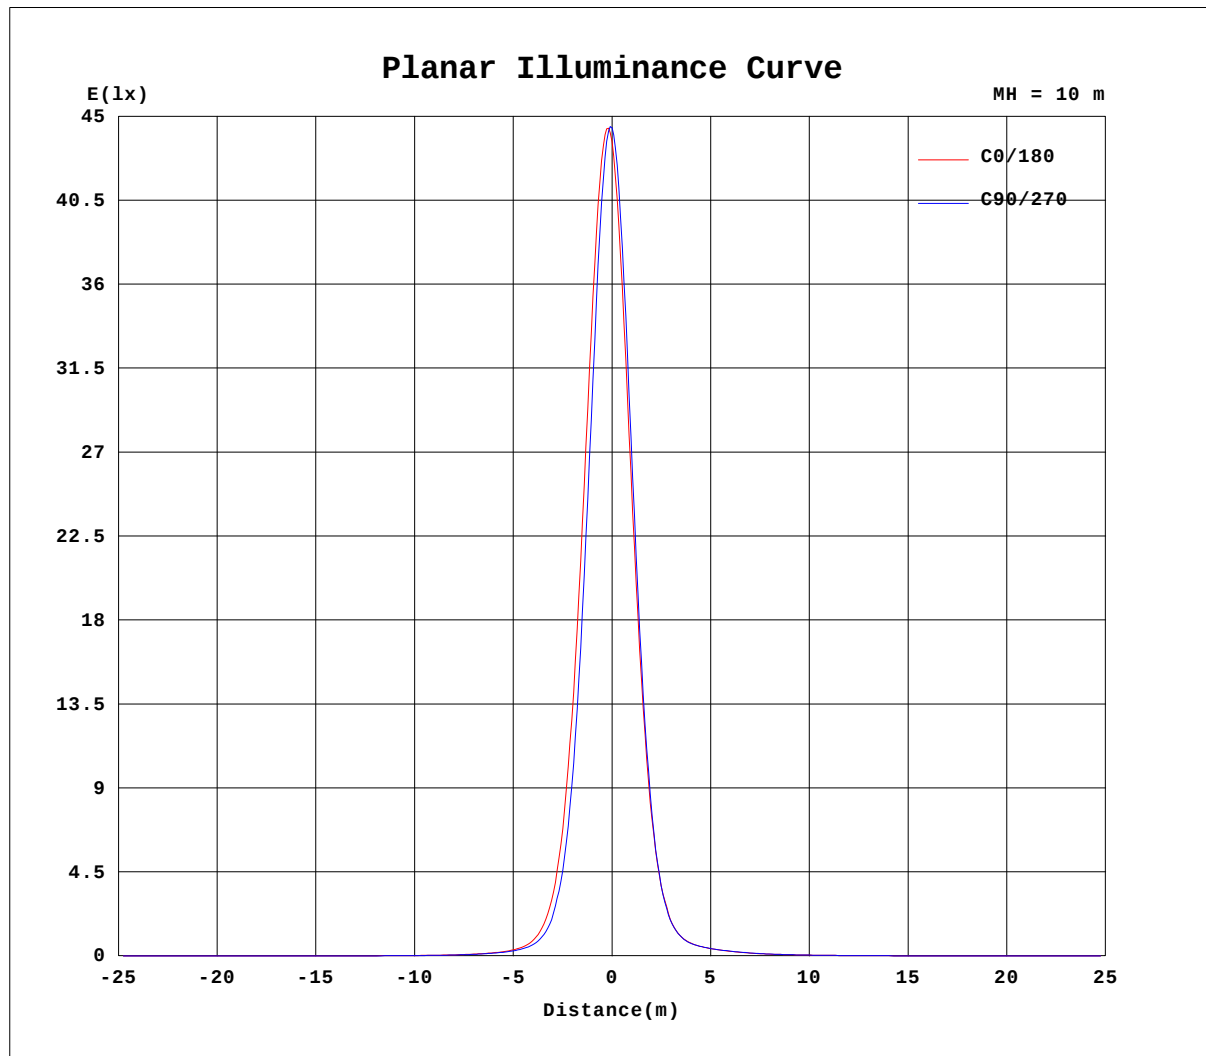


H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-09-22

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Aurora Max-618mm-RGBW BLUE-15D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:15 DEG	DIM.:618mm	SERIAL No.:IES001754
MFR.:	SUR.:	Shielding Angle:

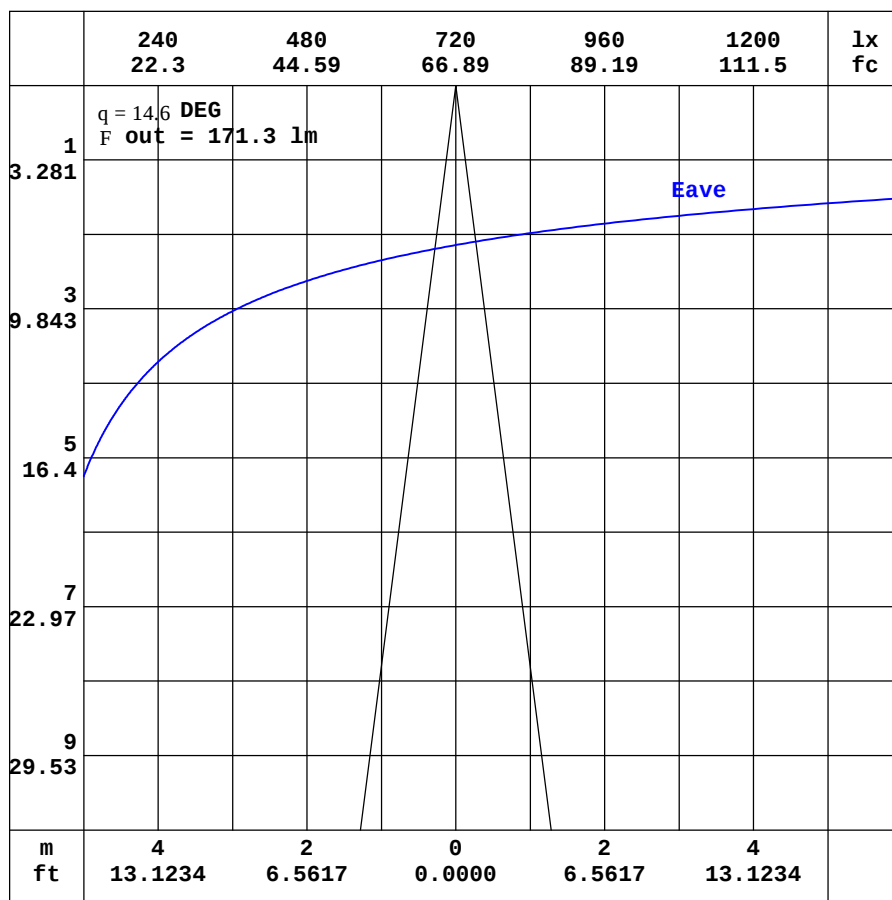

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-09-22

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Aurora Max-618mm-RGBW BLUE-15D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:15 DEG	DIM.:618mm	SERIAL No.:IES001754
MFR.:	SUR.:	Shielding Angle:

Table--1
UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	1.99	1.51	1.17	1.08	1.09	1.13	1.33	1.78	2.49	3.19	3.60	3.65	3.42	3.07	2.77	2.56	2.33	2.18	2.43
-170	1.99	1.49	1.15	1.05	1.03	1.02	1.11	1.39	1.83	2.27	2.56	2.65	2.66	2.68	2.77	2.83	2.98	3.19	3.20
-160	1.99	1.49	1.14	1.01	0.98	0.92	0.90	0.97	1.14	1.32	1.43	1.47	1.56	1.97	2.34	2.68	2.97	3.15	3.26
-150	1.99	1.50	1.15	0.99	0.93	0.86	0.77	0.67	0.62	0.55	0.48	0.69	0.95	1.24	1.51	1.75	1.97	2.11	2.18
-140	1.99	1.51	1.17	0.99	0.90	0.83	0.72	0.56	0.38	0.30	0.30	0.34	0.44	0.56	0.69	0.84	0.96	1.04	1.08
-130	1.99	1.55	1.20	1.00	0.89	0.81	0.72	0.59	0.48	0.41	0.34	0.30	0.29	0.28	0.28	0.31	0.34	0.37	0.38
-120	1.99	1.59	1.27	1.05	0.90	0.81	0.73	0.66	0.64	0.61	0.57	0.53	0.48	0.44	0.41	0.37	0.34	0.33	0.32
-110	1.99	1.63	1.34	1.12	0.94	0.82	0.73	0.71	0.70	0.70	0.69	0.70	0.71	0.70	0.69	0.67	0.66	0.66	0.65
-100	1.99	1.69	1.43	1.19	1.00	0.83	0.69	0.68	0.68	0.68	0.68	0.68	0.69	0.70	0.70	0.70	0.71	0.71	0.71
-90	1.99	1.75	1.52	1.28	1.05	0.81	0.58	0.58	0.58	0.58	0.58	0.58	0.58	0.58	0.59	0.59	0.59	0.59	0.60
-80	1.99	1.80	1.60	1.38	1.13	0.89	0.61	0.61	0.63	0.65	0.66	0.67	0.68	0.68	0.67	0.67	0.66	0.65	0.63
-70	1.99	1.87	1.70	1.60	1.37	1.12	0.85	0.82	0.92	1.02	1.12	1.22	1.31	1.38	1.45	1.50	1.52	1.53	1.52
-60	1.99	1.94	1.94	1.80	1.62	1.45	1.33	1.32	1.56	1.82	2.07	2.33	2.58	2.80	2.97	3.11	3.19	3.23	3.22
-50	1.99	2.00	2.10	2.02	1.94	1.96	2.03	2.14	2.42	2.87	3.34	3.80	4.27	4.71	5.11	5.44	5.68	5.82	5.83
-40	1.99	2.11	2.26	2.26	2.35	2.58	2.91	3.26	3.54	4.05	4.82	5.70	6.67	7.74	8.90	9.92	10.8	11.3	11.4
-30	1.99	2.25	2.43	2.53	2.80	3.29	3.92	4.61	5.28	5.91	6.69	8.42	10.6	13.5	17.0	20.8	24.3	26.8	27.6
-20	1.99	2.35	2.58	2.80	3.26	4.02	5.00	6.12	7.37	8.82	10.7	13.3	17.0	24.2	35.0	52.0	77.1	103	111
-10	1.99	2.43	2.73	3.04	3.67	4.69	6.03	7.62	9.57	12.1	15.8	21.9	31.0	45.2	81.4	211	569	1151	1386
0	1.99	2.50	2.87	3.25	4.00	5.21	6.83	8.85	11.4	14.9	20.4	29.6	43.7	63.3	111	329	1105	2823	4363
10	1.99	2.49	2.85	3.22	3.93	5.09	6.65	8.59	11.0	14.2	19.1	27.2	39.5	55.5	81.3	160	408	895	1165
20	1.99	2.46	2.81	3.14	3.76	4.76	6.13	7.85	9.91	12.5	16.0	21.1	29.0	39.6	51.5	64.7	81.7	100	109
30	1.99	2.40	2.76	3.04	3.51	4.28	5.38	6.76	8.36	10.3	12.5	15.3	18.9	23.6	29.5	35.6	40.7	44.0	45.2
40	1.99	2.31	2.70	2.92	3.23	3.75	4.51	5.49	6.65	7.94	9.35	10.9	12.5	14.3	16.2	17.9	19.4	20.4	20.7
50	1.99	2.23	2.61	2.80	2.99	3.27	3.71	4.28	4.97	5.79	6.65	7.54	8.41	9.26	10.00	10.6	11.1	11.4	11.5
60	1.99	2.19	2.50	2.68	2.80	2.92	3.10	3.35	3.66	4.02	4.43	4.87	5.33	5.75	6.11	6.40	6.61	6.74	6.77
70	1.99	2.13	2.27	2.52	2.62	2.70	2.76	2.81	2.89	2.97	3.07	3.18	3.30	3.42	3.53	3.63	3.69	3.73	3.74
80	1.99	2.07	2.15	2.23	2.33	2.45	2.53	2.57	2.59	2.61	2.61	2.61	2.60	2.62	2.63	2.64	2.65	2.66	2.67
90	1.99	2.01	2.02	2.04	2.06	2.08	2.10	2.11	2.12	2.13	2.14	2.14	2.15	2.16	2.17	2.18	2.18	2.19	2.20
100	1.99	1.92	1.86	1.79	1.73	1.66	1.60	1.53	1.46	1.40	1.34	1.30	1.26	1.23	1.22	1.21	1.20	1.20	1.21
110	1.99	1.84	1.69	1.54	1.41	1.31	1.23	1.17	1.12	1.09	1.07	1.05	1.04	1.05	1.05	1.06	1.06	1.07	1.07
120	1.99	1.76	1.54	1.34	1.21	1.13	1.10	1.08	1.06	1.05	1.05	1.05	1.05	1.07	1.09	1.09	1.10	1.11	1.10
130	1.99	1.69	1.40	1.21	1.11	1.09	1.07	1.06	1.06	1.08	1.16	1.27	1.42	1.58	1.77	1.93	2.07	2.14	2.16
140	1.99	1.63	1.31	1.14	1.09	1.07	1.07	1.09	1.18	1.39	1.71	2.11	2.53	2.90	3.19	3.38	3.50	3.56	3.57
150	1.99	1.58	1.25	1.10	1.08	1.07	1.10	1.23	1.53	2.03	2.60	3.10	3.47	3.69	3.82	3.91	3.95	3.97	3.97
160	1.99	1.54	1.21	1.09	1.08	1.09	1.18	1.46	1.99	2.66	3.24	3.59	3.76	3.86	3.95	4.06	4.17	4.25	4.34
170	1.99	1.52	1.18	1.08	1.08	1.11	1.27	1.68	2.34	3.04	3.53	3.70	3.69	3.65	3.59	3.52	3.51	3.57	3.80
180	1.99	1.51	1.17	1.08	1.09	1.13	1.33	1.78	2.49	3.19	3.60	3.65	3.42	3.07	2.77	2.56	2.33	2.18	2.45

H_b Range:-90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Aurora Max-618mm-RGBW BLUE-15D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:15 DEG	DIM.:618mm	SERIAL No.:IES001754
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(DEC) V(DEC)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	2.33	2.50	2.50	2.39	2.16	1.79	1.34	0.89	0.55	0.32	0.32	0.43	0.60	0.70	0.70	0.66	0.57	0.41
-170	3.16	3.04	2.88	2.65	2.24	1.76	1.27	0.84	0.52	0.34	0.34	0.45	0.60	0.69	0.70	0.66	0.57	0.41
-160	3.14	2.95	2.64	2.27	1.84	1.41	1.00	0.65	0.42	0.34	0.36	0.48	0.63	0.69	0.70	0.66	0.57	0.41
-150	2.10	1.95	1.73	1.46	1.15	0.87	0.61	0.45	0.36	0.35	0.42	0.55	0.66	0.70	0.70	0.65	0.56	0.41
-140	1.03	0.95	0.82	0.66	0.52	0.41	0.34	0.34	0.34	0.42	0.53	0.63	0.69	0.70	0.69	0.64	0.55	0.41
-130	0.37	0.34	0.31	0.30	0.30	0.31	0.35	0.41	0.49	0.57	0.64	0.69	0.70	0.70	0.67	0.62	0.53	0.41
-120	0.34	0.36	0.38	0.42	0.47	0.52	0.57	0.62	0.66	0.69	0.70	0.70	0.70	0.68	0.64	0.59	0.51	0.41
-110	0.66	0.67	0.68	0.69	0.70	0.70	0.70	0.70	0.70	0.70	0.70	0.70	0.69	0.65	0.60	0.55	0.49	0.41
-100	0.71	0.70	0.70	0.70	0.69	0.68	0.68	0.67	0.67	0.66	0.65	0.63	0.60	0.57	0.53	0.50	0.46	0.41
-90	0.58	0.56	0.55	0.53	0.52	0.50	0.50	0.50	0.50	0.50	0.50	0.50	0.48	0.47	0.46	0.44	0.43	0.41
-80	0.62	0.61	0.59	0.58	0.55	0.53	0.49	0.46	0.43	0.41	0.38	0.36	0.37	0.37	0.38	0.38	0.40	0.41
-70	1.51	1.47	1.41	1.34	1.24	1.15	1.05	0.94	0.82	0.70	0.60	0.49	0.40	0.36	0.35	0.35	0.37	0.41
-60	3.19	3.12	3.00	2.83	2.63	2.40	2.16	1.89	1.62	1.36	1.10	0.86	0.68	0.51	0.39	0.34	0.35	0.41
-50	5.77	5.59	5.30	4.94	4.52	4.08	3.61	3.14	2.67	2.21	1.78	1.39	1.03	0.74	0.50	0.35	0.34	0.41
-40	11.2	10.6	9.68	8.63	7.57	6.56	5.60	4.69	3.87	3.16	2.53	1.96	1.44	0.98	0.65	0.40	0.34	0.41
-30	26.5	23.7	20.2	16.7	13.5	10.7	8.50	6.75	5.32	4.17	3.27	2.50	1.83	1.24	0.79	0.45	0.33	0.41
-20	96.8	70.6	49.8	34.9	24.7	17.6	12.6	9.16	6.83	5.15	3.92	2.96	2.16	1.46	0.89	0.50	0.33	0.41
-10	1051	544	211	84.0	42.7	26.0	17.0	11.5	8.16	5.91	4.39	3.28	2.38	1.61	0.97	0.54	0.33	0.41
0	3755	1839	583	160	58.5	31.2	19.3	12.6	8.74	6.21	4.58	3.42	2.48	1.67	1.00	0.56	0.33	0.41
10	907	459	187	88.8	53.7	35.1	22.7	14.9	10.4	7.40	5.38	3.94	2.80	1.88	1.15	0.66	0.39	0.41
20	101	82.3	65.6	52.5	41.0	30.5	20.9	14.6	10.6	7.76	5.70	4.16	2.94	1.97	1.25	0.74	0.45	0.41
30	44.0	40.6	35.6	29.8	24.2	19.4	15.6	12.7	9.76	7.35	5.51	4.04	2.88	1.96	1.30	0.80	0.50	0.41
40	20.4	19.4	18.0	16.2	14.4	12.6	11.0	9.34	7.89	6.41	4.89	3.64	2.65	1.87	1.31	0.86	0.55	0.41
50	11.4	11.1	10.6	9.98	9.24	8.39	7.51	6.62	5.74	4.91	4.04	3.12	2.36	1.79	1.29	0.89	0.60	0.41
60	6.74	6.61	6.39	6.10	5.74	5.31	4.84	4.37	3.92	3.52	3.16	2.65	2.17	1.71	1.30	0.94	0.64	0.41
70	3.72	3.67	3.58	3.47	3.34	3.20	3.06	2.93	2.81	2.71	2.62	2.44	2.06	1.68	1.33	0.99	0.67	0.41
80	2.65	2.63	2.61	2.59	2.56	2.54	2.53	2.51	2.49	2.47	2.45	2.41	2.06	1.71	1.35	1.01	0.70	0.41
90	2.19	2.19	2.18	2.17	2.16	2.16	2.17	2.19	2.21	2.22	2.24	2.26	1.95	1.64	1.34	1.03	0.72	0.41
100	1.21	1.21	1.21	1.22	1.23	1.26	1.32	1.39	1.47	1.57	1.67	1.76	1.63	1.46	1.25	1.02	0.73	0.41
110	1.07	1.06	1.06	1.06	1.05	1.05	1.06	1.08	1.11	1.16	1.23	1.30	1.28	1.23	1.13	0.97	0.73	0.41
120	1.11	1.10	1.09	1.08	1.07	1.06	1.06	1.05	1.05	1.06	1.08	1.08	1.06	1.05	1.02	0.92	0.72	0.41
130	2.13	2.04	1.90	1.73	1.55	1.37	1.23	1.12	1.06	1.05	1.03	0.99	0.96	0.95	0.92	0.86	0.70	0.41
140	3.55	3.49	3.35	3.14	2.80	2.39	1.95	1.56	1.28	1.07	0.96	0.93	0.90	0.88	0.86	0.81	0.69	0.41
150	3.98	3.97	3.93	3.83	3.66	3.37	2.92	2.35	1.61	1.11	0.88	0.83	0.84	0.83	0.82	0.77	0.66	0.41
160	4.29	4.26	4.14	4.03	3.91	3.76	3.16	2.40	1.63	1.06	0.77	0.71	0.77	0.79	0.78	0.73	0.63	0.41
170	3.69	3.75	3.86	3.75	3.36	2.91	2.38	1.81	1.24	0.78	0.58	0.58	0.68	0.74	0.74	0.70	0.60	0.41
180	2.33	2.50	2.50	2.39	2.16	1.79	1.34	0.89	0.55	0.32	0.32	0.43	0.60	0.70	0.70	0.66	0.57	0.41

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-09-22

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: