

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	10194.3 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	27.9V x 29.3H
	At 50% of Imax	14.5V x 15.3H
	At 90% of Imax	5.6V x 5.9H

Beam Flux	Total	1000.4 lumens per klm.
	To 10% of Imax	738.6 lumens per klm.
	To 50% of Imax	393.4 lumens per klm.
	To 90% of Imax	73.9 lumens per klm.

Upward LOR	2.2 %
Downward LOR	97.8 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Aurora Max-618mm-RGBW GREEN-15D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:15 DEG	DIM.:618mm	SERIAL No.:IES001753
MFR.:	SUR.:	Shielding Angle:

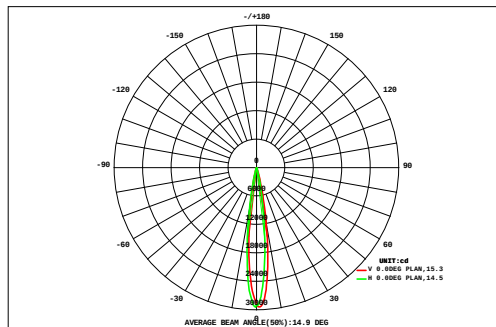

DATA OF LAMP		Eff:50.52lm/W	
MODEL		Imax(cd)	29411
NOMINAL POWER(W)	57.1	AVAILABILITY(%)	73.9
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	2131
NOMINAL FLUX(lm)	2885	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	2885
TEST VOLTAGE(V)	220	q @50%(H,V)	15,14DEG

		AREA FLUX DIAGRAM															UNIT:lm				F t	F a
		0.47	0.56	0.66	0.77	0.86	0.94	1.01	1.06	1.08	1.08	1.06	1.01	0.94	0.86	0.77	0.67	0.57	0.48	14.8	0.00	
VERTICAL (DEG)	27	0.55	0.66	0.78	0.90	1.02	1.13	1.24	1.33	1.38	1.38	1.33	1.24	1.13	1.02	0.91	0.80	0.68	0.57	18.0	0.00	
	24	0.63	0.76	0.90	1.05	1.23	1.44	1.68	1.90	2.04	2.04	1.92	1.70	1.46	1.24	1.07	0.92	0.78	0.65	23.4	0.00	
	21	0.71	0.86	1.03	1.25	1.57	2.07	2.72	3.37	3.78	3.80	3.44	2.79	2.15	1.64	1.30	1.06	0.89	0.73	35.1	0.00	
	18	0.78	0.96	1.18	1.55	2.22	3.38	5.11	7.00	8.11	8.18	7.17	5.33	3.65	2.44	1.66	1.24	0.99	0.78	61.7	15.6	
	15	0.85	1.06	1.37	2.00	3.32	5.85	10.0	14.6	17.7	17.8	15.0	10.7	6.61	3.82	2.29	1.50	1.08	0.81	116	86.3	
	12	0.91	1.15	1.60	2.63	4.85	9.55	17.6	27.8	34.7	34.8	28.5	19.4	11.3	6.07	3.32	1.88	1.19	0.84	208	182	
	9	0.95	1.24	1.83	3.25	6.62	13.8	26.4	43.1	56.4	56.3	45.4	30.8	18.3	9.62	4.70	2.39	1.33	0.85	323	300	
		0.97	1.29	1.97	3.67	7.85	16.7	32.3	53.1	71.6	73.4	62.1	44.2	26.1	13.2	6.04	2.81	1.43	0.85	420	398	
		0.95	1.29	2.03	3.92	8.61	18.5	35.7	58.4	75.2	76.7	66.5	46.9	27.4	13.7	6.20	2.83	1.41	0.83	447	427	
		0.88	1.21	1.96	3.86	8.52	18.1	33.9	51.1	62.3	61.5	51.5	36.4	21.4	10.9	5.06	2.43	1.27	0.77	373	353	
		0.78	1.07	1.72	3.28	6.96	13.6	23.2	33.8	40.5	39.7	32.3	22.9	13.9	7.46	3.66	1.90	1.08	0.70	249	226	
	0.66	0.90	1.38	2.43	4.49	8.09	13.1	18.5	21.7	21.2	17.1	12.1	7.82	4.45	2.45	1.41	0.89	0.61	139	113		
	0.53	0.72	1.04	1.63	2.70	4.36	6.61	8.88	10.2	9.95	8.21	5.87	4.03	2.57	1.60	1.05	0.72	0.52	71.2	30.0		
	0.43	0.57	0.79	1.11	1.62	2.37	3.26	4.06	4.49	4.39	3.80	2.94	2.13	1.52	1.08	0.79	0.58	0.44	36.4	0.00		
	0.37	0.47	0.61	0.79	1.04	1.35	1.70	2.01	2.15	2.11	1.90	1.57	1.24	0.98	0.77	0.60	0.47	0.37	20.5	0.00		
	0.31	0.39	0.48	0.59	0.72	0.87	1.02	1.14	1.19	1.18	1.10	0.97	0.83	0.69	0.58	0.48	0.39	0.31	13.2	0.00		
	0.26	0.32	0.38	0.46	0.54	0.61	0.69	0.74	0.77	0.77	0.73	0.67	0.59	0.52	0.45	0.38	0.32	0.26	9.45	0.00		
	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL (DEG)				6	9	12	15	18	21	24	27		
F t	12.0	15.5	21.7	35.2	64.7	123	217	332	415	416	349	248	151	82.6	43.9	25.1	16.1	11.4	2579	---		
F a	0.00	0.00	0.00	0.00	21.1	94.8	193	310	392	394	327	224	123	49.9	2.72	0.00	0.00	0.00	---	2131		


one-half-peak spread: U:7.2,D:7.4 , L:7.5,R:7.5EMA Beam Type: Type 3 x 2 (H x V)

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-09-22

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:Aurora Max-618mm-RGBW GREEN-15D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:15 DEG	DIM.:618mm	SERIAL No.:IES001753
MFR.:	SUR.:	Shielding Angle:

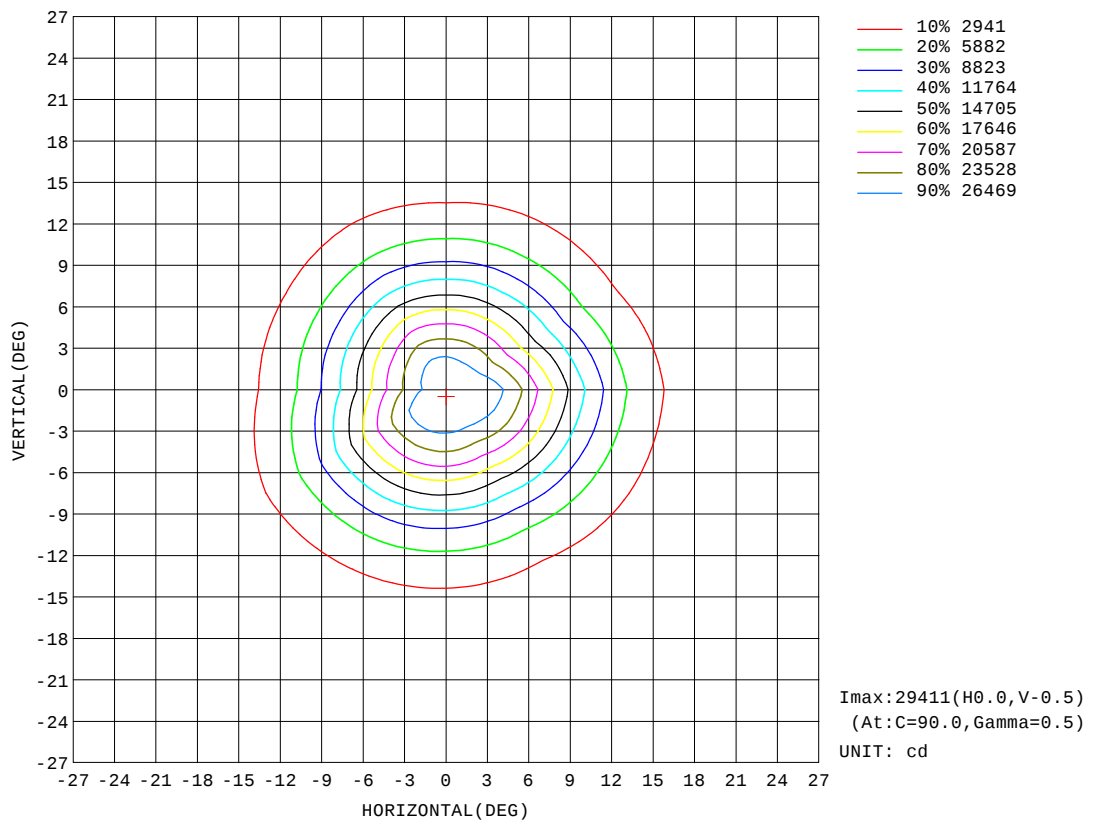


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-09-22

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Aurora Max-618mm-RGBW GREEN-15D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:15 DEG	DIM.:618mm	SERIAL No.:IES001753
MFR.:	SUR.:	Shielding Angle:

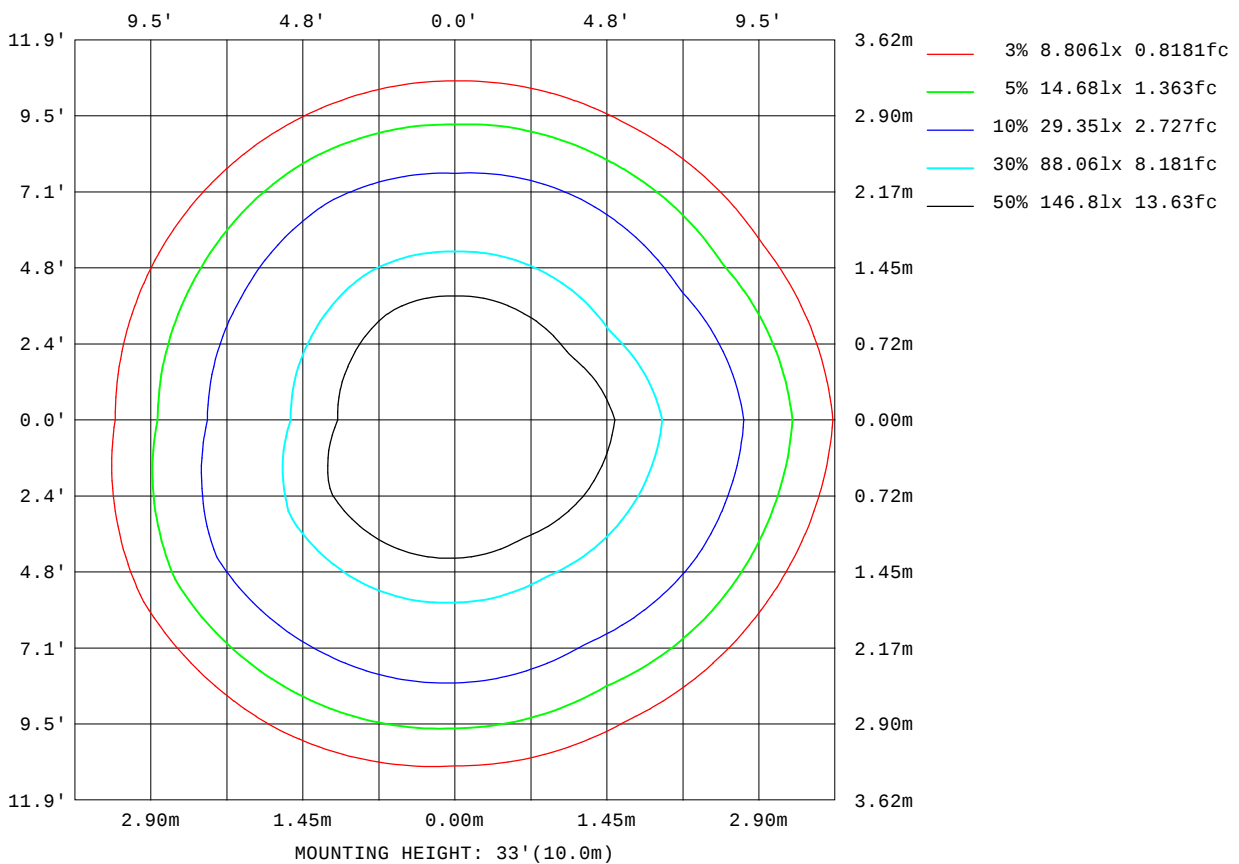

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

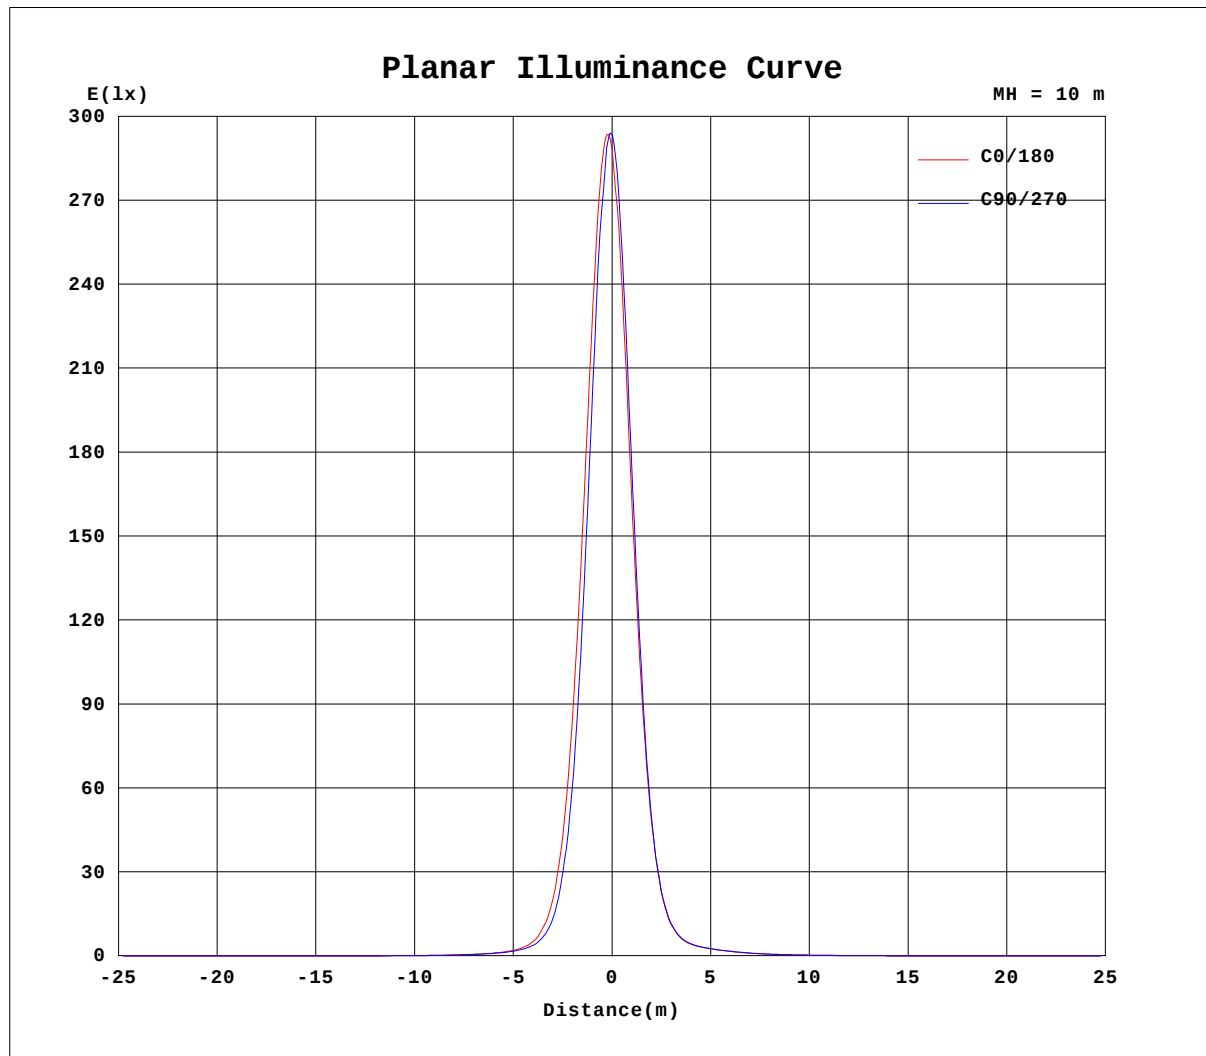


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-09-22

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Aurora Max-618mm-RGBW GREEN-15D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:15 DEG	DIM.:618mm	SERIAL No.:IES001753
MFR.:	SUR.:	Shielding Angle:

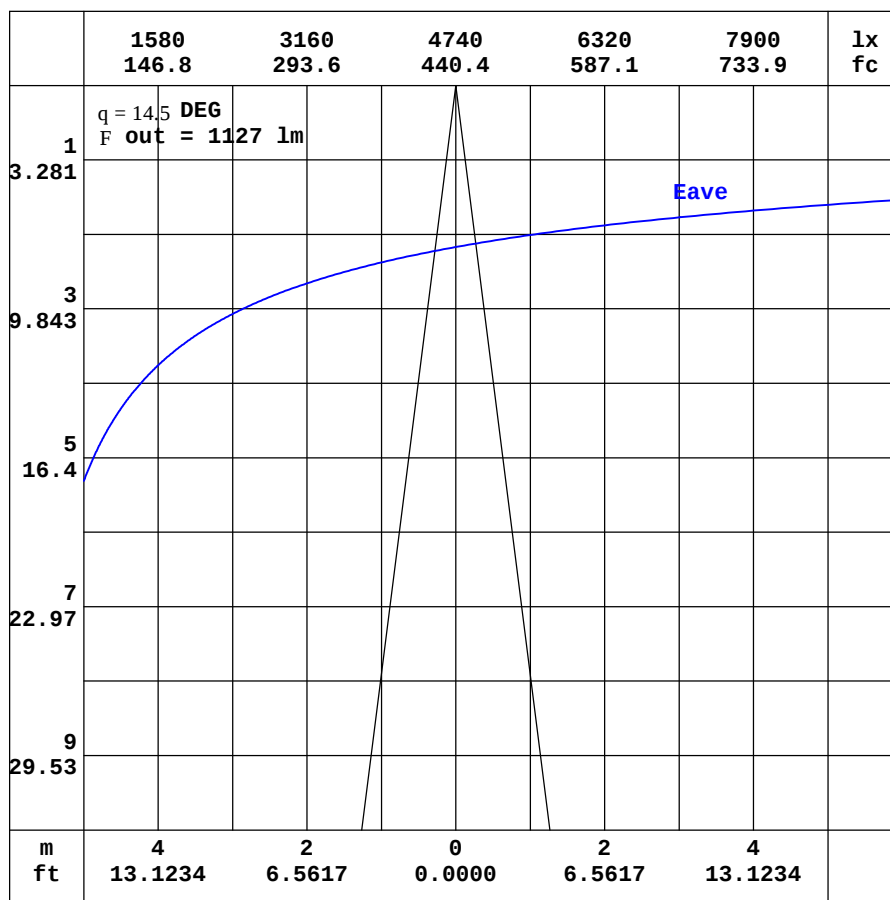

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

$H(b)$ Range:-90 - 90DEG
 $H(b)$ Interval: 0.5DEG
 Test Speed: LOW
 Temperature:25.3DEG
 Operators:Fan
 Test Date:2023-09-22

$V(B)$ Range:-180 - 180DEG
 $V(B)$ Interval: 0.5DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:8.630m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Aurora Max-618mm-RGBW GREEN-15D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:15 DEG	DIM.:618mm	SERIAL No.:IES001753
MFR.:	SUR.:	Shielding Angle:

Table--1
UNIT: ×10cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.98	0.82	0.73	0.71	0.71	0.73	0.86	1.16	1.64	2.10	2.37	2.42	2.27	2.03	1.80	1.64	1.47	1.32	1.46
-170	0.98	0.82	0.73	0.69	0.68	0.68	0.73	0.91	1.21	1.51	1.69	1.76	1.76	1.76	1.79	1.84	1.92	2.01	2.01
-160	0.98	0.81	0.72	0.69	0.66	0.63	0.61	0.66	0.76	0.89	0.96	0.98	1.04	1.30	1.53	1.74	1.91	2.00	2.04
-150	0.98	0.81	0.72	0.68	0.65	0.61	0.55	0.48	0.44	0.39	0.34	0.48	0.66	0.84	1.02	1.17	1.29	1.36	1.38
-140	0.98	0.82	0.72	0.67	0.65	0.61	0.54	0.44	0.32	0.24	0.23	0.26	0.33	0.41	0.50	0.59	0.65	0.69	0.70
-130	0.98	0.83	0.73	0.68	0.64	0.61	0.57	0.49	0.41	0.34	0.29	0.25	0.23	0.22	0.22	0.24	0.25	0.26	0.26
-120	0.98	0.84	0.74	0.68	0.64	0.61	0.59	0.56	0.53	0.50	0.47	0.43	0.39	0.35	0.32	0.30	0.29	0.28	0.28
-110	0.98	0.86	0.76	0.69	0.64	0.61	0.59	0.58	0.58	0.58	0.58	0.57	0.57	0.56	0.55	0.55	0.54	0.54	0.55
-100	0.98	0.87	0.78	0.70	0.64	0.59	0.55	0.55	0.56	0.57	0.57	0.57	0.58	0.58	0.58	0.59	0.59	0.59	0.59
-90	0.98	0.90	0.81	0.72	0.64	0.55	0.46	0.47	0.47	0.47	0.47	0.48	0.48	0.48	0.48	0.48	0.48	0.48	0.48
-80	0.98	0.92	0.85	0.77	0.68	0.61	0.49	0.49	0.49	0.50	0.50	0.49	0.49	0.49	0.49	0.49	0.49	0.48	0.48
-70	0.98	0.95	0.90	0.91	0.84	0.74	0.61	0.59	0.64	0.69	0.74	0.79	0.83	0.88	0.92	0.95	0.97	0.98	0.98
-60	0.98	0.98	1.06	1.04	1.00	0.94	0.89	0.88	1.01	1.16	1.30	1.45	1.59	1.72	1.83	1.91	1.96	1.99	1.99
-50	0.98	1.02	1.16	1.19	1.21	1.25	1.31	1.37	1.53	1.80	2.07	2.34	2.61	2.88	3.12	3.32	3.48	3.57	3.58
-40	0.98	1.07	1.26	1.36	1.48	1.65	1.85	2.06	2.22	2.53	2.99	3.50	4.08	4.72	5.40	6.04	6.58	6.94	7.05
-30	0.98	1.15	1.37	1.54	1.77	2.09	2.48	2.90	3.31	3.68	4.12	5.16	6.50	8.25	10.3	12.7	14.9	16.5	17.0
-20	0.98	1.22	1.47	1.72	2.07	2.55	3.16	3.86	4.63	5.52	6.65	8.20	10.4	14.8	21.5	32.1	47.3	63.4	69.0
-10	0.98	1.26	1.56	1.88	2.33	2.98	3.82	4.82	6.04	7.62	9.97	13.8	19.5	28.4	50.5	131	357	718	893
0	0.98	1.29	1.63	2.00	2.54	3.30	4.33	5.60	7.23	9.44	13.0	18.9	28.4	40.9	70.2	201	708	1865	2884
10	0.98	1.29	1.62	1.98	2.50	3.24	4.23	5.46	7.00	9.05	12.1	17.4	25.5	35.9	51.5	101	257	566	734
20	0.98	1.27	1.59	1.92	2.38	3.04	3.92	5.00	6.31	7.95	10.2	13.6	18.7	25.6	33.3	41.5	51.8	62.9	68.0
30	0.98	1.22	1.54	1.83	2.21	2.74	3.44	4.33	5.36	6.55	7.97	9.73	12.0	15.1	18.8	22.7	26.2	28.6	29.3
40	0.98	1.15	1.47	1.72	2.01	2.39	2.90	3.53	4.29	5.10	5.99	6.95	7.98	9.11	10.3	11.4	12.3	13.0	13.3
50	0.98	1.11	1.39	1.59	1.80	2.06	2.37	2.76	3.21	3.72	4.27	4.81	5.36	5.87	6.34	6.73	7.04	7.23	7.27
60	0.98	1.08	1.29	1.45	1.61	1.76	1.93	2.13	2.35	2.59	2.85	3.12	3.40	3.66	3.89	4.08	4.21	4.29	4.31
70	0.98	1.05	1.13	1.30	1.41	1.51	1.60	1.69	1.78	1.87	1.96	2.04	2.12	2.20	2.27	2.32	2.36	2.39	2.39
80	0.98	1.02	1.05	1.10	1.16	1.24	1.31	1.35	1.40	1.44	1.47	1.50	1.52	1.54	1.56	1.57	1.57	1.58	1.58
90	0.98	0.99	0.99	1.00	1.00	1.01	1.01	1.02	1.02	1.03	1.04	1.04	1.05	1.05	1.05	1.05	1.05	1.05	1.05
100	0.98	0.96	0.93	0.90	0.88	0.86	0.84	0.82	0.81	0.79	0.78	0.77	0.76	0.76	0.75	0.75	0.75	0.75	0.75
110	0.98	0.93	0.87	0.83	0.79	0.76	0.74	0.73	0.72	0.72	0.72	0.72	0.72	0.71	0.71	0.71	0.71	0.72	0.72
120	0.98	0.90	0.83	0.77	0.74	0.72	0.72	0.71	0.71	0.70	0.70	0.70	0.71	0.72	0.73	0.74	0.75	0.76	0.76
130	0.98	0.88	0.79	0.74	0.72	0.71	0.71	0.70	0.71	0.74	0.78	0.86	0.95	1.06	1.18	1.29	1.38	1.43	1.45
140	0.98	0.86	0.77	0.72	0.71	0.71	0.71	0.73	0.80	0.94	1.15	1.41	1.69	1.93	2.11	2.24	2.32	2.36	2.38
150	0.98	0.84	0.75	0.72	0.71	0.71	0.73	0.82	1.03	1.36	1.74	2.07	2.31	2.44	2.52	2.57	2.60	2.61	2.62
160	0.98	0.83	0.74	0.71	0.71	0.71	0.78	0.97	1.32	1.77	2.16	2.39	2.51	2.56	2.59	2.64	2.72	2.76	2.81
170	0.98	0.83	0.74	0.71	0.71	0.73	0.83	1.10	1.55	2.02	2.34	2.46	2.46	2.40	2.33	2.26	2.24	2.27	2.38
180	0.98	0.82	0.73	0.71	0.71	0.73	0.86	1.16	1.64	2.10	2.37	2.42	2.27	2.03	1.80	1.64	1.47	1.32	1.47

H_b Range:-90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Aurora Max-618mm-RGBW GREEN-15D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:15 DEG	DIM.:618mm	SERIAL No.:IES001753
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: ×10cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	1.37	1.49	1.53	1.50	1.38	1.17	0.90	0.61	0.39	0.26	0.26	0.35	0.47	0.56	0.59	0.57	0.50	0.38
-170	1.94	1.88	1.80	1.66	1.42	1.14	0.84	0.57	0.36	0.25	0.26	0.36	0.48	0.56	0.59	0.56	0.50	0.38
-160	1.98	1.87	1.68	1.44	1.18	0.91	0.65	0.44	0.30	0.24	0.28	0.39	0.50	0.57	0.59	0.56	0.49	0.38
-150	1.35	1.26	1.13	0.96	0.77	0.58	0.41	0.30	0.24	0.26	0.34	0.44	0.53	0.58	0.58	0.55	0.49	0.38
-140	0.68	0.63	0.56	0.47	0.38	0.30	0.25	0.24	0.27	0.34	0.43	0.51	0.57	0.58	0.58	0.54	0.48	0.38
-130	0.26	0.25	0.23	0.22	0.22	0.23	0.27	0.32	0.39	0.46	0.52	0.56	0.58	0.58	0.56	0.52	0.46	0.38
-120	0.28	0.29	0.31	0.34	0.37	0.41	0.45	0.50	0.53	0.56	0.58	0.58	0.58	0.57	0.54	0.50	0.45	0.38
-110	0.55	0.55	0.56	0.56	0.57	0.58	0.58	0.59	0.59	0.58	0.58	0.57	0.56	0.53	0.51	0.47	0.43	0.38
-100	0.59	0.59	0.59	0.58	0.58	0.57	0.57	0.56	0.55	0.54	0.53	0.51	0.49	0.48	0.46	0.43	0.41	0.38
-90	0.47	0.47	0.46	0.46	0.45	0.45	0.44	0.43	0.42	0.42	0.41	0.40	0.40	0.40	0.39	0.39	0.39	0.38
-80	0.47	0.45	0.44	0.43	0.41	0.39	0.38	0.36	0.35	0.33	0.31	0.30	0.31	0.32	0.33	0.35	0.36	0.38
-70	0.97	0.95	0.91	0.86	0.81	0.75	0.69	0.63	0.56	0.50	0.44	0.38	0.33	0.30	0.29	0.31	0.34	0.38
-60	1.98	1.93	1.86	1.76	1.64	1.50	1.36	1.21	1.05	0.89	0.74	0.60	0.48	0.38	0.31	0.28	0.32	0.38
-50	3.55	3.44	3.27	3.05	2.80	2.53	2.25	1.96	1.69	1.41	1.15	0.91	0.69	0.51	0.37	0.29	0.31	0.38
-40	6.89	6.50	5.93	5.28	4.66	4.04	3.46	2.91	2.42	1.99	1.60	1.25	0.93	0.65	0.46	0.31	0.29	0.38
-30	16.3	14.7	12.4	10.2	8.25	6.57	5.22	4.16	3.29	2.60	2.04	1.57	1.16	0.81	0.53	0.34	0.28	0.38
-20	60.2	43.7	30.9	21.5	15.2	10.8	7.70	5.63	4.21	3.18	2.43	1.85	1.36	0.93	0.60	0.36	0.28	0.38
-10	659	343	132	52.0	26.4	16.0	10.4	7.05	4.99	3.64	2.71	2.03	1.48	1.02	0.64	0.38	0.28	0.38
0	2475	1190	364	100	36.2	19.4	11.8	7.75	5.34	3.81	2.81	2.11	1.53	1.05	0.66	0.39	0.27	0.38
10	579	291	117	55.8	34.2	22.4	14.3	9.35	6.47	4.62	3.37	2.47	1.76	1.19	0.75	0.45	0.30	0.38
20	63.5	52.2	42.0	34.0	26.5	19.7	13.4	9.28	6.71	4.91	3.62	2.64	1.87	1.26	0.81	0.49	0.33	0.38
30	28.6	26.2	22.8	19.1	15.5	12.3	9.97	8.13	6.24	4.72	3.53	2.59	1.84	1.26	0.83	0.51	0.36	0.38
40	13.0	12.4	11.4	10.3	9.16	8.05	6.99	6.00	5.09	4.15	3.16	2.35	1.70	1.19	0.82	0.53	0.39	0.38
50	7.22	7.03	6.73	6.32	5.86	5.34	4.80	4.25	3.71	3.19	2.61	2.01	1.50	1.12	0.78	0.53	0.41	0.38
60	4.29	4.21	4.07	3.88	3.65	3.39	3.10	2.82	2.53	2.27	2.02	1.66	1.33	1.01	0.75	0.55	0.44	0.38
70	2.38	2.35	2.30	2.23	2.14	2.06	1.96	1.86	1.76	1.67	1.56	1.40	1.15	0.91	0.72	0.57	0.46	0.38
80	1.57	1.55	1.54	1.52	1.49	1.46	1.43	1.39	1.34	1.30	1.26	1.21	1.04	0.87	0.73	0.59	0.48	0.38
90	1.05	1.05	1.05	1.05	1.05	1.05	1.05	1.06	1.06	1.06	1.06	1.06	0.95	0.84	0.72	0.61	0.50	0.38
100	0.75	0.75	0.75	0.75	0.76	0.76	0.78	0.79	0.81	0.83	0.86	0.88	0.83	0.78	0.70	0.61	0.51	0.38
110	0.72	0.72	0.72	0.71	0.71	0.71	0.71	0.72	0.72	0.73	0.74	0.75	0.74	0.72	0.68	0.61	0.52	0.38
120	0.76	0.75	0.74	0.73	0.72	0.71	0.71	0.71	0.71	0.71	0.71	0.70	0.69	0.68	0.66	0.61	0.52	0.38
130	1.42	1.36	1.26	1.15	1.03	0.92	0.83	0.76	0.73	0.71	0.70	0.68	0.67	0.66	0.64	0.60	0.52	0.38
140	2.36	2.30	2.21	2.07	1.85	1.59	1.30	1.05	0.87	0.75	0.67	0.65	0.65	0.64	0.63	0.60	0.52	0.38
150	2.61	2.59	2.56	2.51	2.41	2.24	1.95	1.57	1.09	0.77	0.62	0.60	0.61	0.63	0.62	0.59	0.52	0.38
160	2.78	2.75	2.68	2.63	2.58	2.49	2.10	1.60	1.10	0.73	0.55	0.53	0.57	0.61	0.61	0.58	0.51	0.38
170	2.35	2.40	2.48	2.42	2.20	1.92	1.59	1.22	0.85	0.55	0.43	0.44	0.52	0.58	0.60	0.57	0.51	0.38
180	1.37	1.49	1.53	1.50	1.38	1.17	0.90	0.61	0.39	0.26	0.26	0.35	0.47	0.56	0.59	0.57	0.50	0.38

H_(b) Range: -90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-09-22

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: