

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		10615.8 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	27.4V x 28.9H
	At 50% of Imax	14.1V x 14.9H
	At 90% of Imax	5.4V x 5.7H
Beam Flux	Total	1000.4 lumens per klm.
	To 10% of Imax	737.1 lumens per klm.
	To 50% of Imax	384.0 lumens per klm.
	To 90% of Imax	76.8 lumens per klm.
	Upward LOR	2.2 %
	Downward LOR	97.8 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-22

V(θ) Range:-180 - 180DEG
V(θ) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Aurora Max-618mm-RGBW RED-15D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:15 DEG	DIM.:618mm	SERIAL No.:IES001752
MFR.:	SUR.:	Shielding Angle:

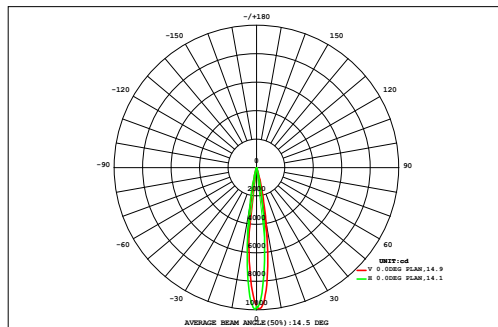

DATA OF LAMP		Eff:20.74lm/W	
MODEL		Imax(cd)	9974
NOMINAL POWER(W)	45.3	AVAILABILITY(%)	73.6
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	691.6
NOMINAL FLUX(lm)	939.5	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	939.5
TEST VOLTAGE(V)	220	q @50%(H,V)	15,14DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm				F t	F a
	18	16	14	12	10	8	6	4	2	0	2	4	6	8	10	12	14	16	18			
	0.17	0.19	0.22	0.25	0.31	0.36	0.41	0.44	0.46	0.46	0.45	0.42	0.38	0.32	0.27	0.23	0.20	0.17	5.70	0.00		
	0.19	0.22	0.27	0.34	0.43	0.53	0.63	0.71	0.75	0.76	0.72	0.65	0.55	0.46	0.37	0.29	0.24	0.20	8.32	0.00		
	0.21	0.27	0.35	0.47	0.63	0.83	1.04	1.21	1.31	1.32	1.24	1.08	0.88	0.69	0.52	0.40	0.30	0.23	13.0	3.50		
	0.25	0.33	0.46	0.67	0.96	1.33	1.72	2.02	2.19	2.20	2.07	1.78	1.41	1.07	0.76	0.54	0.38	0.28	20.4	14.5		
	0.29	0.41	0.61	0.94	1.42	2.03	2.75	3.34	3.62	3.64	3.39	2.84	2.21	1.60	1.12	0.74	0.50	0.35	31.8	26.9		
	0.34	0.51	0.79	1.29	1.97	2.95	4.11	5.08	5.58	5.60	5.13	4.30	3.27	2.31	1.55	1.03	0.67	0.44	46.9	43.2		
	0.39	0.61	1.00	1.62	2.57	3.90	5.50	7.07	7.90	7.90	7.17	5.91	4.46	3.16	2.16	1.42	0.89	0.55	64.2	60.7		
	0.43	0.69	1.16	1.92	3.11	4.73	6.70	8.74	10.1	10.1	9.10	7.51	5.86	4.26	2.87	1.82	1.12	0.66	80.9	78.1		
	0.45	0.74	1.25	2.10	3.44	5.21	7.37	9.56	11.3	11.6	10.7	9.27	7.30	5.25	3.49	2.17	1.31	0.75	93.3	90.5		
	0.48	0.78	1.34	2.26	3.71	5.61	7.94	10.3	11.8	11.9	11.3	9.70	7.60	5.45	3.61	2.23	1.33	0.76	98.0	95.4		
	0.49	0.81	1.39	2.37	3.88	5.86	8.11	9.90	10.9	10.8	9.96	8.56	6.69	4.80	3.19	1.97	1.19	0.69	91.5	89.0		
	0.47	0.78	1.33	2.23	3.61	5.17	6.77	8.15	8.92	8.82	7.92	6.79	5.34	3.89	2.57	1.61	0.99	0.59	76.0	72.9		
	0.42	0.69	1.16	1.86	2.80	3.93	5.08	6.07	6.60	6.51	5.81	4.86	3.88	2.84	1.92	1.24	0.77	0.48	56.9	53.5		
	0.36	0.57	0.89	1.36	1.97	2.72	3.50	4.15	4.48	4.42	3.95	3.23	2.58	1.92	1.35	0.89	0.58	0.38	39.3	35.1		
	0.29	0.43	0.63	0.93	1.33	1.78	2.23	2.60	2.78	2.73	2.47	2.04	1.61	1.25	0.89	0.62	0.42	0.29	25.3	20.0		
	0.22	0.32	0.44	0.62	0.85	1.12	1.37	1.56	1.65	1.62	1.48	1.26	1.00	0.76	0.58	0.42	0.31	0.22	15.8	8.43		
	0.17	0.23	0.31	0.41	0.54	0.68	0.81	0.91	0.95	0.94	0.86	0.74	0.60	0.47	0.37	0.29	0.22	0.17	9.69	0.00		
	0.14	0.17	0.22	0.28	0.35	0.42	0.49	0.54	0.55	0.54	0.51	0.45	0.38	0.31	0.25	0.20	0.17	0.13	6.11	0.00		
-18	-16	-14	-12	-10	-8	-6	-4	HORIZONTAL (DEG)				4	6	8	10	12	14	16	18			
F t	5.77	8.75	13.8	21.9	33.9	49.2	66.5	82.3	91.8	91.8	84.2	71.4	56.0	40.8	27.8	18.1	11.6	7.34	783	---		
F a	0.00	0.00	5.51	16.5	29.2	45.3	63.2	79.2	88.5	88.5	81.1	67.8	51.9	36.5	22.8	11.9	3.67	0.00	---	692		

one-half-peak spread: U:7.0,D:7.2 , L:7.3,R:7.7


NEMA Beam Type: Type 2

H(B) Range:-90 - 90DEG
H(B) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:Aurora Max-618mm-RGBW RED-15D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:15 DEG	DIM.:618mm	SERIAL No.:IES001752
MFR.:	SUR.:	Shielding Angle:

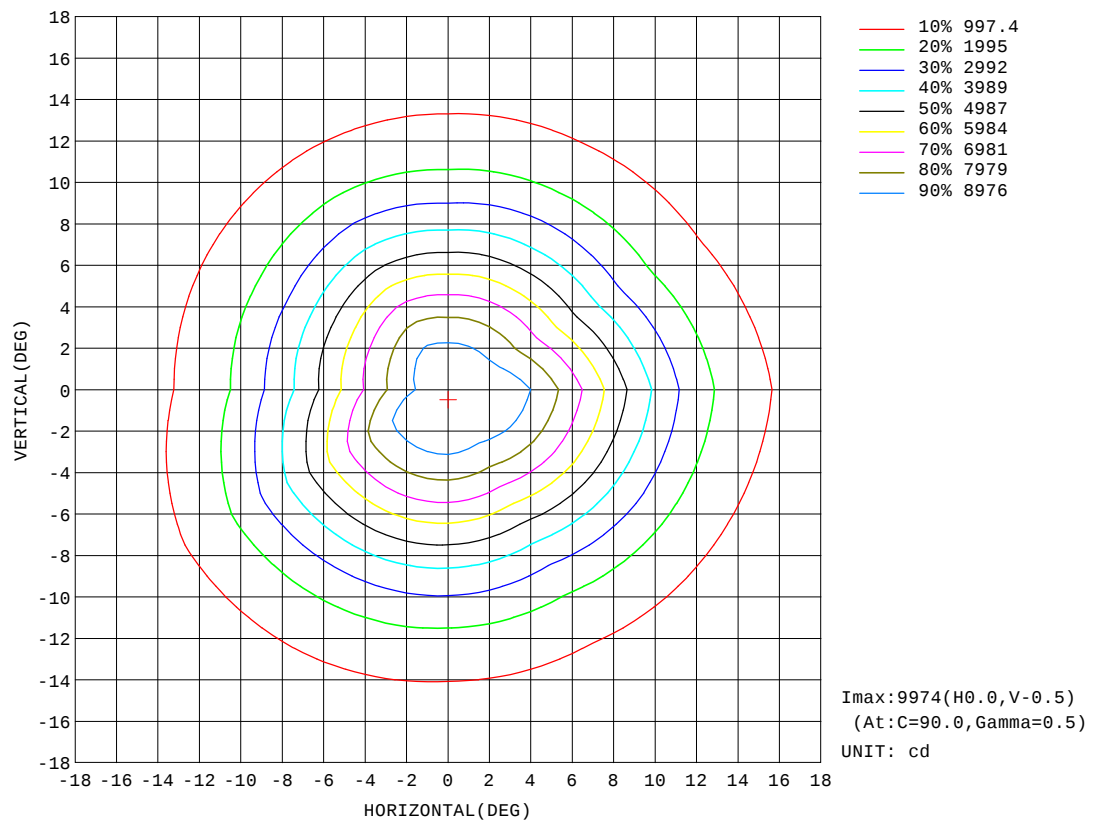


H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Aurora Max-618mm-RGBW RED-15D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:15 DEG	DIM.:618mm	SERIAL No.:IES001752
MFR.:	SUR.:	Shielding Angle:

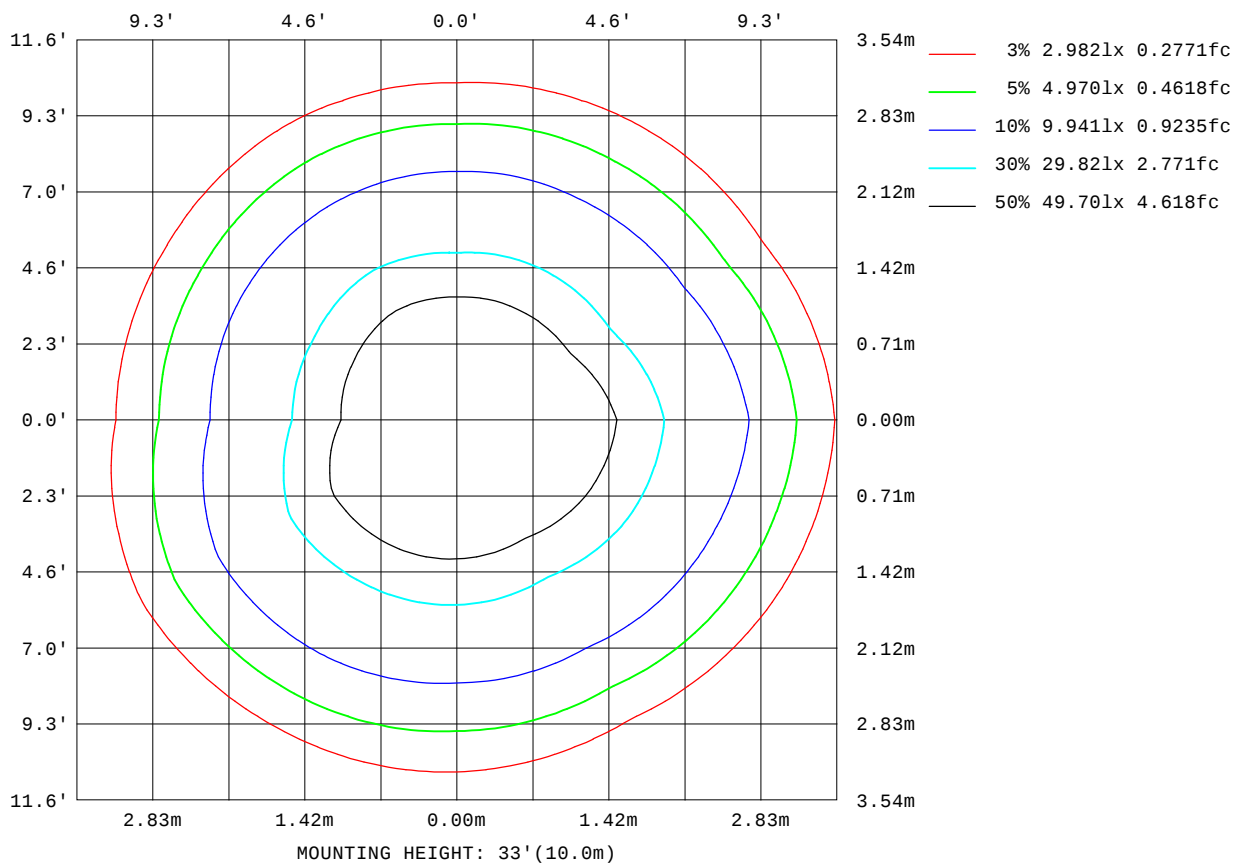

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

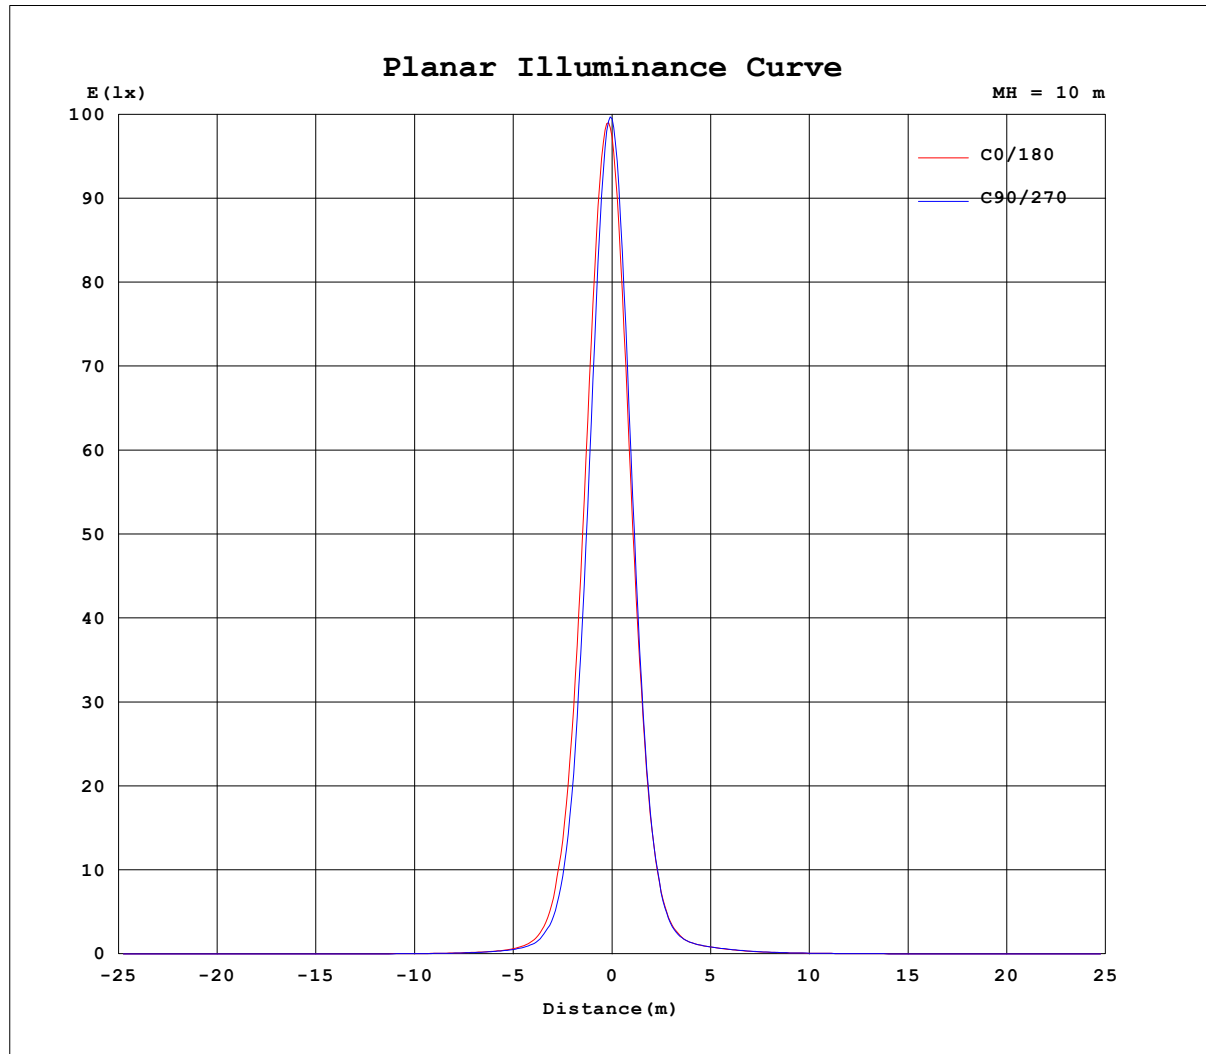


H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Aurora Max-618mm-RGBW RED-15D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:15 DEG	DIM.:618mm	SERIAL No.:IES001752
MFR.:	SUR.:	Shielding Angle:

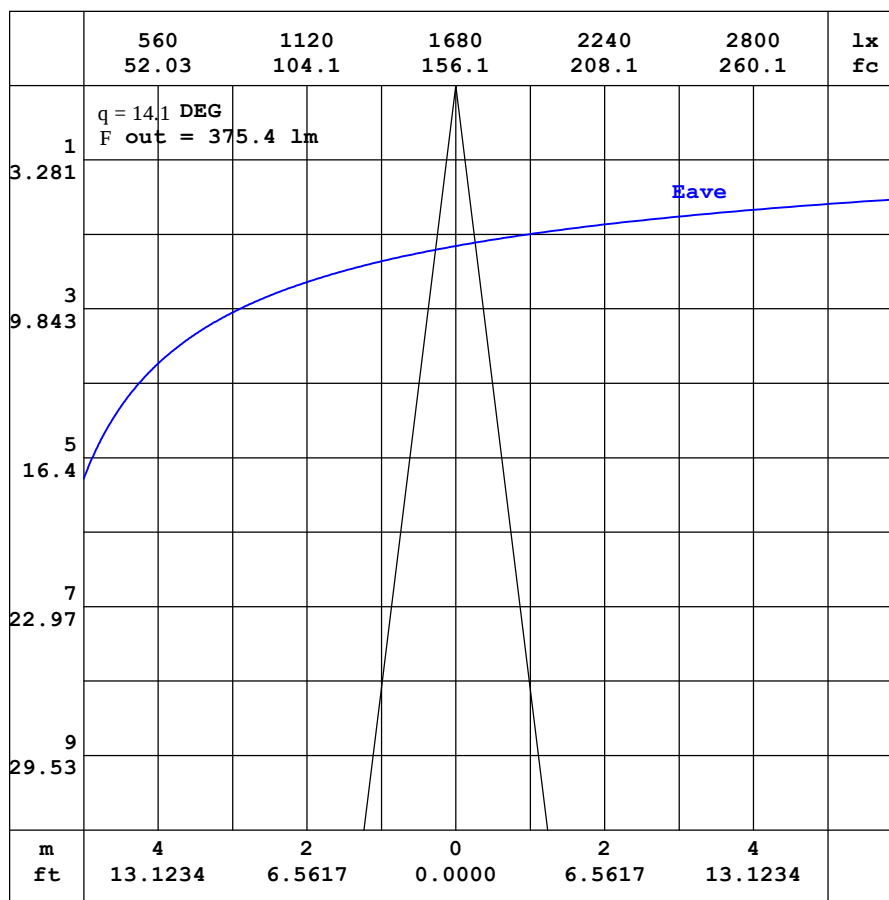

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Aurora Max-618mm-RGBW RED-15D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:15 DEG	DIM.:618mm	SERIAL No.:IES001752
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	3.22	2.66	2.33	2.26	2.27	2.38	2.77	3.76	5.34	6.88	7.81	7.93	7.43	6.62	5.90	5.41	4.86	4.40	4.94
-170	3.22	2.64	2.31	2.23	2.20	2.20	2.36	2.94	3.92	4.91	5.54	5.76	5.79	5.84	6.03	6.22	6.51	6.86	6.86
-160	3.22	2.64	2.31	2.21	2.15	2.06	1.98	2.09	2.45	2.84	3.08	3.17	3.38	4.29	5.13	5.86	6.46	6.79	6.94
-150	3.22	2.66	2.32	2.19	2.12	1.99	1.77	1.54	1.38	1.20	1.04	1.49	2.07	2.70	3.31	3.85	4.27	4.53	4.61
-140	3.22	2.68	2.35	2.19	2.11	1.99	1.77	1.42	0.99	0.72	0.71	0.78	0.98	1.25	1.54	1.83	2.06	2.20	2.24
-130	3.22	2.71	2.38	2.20	2.11	2.03	1.88	1.63	1.35	1.12	0.91	0.77	0.70	0.67	0.67	0.71	0.75	0.79	0.80
-120	3.22	2.76	2.43	2.24	2.11	2.05	1.97	1.88	1.80	1.70	1.57	1.43	1.29	1.17	1.06	0.98	0.92	0.88	0.86
-110	3.22	2.81	2.50	2.29	2.15	2.06	1.98	1.96	1.97	1.97	1.97	1.97	1.95	1.92	1.90	1.87	1.85	1.83	1.83
-100	3.22	2.88	2.59	2.34	2.15	2.00	1.88	1.90	1.92	1.95	1.95	1.96	1.97	1.99	2.00	2.01	2.01	2.01	2.02
-90	3.22	2.95	2.68	2.40	2.13	1.86	1.59	1.59	1.60	1.60	1.60	1.61	1.61	1.62	1.62	1.62	1.62	1.63	1.63
-80	3.22	3.04	2.81	2.54	2.24	2.00	1.62	1.60	1.61	1.62	1.62	1.62	1.61	1.60	1.59	1.58	1.56	1.54	1.52
-70	3.22	3.13	2.98	3.01	2.74	2.38	1.94	1.87	2.02	2.18	2.34	2.50	2.65	2.79	2.92	3.02	3.09	3.11	3.10
-60	3.22	3.24	3.48	3.41	3.22	3.00	2.80	2.77	3.19	3.65	4.12	4.61	5.05	5.46	5.78	6.05	6.21	6.31	6.30
-50	3.22	3.35	3.81	3.87	3.89	3.99	4.15	4.30	4.82	5.66	6.52	7.39	8.26	9.10	9.89	10.5	11.0	11.2	11.3
-40	3.22	3.54	4.14	4.39	4.72	5.24	5.87	6.49	6.99	7.94	9.38	11.0	12.8	14.9	17.0	19.0	20.7	21.8	22.1
-30	3.22	3.82	4.48	4.95	5.66	6.66	7.89	9.20	10.5	11.6	12.9	16.1	20.4	25.9	32.6	40.1	47.1	52.3	54.0
-20	3.22	4.02	4.78	5.52	6.60	8.13	10.1	12.3	14.7	17.5	21.0	25.8	32.7	46.8	67.9	101	150	200	217
-10	3.22	4.16	5.07	6.02	7.45	9.51	12.1	15.4	19.2	24.3	31.8	44.1	62.8	90.5	158	415	1142	2310	2955
0	3.22	4.26	5.30	6.43	8.12	10.6	13.8	17.9	23.1	30.3	41.7	61.6	92.0	131	220	631	2262	6132	9731
10	3.22	4.24	5.27	6.36	7.99	10.4	13.5	17.4	22.4	29.0	39.0	56.1	82.7	116	165	312	797	1786	2316
20	3.22	4.18	5.17	6.19	7.62	9.70	12.5	15.9	20.1	25.4	32.4	43.2	59.8	82.8	108	134	164	199	216
30	3.22	4.04	5.03	5.91	7.08	8.73	11.0	13.8	17.1	20.8	25.4	31.1	38.5	48.5	61.0	74.2	85.3	92.5	95.1
40	3.22	3.81	4.82	5.57	6.45	7.65	9.22	11.3	13.6	16.2	19.1	22.2	25.6	29.3	33.1	36.7	39.8	41.9	42.6
50	3.22	3.65	4.57	5.20	5.83	6.60	7.57	8.78	10.3	11.9	13.7	15.5	17.2	18.9	20.4	21.7	22.7	23.3	23.4
60	3.22	3.55	4.27	4.78	5.23	5.70	6.23	6.84	7.52	8.28	9.13	10.0	11.0	11.8	12.6	13.2	13.6	13.8	13.9
70	3.22	3.45	3.73	4.31	4.64	4.95	5.21	5.48	5.75	6.03	6.31	6.58	6.84	7.08	7.31	7.48	7.61	7.67	7.67
80	3.22	3.35	3.48	3.62	3.82	4.11	4.32	4.47	4.60	4.72	4.81	4.89	4.95	5.02	5.06	5.10	5.13	5.14	5.15
90	3.22	3.24	3.27	3.29	3.32	3.34	3.36	3.38	3.39	3.40	3.41	3.42	3.44	3.45	3.46	3.47	3.48	3.50	3.51
100	3.22	3.14	3.06	2.98	2.89	2.82	2.76	2.68	2.61	2.55	2.51	2.46	2.43	2.42	2.41	2.41	2.41	2.42	2.43
110	3.22	3.04	2.86	2.70	2.56	2.47	2.41	2.36	2.32	2.31	2.29	2.27	2.26	2.26	2.27	2.28	2.29	2.30	2.31
120	3.22	2.94	2.69	2.50	2.38	2.33	2.31	2.29	2.27	2.26	2.25	2.25	2.27	2.29	2.33	2.37	2.41	2.42	2.42
130	3.22	2.86	2.56	2.38	2.31	2.29	2.28	2.27	2.27	2.34	2.50	2.74	3.05	3.40	3.81	4.19	4.50	4.69	4.75
140	3.22	2.79	2.47	2.32	2.28	2.27	2.28	2.33	2.56	3.03	3.72	4.60	5.51	6.32	6.94	7.39	7.65	7.80	7.85
150	3.22	2.74	2.41	2.29	2.27	2.28	2.34	2.64	3.31	4.41	5.68	6.81	7.58	8.04	8.30	8.46	8.56	8.62	8.64
160	3.22	2.70	2.37	2.28	2.27	2.31	2.50	3.12	4.29	5.78	7.08	7.85	8.23	8.40	8.54	8.72	8.98	9.13	9.34
170	3.22	2.67	2.34	2.27	2.27	2.34	2.68	3.56	5.04	6.61	7.67	8.06	8.04	7.87	7.68	7.53	7.47	7.59	7.97
180	3.22	2.66	2.33	2.26	2.27	2.38	2.77	3.76	5.34	6.88	7.81	7.93	7.43	6.62	5.90	5.41	4.86	4.40	4.98

H_(h) Range:-90 - 90DEG
H_(h) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Aurora Max-618mm-RGBW RED-15D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:15 DEG	DIM.:618mm	SERIAL No.:IES001752
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	4.70	5.09	5.20	5.07	4.62	3.87	2.90	1.93	1.19	0.77	0.81	1.15	1.59	1.92	2.01	1.91	1.68	1.28	
-170	6.69	6.45	6.13	5.64	4.78	3.77	2.72	1.79	1.12	0.77	0.82	1.17	1.61	1.92	2.00	1.91	1.68	1.28	
-160	6.73	6.33	5.67	4.84	3.92	2.96	2.08	1.37	0.91	0.76	0.90	1.28	1.69	1.95	2.00	1.90	1.67	1.28	
-150	4.48	4.18	3.71	3.11	2.46	1.82	1.28	0.92	0.76	0.81	1.10	1.48	1.81	1.98	1.99	1.88	1.64	1.28	
-140	2.17	2.00	1.74	1.44	1.14	0.90	0.75	0.74	0.84	1.09	1.41	1.72	1.92	1.99	1.96	1.85	1.61	1.28	
-130	0.78	0.74	0.70	0.68	0.69	0.74	0.86	1.05	1.29	1.54	1.75	1.91	1.98	1.98	1.92	1.79	1.57	1.28	
-120	0.89	0.94	1.01	1.11	1.23	1.37	1.53	1.68	1.81	1.90	1.95	1.98	1.98	1.94	1.85	1.70	1.51	1.28	
-110	1.84	1.86	1.89	1.92	1.96	1.99	1.99	1.99	1.99	1.98	1.98	1.96	1.90	1.83	1.72	1.60	1.44	1.28	
-100	2.01	2.00	2.00	1.99	1.97	1.95	1.94	1.92	1.89	1.86	1.81	1.76	1.70	1.63	1.55	1.46	1.37	1.28	
-90	1.60	1.58	1.56	1.54	1.51	1.49	1.47	1.45	1.43	1.41	1.39	1.37	1.35	1.34	1.32	1.31	1.29	1.28	
-80	1.49	1.46	1.43	1.39	1.34	1.29	1.24	1.18	1.13	1.07	1.02	0.99	1.02	1.06	1.10	1.16	1.21	1.28	
-70	3.07	3.00	2.89	2.75	2.58	2.39	2.20	1.99	1.77	1.56	1.38	1.19	1.03	0.96	0.95	1.02	1.14	1.28	
-60	6.26	6.13	5.91	5.60	5.22	4.79	4.31	3.80	3.29	2.79	2.31	1.84	1.50	1.21	0.99	0.93	1.06	1.28	
-50	11.2	10.9	10.4	9.68	8.86	8.00	7.08	6.17	5.26	4.40	3.59	2.83	2.14	1.60	1.18	0.94	1.01	1.28	
-40	21.7	20.4	18.7	16.7	14.6	12.7	10.8	9.09	7.54	6.18	4.98	3.89	2.91	2.04	1.45	1.01	0.96	1.28	
-30	51.7	46.2	39.1	32.1	25.9	20.5	16.2	12.9	10.2	8.06	6.35	4.90	3.64	2.52	1.68	1.08	0.93	1.28	
-20	190	139	96.6	67.6	47.7	33.7	24.0	17.5	13.0	9.87	7.55	5.75	4.23	2.91	1.87	1.16	0.91	1.28	
-10	2116	1101	413	161	82.5	50.1	32.5	21.9	15.5	11.3	8.41	6.33	4.64	3.19	2.00	1.23	0.91	1.28	
0	8258	3854	1171	307	114	60.2	37.1	24.1	16.6	11.9	8.74	6.56	4.79	3.30	2.06	1.25	0.91	1.28	
10	1851	930	366	180	110	71.9	45.7	29.7	20.4	14.6	10.6	7.78	5.56	3.76	2.36	1.44	1.00	1.28	
20	202	167	136	111	86.7	63.7	43.0	29.8	21.4	15.6	11.5	8.38	5.93	3.99	2.56	1.56	1.08	1.28	
30	92.8	85.7	75.0	62.4	50.2	39.9	32.1	26.1	20.0	15.1	11.3	8.28	5.87	4.00	2.67	1.66	1.17	1.28	
40	42.0	40.0	37.0	33.4	29.7	26.0	22.5	19.3	16.4	13.3	10.2	7.55	5.45	3.82	2.66	1.74	1.27	1.28	
50	23.3	22.7	21.7	20.5	19.0	17.3	15.5	13.7	12.0	10.3	8.42	6.45	4.83	3.61	2.54	1.76	1.36	1.28	
60	13.8	13.6	13.1	12.5	11.8	10.9	10.0	9.11	8.17	7.32	6.53	5.38	4.29	3.28	2.45	1.82	1.44	1.28	
70	7.65	7.56	7.41	7.19	6.93	6.64	6.35	6.02	5.71	5.40	5.09	4.57	3.76	3.01	2.39	1.90	1.53	1.28	
80	5.11	5.06	5.00	4.92	4.84	4.74	4.64	4.52	4.39	4.26	4.14	4.01	3.43	2.90	2.41	1.98	1.60	1.28	
90	3.50	3.49	3.49	3.48	3.47	3.47	3.48	3.50	3.51	3.52	3.54	3.55	3.17	2.79	2.42	2.04	1.66	1.28	
100	2.42	2.42	2.42	2.43	2.44	2.46	2.51	2.58	2.65	2.74	2.84	2.93	2.79	2.60	2.36	2.06	1.70	1.28	
110	2.31	2.30	2.30	2.29	2.28	2.28	2.29	2.30	2.32	2.35	2.41	2.47	2.45	2.40	2.27	2.06	1.73	1.28	
120	2.42	2.41	2.38	2.34	2.32	2.29	2.28	2.27	2.27	2.28	2.30	2.29	2.27	2.25	2.20	2.05	1.75	1.28	
130	4.66	4.44	4.10	3.72	3.31	2.95	2.66	2.44	2.32	2.28	2.25	2.22	2.20	2.19	2.14	2.03	1.76	1.28	
140	7.79	7.62	7.31	6.82	6.10	5.20	4.25	3.41	2.80	2.38	2.14	2.11	2.14	2.14	2.10	2.01	1.76	1.28	
150	8.63	8.59	8.49	8.31	7.99	7.39	6.43	5.17	3.55	2.46	2.00	1.93	2.03	2.10	2.09	1.99	1.75	1.28	
160	9.23	9.14	8.92	8.71	8.53	8.24	6.94	5.28	3.60	2.35	1.76	1.71	1.88	2.04	2.07	1.97	1.74	1.28	
170	7.88	8.03	8.29	8.09	7.30	6.35	5.22	3.96	2.73	1.76	1.36	1.43	1.72	1.98	2.04	1.95	1.71	1.28	
180	4.70	5.09	5.20	5.07	4.62	3.87	2.90	1.93	1.19	0.77	0.81	1.15	1.59	1.92	2.01	1.91	1.68	1.28	

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-09-22

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: