

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	4926.1 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	41.4V x 42.6H
	At 50% of Imax	21.9V x 22.6H
	At 90% of Imax	8.5V x 8.7H

Beam Flux	Total	1000.2 lumens per klm.
	To 10% of Imax	780.4 lumens per klm.
	To 50% of Imax	420.4 lumens per klm.
	To 90% of Imax	81.6 lumens per klm.

Upward LOR	2.2 %
Downward LOR	97.8 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-21

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Aurora Max-618mm-RGBW 6500K-23D-Rev1	TYPE:RGBW-6500K	WEIGHT:
SPEC.:23 DEG	DIM.:618mm	SERIAL No.:IES001750
MFR.:	SUR.:	Shielding Angle:

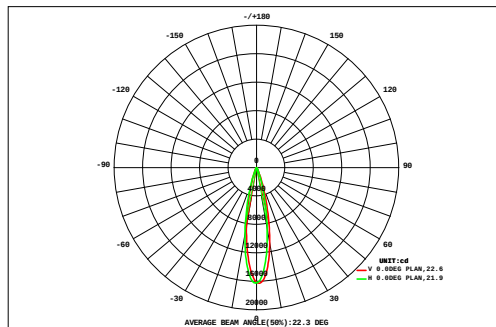

DATA OF LAMP		Eff:55.48lm/W	
MODEL		Imax(cd)	16261
NOMINAL POWER(W)	59.5	AVAILABILITY(%)	77.9
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	2571
NOMINAL FLUX(lm)	3301	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	3301
TEST VOLTAGE(V)	220	q @50%(H,V)	23,22DEG

AREA FLUX DIAGRAM																	UNIT:lm		F t	F a
27	0.59	0.71	0.85	1.03	1.23	1.44	1.64	1.78	1.84	1.82	1.72	1.56	1.35	1.15	0.98	0.83	0.70	0.59	21.8	0.00
24	0.69	0.86	1.08	1.38	1.77	2.20	2.61	2.92	3.06	3.01	2.81	2.44	2.02	1.63	1.31	1.05	0.85	0.70	32.4	0.00
21	0.81	1.05	1.41	1.94	2.66	3.53	4.36	5.00	5.29	5.21	4.77	4.04	3.20	2.46	1.85	1.38	1.05	0.82	50.8	19.0
18	0.95	1.31	1.89	2.78	4.04	5.66	7.31	8.53	9.12	8.98	8.15	6.75	5.20	3.82	2.70	1.87	1.32	0.97	81.4	60.9
15	1.12	1.64	2.52	3.91	5.97	8.67	11.5	13.8	14.8	14.6	13.2	10.8	8.27	5.84	3.91	2.57	1.69	1.15	126	111
12	1.30	2.01	3.26	5.28	8.32	12.3	16.8	20.6	22.3	22.1	19.8	16.2	12.2	8.49	5.50	3.49	2.19	1.38	183	169
9	1.47	2.38	3.99	6.68	10.7	16.1	22.2	27.9	30.7	30.4	27.2	22.4	16.7	11.6	7.58	4.67	2.80	1.65	247	236
	1.61	2.67	4.58	7.84	12.7	19.2	26.6	33.8	38.2	37.8	34.1	28.2	21.6	15.2	9.80	5.88	3.38	1.91	305	295
	1.67	2.81	4.89	8.44	13.7	20.8	28.9	36.7	42.3	42.7	39.5	33.6	25.9	18.1	11.6	6.86	3.84	2.11	345	334
	1.67	2.84	4.98	8.64	14.1	21.4	29.8	37.7	43.0	43.7	41.0	34.8	26.8	18.8	12.0	7.06	3.93	2.14	354	344
	1.59	2.73	4.82	8.39	13.7	20.8	28.7	35.5	39.5	39.6	36.7	31.3	24.2	16.9	10.9	6.44	3.61	1.98	327	317
	1.44	2.44	4.29	7.42	12.0	17.8	24.0	29.4	32.6	32.6	29.8	25.4	19.7	14.0	9.07	5.42	3.09	1.73	272	261
	1.22	2.04	3.51	5.92	9.33	13.5	18.1	22.1	24.4	24.4	22.2	18.7	14.6	10.5	6.96	4.24	2.48	1.43	206	194
-9	0.99	1.59	2.63	4.26	6.57	9.44	12.5	15.1	16.6	16.6	15.2	12.7	9.93	7.23	4.85	3.09	1.88	1.14	142	127
-12	0.77	1.18	1.86	2.90	4.32	6.07	7.92	9.50	10.4	10.4	9.54	7.98	6.25	4.63	3.22	2.12	1.36	0.89	91.4	73.2
-15	0.60	0.87	1.28	1.89	2.73	3.71	4.72	5.57	6.06	6.07	5.60	4.75	3.76	2.86	2.04	1.42	0.97	0.68	55.6	29.8
-18	0.47	0.64	0.89	1.22	1.66	2.19	2.72	3.15	3.38	3.39	3.16	2.74	2.21	1.71	1.29	0.96	0.70	0.52	33.0	0.00
-21	0.38	0.49	0.63	0.81	1.04	1.30	1.55	1.76	1.87	1.88	1.77	1.56	1.31	1.06	0.84	0.66	0.52	0.41	19.8	0.00
-24	0.38	0.49	0.63	0.81	1.04	1.30	1.55	1.76	1.87	1.88	1.77	1.56	1.31	1.06	0.84	0.66	0.52	0.41	19.8	0.00
-27	0.38	0.49	0.63	0.81	1.04	1.30	1.55	1.76	1.87	1.88	1.77	1.56	1.31	1.06	0.84	0.66	0.52	0.41	19.8	0.00
	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL(DEG)	6	9	12	15	18	21	24	27			
F t	19.4	30.3	49.4	80.7	127	186	252	311	345	345	316	266	205	146	96.4	60.0	36.4	22.2	2894	---
F a	0.00	0.00	18.8	61.9	111	172	240	299	334	334	305	253	192	131	77.9	38.2	5.04	0.00	---	2571

one-half-peak spread: U:11.0,D:11.2 , L:11.7,R:11.1


NEMA Beam Type: Type 3

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-09-21

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:Aurora Max-618mm-RGBW 6500K-23D-Rev1	TYPE:RGBW-6500K	WEIGHT:
SPEC.:23 DEG	DIM.:618mm	SERIAL No.:IES001750
MFR.:	SUR.:	Shielding Angle:

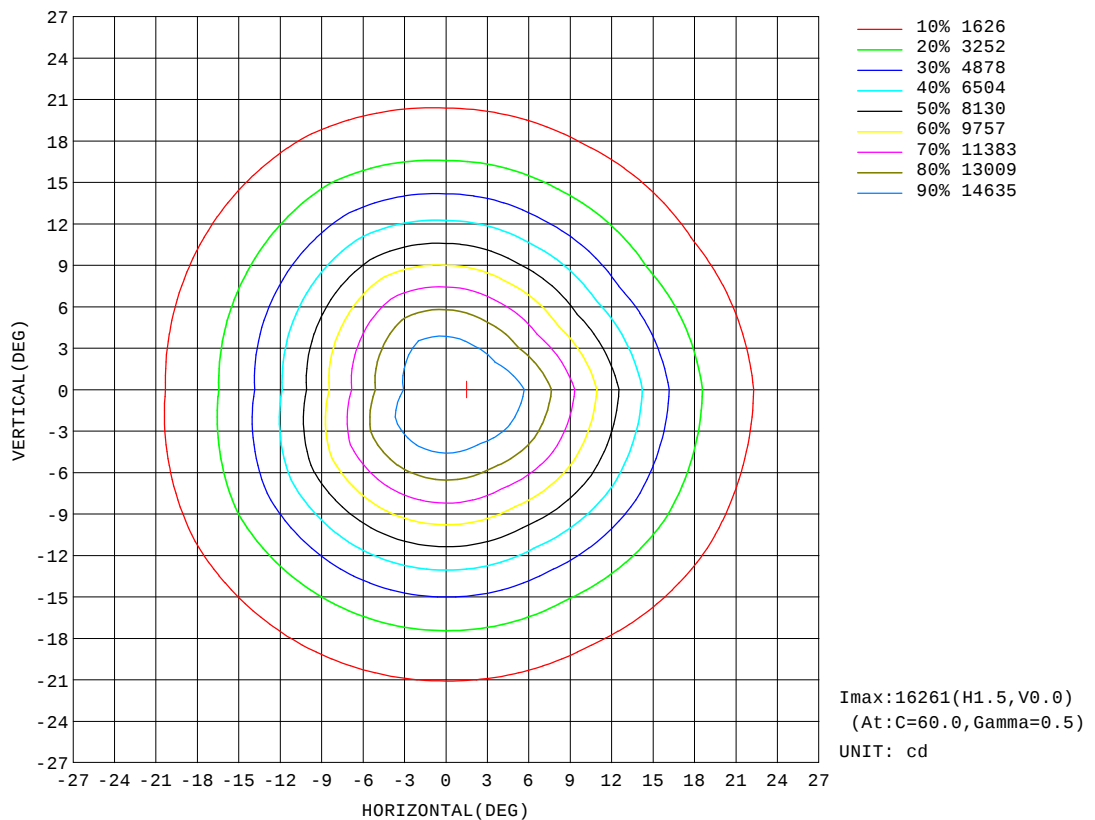


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-21

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Aurora Max-618mm-RGBW 6500K-23D-Rev1	TYPE:RGBW-6500K	WEIGHT:
SPEC.:23 DEG	DIM.:618mm	SERIAL No.:IES001750
MFR.:	SUR.:	Shielding Angle:

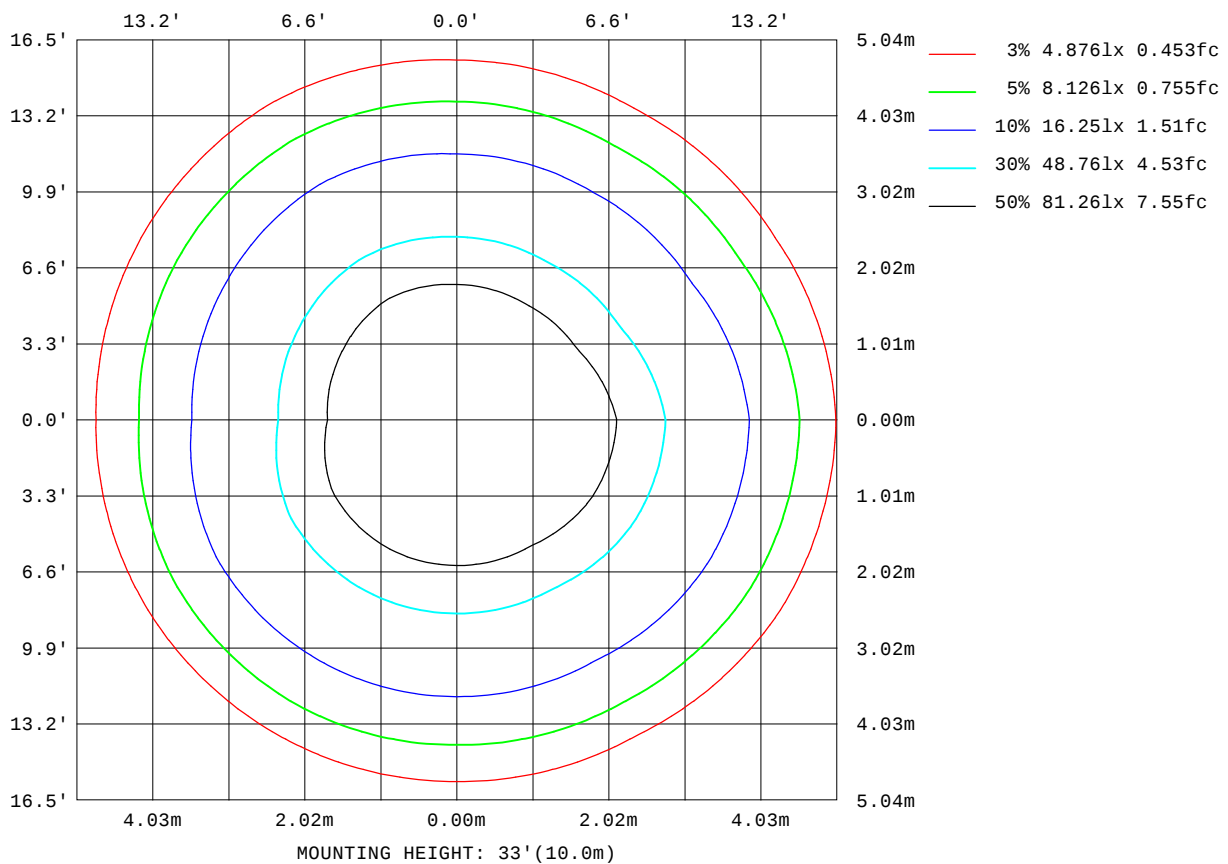

H_(b) Range:-90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature:25.3DEG
 Operators:Fan
 Test Date:2023-09-21

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:8.630m [K=1.0000]
 Remarks:

Planar Illuminance Curve

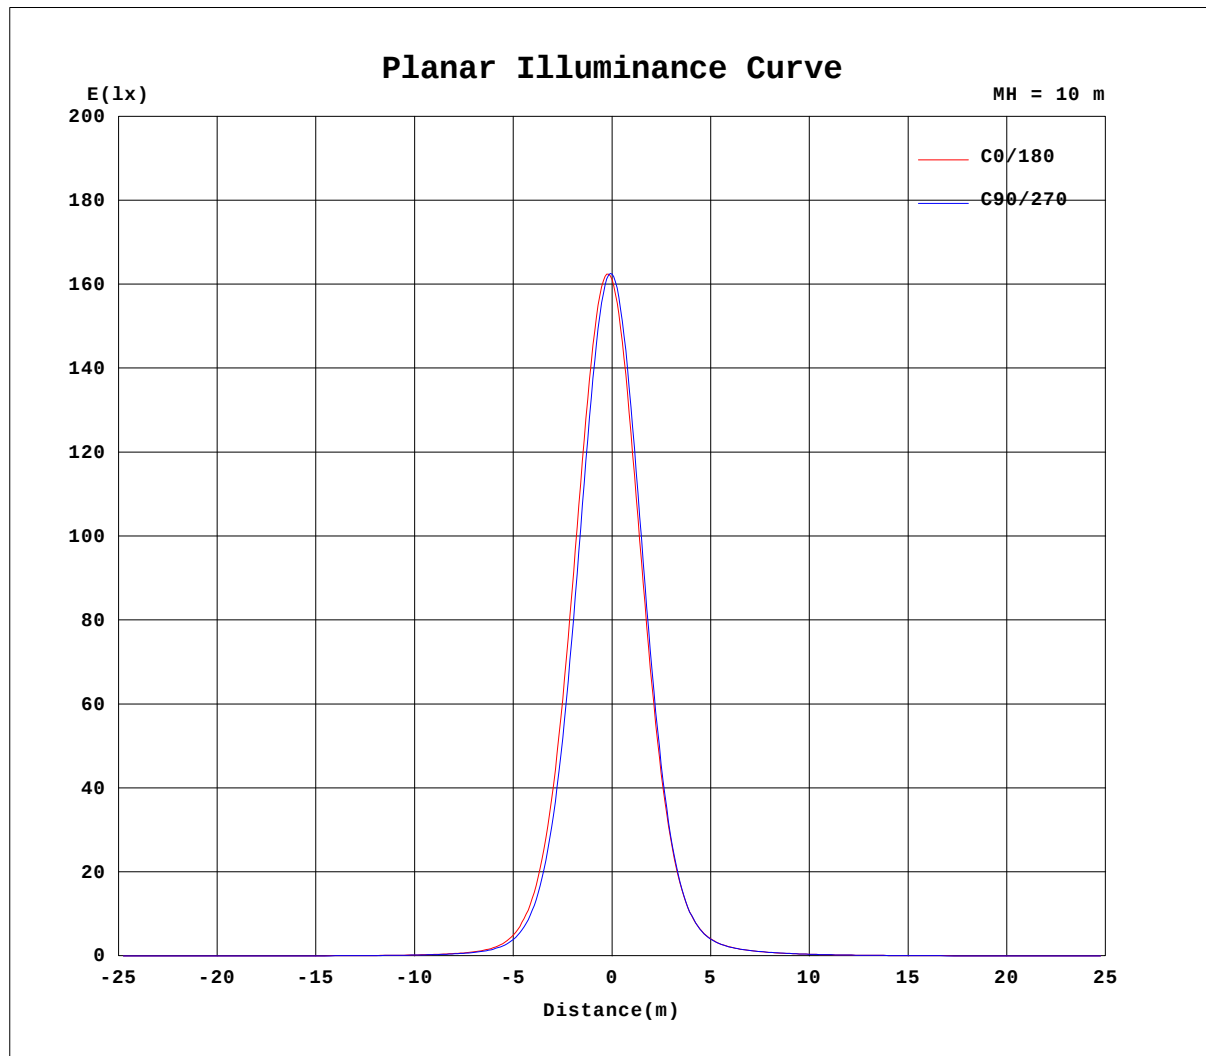


H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-09-21

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Aurora Max-618mm-RGBW 6500K-23D-Rev1	TYPE:RGBW-6500K	WEIGHT:
SPEC.:23 DEG	DIM.:618mm	SERIAL No.:IES001750
MFR.:	SUR.:	Shielding Angle:

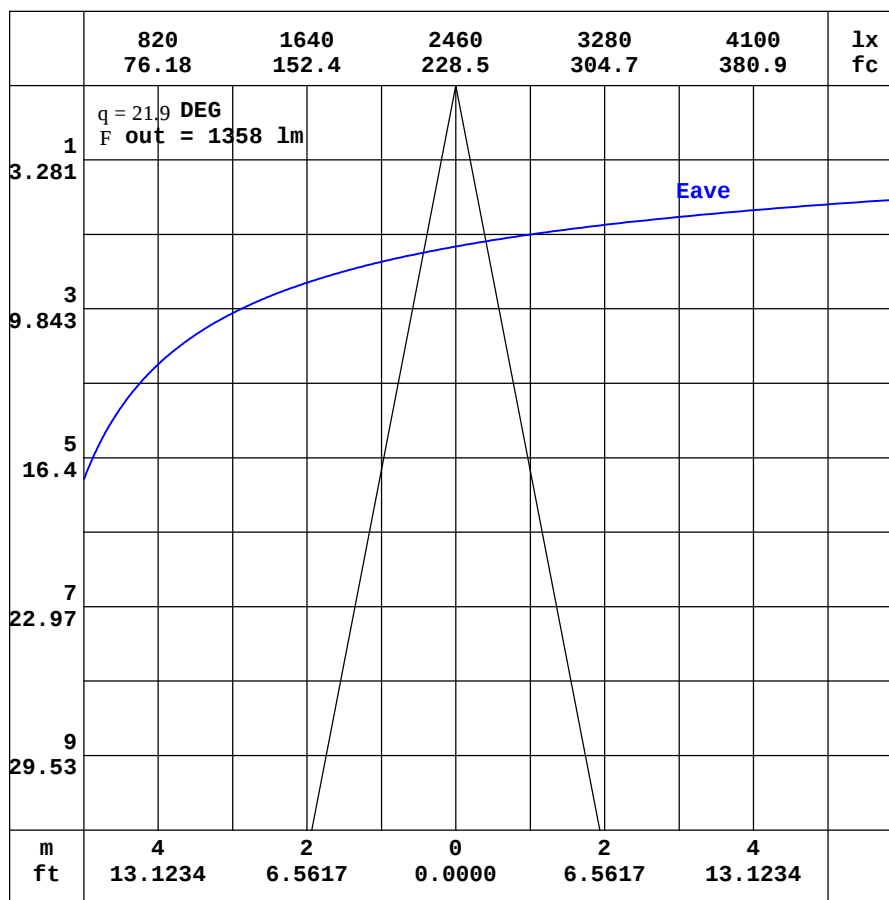

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

$H(b)$ Range:-90 - 90DEG
 $H(b)$ Interval: 0.5DEG
 Test Speed: LOW
 Temperature:25.3DEG
 Operators:Fan
 Test Date:2023-09-21

$V(B)$ Range:-180 - 180DEG
 $V(B)$ Interval: 0.5DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:8.630m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Aurora Max-618mm-RGBW 6500K-23D-Rev1	TYPE:RGBW-6500K	WEIGHT:
SPEC.:23 DEG	DIM.:618mm	SERIAL No.:IES001750
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: ×10cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	1.16	1.03	0.93	0.88	0.88	0.95	1.13	1.46	1.88	2.30	2.59	2.70	2.64	2.50	2.34	2.19	2.04	1.92	2.07
-170	1.16	1.02	0.92	0.86	0.84	0.87	0.97	1.17	1.43	1.69	1.87	1.97	1.99	1.98	1.96	1.98	2.07	2.15	2.15
-160	1.16	1.01	0.91	0.84	0.81	0.79	0.81	0.87	0.96	1.05	1.11	1.13	1.18	1.44	1.68	1.88	2.05	2.13	2.17
-150	1.16	1.01	0.90	0.83	0.78	0.73	0.69	0.64	0.60	0.53	0.47	0.62	0.79	0.98	1.16	1.33	1.45	1.53	1.56
-140	1.16	1.01	0.90	0.82	0.77	0.71	0.64	0.54	0.42	0.35	0.35	0.39	0.46	0.54	0.63	0.72	0.79	0.83	0.85
-130	1.16	1.01	0.90	0.82	0.76	0.71	0.64	0.55	0.48	0.42	0.38	0.35	0.34	0.34	0.35	0.37	0.38	0.40	0.40
-120	1.16	1.02	0.91	0.83	0.76	0.71	0.66	0.61	0.59	0.56	0.52	0.49	0.46	0.43	0.41	0.40	0.39	0.39	0.38
-110	1.16	1.02	0.91	0.83	0.76	0.70	0.66	0.64	0.64	0.64	0.64	0.63	0.62	0.62	0.61	0.60	0.60	0.60	0.60
-100	1.16	1.04	0.93	0.83	0.74	0.67	0.60	0.61	0.62	0.63	0.64	0.64	0.65	0.65	0.66	0.66	0.67	0.67	0.67
-90	1.16	1.05	0.95	0.84	0.73	0.62	0.51	0.51	0.51	0.52	0.52	0.52	0.52	0.52	0.52	0.52	0.52	0.52	0.52
-80	1.16	1.07	0.98	0.89	0.82	0.74	0.64	0.64	0.65	0.66	0.66	0.67	0.68	0.68	0.69	0.69	0.69	0.69	0.69
-70	1.16	1.10	1.05	1.09	1.02	0.94	0.83	0.85	0.92	1.01	1.09	1.17	1.25	1.32	1.38	1.43	1.46	1.47	1.46
-60	1.16	1.14	1.24	1.25	1.26	1.25	1.25	1.30	1.51	1.72	1.94	2.14	2.33	2.51	2.66	2.79	2.88	2.92	2.93
-50	1.16	1.17	1.36	1.46	1.57	1.71	1.86	1.99	2.26	2.63	3.01	3.38	3.76	4.13	4.48	4.78	5.01	5.16	5.20
-40	1.16	1.23	1.49	1.69	1.94	2.26	2.60	2.93	3.20	3.65	4.28	5.00	5.81	6.71	7.66	8.59	9.39	9.94	10.1
-30	1.16	1.33	1.63	1.93	2.35	2.86	3.43	4.02	4.60	5.17	5.86	7.28	9.16	11.7	15.2	19.8	24.7	29.3	31.0
-20	1.16	1.41	1.75	2.17	2.75	3.46	4.29	5.22	6.28	7.53	9.14	11.4	15.1	24.2	43.4	78.8	131	180	202
-10	1.16	1.46	1.86	2.38	3.09	3.99	5.09	6.40	8.04	10.2	13.3	18.2	28.1	54.4	128	297	558	834	954
0	1.16	1.49	1.94	2.53	3.34	4.40	5.71	7.35	9.49	12.5	16.9	23.8	37.6	72.4	172	408	823	1310	1611
10	1.16	1.48	1.93	2.50	3.29	4.31	5.58	7.15	9.18	11.9	16.0	22.1	32.9	56.9	121	263	507	780	869
20	1.16	1.46	1.88	2.41	3.12	4.04	5.18	6.56	8.26	10.4	13.5	17.7	23.7	32.9	49.3	79.6	125	163	174
30	1.16	1.40	1.81	2.26	2.86	3.63	4.58	5.69	7.00	8.56	10.5	12.9	15.9	19.5	23.7	29.0	33.3	36.6	37.3
40	1.16	1.32	1.72	2.08	2.55	3.14	3.85	4.69	5.63	6.67	7.84	9.13	10.5	12.1	13.7	15.1	16.3	17.0	17.3
50	1.16	1.27	1.61	1.89	2.22	2.63	3.12	3.67	4.28	4.94	5.64	6.36	7.07	7.77	8.36	8.86	9.23	9.44	9.48
60	1.16	1.24	1.50	1.70	1.91	2.16	2.44	2.76	3.11	3.47	3.85	4.23	4.59	4.93	5.19	5.40	5.55	5.63	5.64
70	1.16	1.22	1.30	1.51	1.64	1.77	1.91	2.05	2.21	2.36	2.52	2.68	2.82	2.94	3.05	3.13	3.18	3.20	3.19
80	1.16	1.19	1.22	1.26	1.34	1.44	1.52	1.58	1.63	1.68	1.73	1.77	1.81	1.84	1.86	1.88	1.89	1.89	1.89
90	1.16	1.17	1.17	1.17	1.17	1.18	1.18	1.18	1.18	1.19	1.19	1.19	1.20	1.20	1.20	1.20	1.20	1.20	1.20
100	1.16	1.14	1.12	1.10	1.08	1.06	1.04	1.03	1.01	1.00	0.99	0.98	0.97	0.96	0.96	0.95	0.95	0.95	0.95
110	1.16	1.12	1.07	1.03	1.00	0.97	0.95	0.92	0.91	0.89	0.88	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87
120	1.16	1.10	1.03	0.98	0.94	0.91	0.89	0.88	0.87	0.87	0.88	0.90	0.92	0.94	0.97	0.99	1.01	1.03	1.03
130	1.16	1.08	1.00	0.94	0.90	0.88	0.87	0.88	0.91	0.97	1.06	1.16	1.27	1.39	1.50	1.60	1.68	1.72	1.74
140	1.16	1.06	0.98	0.92	0.88	0.87	0.89	0.96	1.08	1.25	1.47	1.70	1.93	2.13	2.30	2.43	2.52	2.57	2.59
150	1.16	1.05	0.96	0.90	0.87	0.88	0.95	1.10	1.34	1.65	1.97	2.27	2.51	2.68	2.80	2.89	2.94	2.97	2.99
160	1.16	1.04	0.94	0.89	0.87	0.91	1.03	1.27	1.61	2.00	2.35	2.62	2.78	2.85	2.89	2.93	2.98	3.01	3.07
170	1.16	1.03	0.94	0.88	0.88	0.94	1.10	1.41	1.81	2.22	2.54	2.72	2.76	2.71	2.63	2.55	2.50	2.50	2.57
180	1.16	1.03	0.93	0.88	0.88	0.95	1.13	1.46	1.88	2.30	2.59	2.70	2.64	2.50	2.34	2.19	2.04	1.92	2.08

H_(b) Range: -90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-09-21

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Aurora Max-618mm-RGBW 6500K-23D-Rev1	TYPE:RGBW-6500K	WEIGHT:
SPEC.:23 DEG	DIM.:618mm	SERIAL No.:IES001750
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: ×10cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	1.87	1.90	1.88	1.77	1.59	1.33	1.04	0.76	0.53	0.40	0.38	0.44	0.53	0.61	0.65	0.63	0.55	0.44
-170	2.09	2.05	1.96	1.81	1.58	1.29	0.99	0.71	0.50	0.39	0.38	0.44	0.54	0.62	0.65	0.63	0.55	0.44
-160	2.11	2.01	1.83	1.60	1.34	1.06	0.80	0.58	0.43	0.37	0.39	0.46	0.56	0.63	0.65	0.62	0.55	0.44
-150	1.52	1.43	1.29	1.11	0.92	0.72	0.56	0.43	0.37	0.37	0.43	0.51	0.59	0.64	0.65	0.61	0.54	0.44
-140	0.83	0.78	0.70	0.62	0.52	0.44	0.38	0.36	0.38	0.43	0.49	0.56	0.62	0.64	0.64	0.60	0.53	0.44
-130	0.39	0.38	0.37	0.35	0.35	0.36	0.38	0.41	0.46	0.52	0.57	0.62	0.64	0.64	0.63	0.58	0.52	0.44
-120	0.39	0.40	0.41	0.43	0.45	0.48	0.51	0.55	0.58	0.61	0.63	0.64	0.64	0.63	0.60	0.56	0.50	0.44
-110	0.60	0.60	0.61	0.61	0.62	0.63	0.64	0.64	0.65	0.65	0.64	0.63	0.61	0.59	0.56	0.52	0.48	0.44
-100	0.67	0.66	0.66	0.65	0.64	0.64	0.63	0.62	0.61	0.60	0.58	0.57	0.55	0.53	0.51	0.49	0.46	0.44
-90	0.52	0.51	0.51	0.50	0.50	0.49	0.49	0.48	0.47	0.47	0.46	0.46	0.45	0.45	0.45	0.45	0.44	0.44
-80	0.68	0.66	0.64	0.62	0.59	0.57	0.54	0.51	0.48	0.46	0.42	0.40	0.40	0.40	0.40	0.41	0.42	0.44
-70	1.45	1.43	1.38	1.32	1.24	1.15	1.06	0.97	0.86	0.76	0.67	0.58	0.49	0.42	0.38	0.38	0.40	0.44
-60	2.92	2.86	2.76	2.62	2.45	2.26	2.06	1.84	1.61	1.38	1.15	0.93	0.73	0.58	0.44	0.37	0.39	0.44
-50	5.16	5.01	4.77	4.46	4.11	3.74	3.35	2.94	2.54	2.15	1.76	1.39	1.06	0.78	0.56	0.40	0.38	0.44
-40	9.96	9.42	8.62	7.69	6.79	5.91	5.08	4.32	3.63	2.99	2.41	1.89	1.42	1.00	0.69	0.45	0.37	0.44
-30	29.5	24.9	20.0	15.7	12.2	9.58	7.61	6.08	4.86	3.86	3.04	2.35	1.75	1.23	0.80	0.50	0.36	0.44
-20	181	132	83.6	47.9	27.5	16.7	11.3	8.16	6.13	4.68	3.58	2.73	2.01	1.40	0.89	0.55	0.36	0.44
-10	838	600	343	156	64.7	29.2	15.8	10.2	7.21	5.30	3.96	2.98	2.19	1.52	0.96	0.58	0.36	0.44
0	1508	1071	584	252	95.1	37.5	18.5	11.2	7.68	5.55	4.10	3.07	2.25	1.57	0.98	0.59	0.36	0.44
10	746	505	272	131	61.4	32.0	19.3	12.8	8.88	6.42	4.70	3.47	2.50	1.72	1.08	0.65	0.39	0.44
20	155	113	74.6	48.4	33.2	24.2	17.3	12.4	8.97	6.61	4.90	3.61	2.60	1.78	1.13	0.68	0.42	0.44
30	35.8	32.3	27.8	23.3	19.5	16.0	13.0	10.6	8.16	6.21	4.70	3.50	2.53	1.74	1.14	0.69	0.44	0.44
40	16.9	16.1	14.8	13.3	11.9	10.4	9.05	7.77	6.59	5.40	4.17	3.15	2.31	1.61	1.10	0.69	0.47	0.44
50	9.39	9.13	8.72	8.18	7.58	6.91	6.22	5.52	4.83	4.17	3.44	2.66	1.99	1.45	1.01	0.67	0.49	0.44
60	5.60	5.49	5.31	5.07	4.78	4.45	4.09	3.72	3.34	2.97	2.62	2.13	1.68	1.26	0.92	0.66	0.51	0.44
70	3.17	3.13	3.05	2.94	2.82	2.68	2.54	2.38	2.22	2.07	1.92	1.69	1.37	1.08	0.85	0.67	0.53	0.44
80	1.87	1.85	1.83	1.80	1.76	1.72	1.67	1.62	1.56	1.49	1.44	1.38	1.18	1.00	0.83	0.68	0.55	0.44
90	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.21	1.21	1.21	1.09	0.96	0.83	0.70	0.57	0.44
100	0.95	0.95	0.95	0.96	0.96	0.97	0.98	1.00	1.02	1.03	1.05	1.07	1.00	0.91	0.82	0.71	0.58	0.44
110	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.88	0.90	0.92	0.94	0.95	0.91	0.87	0.80	0.71	0.59	0.44
120	1.02	1.01	0.99	0.96	0.93	0.91	0.89	0.87	0.87	0.87	0.88	0.87	0.85	0.82	0.78	0.70	0.59	0.44
130	1.72	1.66	1.58	1.47	1.35	1.22	1.11	1.01	0.94	0.89	0.85	0.82	0.80	0.79	0.76	0.70	0.59	0.44
140	2.57	2.51	2.42	2.28	2.08	1.85	1.60	1.36	1.16	0.98	0.84	0.78	0.76	0.75	0.74	0.69	0.59	0.44
150	2.98	2.95	2.90	2.80	2.66	2.45	2.16	1.83	1.37	1.02	0.81	0.73	0.71	0.72	0.71	0.68	0.59	0.44
160	3.05	3.04	3.01	2.97	2.90	2.77	2.31	1.80	1.32	0.95	0.74	0.66	0.66	0.69	0.69	0.66	0.58	0.44
170	2.56	2.67	2.77	2.70	2.47	2.16	1.79	1.39	1.01	0.73	0.58	0.55	0.59	0.65	0.67	0.65	0.57	0.44
180	1.87	1.90	1.88	1.77	1.59	1.33	1.04	0.76	0.53	0.40	0.38	0.44	0.53	0.61	0.65	0.63	0.55	0.44

H_b Range: -90 - 90DEGH_b Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-09-21

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: