

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	4610.7 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	42.7V x 43.8H
	At 50% of Imax	22.8V x 23.5H
	At 90% of Imax	8.8V x 9.2H

Beam Flux	Total	1000.3 lumens per klm.
	To 10% of Imax	782.7 lumens per klm.
	To 50% of Imax	429.0 lumens per klm.
	To 90% of Imax	86.9 lumens per klm.

Upward LOR	2.2 %
Downward LOR	97.9 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-21

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Aurora Max-618mm-RGBW BLUE-23D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:23 DEG	DIM.:618mm	SERIAL No.:IES001749
MFR.:	SUR.:	Shielding Angle:

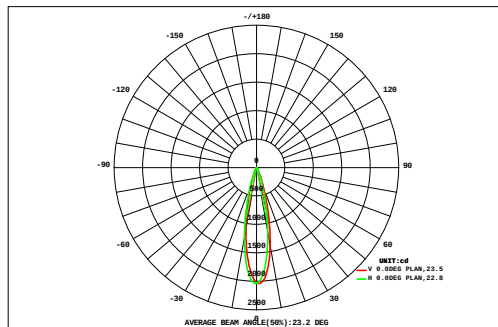

DATA OF LAMP		Eff:7.43lm/W	
MODEL		Imax(cd)	2037
NOMINAL POWER(W)	59.5	AVAILABILITY(%)	78.3
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	346.0
NOMINAL FLUX(lm)	441.9	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	441.9
TEST VOLTAGE(V)	220	q @50%(H,V)	24,23DEG

		AREA FLUX DIAGRAM															UNIT:lm			F t	F a
		0.08	0.10	0.12	0.14	0.17	0.20	0.23	0.25	0.26	0.26	0.24	0.22	0.19	0.16	0.14	0.12	0.10	0.08	3.07	0.00
VERTICAL (DEG)	27	0.10	0.12	0.15	0.19	0.25	0.31	0.37	0.42	0.44	0.43	0.40	0.35	0.29	0.23	0.18	0.15	0.12	0.10	4.58	0.00
	24	0.11	0.15	0.20	0.27	0.38	0.50	0.62	0.71	0.75	0.74	0.68	0.57	0.45	0.35	0.26	0.19	0.15	0.11	7.20	3.83
	21	0.13	0.18	0.27	0.39	0.57	0.80	1.02	1.18	1.27	1.25	1.14	0.95	0.74	0.54	0.38	0.27	0.19	0.14	11.4	9.04
	18	0.16	0.23	0.36	0.56	0.84	1.20	1.58	1.87	2.01	1.99	1.80	1.49	1.15	0.83	0.56	0.37	0.24	0.16	17.4	15.5
	15	0.18	0.29	0.46	0.75	1.16	1.68	2.26	2.73	2.96	2.92	2.64	2.19	1.67	1.18	0.78	0.50	0.31	0.20	24.8	23.2
	12	0.21	0.34	0.56	0.94	1.48	2.17	2.94	3.63	3.97	3.93	3.56	2.96	2.25	1.59	1.06	0.66	0.40	0.24	32.9	31.5
	9	0.23	0.38	0.65	1.09	1.73	2.56	3.48	4.33	4.85	4.81	4.38	3.67	2.85	2.05	1.35	0.83	0.48	0.28	40.0	38.8
		0.24	0.39	0.69	1.16	1.86	2.76	3.75	4.68	5.33	5.38	5.01	4.31	3.38	2.42	1.59	0.96	0.55	0.30	44.7	43.7
		0.23	0.40	0.70	1.19	1.90	2.82	3.85	4.79	5.40	5.48	5.16	4.45	3.49	2.50	1.63	0.99	0.56	0.31	45.8	44.8
		0.23	0.38	0.68	1.15	1.85	2.74	3.71	4.52	4.99	5.01	4.67	4.03	3.16	2.26	1.48	0.90	0.51	0.29	42.6	41.4
		0.20	0.34	0.60	1.03	1.63	2.37	3.14	3.80	4.18	4.19	3.85	3.31	2.62	1.89	1.25	0.76	0.44	0.25	35.9	34.6
		0.17	0.29	0.49	0.83	1.28	1.83	2.41	2.91	3.19	3.20	2.93	2.49	1.97	1.43	0.97	0.60	0.35	0.21	27.6	26.1
	0.14	0.23	0.37	0.60	0.92	1.30	1.70	2.03	2.22	2.23	2.05	1.73	1.37	1.01	0.69	0.44	0.27	0.17	19.4	17.7	
	0.11	0.17	0.27	0.41	0.61	0.85	1.10	1.31	1.43	1.43	1.32	1.11	0.88	0.66	0.46	0.30	0.20	0.13	12.7	10.5	
	0.09	0.13	0.18	0.27	0.39	0.53	0.67	0.78	0.85	0.86	0.79	0.68	0.54	0.41	0.29	0.20	0.14	0.10	7.90	4.99	
	0.07	0.09	0.13	0.18	0.24	0.32	0.39	0.45	0.48	0.48	0.45	0.39	0.32	0.25	0.19	0.14	0.10	0.08	4.73	0.38	
	0.06	0.07	0.09	0.12	0.15	0.19	0.22	0.25	0.27	0.27	0.26	0.23	0.19	0.15	0.12	0.10	0.08	0.06	2.87	0.00	
	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL (DEG)			6	9	12	15	18	21	24	27		
F t	2.74	4.28	6.97	11.3	17.4	25.1	33.4	40.6	44.8	44.9	41.3	35.1	27.5	19.9	13.4	8.46	5.18	3.18	386	---	
F a	0.00	0.00	3.82	8.91	15.5	23.5	31.9	39.3	43.6	43.6	39.9	33.7	25.9	18.0	11.2	5.80	1.38	0.00	---	346	

one-half-peak spread: U:11.4,D:11.6 , L:12.1,R:11.6


NEMA Beam Type: Type 3

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-09-21

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:Aurora Max-618mm-RGBW BLUE-23D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:23 DEG	DIM.:618mm	SERIAL No.:IES001749
MFR.:	SUR.:	Shielding Angle:

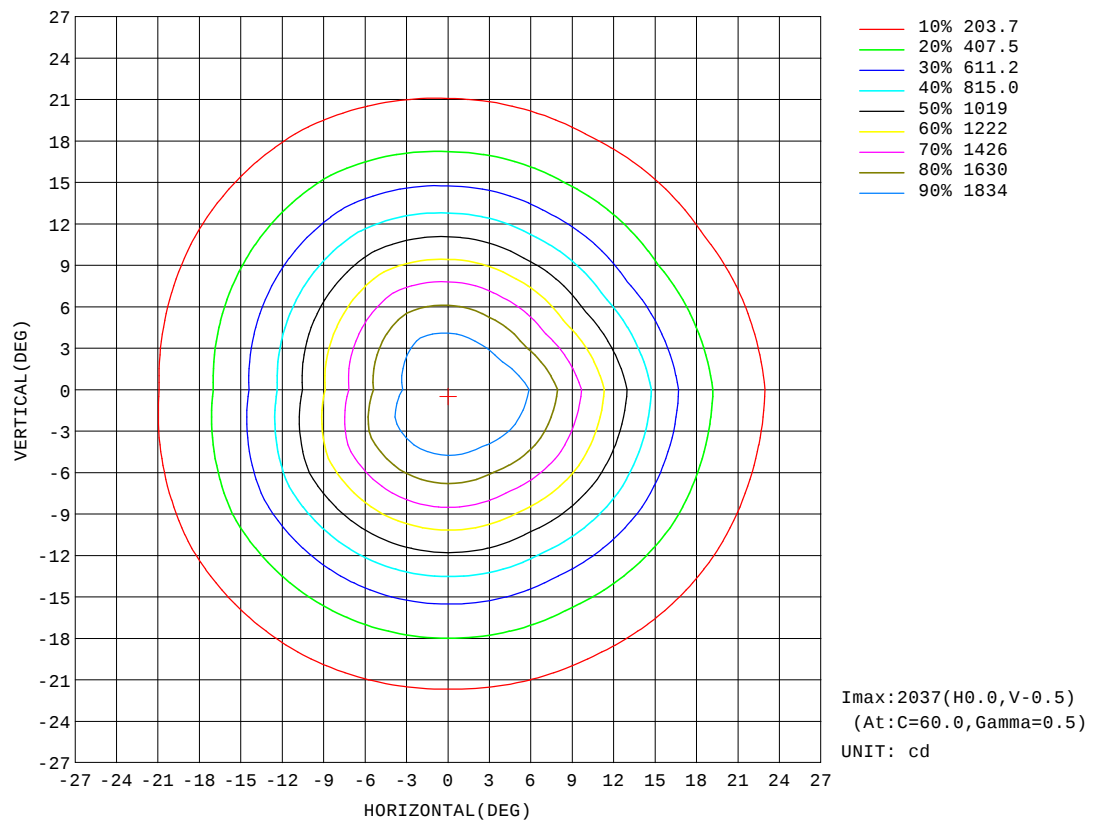


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-21

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Aurora Max-618mm-RGBW BLUE-23D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:23 DEG	DIM.:618mm	SERIAL No.:IES001749
MFR.:	SUR.:	Shielding Angle:

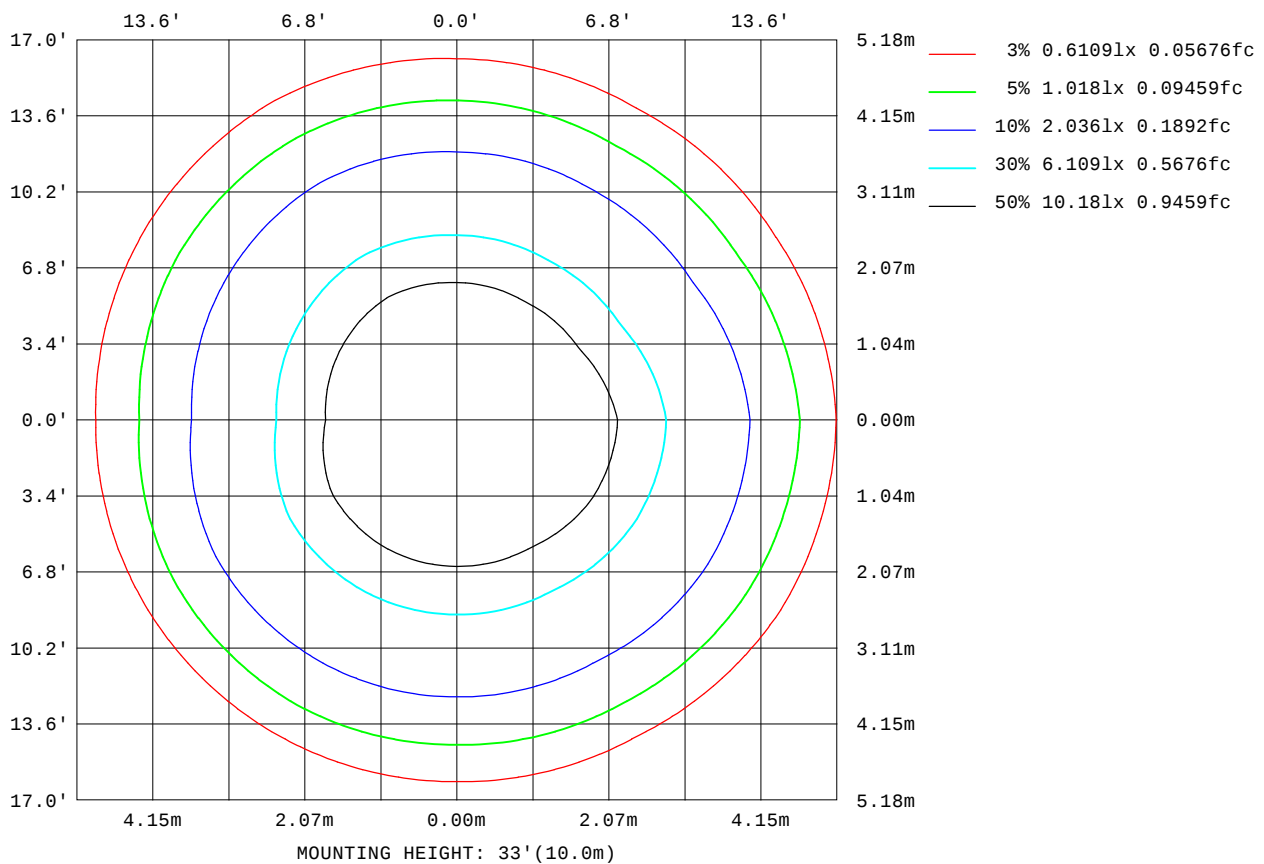

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-09-21

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

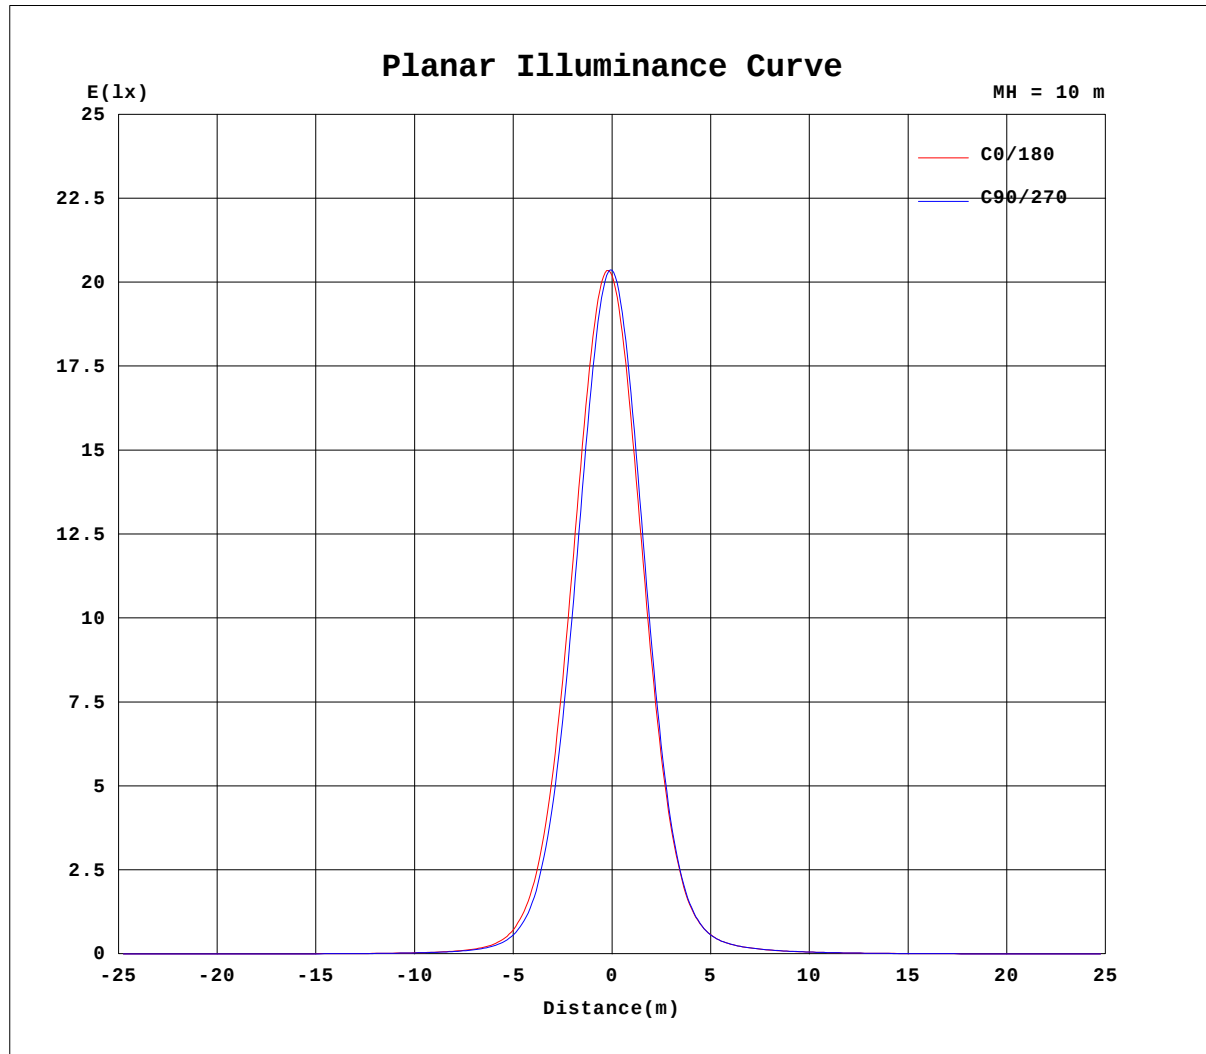


H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-09-21

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Aurora Max-618mm-RGBW BLUE-23D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:23 DEG	DIM.:618mm	SERIAL No.:IES001749
MFR.:	SUR.:	Shielding Angle:

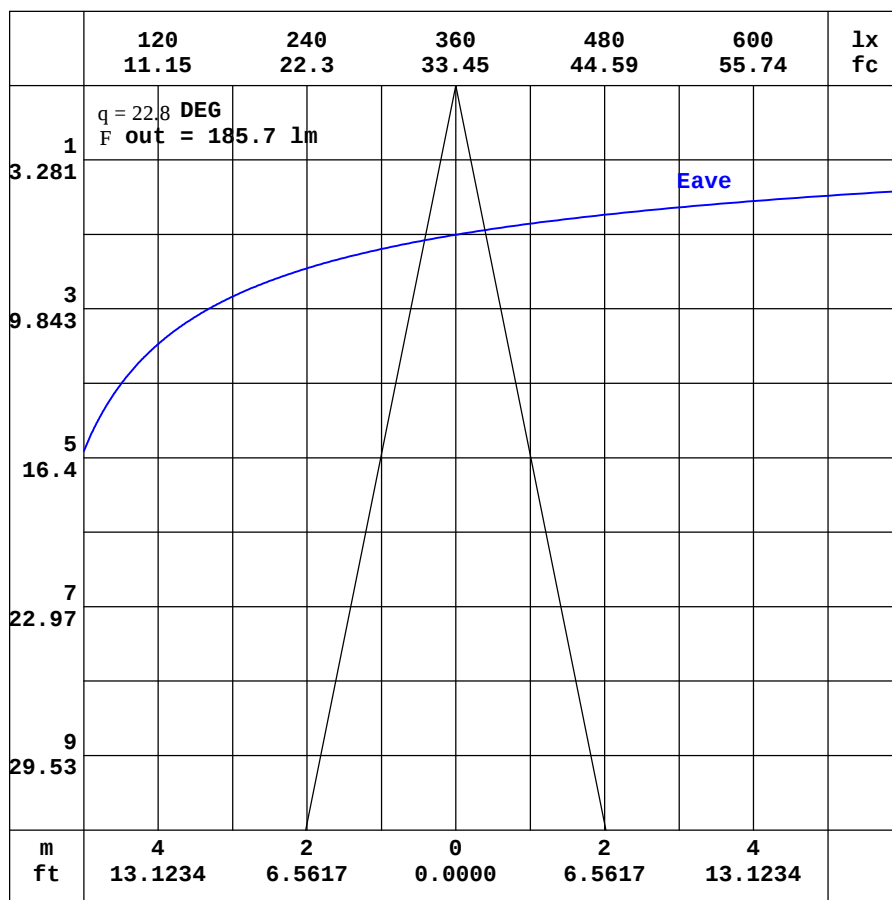

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-21

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Aurora Max-618mm-RGBW BLUE-23D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:23 DEG	DIM.:618mm	SERIAL No.:IES001749
MFR.:	SUR.:	Shielding Angle:

Table--1
UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	1.77	1.51	1.30	1.19	1.19	1.28	1.52	1.93	2.46	2.98	3.37	3.47	3.42	3.26	3.09	2.94	2.79	2.70	2.90
-170	1.77	1.49	1.27	1.13	1.11	1.14	1.28	1.53	1.86	2.18	2.43	2.54	2.57	2.58	2.59	2.62	2.76	2.94	2.96
-160	1.77	1.48	1.25	1.09	1.04	1.01	1.03	1.12	1.24	1.35	1.42	1.46	1.52	1.87	2.19	2.47	2.72	2.87	2.97
-150	1.77	1.47	1.23	1.06	0.98	0.90	0.83	0.79	0.74	0.65	0.58	0.77	1.00	1.25	1.49	1.71	1.90	2.04	2.10
-140	1.77	1.47	1.23	1.05	0.93	0.84	0.73	0.59	0.45	0.39	0.41	0.46	0.54	0.64	0.76	0.90	1.01	1.08	1.12
-130	1.77	1.48	1.24	1.05	0.91	0.80	0.69	0.55	0.46	0.42	0.40	0.39	0.39	0.38	0.39	0.43	0.47	0.49	0.51
-120	1.77	1.49	1.25	1.07	0.91	0.78	0.69	0.59	0.58	0.56	0.52	0.50	0.48	0.46	0.44	0.42	0.41	0.40	0.40
-110	1.77	1.51	1.28	1.09	0.93	0.79	0.67	0.63	0.63	0.63	0.63	0.63	0.64	0.63	0.62	0.61	0.59	0.59	0.58
-100	1.77	1.53	1.32	1.11	0.93	0.77	0.62	0.62	0.62	0.62	0.62	0.63	0.62	0.63	0.63	0.64	0.65	0.65	0.65
-90	1.77	1.56	1.35	1.14	0.93	0.72	0.51	0.51	0.51	0.51	0.50	0.50	0.50	0.51	0.51	0.52	0.52	0.53	0.53
-80	1.77	1.59	1.41	1.21	1.04	0.88	0.66	0.68	0.71	0.73	0.76	0.79	0.81	0.82	0.82	0.82	0.82	0.81	0.80
-70	1.77	1.64	1.51	1.48	1.34	1.17	1.00	1.03	1.17	1.31	1.46	1.60	1.74	1.85	1.94	2.00	2.03	2.03	2.00
-60	1.77	1.69	1.76	1.73	1.68	1.65	1.64	1.72	2.05	2.39	2.74	3.07	3.38	3.65	3.86	4.03	4.14	4.19	4.18
-50	1.77	1.75	1.94	2.02	2.13	2.31	2.52	2.74	3.15	3.72	4.30	4.90	5.48	6.03	6.53	6.96	7.28	7.48	7.53
-40	1.77	1.85	2.13	2.35	2.67	3.09	3.58	4.08	4.52	5.22	6.19	7.27	8.47	9.82	11.2	12.5	13.7	14.5	14.8
-30	1.77	1.98	2.32	2.69	3.24	3.95	4.76	5.62	6.51	7.42	8.53	10.6	13.4	17.2	22.2	28.7	36.0	42.3	44.6
-20	1.77	2.09	2.50	3.03	3.79	4.78	5.95	7.29	8.84	10.7	13.1	16.5	22.3	35.6	62.7	114	186	255	287
-10	1.77	2.16	2.66	3.32	4.27	5.52	7.06	8.91	11.2	14.3	18.7	25.8	40.0	77.6	180	409	749	1095	1244
0	1.77	2.22	2.79	3.55	4.63	6.08	7.90	10.2	13.1	17.2	23.3	33.0	52.0	102	239	560	1085	1674	2020
10	1.77	2.21	2.77	3.50	4.55	5.95	7.71	9.89	12.7	16.5	22.0	30.5	45.5	80.1	170	368	689	1034	1146
20	1.77	2.18	2.71	3.38	4.32	5.57	7.13	9.04	11.4	14.5	18.6	24.3	32.5	45.6	69.4	113	175	232	249
30	1.77	2.12	2.63	3.19	3.97	5.01	6.29	7.84	9.65	11.8	14.5	17.8	21.9	26.9	32.9	39.7	46.1	50.9	52.1
40	1.77	2.02	2.51	2.97	3.57	4.34	5.30	6.43	7.73	9.16	10.8	12.6	14.5	16.7	18.9	20.8	22.4	23.3	23.6
50	1.77	1.94	2.38	2.73	3.14	3.66	4.29	5.04	5.86	6.78	7.74	8.72	9.73	10.7	11.5	12.2	12.7	13.0	13.1
60	1.77	1.90	2.24	2.49	2.76	3.06	3.42	3.82	4.27	4.75	5.26	5.78	6.28	6.73	7.11	7.41	7.61	7.73	7.74
70	1.77	1.86	1.99	2.26	2.43	2.60	2.76	2.92	3.10	3.29	3.48	3.67	3.85	4.02	4.16	4.27	4.34	4.37	4.36
80	1.77	1.82	1.88	1.94	2.05	2.19	2.29	2.36	2.42	2.47	2.52	2.55	2.59	2.62	2.65	2.67	2.69	2.70	2.70
90	1.77	1.78	1.80	1.81	1.82	1.84	1.85	1.85	1.85	1.85	1.84	1.84	1.84	1.85	1.86	1.87	1.88	1.88	1.89
100	1.77	1.74	1.71	1.68	1.65	1.62	1.59	1.55	1.51	1.47	1.44	1.41	1.38	1.37	1.36	1.36	1.36	1.36	1.37
110	1.77	1.70	1.62	1.54	1.47	1.42	1.36	1.30	1.25	1.21	1.17	1.15	1.14	1.14	1.14	1.14	1.13	1.13	1.13
120	1.77	1.66	1.54	1.43	1.34	1.26	1.21	1.18	1.16	1.15	1.15	1.16	1.19	1.23	1.25	1.28	1.31	1.31	1.31
130	1.77	1.62	1.46	1.34	1.24	1.19	1.17	1.16	1.16	1.24	1.36	1.49	1.65	1.80	1.95	2.07	2.17	2.22	2.24
140	1.77	1.58	1.41	1.27	1.19	1.17	1.17	1.23	1.38	1.60	1.88	2.18	2.48	2.75	2.98	3.15	3.26	3.32	3.34
150	1.77	1.56	1.37	1.22	1.18	1.18	1.25	1.43	1.72	2.10	2.51	2.90	3.23	3.47	3.65	3.77	3.84	3.88	3.88
160	1.77	1.54	1.33	1.20	1.18	1.21	1.36	1.65	2.08	2.57	3.02	3.35	3.57	3.70	3.78	3.83	3.90	3.98	4.08
170	1.77	1.52	1.31	1.19	1.18	1.25	1.47	1.84	2.35	2.87	3.29	3.50	3.57	3.54	3.47	3.41	3.37	3.38	3.54
180	1.77	1.51	1.30	1.19	1.19	1.28	1.52	1.93	2.46	2.98	3.37	3.47	3.42	3.26	3.09	2.94	2.79	2.70	2.95

H_b Range:-90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-21

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Aurora Max-618mm-RGBW BLUE-23D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:23 DEG	DIM.:618mm	SERIAL No.:IES001749
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	2.70	2.71	2.63	2.43	2.13	1.76	1.35	0.96	0.66	0.44	0.41	0.46	0.56	0.63	0.64	0.60	0.52	0.41
-170	2.93	2.84	2.73	2.48	2.13	1.72	1.30	0.92	0.64	0.44	0.43	0.47	0.56	0.63	0.63	0.60	0.52	0.41
-160	2.87	2.71	2.47	2.16	1.80	1.42	1.07	0.76	0.55	0.44	0.44	0.49	0.57	0.63	0.63	0.60	0.52	0.41
-150	2.04	1.91	1.71	1.47	1.21	0.95	0.73	0.57	0.47	0.44	0.46	0.52	0.60	0.63	0.63	0.59	0.51	0.41
-140	1.08	1.01	0.90	0.76	0.64	0.54	0.47	0.45	0.45	0.46	0.51	0.57	0.62	0.63	0.63	0.58	0.50	0.41
-130	0.50	0.47	0.43	0.41	0.41	0.42	0.43	0.45	0.48	0.53	0.57	0.62	0.63	0.63	0.61	0.57	0.49	0.41
-120	0.41	0.42	0.44	0.45	0.48	0.51	0.54	0.57	0.59	0.62	0.63	0.63	0.63	0.62	0.59	0.54	0.46	0.41
-110	0.59	0.60	0.61	0.63	0.63	0.64	0.63	0.63	0.63	0.63	0.63	0.63	0.62	0.59	0.55	0.50	0.45	0.41
-100	0.65	0.64	0.64	0.64	0.63	0.62	0.61	0.61	0.60	0.60	0.59	0.58	0.55	0.52	0.49	0.46	0.43	0.41
-90	0.52	0.51	0.50	0.48	0.47	0.46	0.46	0.46	0.46	0.46	0.46	0.46	0.45	0.44	0.43	0.43	0.42	0.41
-80	0.78	0.77	0.74	0.72	0.69	0.66	0.61	0.56	0.52	0.47	0.44	0.42	0.41	0.40	0.40	0.38	0.38	0.41
-70	2.00	1.96	1.89	1.80	1.68	1.55	1.41	1.26	1.10	0.94	0.80	0.67	0.53	0.44	0.40	0.38	0.37	0.41
-60	4.16	4.08	3.94	3.74	3.49	3.21	2.90	2.56	2.21	1.85	1.51	1.18	0.90	0.68	0.48	0.39	0.37	0.41
-50	7.47	7.25	6.90	6.44	5.93	5.38	4.80	4.19	3.59	2.99	2.41	1.88	1.39	0.98	0.66	0.43	0.37	0.41
-40	14.5	13.7	12.6	11.2	9.90	8.59	7.37	6.25	5.21	4.24	3.39	2.61	1.93	1.32	0.86	0.51	0.37	0.41
-30	42.6	36.5	29.2	22.9	17.9	14.0	11.1	8.88	7.05	5.55	4.32	3.30	2.43	1.66	1.03	0.58	0.37	0.41
-20	257	189	122	69.5	39.8	24.6	16.6	11.9	8.94	6.77	5.14	3.87	2.82	1.93	1.18	0.66	0.37	0.41
-10	1104	806	469	219	93.2	42.2	23.1	14.9	10.5	7.68	5.70	4.25	3.09	2.11	1.28	0.71	0.37	0.41
0	1901	1388	787	354	139	54.7	26.9	16.3	11.2	8.02	5.89	4.38	3.19	2.18	1.32	0.73	0.37	0.41
10	996	689	381	186	87.3	45.3	27.1	18.0	12.6	9.09	6.65	4.88	3.51	2.38	1.46	0.82	0.42	0.41
20	219	160	106	68.0	45.9	33.1	23.8	17.1	12.5	9.23	6.83	5.03	3.61	2.45	1.53	0.87	0.47	0.41
30	49.9	44.6	38.2	32.2	26.8	21.9	17.9	14.5	11.3	8.56	6.48	4.83	3.49	2.39	1.54	0.90	0.51	0.41
40	23.2	22.1	20.4	18.5	16.4	14.4	12.5	10.7	9.02	7.38	5.71	4.32	3.17	2.22	1.50	0.90	0.55	0.41
50	13.0	12.6	12.1	11.3	10.5	9.56	8.58	7.59	6.62	5.69	4.70	3.65	2.75	2.01	1.39	0.89	0.58	0.41
60	7.70	7.56	7.33	7.00	6.61	6.14	5.63	5.10	4.57	4.08	3.62	2.97	2.34	1.78	1.29	0.89	0.60	0.41
70	4.34	4.29	4.19	4.05	3.88	3.69	3.50	3.30	3.10	2.91	2.73	2.45	2.00	1.58	1.21	0.90	0.62	0.41
80	2.68	2.65	2.62	2.57	2.52	2.47	2.43	2.37	2.31	2.25	2.19	2.13	1.81	1.49	1.19	0.90	0.63	0.41
90	1.89	1.88	1.87	1.87	1.86	1.86	1.87	1.88	1.90	1.91	1.92	1.94	1.68	1.43	1.17	0.92	0.66	0.41
100	1.36	1.36	1.36	1.37	1.38	1.40	1.44	1.48	1.53	1.58	1.64	1.68	1.52	1.34	1.13	0.91	0.66	0.41
110	1.13	1.13	1.13	1.13	1.13	1.13	1.16	1.19	1.23	1.29	1.36	1.39	1.32	1.21	1.07	0.89	0.66	0.41
120	1.31	1.30	1.27	1.24	1.22	1.18	1.15	1.14	1.14	1.16	1.20	1.18	1.15	1.09	1.00	0.86	0.65	0.41
130	2.21	2.15	2.04	1.91	1.75	1.59	1.43	1.30	1.20	1.15	1.12	1.06	1.02	0.99	0.93	0.82	0.65	0.41
140	3.32	3.25	3.14	2.96	2.70	2.39	2.06	1.75	1.48	1.23	1.04	0.97	0.93	0.90	0.87	0.78	0.63	0.41
150	3.90	3.86	3.80	3.66	3.45	3.16	2.78	2.35	1.75	1.28	1.00	0.87	0.85	0.82	0.80	0.74	0.61	0.41
160	4.04	4.03	3.98	3.89	3.77	3.58	2.98	2.30	1.67	1.18	0.89	0.77	0.75	0.76	0.74	0.70	0.58	0.41
170	3.47	3.61	3.74	3.60	3.25	2.81	2.31	1.77	1.28	0.88	0.69	0.63	0.66	0.69	0.69	0.65	0.55	0.41
180	2.70	2.71	2.63	2.43	2.13	1.76	1.35	0.96	0.66	0.44	0.41	0.46	0.56	0.63	0.64	0.60	0.52	0.41

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-21

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks: