

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		4801.1 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	42.0V x 43.1H
	At 50% of Imax	22.3V x 22.9H
	At 90% of Imax	8.6V x 8.9H
Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	780.8 lumens per klm.
	To 50% of Imax	424.1 lumens per klm.
	To 90% of Imax	82.4 lumens per klm.
	Upward LOR	2.2 %
	Downward LOR	97.8 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(B) Range:-90 - 90DEG
H(B) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-21

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Aurora Max-618mm-RGBW GREEN-23D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:23 DEG	DIM.:618mm	SERIAL No.:IES001748
MFR.:	SUR.:	Shielding Angle:

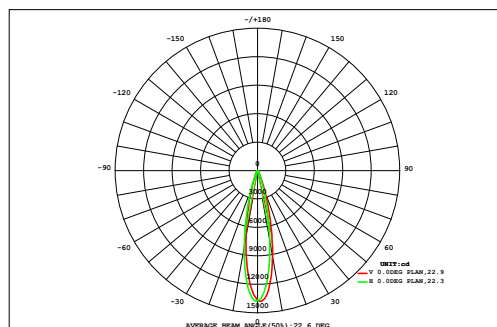

DATA OF LAMP		Eff:50.12lm/W	
MODEL		Imax(cd)	13765
NOMINAL POWER(W)	57.3	AVAILABILITY(%)	78.0
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	2237
NOMINAL FLUX(lm)	2867	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	2867
TEST VOLTAGE(V)	220	q @50%(H,V)	23,22DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		F t	F a
	0.52	0.63	0.76	0.92	1.10	1.29	1.46	1.59	1.65	1.64	1.55	1.40	1.22	1.04	0.88	0.74	0.62	0.52	19.5	0.00
27	0.61	0.76	0.96	1.23	1.58	1.97	2.33	2.62	2.75	2.72	2.53	2.20	1.83	1.47	1.18	0.94	0.75	0.61	29.0	0.00
24	0.72	0.94	1.26	1.73	2.38	3.15	3.89	4.45	4.71	4.65	4.29	3.65	2.91	2.23	1.66	1.23	0.93	0.72	45.5	20.8
21	0.85	1.17	1.69	2.48	3.60	5.02	6.44	7.54	8.05	7.95	7.26	6.04	4.69	3.44	2.42	1.67	1.18	0.86	72.3	55.3
18	1.00	1.46	2.25	3.49	5.28	7.64	10.1	12.0	13.0	12.8	11.6	9.63	7.35	5.21	3.50	2.28	1.50	1.02	111	97.4
15	1.16	1.79	2.91	4.68	7.33	10.8	14.6	17.8	19.3	19.1	17.3	14.2	10.8	7.48	4.86	3.11	1.95	1.23	160	149
12	1.31	2.12	3.56	5.91	9.41	14.0	19.2	24.0	26.3	26.1	23.6	19.4	14.5	10.1	6.66	4.14	2.48	1.47	214	204
9	1.43	2.38	4.07	6.91	11.1	16.6	22.9	28.8	32.5	32.3	29.2	24.2	18.6	13.2	8.57	5.19	3.01	1.70	263	254
-9	1.49	2.51	4.34	7.44	12.0	18.0	24.8	31.3	35.9	36.2	33.6	28.7	22.2	15.7	10.1	6.04	3.42	1.88	296	288
-12	1.49	2.53	4.42	7.61	12.3	18.5	25.5	32.1	36.4	37.0	34.7	29.7	23.0	16.2	10.5	6.22	3.50	1.90	304	295
-15	1.43	2.44	4.28	7.37	11.9	17.9	24.5	30.1	33.4	33.6	31.2	26.8	20.8	14.7	9.50	5.67	3.22	1.77	281	272
-18	1.29	2.18	3.81	6.53	10.5	15.4	20.5	25.0	27.7	27.9	25.5	21.8	17.1	12.2	7.97	4.79	2.76	1.55	234	226
-21	1.10	1.83	3.13	5.22	8.15	11.7	15.5	18.9	20.9	21.0	19.1	16.2	12.7	9.20	6.12	3.77	2.22	1.29	178	168
-24	0.89	1.43	2.35	3.77	5.75	8.18	10.8	13.0	14.4	14.4	13.2	11.1	8.72	6.37	4.31	2.75	1.69	1.03	124	113
-27	0.70	1.06	1.66	2.57	3.79	5.28	6.88	8.27	9.11	9.15	8.39	7.04	5.53	4.12	2.87	1.90	1.23	0.80	80.3	65.8
	0.54	0.78	1.14	1.68	2.40	3.24	4.13	4.90	5.35	5.38	4.97	4.23	3.36	2.55	1.83	1.28	0.88	0.61	49.2	28.4
	0.43	0.57	0.79	1.09	1.47	1.92	2.40	2.79	3.01	3.03	2.83	2.45	1.98	1.54	1.17	0.86	0.63	0.47	29.4	0.00
	0.34	0.43	0.56	0.72	0.92	1.15	1.38	1.57	1.68	1.69	1.59	1.41	1.18	0.95	0.76	0.60	0.47	0.37	17.8	0.00
	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL (DEG)	6	9	12	15	18	21	24	27			
F t	17.3	27.0	44.0	71.4	111	162	217	267	296	297	273	230	179	128	84.9	53.2	32.4	19.8	2508	---
F a	0.00	0.00	21.1	55.4	97.5	150	207	257	287	288	263	220	167	115	70.0	34.5	4.87	0.00	---	2237

one-half-peak spread: U:11.1,D:11.3 , L:11.8,R:11.3


NEMA Beam Type: Type 3

H(B) Range:-90 - 90DEG
H(B) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-21

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:Aurora Max-618mm-RGBW GREEN-23D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:23 DEG	DIM.:618mm	SERIAL No.:IES001748
MFR.:	SUR.:	Shielding Angle:

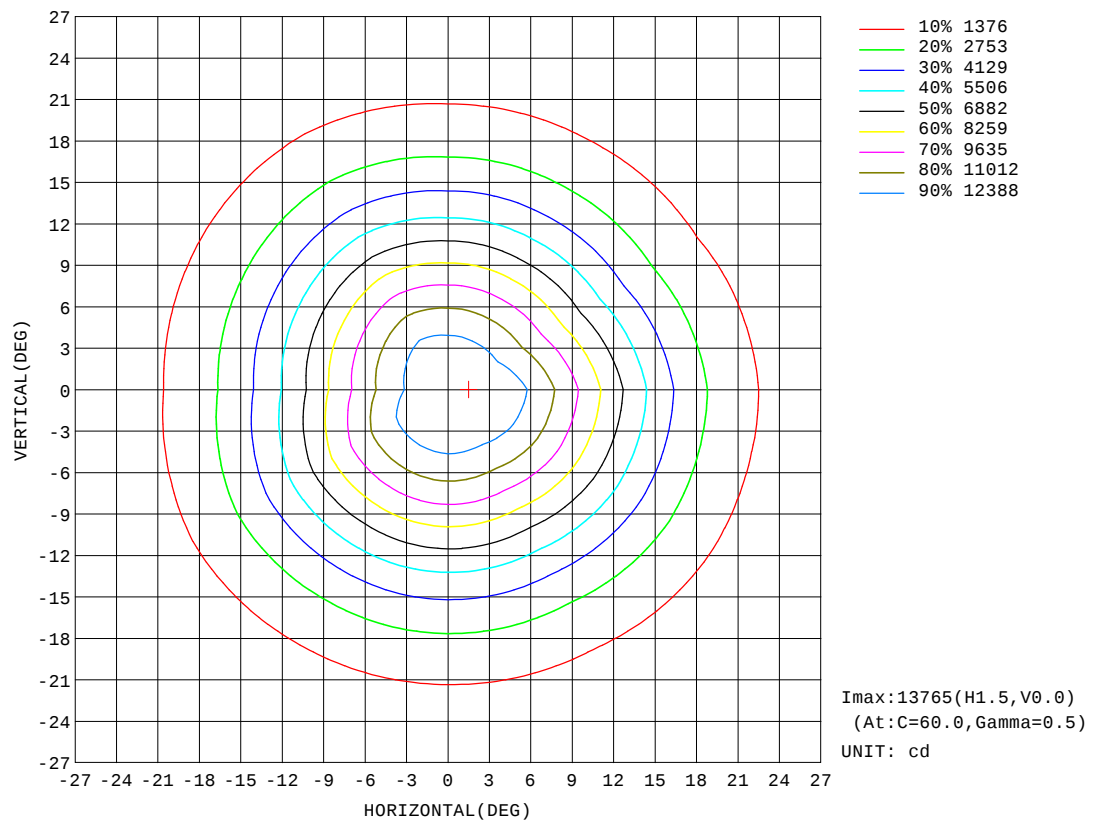


H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-21

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Aurora Max-618mm-RGBW GREEN-23D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:23 DEG	DIM.:618mm	SERIAL No.:IES001748
MFR.:	SUR.:	Shielding Angle:

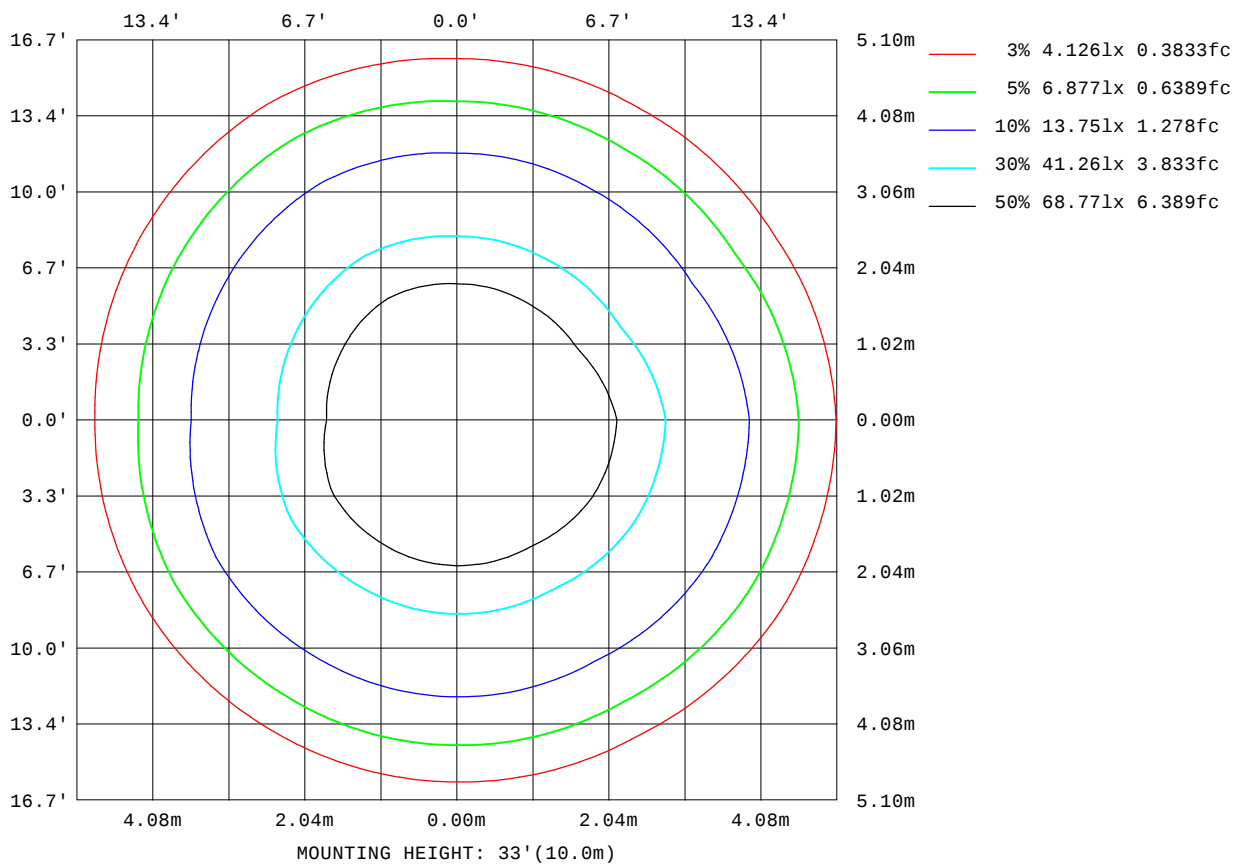

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-21

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

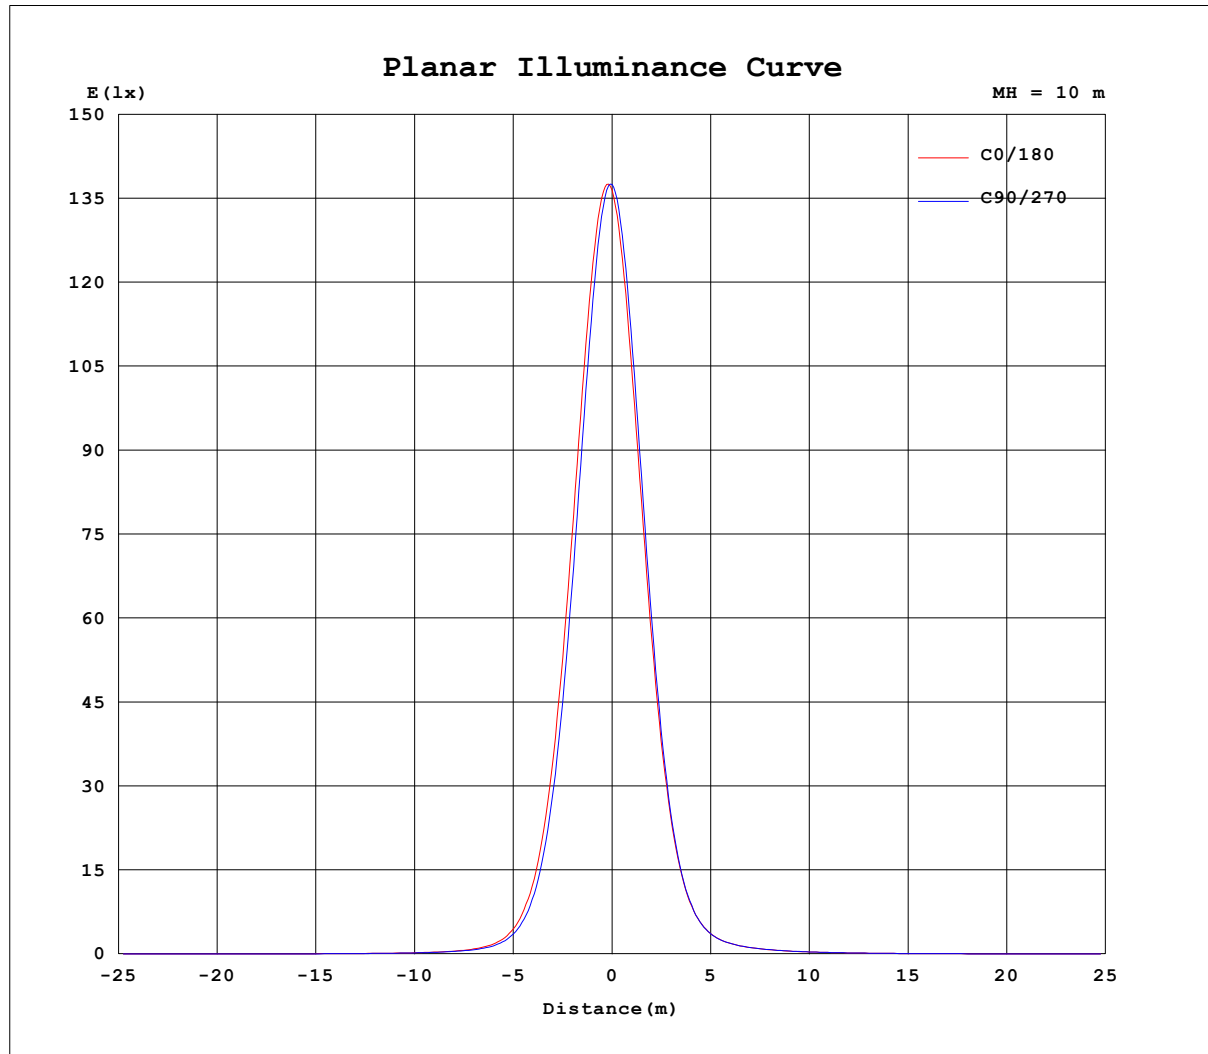


H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-21

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Aurora Max-618mm-RGBW GREEN-23D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:23 DEG	DIM.:618mm	SERIAL No.:IES001748
MFR.:	SUR.:	Shielding Angle:

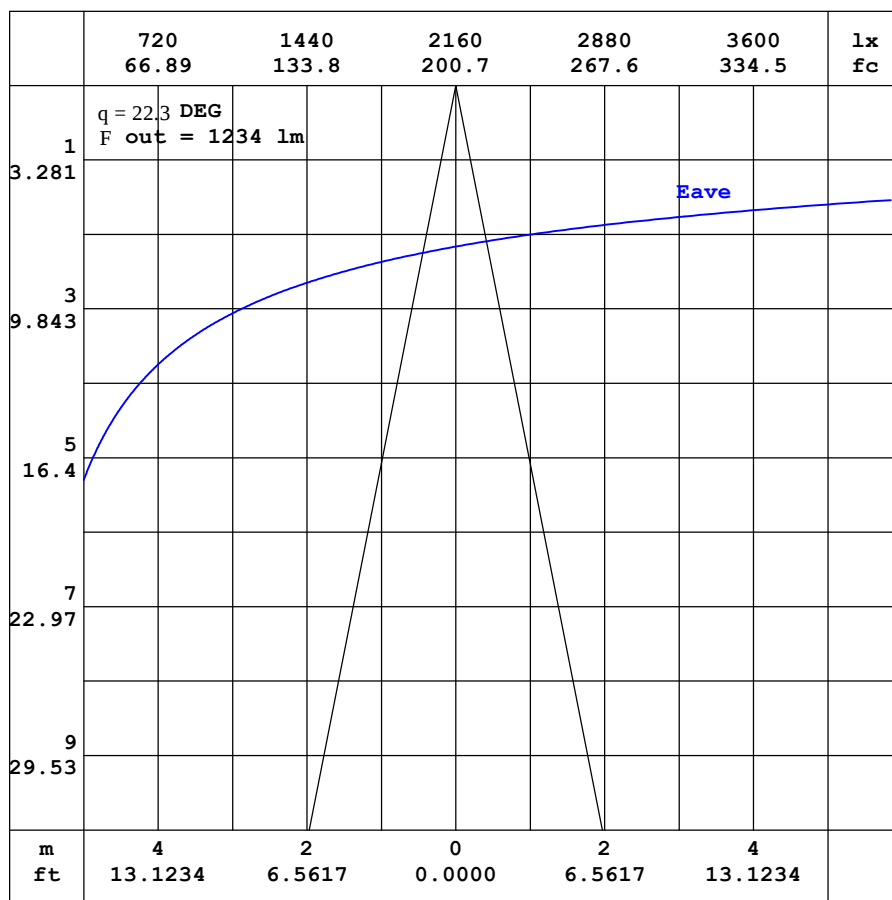

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-21

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Aurora Max-618mm-RGBW GREEN-23D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:23 DEG	DIM.:618mm	SERIAL No.:IES001748
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: ×10cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	1.01	0.89	0.81	0.77	0.77	0.83	0.99	1.27	1.63	1.98	2.24	2.33	2.28	2.16	2.03	1.91	1.77	1.68	1.80
-170	1.01	0.88	0.80	0.74	0.73	0.75	0.84	1.02	1.24	1.46	1.62	1.70	1.72	1.71	1.70	1.71	1.78	1.85	1.86
-160	1.01	0.88	0.79	0.73	0.70	0.68	0.70	0.75	0.83	0.91	0.96	0.98	1.02	1.25	1.45	1.63	1.77	1.84	1.87
-150	1.01	0.87	0.78	0.72	0.67	0.63	0.59	0.55	0.52	0.46	0.41	0.54	0.69	0.86	1.01	1.16	1.26	1.33	1.35
-140	1.01	0.87	0.78	0.71	0.66	0.61	0.54	0.46	0.36	0.30	0.31	0.34	0.40	0.48	0.55	0.63	0.69	0.72	0.73
-130	1.01	0.87	0.78	0.71	0.65	0.60	0.54	0.46	0.40	0.36	0.32	0.30	0.30	0.29	0.31	0.32	0.34	0.35	0.35
-120	1.01	0.88	0.78	0.71	0.65	0.60	0.55	0.51	0.49	0.46	0.44	0.41	0.38	0.36	0.35	0.34	0.33	0.33	0.33
-110	1.01	0.89	0.79	0.71	0.64	0.59	0.55	0.53	0.54	0.54	0.53	0.53	0.52	0.51	0.51	0.50	0.50	0.50	0.50
-100	1.01	0.90	0.80	0.71	0.63	0.56	0.50	0.51	0.52	0.52	0.53	0.53	0.54	0.54	0.55	0.55	0.55	0.56	0.56
-90	1.01	0.91	0.81	0.72	0.62	0.52	0.43	0.43	0.43	0.43	0.43	0.43	0.44	0.44	0.44	0.44	0.44	0.44	0.44
-80	1.01	0.93	0.84	0.77	0.70	0.63	0.54	0.54	0.55	0.56	0.56	0.57	0.57	0.58	0.59	0.59	0.59	0.59	0.59
-70	1.01	0.95	0.91	0.93	0.88	0.80	0.72	0.73	0.80	0.87	0.95	1.02	1.08	1.14	1.20	1.25	1.27	1.29	1.28
-60	1.01	0.98	1.07	1.08	1.08	1.08	1.09	1.14	1.33	1.52	1.71	1.89	2.05	2.20	2.34	2.46	2.54	2.58	2.59
-50	1.01	1.01	1.17	1.26	1.36	1.49	1.63	1.76	2.00	2.33	2.67	3.00	3.33	3.64	3.95	4.22	4.44	4.58	4.62
-40	1.01	1.06	1.29	1.47	1.69	1.98	2.29	2.59	2.85	3.25	3.81	4.45	5.16	5.95	6.79	7.63	8.36	8.88	9.08
-30	1.01	1.15	1.41	1.68	2.05	2.51	3.02	3.55	4.08	4.61	5.24	6.51	8.19	10.5	13.6	17.6	22.0	26.2	28.0
-20	1.01	1.22	1.52	1.89	2.40	3.03	3.77	4.60	5.55	6.68	8.14	10.2	13.6	21.8	38.8	69.6	115	158	179
-10	1.01	1.26	1.61	2.07	2.70	3.50	4.47	5.63	7.08	9.01	11.8	16.2	25.2	48.9	114	259	482	711	820
0	1.01	1.29	1.68	2.20	2.93	3.85	5.01	6.45	8.32	10.9	14.9	21.0	33.4	64.7	153	358	711	1117	1365
10	1.01	1.28	1.67	2.17	2.87	3.77	4.89	6.28	8.06	10.5	14.1	19.5	29.2	50.8	108	232	443	676	750
20	1.01	1.26	1.63	2.09	2.72	3.54	4.54	5.76	7.26	9.19	11.8	15.6	20.9	29.2	44.0	71.2	111	145	155
30	1.01	1.21	1.57	1.96	2.50	3.18	4.01	5.00	6.15	7.53	9.21	11.3	14.0	17.2	20.9	25.3	29.7	32.5	33.2
40	1.01	1.14	1.48	1.80	2.22	2.74	3.37	4.11	4.94	5.86	6.88	8.01	9.26	10.6	12.0	13.3	14.3	15.0	15.2
50	1.01	1.10	1.39	1.64	1.93	2.29	2.72	3.21	3.75	4.33	4.95	5.57	6.19	6.80	7.33	7.76	8.10	8.29	8.32
60	1.01	1.08	1.29	1.47	1.66	1.87	2.12	2.41	2.71	3.03	3.36	3.69	4.01	4.30	4.53	4.72	4.85	4.93	4.93
70	1.01	1.05	1.13	1.31	1.42	1.53	1.65	1.77	1.91	2.05	2.19	2.32	2.45	2.56	2.65	2.72	2.76	2.79	2.78
80	1.01	1.03	1.06	1.09	1.16	1.24	1.31	1.36	1.41	1.45	1.49	1.53	1.56	1.59	1.61	1.62	1.63	1.63	1.63
90	1.01	1.01	1.01	1.01	1.02	1.02	1.02	1.02	1.03	1.03	1.03	1.03	1.04	1.04	1.04	1.04	1.04	1.04	1.04
100	1.01	0.99	0.97	0.95	0.93	0.92	0.90	0.89	0.88	0.87	0.86	0.85	0.84	0.84	0.83	0.83	0.83	0.82	0.82
110	1.01	0.97	0.93	0.90	0.87	0.84	0.82	0.80	0.79	0.78	0.77	0.76	0.76	0.76	0.76	0.75	0.75	0.75	0.75
120	1.01	0.95	0.90	0.85	0.82	0.79	0.77	0.76	0.76	0.76	0.77	0.78	0.80	0.82	0.85	0.87	0.88	0.89	0.90
130	1.01	0.93	0.87	0.82	0.79	0.76	0.76	0.77	0.80	0.85	0.92	1.01	1.11	1.20	1.30	1.39	1.45	1.49	1.50
140	1.01	0.92	0.85	0.80	0.77	0.76	0.78	0.83	0.94	1.09	1.27	1.47	1.67	1.84	1.99	2.10	2.17	2.22	2.24
150	1.01	0.91	0.83	0.78	0.76	0.77	0.83	0.96	1.16	1.42	1.70	1.96	2.17	2.31	2.42	2.50	2.54	2.57	2.58
160	1.01	0.90	0.82	0.77	0.76	0.79	0.90	1.11	1.40	1.73	2.03	2.26	2.40	2.46	2.49	2.53	2.57	2.60	2.65
170	1.01	0.90	0.81	0.77	0.76	0.82	0.96	1.22	1.56	1.92	2.19	2.35	2.38	2.34	2.27	2.21	2.17	2.17	2.22
180	1.01	0.89	0.81	0.77	0.77	0.83	0.99	1.27	1.63	1.98	2.24	2.33	2.28	2.16	2.03	1.91	1.77	1.68	1.81

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-09-21

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Aurora Max-618mm-RGBW GREEN-23D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:23 DEG	DIM.:618mm	SERIAL No.:IES001748
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: ×10cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	1.63	1.65	1.63	1.54	1.37	1.16	0.90	0.66	0.46	0.35	0.32	0.37	0.44	0.51	0.54	0.52	0.46	0.37	
-170	1.80	1.77	1.69	1.56	1.37	1.12	0.86	0.62	0.44	0.34	0.32	0.37	0.45	0.51	0.54	0.52	0.46	0.37	
-160	1.82	1.73	1.58	1.39	1.16	0.92	0.70	0.51	0.38	0.32	0.33	0.39	0.46	0.52	0.54	0.52	0.46	0.37	
-150	1.32	1.24	1.13	0.97	0.80	0.63	0.49	0.38	0.33	0.32	0.36	0.42	0.49	0.53	0.54	0.51	0.45	0.37	
-140	0.72	0.68	0.61	0.54	0.45	0.38	0.33	0.31	0.32	0.36	0.41	0.47	0.52	0.54	0.53	0.50	0.44	0.37	
-130	0.35	0.34	0.32	0.31	0.30	0.31	0.32	0.35	0.39	0.44	0.48	0.51	0.53	0.54	0.52	0.48	0.43	0.37	
-120	0.33	0.34	0.35	0.36	0.38	0.40	0.43	0.46	0.49	0.51	0.53	0.53	0.53	0.52	0.50	0.46	0.42	0.37	
-110	0.50	0.50	0.50	0.51	0.52	0.52	0.53	0.54	0.54	0.54	0.54	0.53	0.51	0.49	0.47	0.44	0.40	0.37	
-100	0.56	0.55	0.55	0.54	0.54	0.53	0.52	0.52	0.51	0.50	0.48	0.47	0.46	0.44	0.42	0.41	0.39	0.37	
-90	0.43	0.43	0.42	0.42	0.41	0.41	0.40	0.40	0.39	0.39	0.38	0.38	0.38	0.38	0.37	0.37	0.37	0.37	
-80	0.58	0.56	0.54	0.52	0.50	0.48	0.46	0.43	0.41	0.38	0.36	0.34	0.34	0.34	0.33	0.34	0.35	0.37	
-70	1.27	1.25	1.21	1.15	1.07	1.00	0.92	0.84	0.75	0.66	0.58	0.50	0.42	0.36	0.32	0.32	0.34	0.37	
-60	2.57	2.52	2.43	2.31	2.16	1.99	1.82	1.62	1.42	1.22	1.02	0.81	0.64	0.50	0.38	0.31	0.32	0.37	
-50	4.58	4.45	4.23	3.96	3.64	3.32	2.97	2.62	2.26	1.91	1.57	1.24	0.93	0.67	0.48	0.34	0.31	0.37	
-40	8.91	8.42	7.70	6.85	6.05	5.26	4.53	3.86	3.24	2.67	2.15	1.67	1.25	0.88	0.60	0.38	0.31	0.37	
-30	26.5	22.5	18.0	14.2	10.9	8.59	6.81	5.45	4.35	3.44	2.71	2.08	1.55	1.08	0.70	0.43	0.31	0.37	
-20	161	119	74.9	43.2	24.7	15.0	10.1	7.32	5.49	4.18	3.19	2.42	1.78	1.24	0.78	0.47	0.31	0.37	
-10	723	521	303	139	58.1	26.2	14.2	9.15	6.45	4.73	3.52	2.64	1.94	1.34	0.84	0.50	0.31	0.37	
0	1279	917	507	222	84.8	33.8	16.6	10.0	6.86	4.94	3.64	2.71	1.99	1.38	0.86	0.51	0.30	0.37	
10	654	444	240	117	54.7	28.5	17.2	11.3	7.88	5.68	4.15	3.06	2.20	1.51	0.94	0.56	0.33	0.37	
20	139	103	67.3	43.2	29.3	21.3	15.2	10.8	7.90	5.83	4.31	3.18	2.28	1.56	0.98	0.59	0.35	0.37	
30	32.0	28.8	24.4	20.6	17.1	14.1	11.4	9.27	7.17	5.46	4.13	3.07	2.22	1.52	0.99	0.59	0.38	0.37	
40	14.9	14.2	13.0	11.8	10.5	9.17	7.95	6.82	5.78	4.73	3.65	2.76	2.02	1.40	0.95	0.59	0.40	0.37	
50	8.25	8.02	7.66	7.20	6.66	6.07	5.47	4.85	4.24	3.65	3.01	2.32	1.73	1.26	0.87	0.57	0.42	0.37	
60	4.90	4.81	4.66	4.45	4.20	3.91	3.59	3.26	2.92	2.60	2.29	1.86	1.45	1.10	0.79	0.56	0.43	0.37	
70	2.77	2.73	2.67	2.58	2.47	2.35	2.22	2.08	1.94	1.80	1.66	1.47	1.19	0.94	0.73	0.57	0.45	0.37	
80	1.62	1.60	1.58	1.56	1.53	1.49	1.45	1.41	1.36	1.30	1.25	1.19	1.02	0.86	0.71	0.58	0.47	0.37	
90	1.04	1.04	1.04	1.04	1.04	1.04	1.04	1.04	1.04	1.05	1.05	1.05	0.94	0.82	0.71	0.59	0.48	0.37	
100	0.83	0.83	0.83	0.83	0.84	0.84	0.86	0.87	0.88	0.90	0.91	0.93	0.86	0.78	0.70	0.60	0.49	0.37	
110	0.75	0.75	0.75	0.75	0.75	0.75	0.76	0.77	0.78	0.80	0.81	0.82	0.79	0.74	0.68	0.60	0.50	0.37	
120	0.89	0.88	0.86	0.84	0.81	0.79	0.77	0.76	0.76	0.76	0.76	0.75	0.73	0.71	0.66	0.60	0.50	0.37	
130	1.48	1.44	1.36	1.27	1.17	1.06	0.96	0.88	0.82	0.77	0.74	0.71	0.69	0.67	0.64	0.59	0.50	0.37	
140	2.22	2.16	2.08	1.96	1.79	1.60	1.38	1.18	1.01	0.85	0.73	0.67	0.65	0.64	0.62	0.58	0.50	0.37	
150	2.57	2.55	2.50	2.42	2.29	2.11	1.87	1.58	1.19	0.88	0.70	0.63	0.61	0.61	0.60	0.57	0.49	0.37	
160	2.63	2.63	2.60	2.56	2.50	2.39	2.00	1.55	1.14	0.82	0.63	0.56	0.56	0.58	0.58	0.55	0.48	0.37	
170	2.22	2.31	2.40	2.34	2.14	1.87	1.55	1.20	0.88	0.63	0.50	0.47	0.50	0.54	0.56	0.54	0.47	0.37	
180	1.63	1.65	1.63	1.54	1.37	1.16	0.90	0.66	0.46	0.35	0.32	0.37	0.44	0.51	0.54	0.52	0.46	0.37	

H_(h) Range:-90 - 90DEG

H_(h) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-09-21

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: