

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	27915.9 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	16.4V x 16.8H
	At 50% of Imax	8.3V x 8.6H
	At 90% of Imax	3.2V x 3.3H

Beam Flux	Total	1000.9 lumens per klm.
	To 10% of Imax	684.9 lumens per klm.
	To 50% of Imax	357.0 lumens per klm.
	To 90% of Imax	77.0 lumens per klm.

Upward LOR	2.2 %
Downward LOR	97.9 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-23

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Aurora Max-618mm-RGBW 6500K-8D-Rev1	TYPE:RGBW-6500K	WEIGHT:
SPEC.:8 DEG	DIM.:618mm	SERIAL No.:IES001765
MFR.:	SUR.:	Shielding Angle:

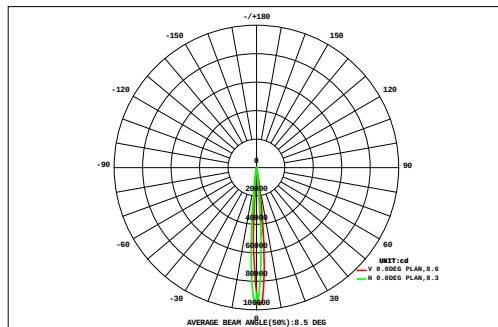

DATA OF LAMP		Eff:57.96lm/W	
MODEL		Imax(cd)	96589
NOMINAL POWER(W)	59.8	AVAILABILITY(%)	68.0
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	2351
NOMINAL FLUX(lm)	3460	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	3460
TEST VOLTAGE(V)	220	q @50%(H,V)	9,8DEG

		AREA FLUX DIAGRAM															UNIT:lm			F t	F a
VERTICAL (DEG)	9	0.61	0.77	0.98	1.19	1.46	1.71	1.96	2.21	2.36	2.36	2.20	1.96	1.70	1.44	1.21	1.03	0.83	0.67	26.6	0.00
	8	0.73	0.95	1.21	1.58	2.04	2.52	2.99	3.37	3.57	3.57	3.36	2.98	2.51	2.06	1.68	1.32	1.06	0.83	38.3	19.8
	7	0.87	1.14	1.55	2.08	2.84	3.67	4.38	4.97	5.29	5.29	4.99	4.39	3.67	2.96	2.38	1.83	1.34	1.03	54.7	39.6
	6	1.01	1.39	1.94	2.86	3.93	5.21	6.46	7.54	8.04	8.11	7.75	6.82	5.39	4.27	3.27	2.52	1.79	1.27	79.6	66.8
	5	1.16	1.64	2.56	3.65	5.05	7.14	9.53	11.0	11.8	11.9	11.1	9.84	8.07	6.04	4.40	3.26	2.41	1.67	112	103
	4	1.33	1.99	3.07	4.23	6.31	9.06	12.2	14.8	16.2	16.3	15.0	13.0	10.7	8.17	5.78	4.26	3.43	2.46	148	143
	3	1.46	2.27	3.37	4.91	7.28	10.7	14.6	18.9	21.1	21.2	19.3	16.8	13.6	10.4	8.39	6.34	4.71	3.33	189	185
	2	1.55	2.38	3.55	5.37	8.16	11.8	16.1	21.3	25.2	25.4	23.5	20.2	17.9	15.0	11.8	8.68	6.13	4.22	228	224
	1	1.56	2.33	3.55	5.41	8.42	12.1	16.4	21.6	26.8	28.1	27.3	25.9	23.2	19.3	15.0	10.9	7.49	5.01	260	256
	0	1.67	2.51	3.97	6.09	9.40	13.5	18.4	24.3	28.8	28.9	28.9	27.6	24.7	20.4	15.8	11.5	7.82	5.18	279	275
	-1	1.88	2.89	4.66	7.29	10.9	15.8	21.6	25.2	27.3	27.5	26.8	25.1	22.1	18.2	14.1	10.4	7.05	4.70	273	269
-2	1.95	3.02	4.78	7.74	11.3	15.1	18.9	22.1	23.8	24.0	22.7	21.2	18.6	15.2	12.0	8.81	6.00	4.05	241	239	
-3	1.91	2.91	4.54	7.00	9.60	12.3	15.4	17.8	19.2	19.3	18.2	16.6	14.5	12.0	9.67	6.96	4.87	3.34	196	191	
-4	1.74	2.59	3.74	5.25	7.36	9.49	11.6	13.4	14.3	14.4	13.7	12.1	10.6	9.00	7.11	5.21	3.78	2.64	148	141	
-5	1.46	2.06	2.91	3.97	5.21	6.73	8.29	9.62	10.3	10.4	9.83	8.60	7.28	6.21	4.93	3.82	2.81	2.02	107	95.3	
-6	1.19	1.57	2.18	2.99	3.82	4.61	5.53	6.45	7.02	7.07	6.59	5.74	4.83	4.12	3.47	2.70	2.03	1.54	73.4	62.2	
-7	0.98	1.21	1.55	2.07	2.76	3.32	3.77	4.13	4.35	4.37	4.19	3.79	3.32	2.83	2.31	1.85	1.47	1.20	49.5	31.2	
-8	0.77	0.95	1.16	1.43	1.74	2.17	2.52	2.73	2.80	2.80	2.74	2.54	2.22	1.80	1.54	1.31	1.10	0.93	33.3	0.00	
-9	-9	-8	-7	-6	-5	-4	-3	-2	HORIZONTAL (DEG)			2	3	4	5	6	7	8	9		
F t	23.8	34.6	51.3	75.1	107	147	191	231	258	261	248	225	195	159	125	92.6	66.1	46.1	2538	---	
F a	0.00	3.02	35.2	63.9	96.7	141	186	227	253	256	243	221	188	151	116	80.0	51.3	29.8	---	2342	

one-half-peak spread: U:4.0,D:4.4 , L:4.2,R:4.4


NEMA Beam Type: Type 1

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature:25.3DEG
 Operators:Fan
 Test Date:2023-09-23

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:Aurora Max-618mm-RGBW 6500K-8D-Rev1	TYPE:RGBW-6500K	WEIGHT:
SPEC.:8 DEG	DIM.:618mm	SERIAL No.:IES001765
MFR.:	SUR.:	Shielding Angle:

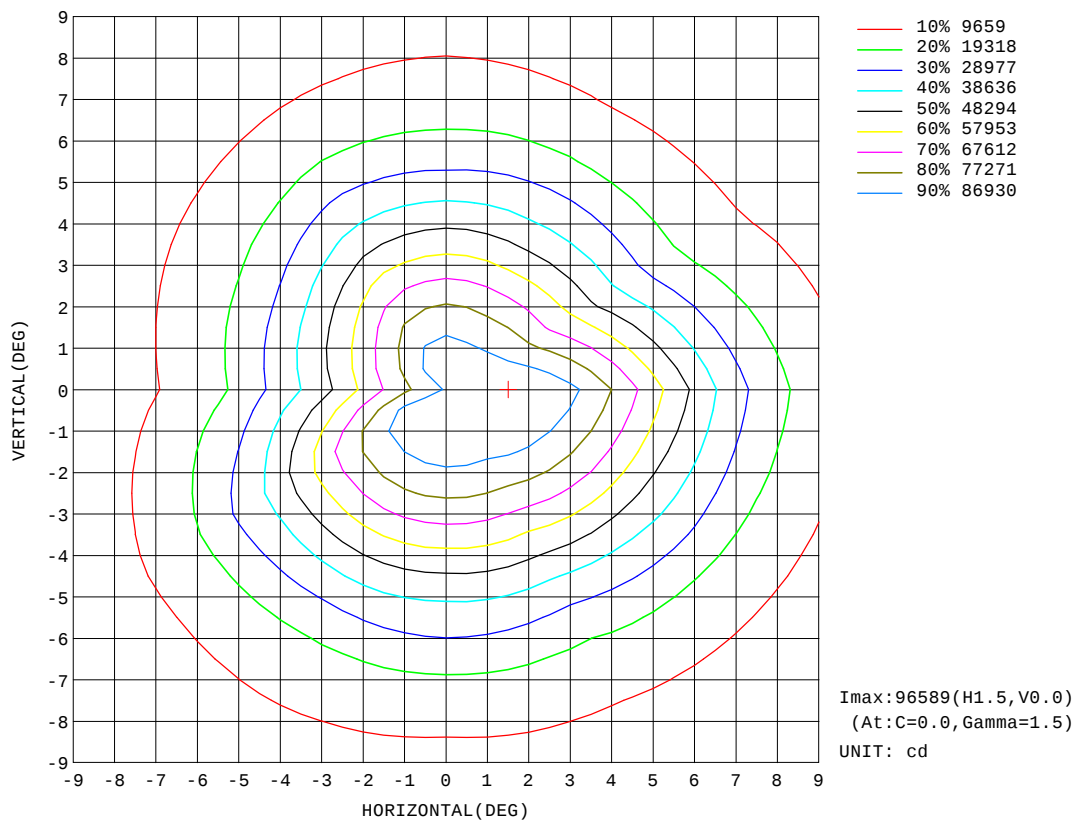


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-23

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Aurora Max-618mm-RGBW 6500K-8D-Rev1	TYPE:RGBW-6500K	WEIGHT:
SPEC.:8 DEG	DIM.:618mm	SERIAL No.:IES001765
MFR.:	SUR.:	Shielding Angle:

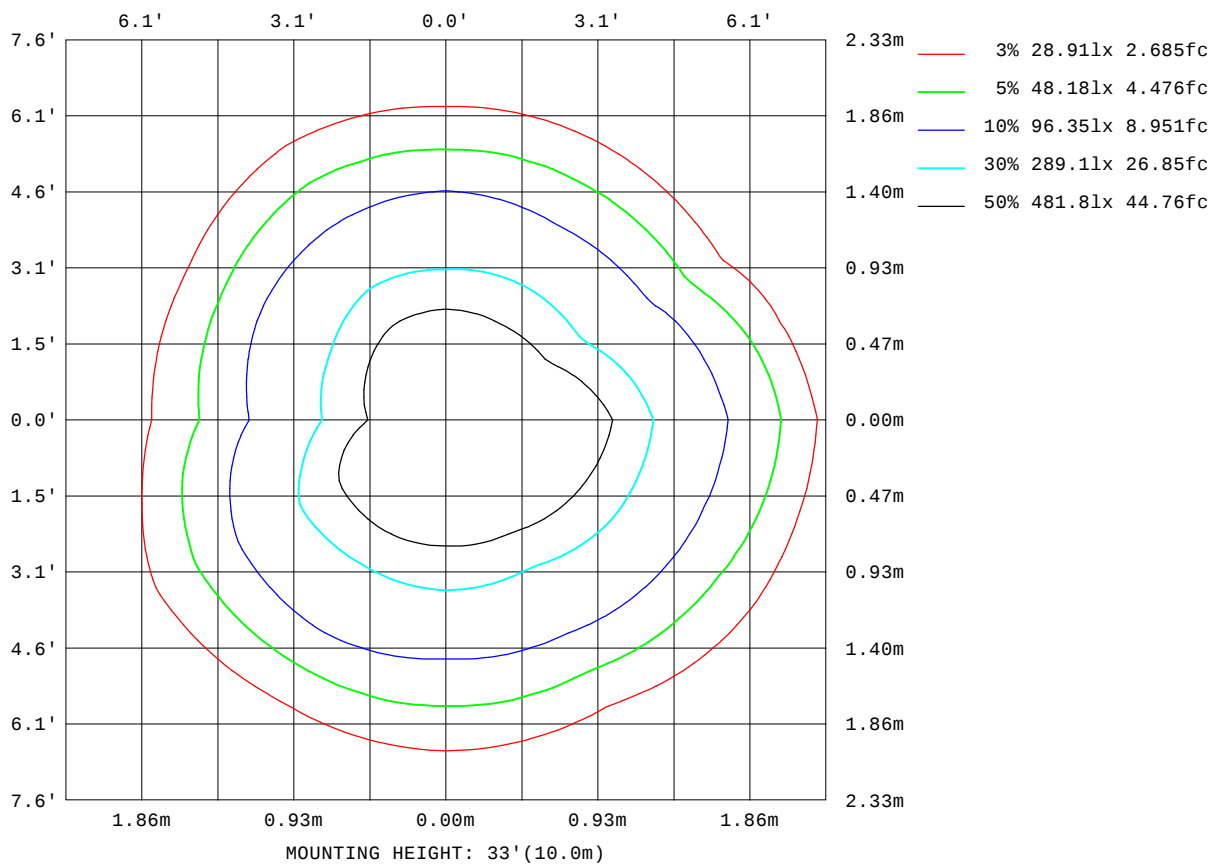

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-23

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

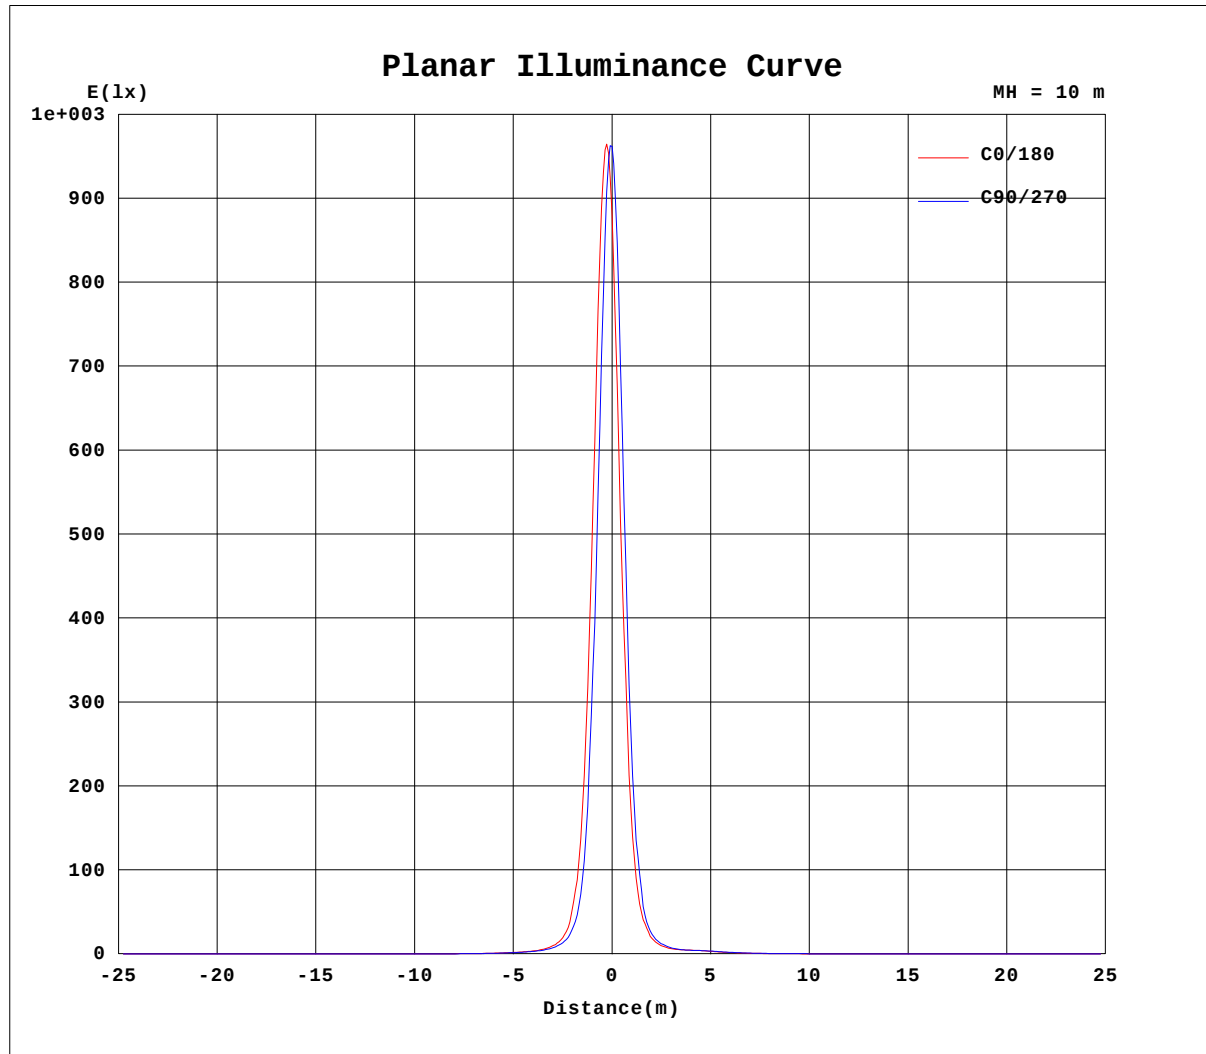


H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-09-23

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Aurora Max-618mm-RGBW 6500K-8D-Rev1	TYPE:RGBW-6500K	WEIGHT:
SPEC.:8 DEG	DIM.:618mm	SERIAL No.:IES001765
MFR.:	SUR.:	Shielding Angle:

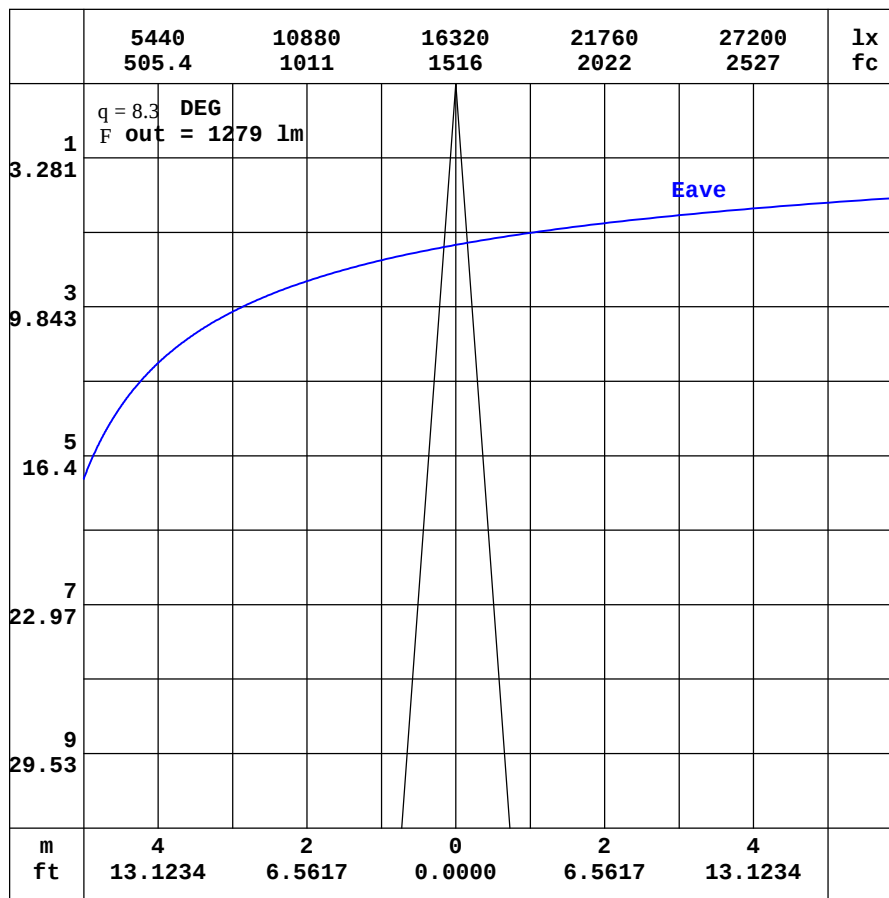

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-09-23

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Aurora Max-618mm-RGBW 6500K-8D-Rev1	TYPE:RGBW-6500K	WEIGHT:
SPEC.:8 DEG	DIM.:618mm	SERIAL No.:IES001765
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: ×10cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	1.08	0.80	0.77	0.80	0.80	0.82	0.92	1.32	2.09	2.73	2.96	2.93	2.58	2.14	1.79	1.55	1.27	1.09	1.24
-170	1.08	0.80	0.76	0.80	0.79	0.76	0.78	1.01	1.50	1.95	2.12	2.16	2.11	2.12	2.28	2.48	2.55	2.72	2.71
-160	1.08	0.80	0.76	0.79	0.78	0.73	0.67	0.69	0.88	1.10	1.20	1.22	1.29	1.62	1.92	2.18	2.39	2.49	2.52
-150	1.08	0.81	0.75	0.78	0.77	0.72	0.62	0.51	0.44	0.41	0.36	0.56	0.79	1.03	1.25	1.43	1.56	1.64	1.65
-140	1.08	0.83	0.75	0.77	0.77	0.74	0.65	0.50	0.33	0.22	0.21	0.25	0.34	0.46	0.58	0.68	0.76	0.81	0.81
-130	1.08	0.85	0.75	0.75	0.76	0.76	0.72	0.62	0.50	0.39	0.29	0.23	0.21	0.20	0.20	0.22	0.23	0.24	0.24
-120	1.08	0.88	0.77	0.74	0.75	0.75	0.74	0.73	0.70	0.66	0.59	0.52	0.45	0.39	0.35	0.32	0.30	0.29	0.28
-110	1.08	0.92	0.81	0.75	0.73	0.73	0.73	0.74	0.74	0.74	0.74	0.74	0.74	0.74	0.73	0.72	0.70	0.72	0.72
-100	1.08	0.96	0.86	0.80	0.75	0.72	0.71	0.72	0.72	0.72	0.73	0.73	0.73	0.73	0.73	0.73	0.73	0.73	0.73
-90	1.08	1.00	0.93	0.85	0.78	0.70	0.63	0.63	0.64	0.64	0.64	0.65	0.65	0.64	0.64	0.63	0.63	0.62	0.62
-80	1.08	1.05	0.99	0.91	0.81	0.68	0.52	0.49	0.47	0.45	0.43	0.41	0.40	0.39	0.38	0.37	0.37	0.36	0.35
-70	1.08	1.10	1.06	1.00	0.87	0.71	0.51	0.46	0.49	0.53	0.59	0.64	0.70	0.75	0.81	0.86	0.89	0.92	0.93
-60	1.08	1.14	1.16	1.10	1.00	0.87	0.75	0.70	0.84	0.99	1.14	1.29	1.44	1.58	1.71	1.81	1.89	1.93	1.95
-50	1.08	1.19	1.26	1.25	1.20	1.17	1.18	1.19	1.34	1.61	1.89	2.17	2.45	2.72	2.96	3.15	3.30	3.39	3.41
-40	1.08	1.24	1.36	1.41	1.46	1.57	1.73	1.91	2.03	2.32	2.77	3.24	3.73	4.27	4.85	5.42	5.92	6.28	6.41
-30	1.08	1.30	1.48	1.60	1.76	2.03	2.40	2.82	3.20	3.47	3.71	4.55	5.69	7.24	9.24	11.7	14.2	16.1	16.9
-20	1.08	1.35	1.59	1.78	2.06	2.52	3.15	3.88	4.59	5.33	6.17	7.29	9.14	13.7	20.4	28.3	36.8	45.7	50.3
-10	1.08	1.39	1.69	1.96	2.35	2.98	3.88	4.94	6.09	7.55	9.53	12.9	19.9	30.2	39.5	66.8	143	320	490
0	1.08	1.43	1.78	2.11	2.58	3.36	4.47	5.83	7.40	9.59	12.6	18.5	32.6	52.8	60.1	93.5	324	2154	8793
10	1.08	1.42	1.77	2.08	2.53	3.27	4.36	5.69	7.22	9.29	12.1	17.1	28.4	46.9	57.8	68.3	127	287	401
20	1.08	1.41	1.73	2.03	2.42	3.05	3.99	5.22	6.56	8.25	10.5	13.5	18.9	29.2	43.6	54.2	57.0	59.2	61.0
30	1.08	1.38	1.68	1.95	2.27	2.74	3.46	4.45	5.60	6.83	8.35	10.2	12.3	15.2	19.6	25.5	31.5	35.7	37.4
40	1.08	1.34	1.60	1.84	2.10	2.42	2.87	3.53	4.39	5.34	6.30	7.35	8.51	9.77	11.0	12.0	12.8	13.4	13.7
50	1.08	1.30	1.52	1.72	1.91	2.13	2.39	2.72	3.18	3.80	4.48	5.13	5.73	6.32	6.84	7.28	7.63	7.85	7.92
60	1.08	1.25	1.44	1.58	1.72	1.86	2.01	2.19	2.36	2.56	2.82	3.15	3.54	3.92	4.23	4.48	4.66	4.77	4.82
70	1.08	1.21	1.33	1.45	1.54	1.61	1.69	1.77	1.87	1.97	2.06	2.14	2.20	2.26	2.31	2.36	2.39	2.42	2.43
80	1.08	1.15	1.23	1.29	1.36	1.42	1.46	1.50	1.52	1.55	1.57	1.59	1.61	1.63	1.65	1.67	1.68	1.69	1.69
90	1.08	1.10	1.12	1.14	1.16	1.18	1.20	1.21	1.23	1.24	1.26	1.27	1.29	1.29	1.30	1.30	1.31	1.31	1.32
100	1.08	1.04	0.99	0.95	0.91	0.88	0.85	0.83	0.81	0.80	0.79	0.79	0.79	0.79	0.79	0.79	0.79	0.80	0.80
110	1.08	0.98	0.89	0.82	0.78	0.77	0.77	0.78	0.80	0.81	0.83	0.84	0.84	0.84	0.84	0.84	0.84	0.85	0.85
120	1.08	0.93	0.81	0.77	0.77	0.79	0.81	0.82	0.82	0.80	0.79	0.78	0.79	0.79	0.81	0.82	0.83	0.84	0.84
130	1.08	0.88	0.77	0.77	0.80	0.81	0.81	0.80	0.79	0.81	0.86	0.92	1.00	1.10	1.24	1.40	1.52	1.59	1.60
140	1.08	0.85	0.76	0.78	0.81	0.81	0.80	0.81	0.87	1.00	1.26	1.67	2.13	2.49	2.72	2.84	2.90	2.93	2.94
150	1.08	0.83	0.76	0.80	0.81	0.80	0.81	0.89	1.11	1.60	2.23	2.69	2.90	3.00	3.05	3.08	3.10	3.11	3.12
160	1.08	0.81	0.76	0.80	0.80	0.80	0.85	1.04	1.56	2.28	2.78	2.97	3.05	3.09	3.13	3.20	3.33	3.39	3.43
170	1.08	0.80	0.77	0.80	0.80	0.81	0.89	1.22	1.94	2.63	2.93	3.00	2.92	2.85	2.81	2.84	2.89	2.99	3.21
180	1.08	0.80	0.77	0.80	0.80	0.82	0.92	1.32	2.09	2.73	2.96	2.93	2.58	2.14	1.79	1.55	1.27	1.09	1.23

H_b Range:-90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-23

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Aurora Max-618mm-RGBW 6500K-8D-Rev1	TYPE:RGBW-6500K	WEIGHT:
SPEC.:8 DEG	DIM.:618mm	SERIAL No.:IES001765
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: ×10cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	1.25	1.47	1.63	1.69	1.61	1.36	0.99	0.64	0.36	0.24	0.28	0.45	0.64	0.75	0.75	0.72	0.64	0.45
-170	2.57	2.39	2.28	2.02	1.68	1.31	0.93	0.59	0.34	0.24	0.29	0.46	0.65	0.75	0.75	0.72	0.64	0.45
-160	2.44	2.27	2.00	1.69	1.36	1.02	0.70	0.43	0.27	0.24	0.33	0.51	0.68	0.76	0.75	0.72	0.63	0.45
-150	1.59	1.47	1.31	1.09	0.85	0.61	0.40	0.27	0.23	0.29	0.43	0.60	0.72	0.76	0.74	0.71	0.62	0.45
-140	0.78	0.71	0.61	0.49	0.37	0.28	0.23	0.24	0.30	0.43	0.57	0.69	0.75	0.75	0.73	0.70	0.60	0.45
-130	0.24	0.22	0.21	0.21	0.22	0.25	0.30	0.39	0.51	0.63	0.71	0.75	0.75	0.74	0.72	0.68	0.58	0.45
-120	0.30	0.32	0.35	0.40	0.46	0.53	0.61	0.68	0.72	0.74	0.75	0.75	0.74	0.72	0.70	0.64	0.56	0.45
-110	0.72	0.73	0.74	0.74	0.75	0.75	0.75	0.75	0.75	0.74	0.73	0.72	0.71	0.69	0.65	0.60	0.53	0.45
-100	0.73	0.73	0.73	0.73	0.73	0.73	0.72	0.72	0.71	0.70	0.68	0.66	0.64	0.61	0.57	0.54	0.50	0.45
-90	0.61	0.60	0.60	0.59	0.58	0.58	0.56	0.55	0.53	0.52	0.50	0.49	0.48	0.48	0.47	0.47	0.46	0.45
-80	0.34	0.33	0.32	0.31	0.29	0.28	0.28	0.28	0.28	0.28	0.29	0.30	0.32	0.34	0.37	0.39	0.42	0.45
-70	0.90	0.86	0.81	0.75	0.68	0.62	0.56	0.50	0.43	0.37	0.32	0.28	0.26	0.26	0.28	0.33	0.39	0.45
-60	1.92	1.86	1.77	1.65	1.51	1.36	1.21	1.06	0.90	0.75	0.60	0.46	0.36	0.28	0.26	0.28	0.36	0.45
-50	3.39	3.30	3.15	2.94	2.69	2.41	2.12	1.82	1.54	1.27	1.01	0.78	0.56	0.39	0.28	0.26	0.33	0.45
-40	6.30	5.96	5.46	4.89	4.33	3.80	3.28	2.76	2.28	1.84	1.47	1.12	0.81	0.53	0.34	0.26	0.31	0.45
-30	16.2	14.4	11.9	9.60	7.62	6.03	4.80	3.86	3.09	2.44	1.91	1.46	1.06	0.69	0.42	0.27	0.30	0.45
-20	46.0	37.2	29.4	21.9	15.0	10.1	7.05	5.11	3.86	2.97	2.29	1.73	1.26	0.82	0.48	0.28	0.29	0.45
-10	330	162	76.5	40.9	25.7	15.8	9.62	6.34	4.48	3.34	2.53	1.92	1.40	0.92	0.53	0.30	0.28	0.45
0	6179	923	164	60.2	31.8	19.2	11.0	6.90	4.74	3.45	2.62	2.00	1.46	0.96	0.55	0.30	0.28	0.45
10	285	134	70.7	54.1	42.7	25.3	14.2	8.88	6.23	4.50	3.30	2.44	1.71	1.11	0.65	0.37	0.32	0.45
20	58.6	55.9	54.2	45.9	31.9	20.7	13.3	9.34	6.85	4.99	3.66	2.66	1.84	1.18	0.72	0.44	0.36	0.45
30	36.0	31.9	26.0	20.2	15.7	12.5	10.4	8.62	6.55	4.90	3.66	2.64	1.81	1.19	0.77	0.49	0.40	0.45
40	13.4	12.7	11.9	10.9	9.82	8.64	7.47	6.36	5.38	4.38	3.28	2.37	1.66	1.15	0.79	0.54	0.44	0.45
50	7.85	7.64	7.28	6.83	6.30	5.72	5.13	4.54	3.93	3.31	2.65	1.99	1.48	1.11	0.80	0.59	0.48	0.45
60	4.76	4.65	4.47	4.24	3.95	3.62	3.25	2.88	2.55	2.27	2.03	1.69	1.36	1.07	0.83	0.64	0.51	0.45
70	2.41	2.37	2.31	2.23	2.15	2.06	1.99	1.92	1.84	1.76	1.68	1.55	1.30	1.08	0.87	0.69	0.55	0.45
80	1.68	1.67	1.65	1.63	1.61	1.60	1.58	1.57	1.56	1.55	1.55	1.52	1.30	1.10	0.90	0.73	0.58	0.45
90	1.32	1.31	1.31	1.31	1.31	1.31	1.31	1.32	1.32	1.33	1.33	1.33	1.19	1.04	0.89	0.75	0.60	0.45
100	0.80	0.79	0.79	0.79	0.79	0.79	0.80	0.81	0.84	0.87	0.92	0.97	0.96	0.92	0.85	0.75	0.62	0.45
110	0.85	0.85	0.85	0.85	0.85	0.84	0.82	0.81	0.78	0.77	0.76	0.77	0.78	0.80	0.80	0.75	0.63	0.45
120	0.84	0.83	0.81	0.80	0.79	0.80	0.80	0.82	0.82	0.82	0.79	0.77	0.75	0.75	0.75	0.74	0.64	0.45
130	1.54	1.43	1.28	1.12	1.00	0.92	0.87	0.83	0.81	0.81	0.81	0.80	0.77	0.75	0.74	0.73	0.65	0.45
140	2.92	2.88	2.79	2.60	2.26	1.78	1.33	1.03	0.89	0.81	0.77	0.78	0.79	0.76	0.74	0.72	0.65	0.45
150	3.11	3.10	3.08	3.04	2.96	2.80	2.39	1.76	1.09	0.78	0.70	0.72	0.77	0.77	0.75	0.72	0.65	0.45
160	3.39	3.31	3.22	3.14	3.09	3.03	2.60	1.95	1.21	0.72	0.59	0.64	0.73	0.77	0.75	0.72	0.65	0.45
170	3.12	3.07	3.14	2.98	2.64	2.28	1.88	1.44	0.95	0.55	0.45	0.54	0.68	0.76	0.75	0.72	0.64	0.45
180	1.25	1.47	1.63	1.69	1.61	1.36	0.99	0.64	0.36	0.24	0.28	0.45	0.64	0.75	0.75	0.72	0.64	0.45

H_(b) Range: -90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature: 25.3DEG

Operators: Fan

Test Date: 2023-09-23

V(B) Range: -180 - 180DEG

V(B) Interval: 0.5DEG

Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity: 65.0%

Test Distance: 8.630m [K=1.0000]

Remarks: