

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	27217.7 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	16.5V x 17.1H
	At 50% of Imax	8.5V x 8.8H
	At 90% of Imax	3.3V x 3.4H

Beam Flux	Total	1001.1 lumens per klm.
	To 10% of Imax	675.7 lumens per klm.
	To 50% of Imax	348.5 lumens per klm.
	To 90% of Imax	71.6 lumens per klm.

Upward LOR	2.2 %
Downward LOR	97.9 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Aurora Max-618mm-RGBW ALL-8D-Rev1	TYPE:RGBW W=6500K	WEIGHT:
SPEC.:8 DEG	DIM.:618mm	SERIAL No.:IES001761
MFR.:	SUR.:	Shielding Angle:

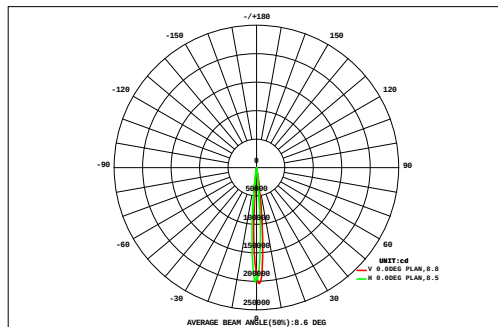

DATA OF LAMP		Eff:38.96lm/W	
MODEL		Imax(cd)	203833
NOMINAL POWER(W)	193.6	AVAILABILITY(%)	67.5
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	5058
NOMINAL FLUX(lm)	7489	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	7489
TEST VOLTAGE(V)	220	q @50%(H,V)	9,9DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		F t	F a
	9	8	7	6	5	4	3	2	1	0	1	2	3	4	5	6	7	8	9	
	1.42	1.76	2.18	2.74	3.35	3.93	4.41	4.78	4.94	4.93	4.76	4.37	3.88	3.31	2.77	2.28	1.84	1.50	59.2	0.00
	1.69	2.16	2.88	3.71	4.70	5.67	6.59	7.34	7.56	7.56	7.33	6.56	5.61	4.66	3.80	3.08	2.41	1.85	85.2	42.9
	2.02	2.80	3.73	4.85	6.54	8.83	10.3	11.3	11.7	11.7	11.3	10.3	8.81	6.76	5.19	4.02	3.17	2.37	126	97.5
	2.50	3.47	4.56	6.52	9.27	12.2	14.3	16.4	17.5	17.5	16.5	14.4	12.5	9.97	7.32	5.28	3.96	3.04	177	154
	2.99	4.02	5.66	8.37	11.8	15.8	20.6	23.9	25.6	25.7	23.9	20.7	17.0	13.4	9.92	6.95	4.89	3.88	245	224
	3.35	4.61	6.75	10.0	14.5	20.3	27.1	32.4	34.9	35.0	32.6	28.3	22.9	17.5	12.7	9.27	6.99	5.15	324	311
	3.61	5.18	7.89	11.7	17.1	24.4	32.6	41.0	44.8	45.0	41.6	36.0	29.1	22.4	17.9	13.4	9.64	6.77	410	401
	3.77	5.54	8.77	12.9	18.9	27.1	36.3	46.4	53.4	53.5	49.6	42.7	37.6	31.3	24.4	18.0	12.5	8.54	491	482
	3.80	5.59	9.10	12.9	19.2	27.6	37.3	47.7	57.2	58.8	57.2	54.1	47.9	39.6	30.4	22.1	15.1	10.1	556	546
	4.02	6.08	9.76	14.0	20.9	30.1	40.7	52.0	60.0	60.9	60.8	57.4	50.7	41.7	31.9	23.1	15.8	10.6	590	580
	4.38	6.91	10.7	15.9	23.7	33.9	45.5	52.7	57.2	57.6	55.9	52.2	45.6	37.3	28.6	20.7	14.3	9.79	573	569
	4.45	7.14	11.0	16.1	23.9	32.1	39.9	46.4	50.2	50.5	47.6	44.2	38.6	31.4	24.1	17.5	12.5	8.61	506	502
	4.26	6.66	10.5	14.4	19.9	26.2	32.6	37.7	40.8	41.1	38.6	34.9	30.3	24.8	19.1	14.0	10.5	7.15	413	409
	3.85	5.70	8.58	11.8	15.4	20.1	24.8	28.6	30.8	31.0	29.2	25.5	22.4	18.4	14.3	11.1	8.42	5.53	315	300
	3.25	4.50	6.18	8.83	11.5	14.5	17.7	20.3	21.8	21.9	20.8	18.3	15.5	13.0	10.5	8.36	6.07	4.31	227	209
	2.65	3.53	4.66	6.12	8.08	10.1	12.2	13.8	14.6	14.7	14.1	12.6	10.5	8.87	7.41	5.83	4.39	3.34	158	127
	2.11	2.78	3.54	4.41	5.52	6.84	8.28	9.53	10.3	10.4	9.68	8.52	7.13	5.87	4.97	4.10	3.29	2.54	110	70.7
	1.67	2.12	2.73	3.34	3.89	4.61	5.33	5.92	6.26	6.29	6.02	5.46	4.75	4.03	3.58	3.02	2.40	1.93	73.3	12.6
-9	-8	-7	-6	-5	-4	-3	-2	HORIZONTAL (DEG)				2	3	4	5	6	7	8	9	
F t	55.8	80.6	119	169	238	324	416	498	550	554	527	477	411	334	259	192	138	97.0	5440	---
F a	0.00	20.7	89.2	143	221	310	407	488	545	549	517	467	396	316	239	165	106	61.5	---	5039

one-half-peak spread: U:4.1,D:4.5 , L:4.6,R:4.3


NEMA Beam Type: Type 1

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-09-22

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:Aurora Max-618mm-RGBW ALL-8D-Rev1	TYPE:RGBW W=6500K	WEIGHT:
SPEC.:8 DEG	DIM.:618mm	SERIAL No.:IES001761
MFR.:	SUR.:	Shielding Angle:

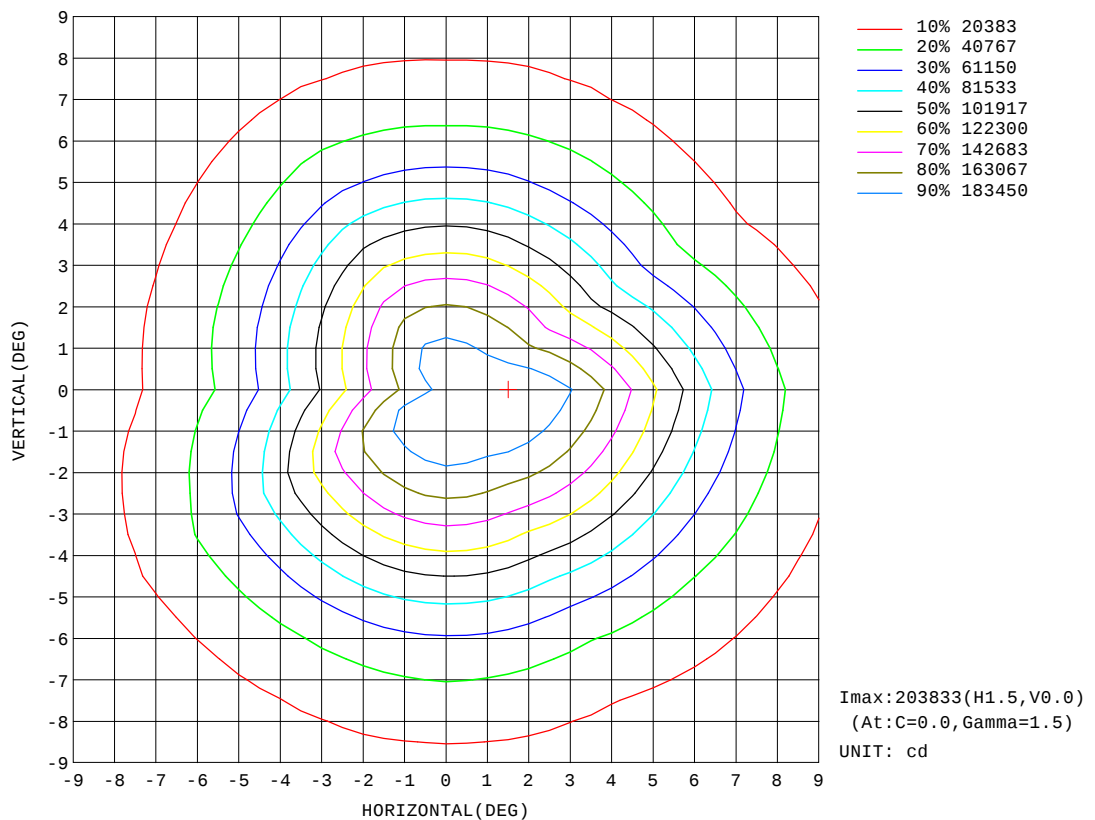


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-09-22

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Aurora Max-618mm-RGBW ALL-8D-Rev1	TYPE:RGBW W=6500K	WEIGHT:
SPEC.:8 DEG	DIM.:618mm	SERIAL No.:IES001761
MFR.:	SUR.:	Shielding Angle:

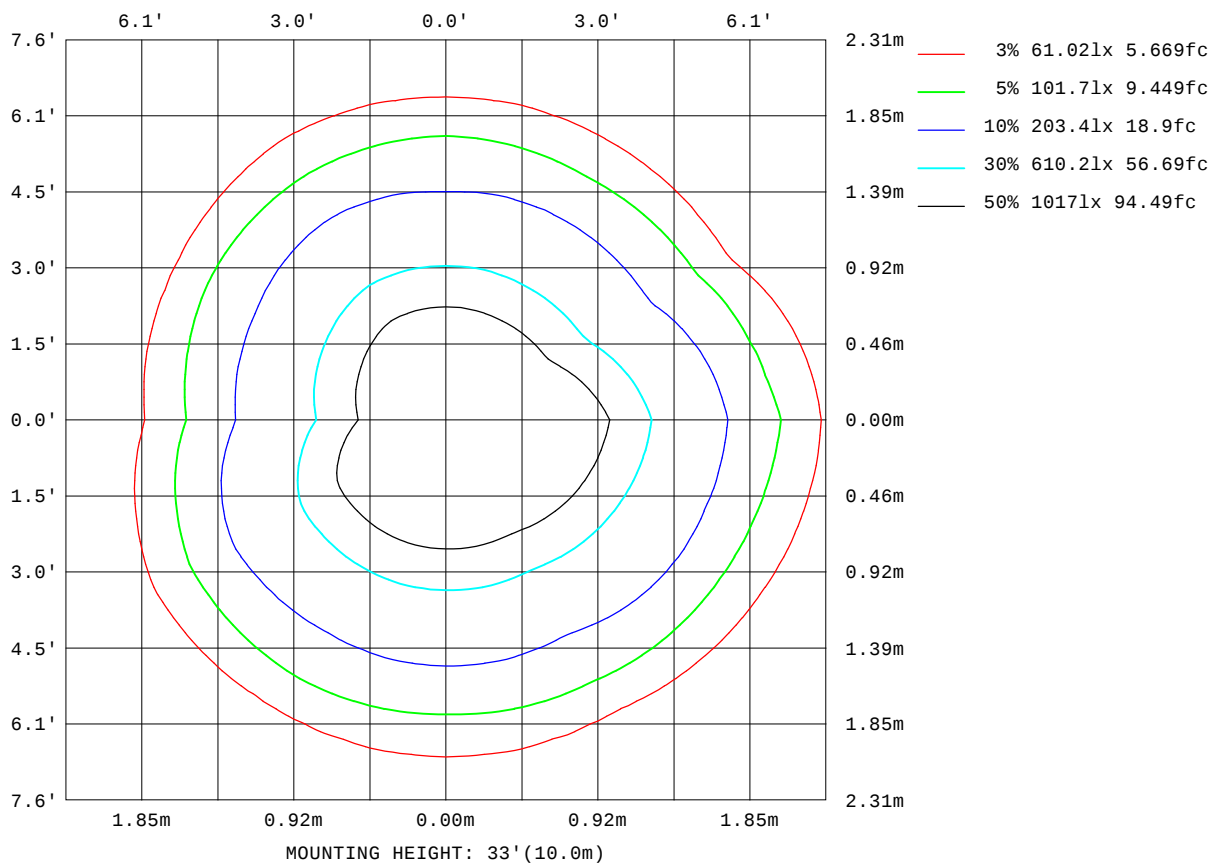

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-09-22

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

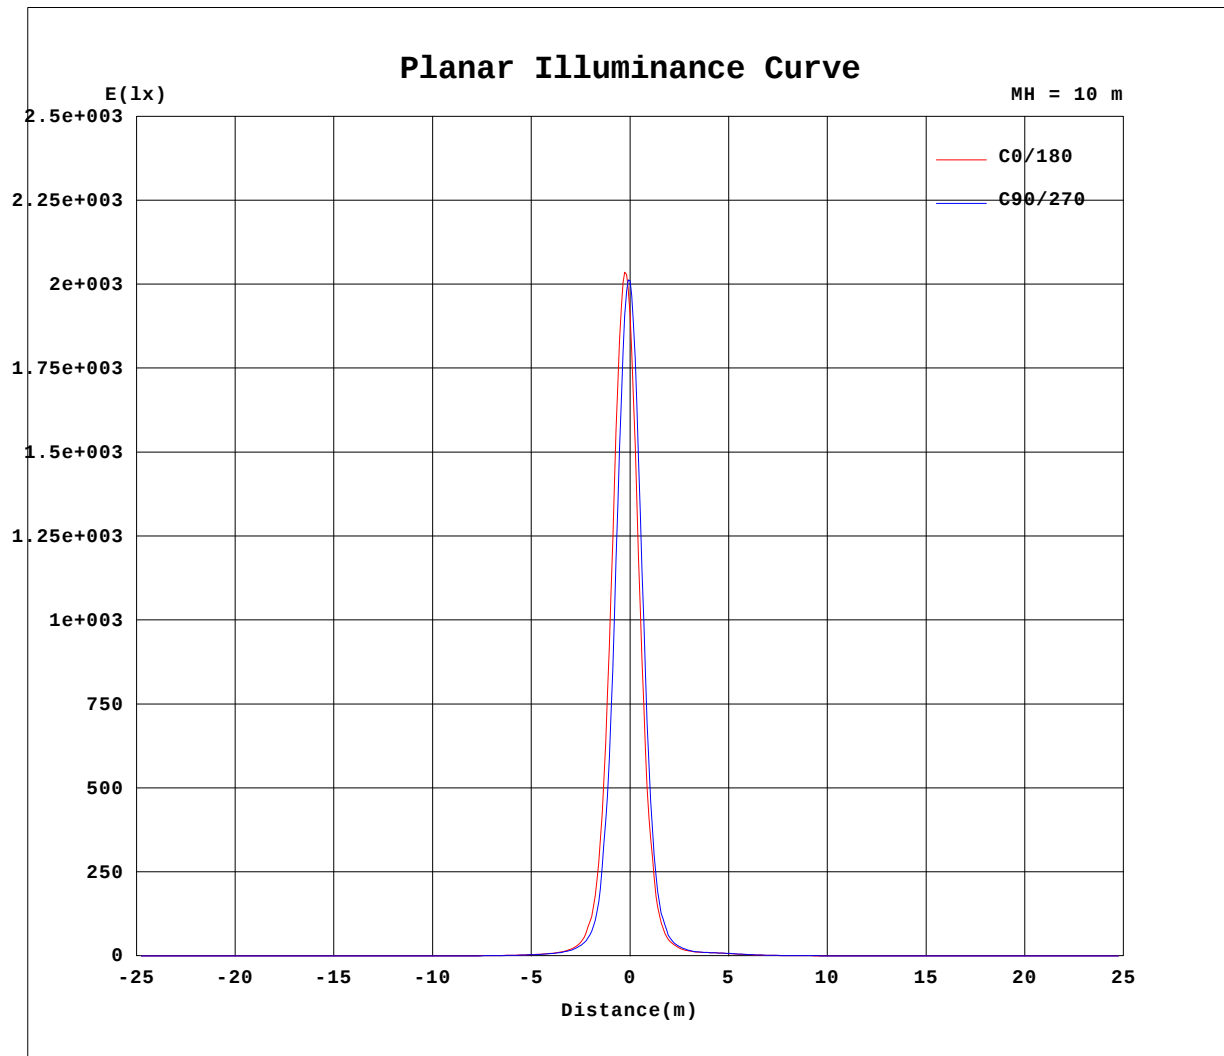


H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-09-22

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Aurora Max-618mm-RGBW ALL-8D-Rev1	TYPE:RGBW W=6500K	WEIGHT:
SPEC.:8 DEG	DIM.:618mm	SERIAL No.:IES001761
MFR.:	SUR.:	Shielding Angle:

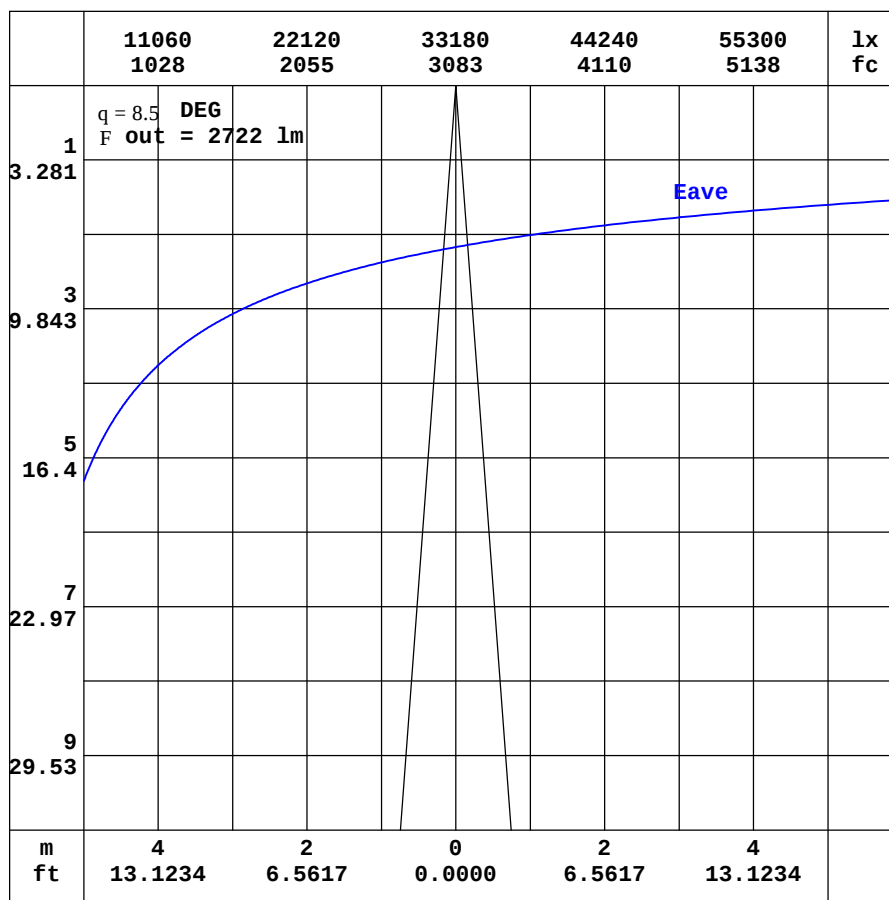

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

$H(b)$ Range:-90 - 90DEG
 $H(b)$ Interval: 0.5DEG
 Test Speed: LOW
 Temperature:25.3DEG
 Operators:Fan
 Test Date:2023-09-22

$V(B)$ Range:-180 - 180DEG
 $V(B)$ Interval: 0.5DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:8.630m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Aurora Max-618mm-RGBW ALL-8D-Rev1	TYPE:RGBW W=6500K	WEIGHT:
SPEC.:8 DEG	DIM.:618mm	SERIAL No.:IES001761
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: ×100cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.25	0.18	0.17	0.18	0.18	0.18	0.20	0.28	0.45	0.59	0.65	0.65	0.58	0.48	0.40	0.35	0.29	0.25	0.27
-170	0.25	0.18	0.17	0.18	0.17	0.17	0.17	0.22	0.32	0.42	0.46	0.47	0.47	0.46	0.50	0.54	0.55	0.59	0.58
-160	0.25	0.18	0.17	0.17	0.17	0.16	0.15	0.15	0.19	0.24	0.26	0.26	0.28	0.35	0.42	0.47	0.52	0.54	0.55
-150	0.25	0.18	0.17	0.17	0.17	0.16	0.13	0.11	0.10	0.09	0.08	0.12	0.17	0.23	0.27	0.31	0.34	0.36	0.36
-140	0.25	0.19	0.17	0.17	0.17	0.16	0.14	0.11	0.07	0.05	0.05	0.06	0.08	0.10	0.13	0.15	0.17	0.18	0.18
-130	0.25	0.19	0.17	0.16	0.17	0.16	0.15	0.13	0.11	0.08	0.06	0.05	0.05	0.04	0.05	0.05	0.05	0.05	0.05
-120	0.25	0.20	0.17	0.16	0.16	0.16	0.16	0.16	0.15	0.14	0.13	0.11	0.10	0.08	0.08	0.07	0.07	0.06	0.06
-110	0.25	0.21	0.18	0.17	0.16	0.16	0.16	0.16	0.16	0.16	0.16	0.16	0.16	0.16	0.16	0.15	0.15	0.15	0.16
-100	0.25	0.22	0.20	0.18	0.17	0.16	0.15	0.15	0.15	0.15	0.16	0.16	0.16	0.16	0.16	0.16	0.16	0.16	0.16
-90	0.25	0.23	0.21	0.19	0.17	0.15	0.13	0.14	0.14	0.14	0.14	0.14	0.14	0.14	0.14	0.14	0.14	0.13	0.13
-80	0.25	0.24	0.23	0.21	0.18	0.15	0.11	0.11	0.10	0.10	0.09	0.09	0.09	0.09	0.09	0.08	0.08	0.08	0.08
-70	0.25	0.25	0.24	0.23	0.20	0.16	0.11	0.10	0.11	0.12	0.13	0.14	0.16	0.17	0.18	0.19	0.20	0.21	0.21
-60	0.25	0.26	0.26	0.25	0.22	0.19	0.17	0.16	0.19	0.22	0.25	0.29	0.32	0.35	0.38	0.40	0.42	0.43	0.44
-50	0.25	0.27	0.29	0.28	0.27	0.26	0.26	0.26	0.30	0.36	0.42	0.48	0.54	0.60	0.66	0.70	0.74	0.76	0.77
-40	0.25	0.29	0.31	0.32	0.32	0.35	0.39	0.42	0.45	0.51	0.61	0.72	0.83	0.95	1.08	1.21	1.33	1.42	1.45
-30	0.25	0.30	0.33	0.36	0.39	0.45	0.53	0.63	0.71	0.77	0.82	1.01	1.26	1.62	2.07	2.64	3.22	3.69	3.90
-20	0.25	0.31	0.36	0.40	0.46	0.56	0.70	0.86	1.02	1.19	1.37	1.62	2.03	3.08	4.59	6.34	8.30	10.4	11.6
-10	0.25	0.32	0.38	0.44	0.52	0.66	0.86	1.10	1.36	1.69	2.14	2.92	4.49	6.80	8.80	14.9	32.5	74.8	112
0	0.25	0.33	0.40	0.47	0.57	0.75	1.00	1.30	1.66	2.15	2.88	4.25	7.39	11.8	13.5	21.7	72.2	507	1908
10	0.25	0.33	0.40	0.46	0.56	0.73	0.97	1.27	1.62	2.08	2.73	3.88	6.41	10.5	12.8	15.5	29.3	64.0	99.1
20	0.25	0.32	0.39	0.45	0.54	0.68	0.89	1.16	1.47	1.85	2.35	3.02	4.23	6.53	9.69	12.0	12.7	13.4	13.8
30	0.25	0.32	0.38	0.43	0.50	0.61	0.77	0.99	1.24	1.53	1.88	2.28	2.76	3.41	4.41	5.72	6.97	7.90	8.25
40	0.25	0.31	0.36	0.41	0.47	0.54	0.64	0.79	0.98	1.19	1.41	1.64	1.90	2.17	2.42	2.67	2.87	2.99	3.04
50	0.25	0.30	0.35	0.39	0.42	0.47	0.53	0.61	0.71	0.85	1.00	1.14	1.27	1.40	1.51	1.62	1.70	1.75	1.77
60	0.25	0.29	0.33	0.36	0.39	0.41	0.45	0.49	0.53	0.57	0.63	0.70	0.79	0.87	0.93	0.99	1.02	1.05	1.06
70	0.25	0.28	0.31	0.33	0.35	0.36	0.38	0.39	0.41	0.44	0.46	0.47	0.49	0.50	0.51	0.52	0.53	0.54	0.54
80	0.25	0.27	0.28	0.30	0.31	0.32	0.33	0.34	0.34	0.35	0.35	0.35	0.36	0.36	0.36	0.37	0.37	0.37	0.37
90	0.25	0.26	0.26	0.26	0.27	0.27	0.27	0.28	0.28	0.28	0.29	0.29	0.29	0.29	0.29	0.30	0.30	0.30	0.30
100	0.25	0.24	0.23	0.22	0.21	0.20	0.19	0.19	0.18	0.18	0.18	0.18	0.18	0.17	0.17	0.17	0.17	0.18	0.18
110	0.25	0.23	0.20	0.19	0.18	0.17	0.17	0.17	0.18	0.18	0.18	0.18	0.18	0.19	0.19	0.19	0.19	0.19	0.19
120	0.25	0.21	0.19	0.17	0.17	0.17	0.18	0.18	0.18	0.18	0.17	0.17	0.17	0.18	0.18	0.18	0.18	0.18	0.18
130	0.25	0.20	0.17	0.17	0.18	0.18	0.18	0.18	0.18	0.18	0.19	0.20	0.22	0.24	0.27	0.31	0.33	0.35	0.35
140	0.25	0.20	0.17	0.17	0.18	0.18	0.18	0.18	0.19	0.22	0.27	0.36	0.46	0.54	0.59	0.62	0.63	0.64	0.64
150	0.25	0.19	0.17	0.18	0.18	0.18	0.18	0.20	0.24	0.35	0.48	0.58	0.63	0.65	0.67	0.67	0.68	0.68	0.68
160	0.25	0.19	0.17	0.18	0.18	0.18	0.19	0.23	0.34	0.49	0.61	0.65	0.67	0.67	0.68	0.69	0.72	0.73	0.74
170	0.25	0.18	0.17	0.18	0.18	0.18	0.20	0.26	0.42	0.57	0.64	0.66	0.64	0.62	0.61	0.62	0.63	0.65	0.69
180	0.25	0.18	0.17	0.18	0.18	0.18	0.20	0.28	0.45	0.59	0.65	0.65	0.58	0.48	0.40	0.35	0.29	0.25	0.27

H_(b) Range: -90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature: 25.3DEG

Operators: Fan

Test Date: 2023-09-22

V(B) Range: -180 - 180DEG

V(B) Interval: 0.5DEG

Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity: 65.0%

Test Distance: 8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Aurora Max-618mm-RGBW ALL-8D-Rev1	TYPE:RGBW W=6500K	WEIGHT:
SPEC.:8 DEG	DIM.:618mm	SERIAL No.:IES001761
MFR.:	SUR.:	Shielding Angle:

Table--2
UNIT: ×100cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	0.27	0.32	0.36	0.37	0.36	0.30	0.22	0.14	0.08	0.05	0.06	0.10	0.14	0.16	0.16	0.16	0.14	0.10
-170	0.55	0.52	0.50	0.45	0.37	0.29	0.21	0.13	0.08	0.05	0.06	0.10	0.14	0.16	0.16	0.16	0.14	0.10
-160	0.53	0.49	0.44	0.37	0.30	0.23	0.16	0.10	0.06	0.05	0.07	0.11	0.15	0.16	0.16	0.16	0.14	0.10
-150	0.35	0.32	0.29	0.24	0.19	0.14	0.09	0.06	0.05	0.06	0.09	0.13	0.16	0.16	0.16	0.15	0.14	0.10
-140	0.17	0.16	0.13	0.11	0.08	0.06	0.05	0.05	0.07	0.09	0.12	0.15	0.16	0.16	0.16	0.15	0.13	0.10
-130	0.05	0.05	0.05	0.05	0.05	0.05	0.07	0.08	0.11	0.13	0.15	0.16	0.16	0.16	0.16	0.15	0.13	0.10
-120	0.07	0.07	0.08	0.09	0.10	0.11	0.13	0.14	0.15	0.16	0.16	0.16	0.16	0.16	0.16	0.15	0.14	0.12
-110	0.16	0.16	0.16	0.16	0.16	0.16	0.16	0.16	0.16	0.16	0.16	0.16	0.16	0.15	0.15	0.14	0.13	0.12
-100	0.16	0.16	0.16	0.16	0.16	0.16	0.16	0.15	0.15	0.15	0.15	0.14	0.14	0.13	0.13	0.12	0.11	0.10
-90	0.13	0.13	0.13	0.13	0.13	0.12	0.12	0.12	0.12	0.11	0.11	0.11	0.11	0.11	0.10	0.10	0.10	0.10
-80	0.08	0.08	0.07	0.07	0.07	0.06	0.06	0.06	0.06	0.06	0.06	0.07	0.07	0.08	0.08	0.09	0.09	0.10
-70	0.20	0.20	0.18	0.17	0.15	0.14	0.13	0.11	0.10	0.08	0.07	0.06	0.06	0.06	0.06	0.07	0.09	0.10
-60	0.43	0.42	0.40	0.37	0.34	0.30	0.27	0.24	0.20	0.17	0.13	0.10	0.08	0.06	0.06	0.06	0.08	0.10
-50	0.76	0.74	0.70	0.65	0.60	0.54	0.47	0.41	0.34	0.28	0.22	0.17	0.12	0.09	0.06	0.06	0.07	0.10
-40	1.42	1.34	1.22	1.09	0.96	0.84	0.73	0.61	0.50	0.41	0.32	0.25	0.18	0.12	0.08	0.06	0.07	0.10
-30	3.71	3.25	2.68	2.15	1.70	1.33	1.06	0.86	0.68	0.54	0.42	0.32	0.23	0.15	0.09	0.06	0.07	0.10
-20	10.5	8.39	6.57	4.90	3.36	2.23	1.56	1.13	0.85	0.66	0.50	0.38	0.27	0.18	0.10	0.06	0.07	0.10
-10	76.7	35.6	16.8	9.06	5.73	3.51	2.12	1.40	0.99	0.73	0.56	0.42	0.30	0.20	0.11	0.06	0.06	0.10
0	1252	188	34.8	13.1	7.01	4.21	2.44	1.53	1.04	0.76	0.58	0.44	0.31	0.21	0.12	0.07	0.06	0.10
10	63.1	30.4	15.7	11.8	9.27	5.51	3.11	1.96	1.37	0.99	0.72	0.53	0.37	0.24	0.14	0.08	0.07	0.10
20	13.2	12.4	11.8	9.98	6.95	4.52	2.91	2.06	1.51	1.10	0.80	0.58	0.40	0.26	0.16	0.10	0.08	0.10
30	7.92	7.03	5.78	4.50	3.47	2.76	2.29	1.89	1.44	1.07	0.80	0.57	0.39	0.26	0.17	0.11	0.09	0.10
40	2.99	2.85	2.63	2.39	2.15	1.90	1.64	1.39	1.17	0.95	0.71	0.51	0.36	0.25	0.17	0.12	0.10	0.10
50	1.75	1.69	1.61	1.50	1.38	1.25	1.12	0.99	0.86	0.72	0.58	0.43	0.32	0.24	0.18	0.13	0.11	0.10
60	1.05	1.02	0.98	0.93	0.87	0.80	0.71	0.63	0.56	0.50	0.44	0.37	0.30	0.23	0.18	0.14	0.12	0.10
70	0.53	0.52	0.51	0.49	0.47	0.45	0.44	0.42	0.40	0.38	0.37	0.34	0.29	0.24	0.19	0.16	0.12	0.10
80	0.37	0.37	0.36	0.36	0.36	0.35	0.35	0.35	0.35	0.34	0.34	0.34	0.29	0.25	0.20	0.16	0.13	0.10
90	0.30	0.30	0.30	0.30	0.30	0.30	0.30	0.30	0.30	0.30	0.30	0.30	0.27	0.23	0.20	0.17	0.14	0.10
100	0.17	0.17	0.17	0.17	0.17	0.17	0.18	0.18	0.19	0.19	0.21	0.22	0.21	0.21	0.19	0.17	0.14	0.10
110	0.19	0.19	0.19	0.19	0.19	0.18	0.18	0.18	0.17	0.17	0.17	0.17	0.17	0.18	0.18	0.17	0.14	0.10
120	0.18	0.18	0.18	0.18	0.17	0.17	0.18	0.18	0.18	0.18	0.17	0.17	0.16	0.16	0.17	0.16	0.14	0.10
130	0.34	0.31	0.28	0.25	0.22	0.20	0.19	0.18	0.18	0.18	0.18	0.17	0.17	0.16	0.16	0.16	0.14	0.10
140	0.63	0.62	0.60	0.56	0.49	0.39	0.29	0.23	0.19	0.18	0.17	0.17	0.17	0.17	0.16	0.16	0.14	0.10
150	0.68	0.67	0.67	0.66	0.64	0.60	0.52	0.38	0.24	0.17	0.15	0.16	0.17	0.17	0.16	0.16	0.14	0.10
160	0.73	0.72	0.69	0.68	0.67	0.65	0.56	0.42	0.26	0.16	0.13	0.14	0.16	0.17	0.16	0.16	0.14	0.10
170	0.67	0.66	0.68	0.64	0.57	0.50	0.41	0.31	0.21	0.12	0.10	0.12	0.15	0.16	0.16	0.16	0.14	0.10
180	0.27	0.32	0.36	0.37	0.36	0.30	0.22	0.14	0.08	0.05	0.06	0.10	0.14	0.16	0.16	0.16	0.14	0.10

H_b Range:-90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks: