

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	26107.1 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	17.0V x 17.5H
	At 50% of Imax	8.7V x 8.9H
	At 90% of Imax	3.4V x 3.5H

Beam Flux	Total	1000.7 lumens per klm.
	To 10% of Imax	685.0 lumens per klm.
	To 50% of Imax	358.6 lumens per klm.
	To 90% of Imax	86.3 lumens per klm.

Upward LOR	2.2 %
Downward LOR	97.9 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-23

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Aurora Max-618mm-RGBW GREEN-8D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:8 DEG	DIM.:618mm	SERIAL No.:IES001763
MFR.:	SUR.:	Shielding Angle:

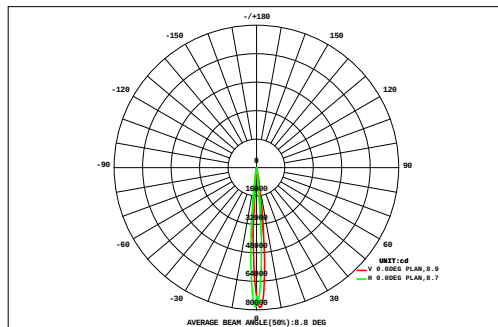

DATA OF LAMP		Eff:52.28lm/W	
MODEL		Imax(cd)	78765
NOMINAL POWER(W)	58	AVAILABILITY(%)	68.4
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	2062
NOMINAL FLUX(lm)	3017	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	3017
TEST VOLTAGE(V)	220	q @50%(H,V)	9,9DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		F t	F a
	0.56	0.71	0.92	1.15	1.36	1.57	1.80	2.01	2.14	2.14	2.01	1.79	1.56	1.34	1.16	0.96	0.75	0.60	24.5	0.00
9	0.67	0.89	1.15	1.46	1.89	2.32	2.73	3.06	3.23	3.22	3.05	2.72	2.30	1.89	1.52	1.23	0.98	0.75	35.1	18.0
8	0.81	1.07	1.43	1.93	2.61	3.37	3.99	4.49	4.73	4.73	4.49	3.98	3.35	2.73	2.17	1.61	1.23	0.94	49.6	38.5
7	0.93	1.27	1.79	2.62	3.59	4.77	5.85	6.77	7.19	7.20	6.81	5.90	4.90	3.88	3.04	2.26	1.56	1.14	71.5	62.5
6	1.07	1.51	2.34	3.33	4.60	6.46	8.57	9.72	10.3	10.3	9.78	8.66	7.03	5.39	4.00	3.04	2.08	1.52	99.7	91.2
5	1.23	1.83	2.79	3.84	5.71	8.13	10.8	12.9	13.9	14.0	13.0	11.4	9.40	7.16	5.17	3.98	3.09	2.15	130	125
4	1.36	2.08	3.06	4.46	6.54	9.40	12.7	16.0	17.6	17.7	16.3	14.3	11.7	9.09	7.35	5.62	4.27	2.91	163	159
3	1.44	2.18	3.22	4.89	7.26	10.3	13.8	17.9	20.9	21.0	19.5	16.9	15.1	12.7	10.1	7.58	5.50	3.74	194	190
2	1.44	2.14	3.23	4.94	7.47	10.6	14.0	18.0	22.0	23.0	22.3	21.3	19.2	16.1	12.8	9.39	6.65	4.44	219	216
1	1.54	2.30	3.56	5.52	8.27	11.7	15.6	20.1	23.5	23.6	23.6	22.6	20.3	17.1	13.4	9.89	6.92	4.60	234	230
0	1.73	2.64	4.12	6.50	9.55	13.5	18.1	20.8	22.4	22.6	22.0	20.7	18.4	15.3	12.0	8.99	6.25	4.19	230	228
-1	1.81	2.76	4.29	6.77	10.0	13.0	16.0	18.5	19.8	20.0	18.9	17.7	15.7	13.0	10.3	7.72	5.34	3.63	205	203
-2	1.75	2.66	4.11	6.02	8.45	10.8	13.2	15.2	16.2	16.4	15.5	14.1	12.4	10.4	8.43	6.18	4.36	3.03	169	167
-3	1.59	2.37	3.40	4.74	6.45	8.38	10.2	11.7	12.4	12.5	11.9	10.5	9.28	7.89	6.29	4.69	3.42	2.41	130	126
-4	1.35	1.88	2.66	3.61	4.72	6.01	7.36	8.52	9.21	9.26	8.68	7.61	6.45	5.53	4.48	3.49	2.56	1.84	95.2	90.1
-5	1.12	1.43	1.99	2.72	3.47	4.19	5.02	5.72	6.10	6.14	5.82	5.16	4.36	3.84	3.21	2.48	1.85	1.40	66.0	58.2
-6	0.89	1.13	1.42	1.89	2.52	3.03	3.45	3.80	4.01	4.03	3.86	3.54	3.14	2.66	2.13	1.68	1.34	1.09	45.6	34.0
-7	0.68	0.87	1.07	1.30	1.59	2.00	2.32	2.53	2.60	2.61	2.56	2.38	2.06	1.65	1.40	1.19	1.00	0.84	30.7	10.3
-8																				
-9																				
	-9	-8	-7	-6	-5	-4	-3	-2	HORIZONTAL (DEG)	2	3	4	5	6	7	8	9			
F t	22.0	31.7	46.5	67.7	96.0	130	165	198	218	220	210	191	167	138	109	82.0	59.2	41.2	2192	---
F a	0.00	8.06	34.4	60.0	91.2	124	161	196	216	218	208	187	161	133	101	73.0	48.4	29.0	---	2048

one-half-peak spread: U:4.2,D:4.6 , L:4.5,R:4.5


NEMA Beam Type: Type 1

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-09-23

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:Aurora Max-618mm-RGBW GREEN-8D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:8 DEG	DIM.:618mm	SERIAL No.:IES001763
MFR.:	SUR.:	Shielding Angle:

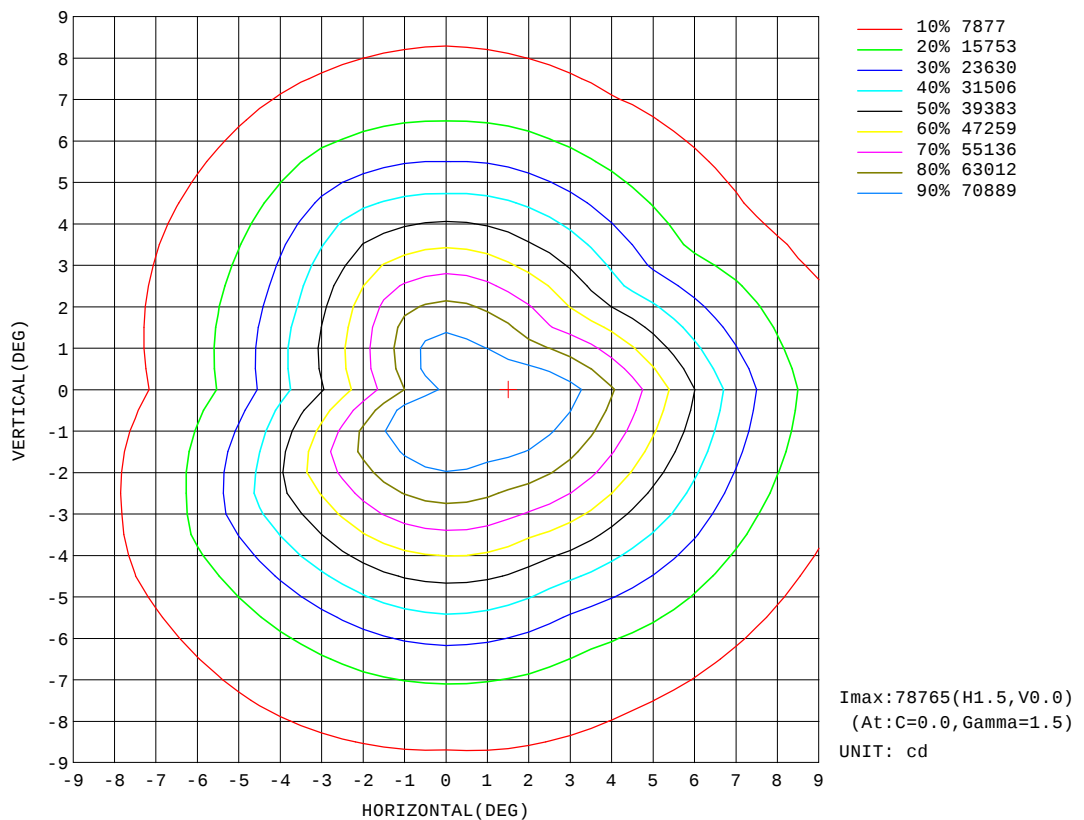


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-09-23

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Aurora Max-618mm-RGBW GREEN-8D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:8 DEG	DIM.:618mm	SERIAL No.:IES001763
MFR.:	SUR.:	Shielding Angle:

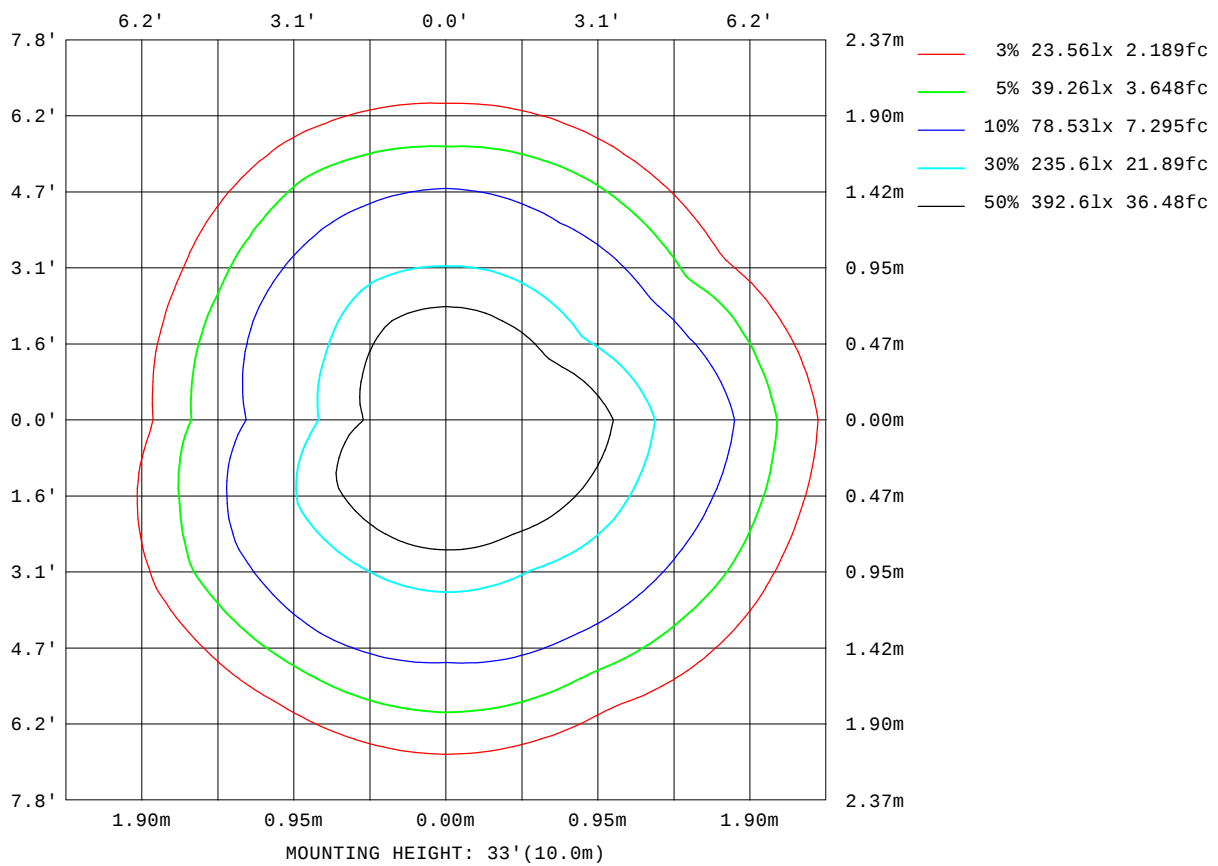

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-23

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

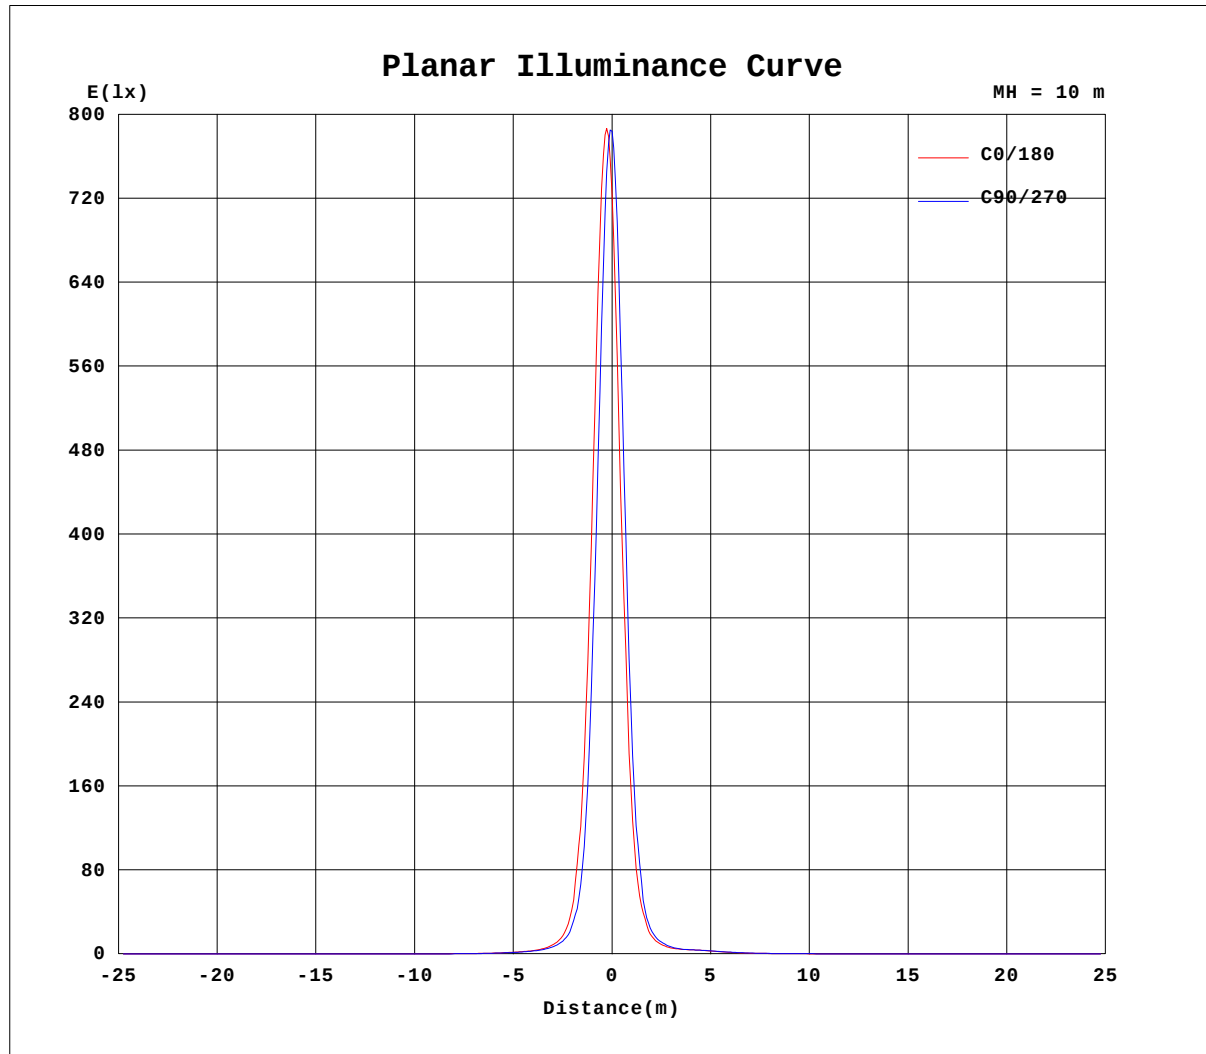


H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-09-23

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Aurora Max-618mm-RGBW GREEN-8D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:8 DEG	DIM.:618mm	SERIAL No.:IES001763
MFR.:	SUR.:	Shielding Angle:

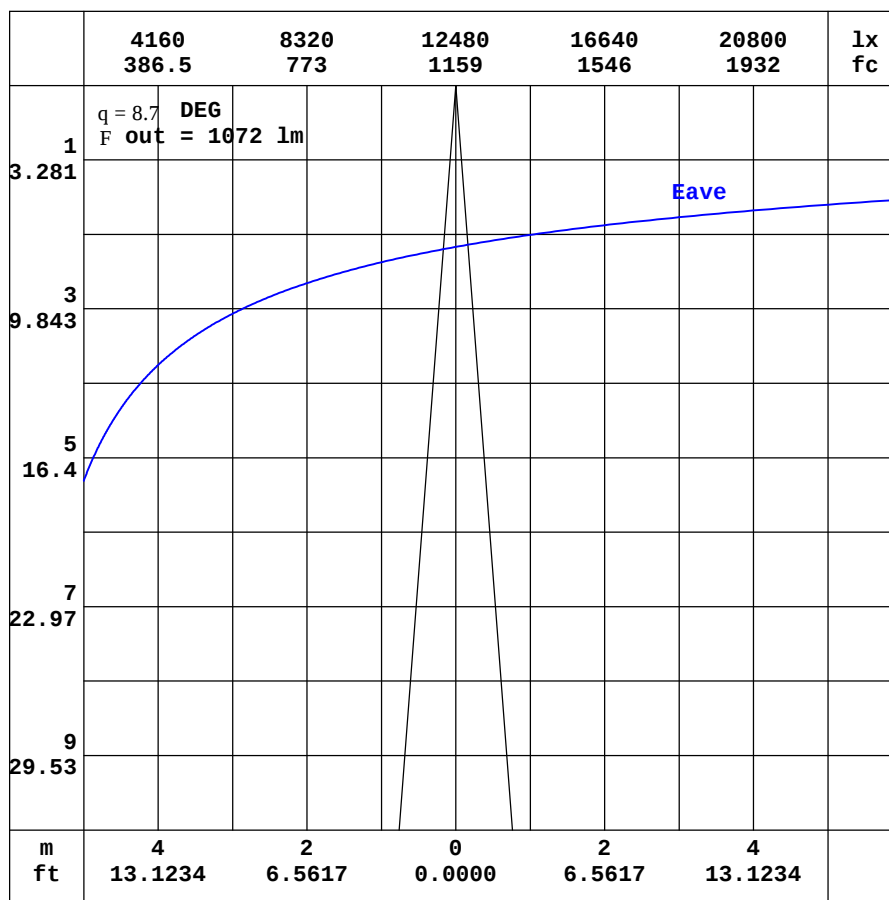

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

$H(b)$ Range:-90 - 90DEG
 $H(b)$ Interval: 0.5DEG
 Test Speed: LOW
 Temperature:25.3DEG
 Operators:Fan
 Test Date:2023-09-23

$V(B)$ Range:-180 - 180DEG
 $V(B)$ Interval: 0.5DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:8.630m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Aurora Max-618mm-RGBW GREEN-8D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:8 DEG	DIM.:618mm	SERIAL No.:IES001763
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: ×10cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.93	0.70	0.67	0.70	0.70	0.71	0.80	1.15	1.81	2.37	2.57	2.55	2.25	1.88	1.58	1.38	1.14	0.98	1.11
-170	0.93	0.70	0.67	0.69	0.68	0.67	0.69	0.88	1.31	1.69	1.84	1.88	1.84	1.84	1.98	2.14	2.20	2.35	2.33
-160	0.93	0.70	0.66	0.69	0.67	0.63	0.58	0.60	0.77	0.96	1.04	1.06	1.12	1.40	1.66	1.89	2.07	2.16	2.18
-150	0.93	0.71	0.66	0.68	0.67	0.62	0.53	0.44	0.39	0.36	0.32	0.49	0.69	0.90	1.09	1.24	1.36	1.42	1.43
-140	0.93	0.72	0.65	0.66	0.66	0.63	0.55	0.43	0.28	0.19	0.18	0.22	0.30	0.40	0.51	0.60	0.67	0.71	0.71
-130	0.93	0.74	0.65	0.65	0.65	0.64	0.61	0.52	0.42	0.33	0.25	0.20	0.18	0.17	0.18	0.19	0.21	0.22	0.22
-120	0.93	0.76	0.67	0.64	0.64	0.64	0.62	0.61	0.59	0.55	0.50	0.44	0.38	0.33	0.30	0.27	0.25	0.25	0.24
-110	0.93	0.79	0.70	0.65	0.63	0.62	0.61	0.61	0.62	0.62	0.62	0.62	0.62	0.61	0.61	0.60	0.60	0.60	0.60
-100	0.93	0.83	0.74	0.68	0.64	0.61	0.59	0.60	0.60	0.60	0.61	0.61	0.61	0.61	0.61	0.61	0.61	0.61	0.61
-90	0.93	0.87	0.80	0.73	0.66	0.59	0.52	0.53	0.53	0.53	0.53	0.54	0.54	0.54	0.53	0.53	0.52	0.52	0.51
-80	0.93	0.90	0.86	0.79	0.69	0.58	0.44	0.41	0.40	0.38	0.37	0.35	0.34	0.34	0.33	0.32	0.32	0.31	0.31
-70	0.93	0.95	0.92	0.86	0.75	0.61	0.44	0.40	0.43	0.48	0.53	0.58	0.63	0.68	0.72	0.76	0.79	0.81	0.82
-60	0.93	0.99	1.00	0.95	0.86	0.76	0.66	0.63	0.76	0.89	1.03	1.17	1.30	1.42	1.53	1.62	1.69	1.73	1.74
-50	0.93	1.03	1.09	1.08	1.04	1.03	1.04	1.07	1.21	1.45	1.70	1.96	2.22	2.46	2.67	2.84	2.97	3.05	3.07
-40	0.93	1.08	1.18	1.23	1.27	1.38	1.53	1.69	1.82	2.08	2.49	2.92	3.36	3.85	4.36	4.87	5.32	5.64	5.77
-30	0.93	1.13	1.28	1.39	1.53	1.77	2.11	2.49	2.84	3.10	3.34	4.09	5.11	6.51	8.33	10.5	12.9	14.6	15.3
-20	0.93	1.17	1.38	1.55	1.80	2.20	2.76	3.41	4.06	4.74	5.50	6.52	8.25	12.4	18.5	25.6	33.4	41.7	46.1
-10	0.93	1.21	1.46	1.70	2.04	2.60	3.39	4.33	5.38	6.69	8.44	11.5	17.5	26.9	35.8	60.5	129	293	452
0	0.93	1.24	1.54	1.83	2.24	2.91	3.90	5.11	6.52	8.45	11.1	16.4	28.8	46.0	53.5	84.6	291	1933	7234
10	0.93	1.23	1.53	1.81	2.20	2.85	3.81	4.99	6.36	8.20	10.7	15.1	24.9	41.0	50.7	61.8	116	266	364
20	0.93	1.22	1.50	1.76	2.11	2.65	3.50	4.58	5.78	7.28	9.22	11.8	16.6	25.6	38.2	47.3	50.5	53.3	55.1
30	0.93	1.20	1.45	1.69	1.98	2.39	3.03	3.92	4.93	6.03	7.37	8.98	10.8	13.4	17.3	22.4	27.7	31.3	32.7
40	0.93	1.16	1.39	1.60	1.83	2.12	2.52	3.11	3.89	4.71	5.57	6.50	7.53	8.63	9.67	10.5	11.3	11.8	11.9
50	0.93	1.13	1.32	1.49	1.66	1.86	2.10	2.40	2.81	3.36	3.97	4.54	5.08	5.61	6.05	6.44	6.73	6.91	6.97
60	0.93	1.09	1.25	1.37	1.49	1.62	1.76	1.92	2.08	2.26	2.50	2.80	3.13	3.46	3.73	3.93	4.08	4.17	4.20
70	0.93	1.04	1.15	1.26	1.33	1.40	1.47	1.55	1.63	1.72	1.81	1.88	1.94	1.99	2.03	2.07	2.10	2.12	2.12
80	0.93	1.00	1.06	1.12	1.18	1.23	1.27	1.30	1.32	1.35	1.37	1.39	1.40	1.42	1.44	1.45	1.46	1.47	1.47
90	0.93	0.95	0.96	0.98	0.99	1.01	1.03	1.04	1.05	1.07	1.08	1.10	1.11	1.11	1.12	1.12	1.12	1.13	1.13
100	0.93	0.90	0.86	0.83	0.79	0.76	0.74	0.72	0.71	0.70	0.69	0.69	0.69	0.69	0.69	0.69	0.69	0.69	0.69
110	0.93	0.85	0.77	0.71	0.68	0.67	0.68	0.68	0.70	0.71	0.72	0.73	0.73	0.73	0.73	0.73	0.73	0.74	0.74
120	0.93	0.80	0.71	0.67	0.67	0.69	0.71	0.71	0.71	0.70	0.69	0.69	0.69	0.70	0.71	0.72	0.73	0.73	0.73
130	0.93	0.77	0.68	0.67	0.70	0.71	0.71	0.70	0.69	0.71	0.75	0.80	0.87	0.96	1.09	1.22	1.33	1.39	1.40
140	0.93	0.74	0.67	0.68	0.71	0.70	0.70	0.71	0.76	0.88	1.11	1.45	1.84	2.15	2.35	2.46	2.51	2.54	2.55
150	0.93	0.72	0.67	0.70	0.70	0.70	0.71	0.78	0.97	1.39	1.93	2.32	2.52	2.60	2.65	2.68	2.69	2.70	2.71
160	0.93	0.71	0.67	0.70	0.70	0.70	0.75	0.91	1.35	1.98	2.41	2.57	2.64	2.68	2.72	2.78	2.89	2.94	2.97
170	0.93	0.70	0.67	0.70	0.70	0.71	0.78	1.07	1.68	2.28	2.54	2.60	2.54	2.47	2.45	2.48	2.51	2.60	2.76
180	0.93	0.70	0.67	0.70	0.70	0.71	0.80	1.15	1.81	2.37	2.57	2.55	2.25	1.88	1.58	1.38	1.14	0.98	1.11

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-23

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Aurora Max-618mm-RGBW GREEN-8D-Rev1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:8 DEG	DIM.:618mm	SERIAL No.:IES001763
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: ×10cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	1.11	1.29	1.43	1.48	1.40	1.19	0.87	0.56	0.32	0.21	0.24	0.38	0.54	0.63	0.63	0.60	0.53	0.38
-170	2.22	2.06	1.97	1.76	1.46	1.14	0.81	0.51	0.30	0.21	0.24	0.39	0.54	0.63	0.63	0.60	0.53	0.38
-160	2.11	1.97	1.74	1.47	1.18	0.89	0.61	0.38	0.24	0.21	0.28	0.43	0.57	0.63	0.62	0.60	0.52	0.38
-150	1.38	1.28	1.14	0.95	0.74	0.54	0.35	0.24	0.20	0.25	0.36	0.50	0.60	0.63	0.62	0.59	0.52	0.38
-140	0.68	0.62	0.53	0.43	0.33	0.24	0.20	0.20	0.26	0.36	0.48	0.58	0.63	0.63	0.61	0.58	0.50	0.38
-130	0.21	0.20	0.19	0.18	0.19	0.21	0.26	0.33	0.43	0.52	0.59	0.62	0.63	0.62	0.60	0.56	0.49	0.38
-120	0.25	0.27	0.30	0.34	0.39	0.45	0.51	0.56	0.60	0.62	0.63	0.63	0.62	0.60	0.58	0.54	0.47	0.38
-110	0.60	0.61	0.61	0.62	0.62	0.63	0.63	0.63	0.62	0.62	0.61	0.60	0.59	0.57	0.54	0.50	0.44	0.38
-100	0.61	0.61	0.61	0.61	0.61	0.60	0.60	0.60	0.59	0.58	0.57	0.55	0.53	0.51	0.48	0.45	0.41	0.38
-90	0.51	0.50	0.50	0.49	0.48	0.48	0.47	0.45	0.44	0.43	0.42	0.41	0.40	0.40	0.39	0.39	0.39	0.38
-80	0.30	0.29	0.28	0.27	0.25	0.25	0.24	0.24	0.24	0.24	0.24	0.25	0.27	0.29	0.31	0.33	0.36	0.38
-70	0.80	0.76	0.72	0.67	0.61	0.55	0.50	0.44	0.38	0.33	0.28	0.24	0.22	0.22	0.24	0.28	0.33	0.38
-60	1.71	1.66	1.58	1.47	1.35	1.22	1.09	0.95	0.81	0.67	0.54	0.41	0.32	0.25	0.22	0.24	0.30	0.38
-50	3.05	2.96	2.83	2.64	2.42	2.17	1.90	1.64	1.38	1.14	0.90	0.69	0.49	0.34	0.24	0.22	0.28	0.38
-40	5.66	5.35	4.90	4.39	3.89	3.41	2.95	2.48	2.04	1.65	1.31	0.99	0.71	0.47	0.30	0.22	0.26	0.38
-30	14.7	13.0	10.7	8.63	6.84	5.40	4.30	3.47	2.78	2.18	1.69	1.28	0.92	0.60	0.36	0.23	0.25	0.38
-20	42.0	33.9	26.7	19.8	13.6	9.12	6.31	4.58	3.46	2.66	2.03	1.52	1.09	0.71	0.42	0.24	0.24	0.38
-10	302	146	69.2	37.3	23.3	14.3	8.66	5.68	4.02	2.98	2.25	1.68	1.21	0.79	0.46	0.26	0.23	0.38
0	5212	903	147	54.6	29.1	17.5	9.97	6.20	4.25	3.09	2.33	1.74	1.25	0.83	0.48	0.26	0.23	0.38
10	262	121	63.7	47.8	37.3	22.3	12.6	7.87	5.52	3.99	2.92	2.12	1.48	0.96	0.57	0.32	0.27	0.38
20	52.6	49.4	47.0	39.8	27.8	18.2	11.6	8.22	6.04	4.40	3.22	2.32	1.60	1.03	0.63	0.38	0.30	0.38
30	31.5	27.9	22.7	17.8	13.8	11.0	9.12	7.56	5.76	4.31	3.21	2.31	1.58	1.04	0.67	0.43	0.34	0.38
40	11.7	11.2	10.4	9.59	8.64	7.60	6.57	5.60	4.73	3.85	2.88	2.07	1.45	1.00	0.69	0.47	0.37	0.38
50	6.91	6.73	6.42	6.03	5.56	5.04	4.51	3.99	3.46	2.91	2.33	1.74	1.30	0.96	0.70	0.51	0.40	0.38
60	4.16	4.06	3.92	3.72	3.48	3.19	2.86	2.53	2.24	1.99	1.78	1.49	1.19	0.93	0.72	0.55	0.44	0.38
70	2.11	2.07	2.03	1.96	1.89	1.81	1.75	1.68	1.61	1.53	1.47	1.35	1.13	0.93	0.75	0.59	0.47	0.38
80	1.46	1.45	1.44	1.42	1.41	1.39	1.38	1.37	1.36	1.35	1.34	1.32	1.13	0.95	0.78	0.62	0.49	0.38
90	1.13	1.13	1.13	1.13	1.13	1.12	1.13	1.13	1.14	1.14	1.15	1.15	1.02	0.89	0.77	0.64	0.51	0.38
100	0.69	0.69	0.69	0.69	0.69	0.69	0.70	0.71	0.73	0.76	0.80	0.84	0.82	0.79	0.72	0.64	0.52	0.38
110	0.74	0.74	0.74	0.74	0.74	0.73	0.72	0.70	0.68	0.67	0.66	0.67	0.68	0.68	0.68	0.63	0.53	0.38
120	0.73	0.72	0.71	0.70	0.69	0.69	0.70	0.71	0.72	0.71	0.69	0.67	0.65	0.64	0.64	0.62	0.54	0.38
130	1.35	1.25	1.12	0.99	0.88	0.81	0.76	0.72	0.70	0.71	0.70	0.69	0.67	0.64	0.63	0.61	0.54	0.38
140	2.53	2.49	2.41	2.25	1.96	1.55	1.17	0.91	0.78	0.70	0.67	0.67	0.67	0.65	0.63	0.61	0.55	0.38
150	2.70	2.69	2.67	2.64	2.57	2.42	2.07	1.53	0.95	0.68	0.60	0.62	0.66	0.65	0.63	0.61	0.54	0.38
160	2.94	2.88	2.79	2.73	2.68	2.63	2.25	1.69	1.05	0.63	0.51	0.54	0.62	0.65	0.63	0.61	0.54	0.38
170	2.69	2.65	2.72	2.59	2.29	1.98	1.64	1.25	0.82	0.48	0.38	0.46	0.57	0.64	0.63	0.60	0.54	0.38
180	1.11	1.29	1.43	1.48	1.40	1.19	0.87	0.56	0.32	0.21	0.24	0.38	0.54	0.63	0.63	0.60	0.53	0.38

H_(b) Range:-90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature:25.3DEG
 Operators:Fan
 Test Date:2023-09-23

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:8.630m [K=1.0000]
 Remarks: