

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		27257.8 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	16.5V x 17.1H
	At 50% of Imax	8.5V x 8.7H
	At 90% of Imax	3.3V x 3.4H
Beam Flux	Total	1001.0 lumens per klm.
	To 10% of Imax	678.6 lumens per klm.
	To 50% of Imax	364.8 lumens per klm.
	To 90% of Imax	83.6 lumens per klm.
	Upward LOR	2.2 %
	Downward LOR	97.9 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Aurora Max-618mm-RGBW RED-8D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:8 DEG	DIM.:618mm	SERIAL No.:IES001762
MFR.:	SUR.:	Shielding Angle:

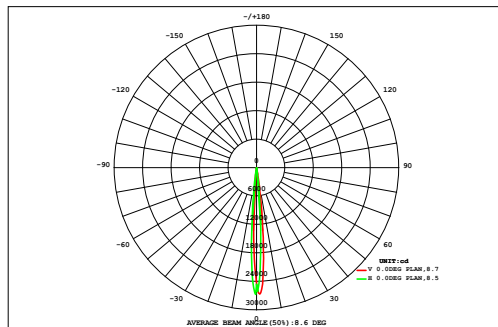

DATA OF LAMP		Eff:21.57lm/W	
MODEL		Imax(cd)	26748
NOMINAL POWER(W)	45.5	AVAILABILITY(%)	68.2
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	668.8
NOMINAL FLUX(lm)	981.3	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	981.3
TEST VOLTAGE(V)	220	q @50%(H,V)	9,8DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		F t	F a
	0.18	0.22	0.28	0.35	0.43	0.50	0.57	0.62	0.64	0.64	0.62	0.57	0.50	0.43	0.36	0.30	0.25	0.20	7.67	0.00
9	0.18	0.22	0.28	0.35	0.43	0.50	0.57	0.62	0.64	0.64	0.62	0.57	0.50	0.43	0.36	0.30	0.25	0.20	7.67	0.00
8	0.22	0.28	0.36	0.47	0.60	0.76	0.89	0.97	0.99	0.99	0.97	0.90	0.76	0.61	0.49	0.39	0.31	0.25	11.2	5.71
7	0.26	0.35	0.46	0.61	0.89	1.16	1.32	1.45	1.52	1.53	1.46	1.34	1.18	0.94	0.68	0.52	0.39	0.31	16.4	12.8
6	0.31	0.41	0.57	0.84	1.18	1.52	1.89	2.16	2.30	2.31	2.19	1.92	1.59	1.30	0.98	0.69	0.50	0.37	23.0	20.2
5	0.36	0.48	0.70	1.03	1.46	2.04	2.70	3.14	3.38	3.41	3.21	2.80	2.26	1.74	1.29	0.91	0.64	0.48	32.0	29.4
4	0.39	0.56	0.81	1.21	1.80	2.57	3.53	4.30	4.63	4.66	4.37	3.80	3.06	2.30	1.65	1.21	0.92	0.68	42.5	40.8
3	0.42	0.62	0.94	1.41	2.07	3.04	4.21	5.42	5.95	6.00	5.60	4.80	3.87	2.94	2.36	1.78	1.30	0.91	53.7	52.6
2	0.45	0.66	1.05	1.55	2.30	3.34	4.55	6.02	7.09	7.15	6.63	5.65	4.99	4.17	3.27	2.42	1.70	1.16	64.2	63.1
1	0.45	0.66	1.09	1.55	2.34	3.40	4.67	6.05	7.47	7.87	7.57	7.16	6.39	5.32	4.13	3.01	2.08	1.39	72.6	71.5
0	0.49	0.73	1.19	1.74	2.63	3.83	5.26	6.85	8.03	8.00	7.99	7.61	6.79	5.63	4.36	3.16	2.17	1.45	77.9	76.7
-1	0.56	0.86	1.35	2.06	3.11	4.52	6.15	7.05	7.59	7.61	7.38	6.97	6.14	5.07	3.91	2.84	1.96	1.34	76.5	75.9
-2	0.57	0.92	1.38	2.14	3.23	4.32	5.33	6.15	6.66	6.68	6.25	5.87	5.19	4.29	3.30	2.40	1.68	1.18	67.5	67.0
-3	0.55	0.90	1.36	1.92	2.67	3.50	4.31	4.98	5.41	5.44	5.06	4.58	4.05	3.35	2.62	1.93	1.40	0.99	55.0	54.5
-4	0.50	0.78	1.14	1.51	2.04	2.65	3.25	3.77	4.07	4.09	3.82	3.33	2.95	2.47	1.95	1.46	1.14	0.79	41.7	39.6
-5	0.42	0.59	0.85	1.16	1.48	1.89	2.31	2.67	2.87	2.89	2.72	2.38	2.01	1.71	1.38	1.10	0.85	0.57	29.9	28.3
-6	0.35	0.45	0.60	0.82	1.05	1.30	1.57	1.79	1.92	1.93	1.82	1.61	1.35	1.15	0.97	0.79	0.58	0.44	20.5	17.3
-7	0.28	0.36	0.45	0.57	0.72	0.89	1.07	1.22	1.31	1.32	1.24	1.10	0.92	0.76	0.66	0.53	0.43	0.34	14.2	9.09
-8	0.22	0.28	0.35	0.42	0.50	0.59	0.69	0.79	0.86	0.86	0.80	0.71	0.61	0.51	0.44	0.39	0.33	0.26	9.62	1.72
-9	0.22	0.28	0.35	0.42	0.50	0.59	0.69	0.79	0.86	0.86	0.80	0.71	0.61	0.51	0.44	0.39	0.33	0.26	9.62	1.72
	-9	-8	-7	-6	-5	-4	-3	-2	HORIZONTAL (DEG)	2	3	4	5	6	7	8	9			
F t	6.99	10.1	14.9	21.4	30.5	41.8	54.3	65.4	72.7	73.4	69.7	63.1	54.6	44.7	34.8	25.8	18.6	13.1	716	---
F a	0.00	2.69	11.2	18.9	28.3	40.0	53.0	64.0	72.1	72.7	68.3	61.8	52.8	42.4	32.2	22.2	15.2	8.42	---	666

one-half-peak spread: U:4.1,D:4.5 , L:4.4,R:4.4


NEMA Beam Type: Type 1

H(B) Range:-90 - 90DEG
H(B) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:Aurora Max-618mm-RGBW RED-8D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:8 DEG	DIM.:618mm	SERIAL No.:IES001762
MFR.:	SUR.:	Shielding Angle:

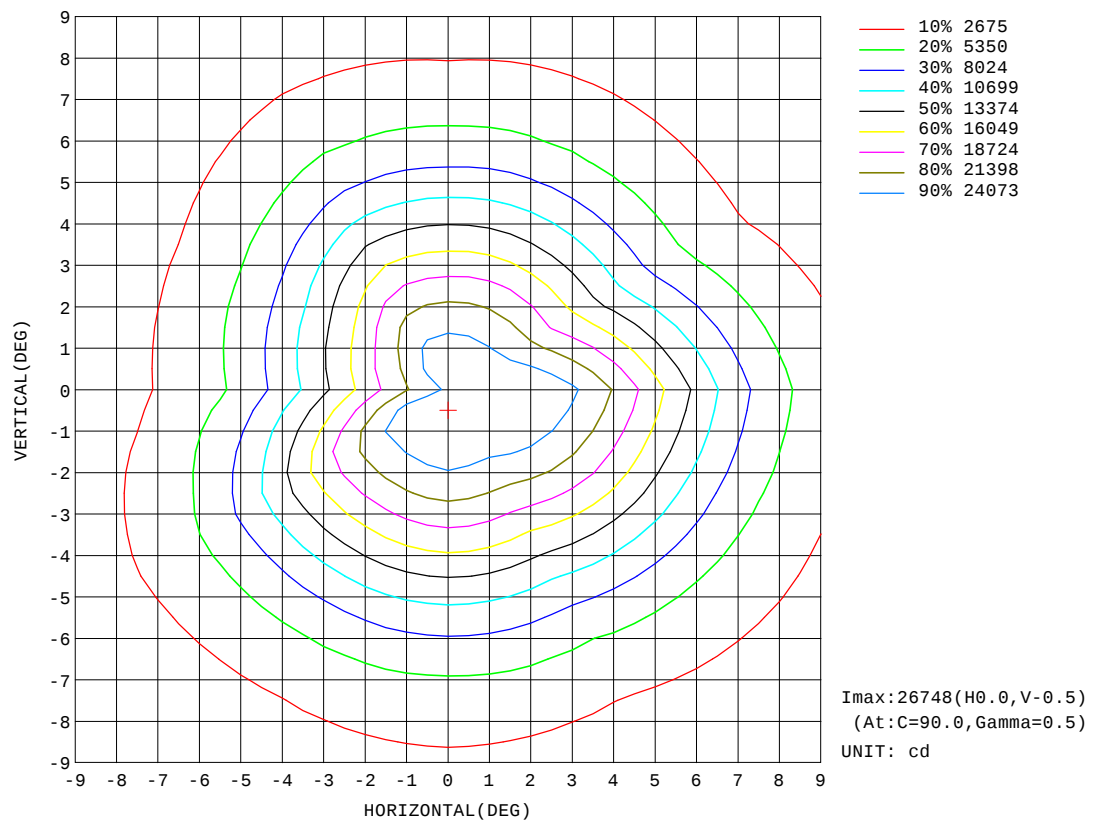


H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Aurora Max-618mm-RGBW RED-8D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:8 DEG	DIM.:618mm	SERIAL No.:IES001762
MFR.:	SUR.:	Shielding Angle:

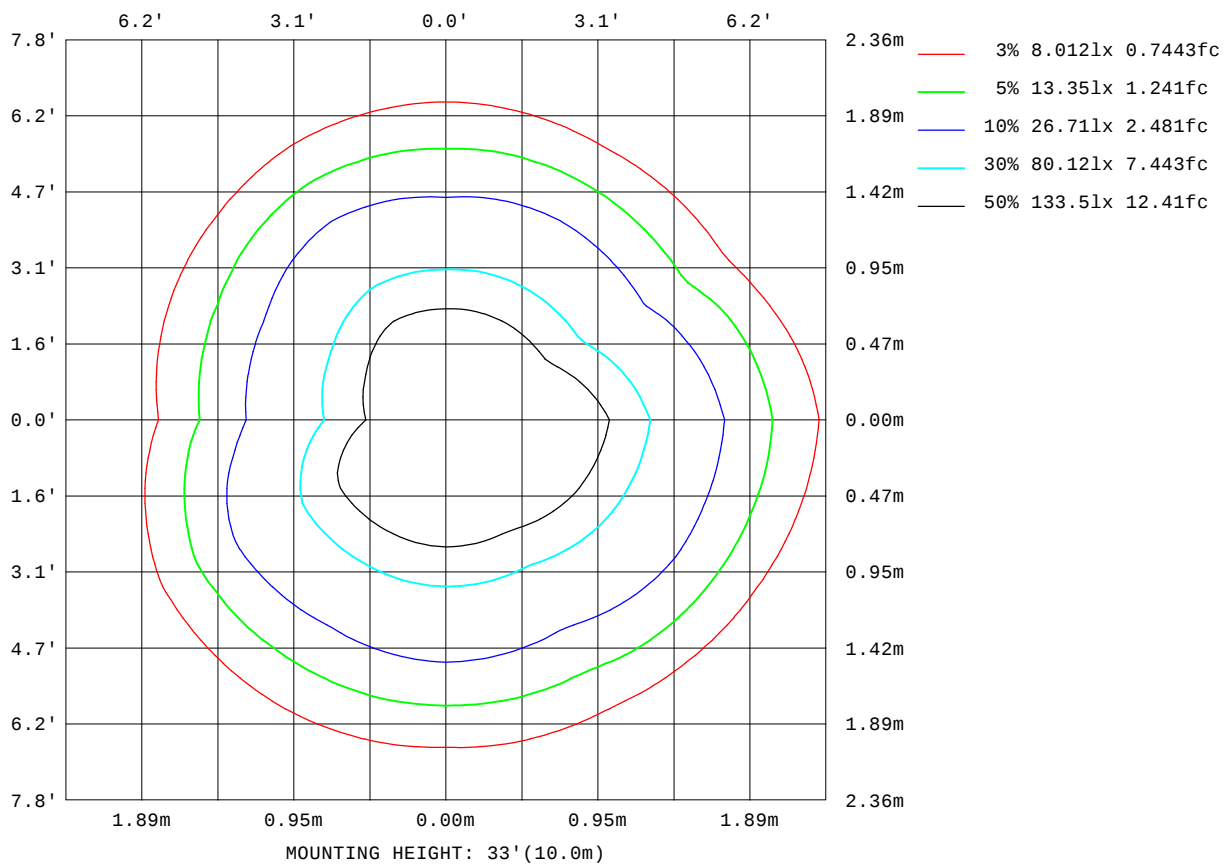

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

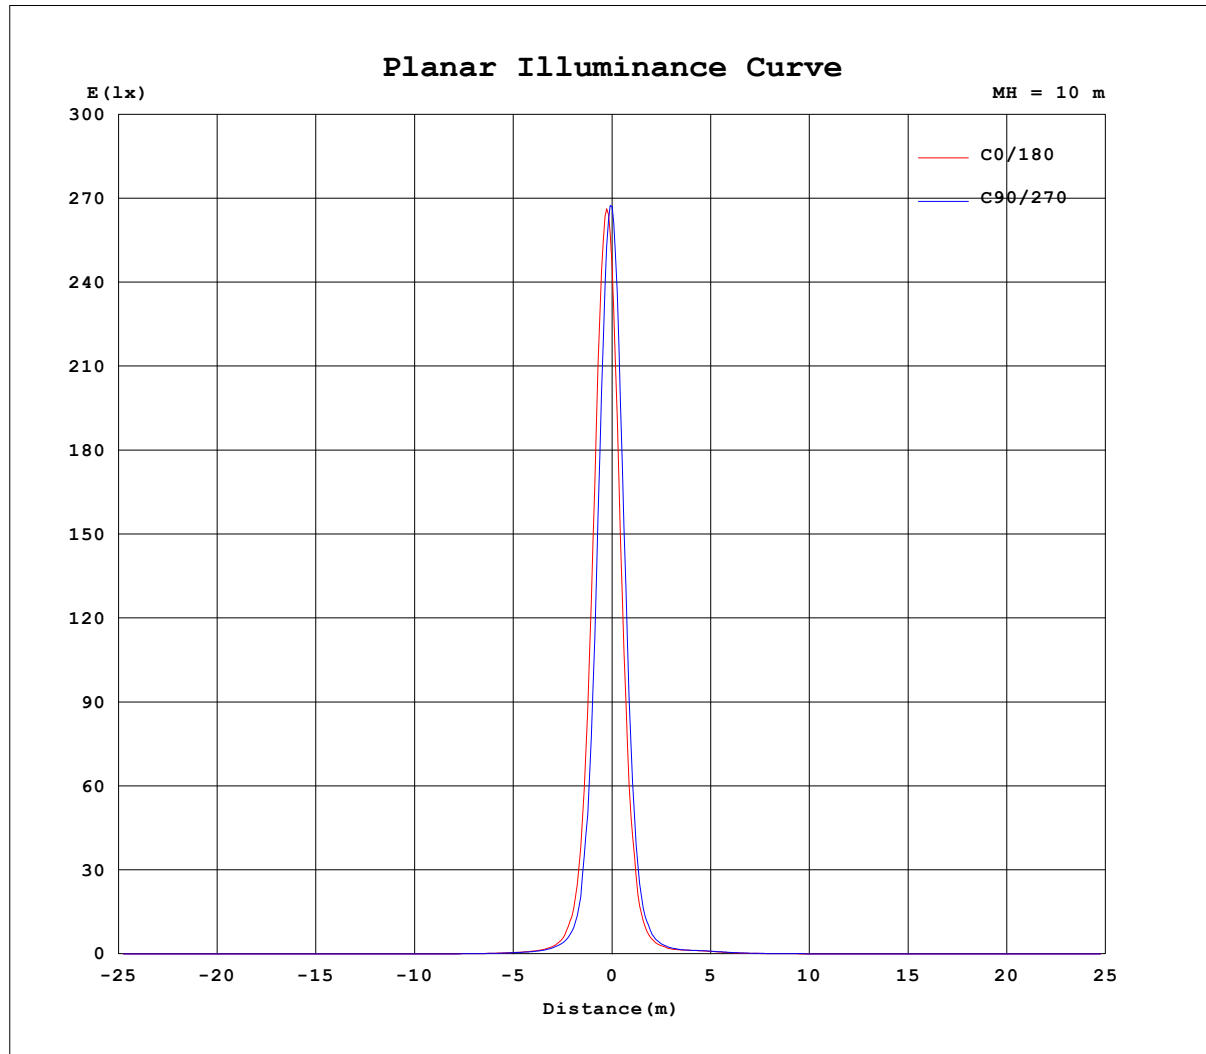


H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Aurora Max-618mm-RGBW RED-8D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:8 DEG	DIM.:618mm	SERIAL No.:IES001762
MFR.:	SUR.:	Shielding Angle:

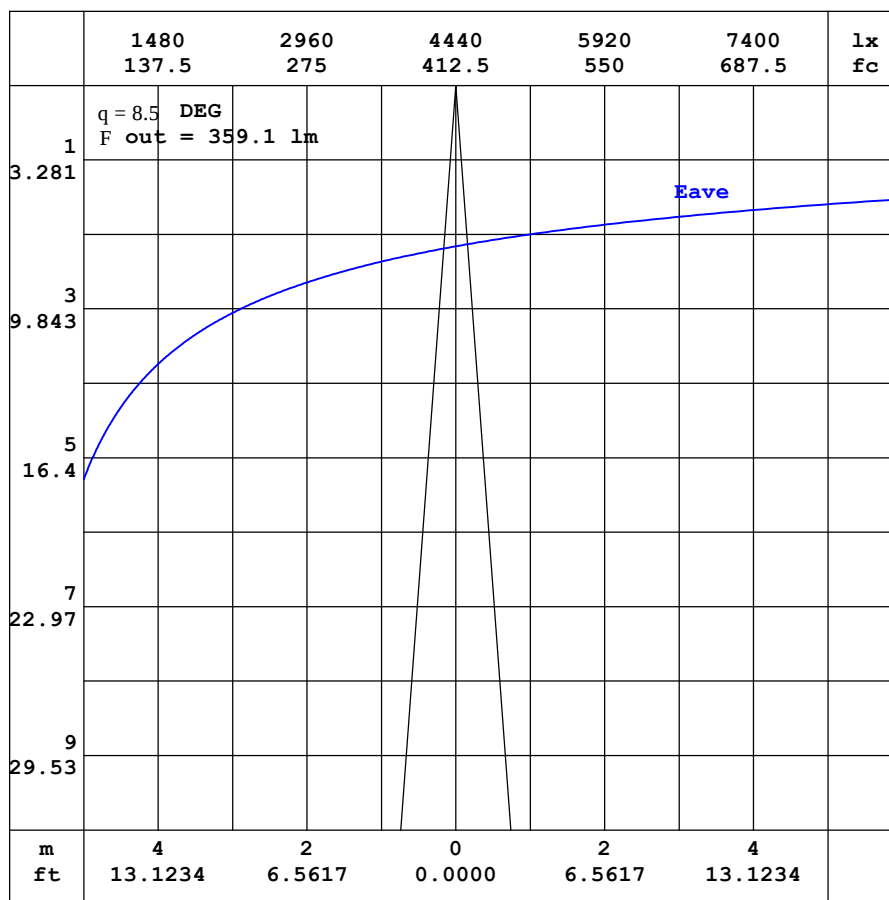

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Aurora Max-618mm-RGBW RED-8D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:8 DEG	DIM.:618mm	SERIAL No.:IES001762
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: ×10cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.32	0.23	0.22	0.23	0.23	0.23	0.26	0.37	0.59	0.78	0.85	0.84	0.74	0.62	0.52	0.45	0.38	0.33	0.38
-170	0.32	0.23	0.22	0.23	0.22	0.22	0.22	0.28	0.42	0.55	0.60	0.61	0.61	0.61	0.66	0.71	0.74	0.80	0.79
-160	0.32	0.23	0.21	0.22	0.22	0.20	0.19	0.19	0.24	0.31	0.33	0.34	0.36	0.46	0.56	0.64	0.70	0.74	0.75
-150	0.32	0.23	0.21	0.22	0.22	0.20	0.17	0.14	0.12	0.11	0.09	0.15	0.22	0.29	0.36	0.41	0.45	0.48	0.48
-140	0.32	0.24	0.21	0.22	0.22	0.21	0.18	0.14	0.09	0.05	0.05	0.06	0.09	0.12	0.16	0.19	0.21	0.22	0.23
-130	0.32	0.25	0.21	0.21	0.22	0.21	0.20	0.17	0.14	0.10	0.08	0.06	0.05	0.05	0.05	0.06	0.06	0.06	0.07
-120	0.32	0.26	0.22	0.21	0.21	0.21	0.21	0.21	0.20	0.18	0.17	0.15	0.13	0.11	0.10	0.09	0.08	0.08	0.07
-110	0.32	0.27	0.23	0.22	0.21	0.21	0.21	0.21	0.21	0.21	0.21	0.21	0.21	0.21	0.21	0.21	0.20	0.20	0.20
-100	0.32	0.28	0.25	0.23	0.22	0.21	0.21	0.21	0.21	0.21	0.21	0.21	0.21	0.21	0.21	0.21	0.21	0.21	0.21
-90	0.32	0.30	0.27	0.25	0.23	0.20	0.18	0.18	0.18	0.18	0.18	0.18	0.19	0.18	0.18	0.18	0.18	0.18	0.18
-80	0.32	0.31	0.29	0.27	0.24	0.20	0.15	0.14	0.13	0.13	0.12	0.11	0.11	0.11	0.11	0.10	0.10	0.10	0.10
-70	0.32	0.32	0.31	0.29	0.25	0.20	0.14	0.13	0.13	0.15	0.16	0.18	0.19	0.21	0.23	0.24	0.25	0.26	0.26
-60	0.32	0.34	0.34	0.32	0.28	0.24	0.21	0.20	0.23	0.28	0.32	0.36	0.40	0.44	0.48	0.51	0.53	0.54	0.55
-50	0.32	0.35	0.37	0.36	0.34	0.33	0.33	0.33	0.38	0.45	0.53	0.61	0.69	0.76	0.82	0.88	0.92	0.95	0.96
-40	0.32	0.37	0.40	0.40	0.41	0.44	0.49	0.54	0.57	0.65	0.78	0.91	1.05	1.19	1.35	1.52	1.66	1.77	1.81
-30	0.32	0.38	0.43	0.45	0.49	0.57	0.67	0.79	0.90	0.98	1.05	1.28	1.60	2.04	2.62	3.33	4.05	4.64	4.88
-20	0.32	0.40	0.46	0.50	0.57	0.70	0.88	1.09	1.29	1.50	1.74	2.06	2.60	3.91	5.87	8.13	10.6	13.4	14.7
-10	0.32	0.41	0.49	0.55	0.65	0.84	1.09	1.39	1.72	2.13	2.70	3.67	5.66	8.69	11.3	19.1	42.0	100.0	143
0	0.32	0.42	0.51	0.59	0.72	0.94	1.25	1.64	2.09	2.71	3.59	5.30	9.30	15.1	17.2	28.0	87.3	613	2456
10	0.32	0.42	0.51	0.58	0.71	0.92	1.22	1.60	2.04	2.63	3.44	4.87	8.12	13.5	16.8	19.8	36.9	82.7	124
20	0.32	0.42	0.50	0.57	0.68	0.85	1.12	1.47	1.86	2.34	2.97	3.82	5.37	8.37	12.6	15.7	16.5	17.3	18.0
30	0.32	0.41	0.49	0.55	0.64	0.77	0.98	1.26	1.59	1.94	2.37	2.90	3.50	4.33	5.62	7.36	9.06	10.3	10.8
40	0.32	0.40	0.47	0.52	0.59	0.68	0.81	1.00	1.25	1.52	1.79	2.09	2.42	2.78	3.12	3.41	3.65	3.82	3.89
50	0.32	0.38	0.45	0.50	0.54	0.60	0.67	0.77	0.91	1.08	1.27	1.46	1.63	1.79	1.94	2.07	2.17	2.24	2.26
60	0.32	0.37	0.42	0.46	0.50	0.53	0.57	0.62	0.67	0.73	0.80	0.90	1.00	1.11	1.20	1.27	1.32	1.35	1.37
70	0.32	0.36	0.39	0.43	0.45	0.47	0.49	0.51	0.53	0.56	0.58	0.61	0.62	0.64	0.65	0.67	0.68	0.69	0.69
80	0.32	0.34	0.36	0.38	0.40	0.42	0.43	0.44	0.45	0.45	0.45	0.46	0.46	0.46	0.47	0.47	0.48	0.48	0.48
90	0.32	0.32	0.33	0.34	0.34	0.35	0.35	0.36	0.36	0.36	0.37	0.37	0.38	0.38	0.38	0.38	0.38	0.38	0.39
100	0.32	0.31	0.29	0.28	0.27	0.25	0.25	0.24	0.23	0.23	0.22	0.22	0.22	0.22	0.22	0.22	0.22	0.22	0.23
110	0.32	0.29	0.26	0.23	0.22	0.22	0.22	0.22	0.22	0.23	0.23	0.23	0.23	0.23	0.23	0.23	0.23	0.24	0.24
120	0.32	0.27	0.23	0.22	0.22	0.22	0.23	0.23	0.23	0.23	0.22	0.22	0.22	0.22	0.23	0.23	0.23	0.23	0.23
130	0.32	0.26	0.22	0.22	0.22	0.23	0.23	0.23	0.22	0.23	0.24	0.26	0.28	0.31	0.35	0.39	0.43	0.45	0.46
140	0.32	0.25	0.22	0.22	0.23	0.23	0.23	0.23	0.24	0.28	0.36	0.47	0.60	0.71	0.77	0.81	0.83	0.84	0.84
150	0.32	0.24	0.22	0.22	0.23	0.23	0.23	0.25	0.31	0.45	0.63	0.76	0.83	0.86	0.87	0.88	0.89	0.89	0.89
160	0.32	0.23	0.22	0.23	0.23	0.23	0.24	0.29	0.44	0.65	0.79	0.85	0.87	0.88	0.90	0.92	0.96	0.98	0.99
170	0.32	0.23	0.22	0.23	0.23	0.23	0.25	0.34	0.55	0.75	0.84	0.85	0.84	0.81	0.81	0.82	0.84	0.87	0.93
180	0.32	0.23	0.22	0.23	0.23	0.23	0.26	0.37	0.59	0.78	0.85	0.84	0.74	0.62	0.52	0.45	0.38	0.33	0.38

H(°) Range:-90 - 90DEG

H(°) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-09-22

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Aurora Max-618mm-RGBW RED-8D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:8 DEG	DIM.:618mm	SERIAL No.:IES001762
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: ×10cd

H(°) V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	0.38	0.45	0.49	0.50	0.47	0.39	0.28	0.17	0.10	0.06	0.07	0.12	0.18	0.22	0.21	0.21	0.18	0.13
-170	0.76	0.71	0.67	0.60	0.49	0.38	0.26	0.16	0.09	0.06	0.08	0.13	0.18	0.22	0.21	0.21	0.18	0.13
-160	0.72	0.67	0.59	0.49	0.39	0.29	0.19	0.12	0.07	0.06	0.09	0.14	0.19	0.22	0.21	0.20	0.18	0.13
-150	0.46	0.43	0.38	0.31	0.24	0.17	0.11	0.07	0.06	0.08	0.12	0.17	0.21	0.22	0.21	0.20	0.18	0.13
-140	0.22	0.20	0.17	0.13	0.10	0.07	0.06	0.06	0.08	0.12	0.16	0.20	0.21	0.21	0.21	0.20	0.17	0.13
-130	0.06	0.06	0.06	0.06	0.06	0.07	0.08	0.11	0.14	0.18	0.20	0.21	0.21	0.21	0.21	0.19	0.17	0.13
-120	0.08	0.09	0.10	0.11	0.13	0.15	0.17	0.19	0.21	0.21	0.21	0.21	0.21	0.21	0.20	0.18	0.16	0.13
-110	0.20	0.21	0.21	0.21	0.21	0.21	0.21	0.21	0.21	0.21	0.21	0.21	0.21	0.21	0.20	0.19	0.17	0.13
-100	0.21	0.21	0.21	0.21	0.21	0.21	0.21	0.21	0.21	0.20	0.20	0.20	0.19	0.18	0.17	0.16	0.15	0.13
-90	0.18	0.17	0.17	0.17	0.17	0.16	0.16	0.16	0.15	0.15	0.14	0.14	0.14	0.14	0.13	0.13	0.13	0.13
-80	0.09	0.09	0.09	0.09	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.09	0.10	0.10	0.11	0.12	0.13
-70	0.25	0.24	0.23	0.21	0.19	0.17	0.15	0.14	0.12	0.10	0.08	0.07	0.07	0.07	0.08	0.09	0.11	0.13
-60	0.54	0.52	0.50	0.46	0.42	0.38	0.34	0.30	0.25	0.21	0.16	0.12	0.10	0.08	0.07	0.08	0.10	0.13
-50	0.95	0.92	0.88	0.82	0.75	0.67	0.59	0.51	0.43	0.35	0.28	0.21	0.15	0.10	0.08	0.07	0.09	0.13
-40	1.77	1.67	1.52	1.35	1.20	1.05	0.91	0.77	0.64	0.52	0.41	0.31	0.22	0.14	0.09	0.07	0.09	0.13
-30	4.65	4.07	3.35	2.69	2.13	1.67	1.33	1.07	0.86	0.68	0.53	0.40	0.29	0.19	0.11	0.07	0.08	0.13
-20	13.4	10.6	8.35	6.22	4.25	2.85	1.96	1.41	1.07	0.82	0.63	0.48	0.34	0.22	0.13	0.08	0.08	0.13
-10	102	46.7	21.6	11.6	7.33	4.45	2.69	1.75	1.23	0.92	0.70	0.53	0.38	0.25	0.14	0.08	0.08	0.13
0	1698	260	47.4	17.2	9.01	5.39	3.08	1.90	1.30	0.95	0.72	0.55	0.39	0.26	0.15	0.08	0.08	0.13
10	82.9	39.4	20.6	15.8	12.4	7.20	4.00	2.50	1.74	1.26	0.92	0.67	0.47	0.30	0.18	0.10	0.09	0.13
20	17.2	16.2	15.7	13.3	9.16	5.91	3.77	2.65	1.94	1.41	1.03	0.74	0.51	0.33	0.20	0.12	0.10	0.13
30	10.4	9.20	7.51	5.82	4.48	3.57	2.96	2.45	1.86	1.39	1.03	0.74	0.51	0.33	0.21	0.14	0.11	0.13
40	3.82	3.64	3.39	3.11	2.79	2.46	2.13	1.81	1.53	1.25	0.93	0.67	0.47	0.32	0.22	0.15	0.12	0.13
50	2.24	2.18	2.07	1.95	1.79	1.63	1.46	1.30	1.12	0.94	0.75	0.56	0.42	0.31	0.23	0.17	0.13	0.13
60	1.35	1.32	1.27	1.21	1.13	1.03	0.93	0.82	0.73	0.64	0.58	0.48	0.39	0.30	0.24	0.18	0.15	0.13
70	0.68	0.67	0.66	0.64	0.61	0.59	0.57	0.54	0.52	0.50	0.48	0.44	0.37	0.31	0.25	0.20	0.16	0.13
80	0.48	0.47	0.47	0.46	0.46	0.45	0.45	0.44	0.44	0.44	0.44	0.44	0.38	0.32	0.26	0.21	0.17	0.13
90	0.39	0.39	0.39	0.39	0.39	0.39	0.39	0.39	0.39	0.39	0.39	0.40	0.35	0.31	0.26	0.22	0.17	0.13
100	0.22	0.22	0.22	0.22	0.22	0.22	0.23	0.23	0.24	0.26	0.28	0.29	0.29	0.27	0.25	0.22	0.18	0.13
110	0.24	0.24	0.24	0.24	0.23	0.23	0.23	0.23	0.22	0.22	0.22	0.22	0.23	0.24	0.23	0.22	0.18	0.13
120	0.23	0.23	0.23	0.23	0.22	0.22	0.22	0.23	0.23	0.23	0.22	0.22	0.21	0.22	0.22	0.21	0.18	0.13
130	0.44	0.41	0.36	0.32	0.28	0.26	0.24	0.23	0.23	0.23	0.22	0.22	0.22	0.21	0.21	0.21	0.19	0.13
140	0.83	0.82	0.80	0.74	0.64	0.51	0.38	0.29	0.25	0.22	0.22	0.22	0.22	0.22	0.21	0.21	0.19	0.13
150	0.89	0.89	0.89	0.87	0.85	0.80	0.68	0.50	0.31	0.22	0.19	0.20	0.22	0.22	0.21	0.21	0.19	0.13
160	0.98	0.96	0.92	0.90	0.88	0.86	0.74	0.55	0.34	0.20	0.16	0.18	0.21	0.22	0.21	0.21	0.19	0.13
170	0.91	0.88	0.90	0.85	0.75	0.65	0.53	0.41	0.27	0.15	0.12	0.15	0.19	0.22	0.21	0.21	0.18	0.13
180	0.38	0.45	0.49	0.50	0.47	0.39	0.28	0.17	0.10	0.06	0.07	0.12	0.18	0.22	0.21	0.21	0.18	0.13

H(°) Range:-90 - 90DEG

H(°) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-09-22

V(°) Range:-180 - 180DEG

V(°) Interval: 0.5DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: