

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	1856.6 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	--

Beam Spread	At 10% of Imax	63.6V x 79.6H
	At 50% of Imax	28.2V x 50.7H
	At 90% of Imax	10.2V x 23.2H

Beam Flux	Total	1000.3 lumens per klm.
	To 10% of Imax	840.1 lumens per klm.
	To 50% of Imax	471.0 lumens per klm.
	To 90% of Imax	103.7 lumens per klm.

Upward LOR	2.4 %
Downward LOR	97.7 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:BlazeLine Slim-600mm-3000K-3050D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:30X50 DEG	DIM.:600MM	SERIAL No.:IES001910
MFR.:	SUR.:	Shielding Angle:

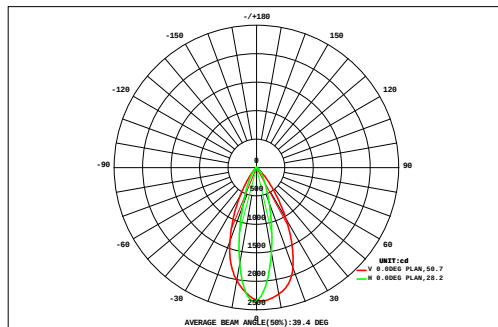

DATA OF LAMP		Eff:67.55lm/W	
MODEL		Imax(cd)	2345
NOMINAL POWER(W)	18.7	AVAILABILITY(%)	84.1
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	1063
NOMINAL FLUX(lm)	1263	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1263
TEST VOLTAGE(V)	220	q @50%(H,V)	51,28DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		F t	F a
	0.05	0.08	0.11	0.14	0.17	0.20	0.24	0.28	0.30	0.31	0.29	0.26	0.22	0.19	0.16	0.12	0.08	0.05	3.25	0.00
72	0.05	0.08	0.11	0.14	0.17	0.20	0.24	0.28	0.30	0.31	0.29	0.26	0.22	0.19	0.16	0.12	0.08	0.05	3.25	0.00
64	0.07	0.11	0.15	0.20	0.25	0.31	0.38	0.45	0.50	0.51	0.47	0.41	0.35	0.28	0.22	0.17	0.11	0.06	4.98	0.00
56	0.09	0.13	0.19	0.26	0.35	0.45	0.59	0.74	0.85	0.88	0.84	0.71	0.55	0.41	0.30	0.21	0.14	0.07	7.75	0.00
48	0.10	0.17	0.23	0.33	0.48	0.72	1.04	1.39	1.64	1.75	1.68	1.40	1.02	0.65	0.41	0.25	0.16	0.09	13.5	0.00
40	0.12	0.20	0.27	0.42	0.70	1.26	1.98	2.76	3.35	3.62	3.45	2.84	2.01	1.15	0.60	0.30	0.17	0.10	25.3	1.03
32	0.13	0.22	0.32	0.54	1.12	2.35	3.89	5.28	6.40	6.93	6.68	5.75	3.97	2.09	0.90	0.37	0.18	0.11	47.2	33.0
24	0.15	0.24	0.37	0.73	1.89	4.40	7.87	10.6	12.7	13.6	13.1	11.3	7.38	3.69	1.37	0.46	0.18	0.11	90.1	81.6
16	0.16	0.25	0.42	0.96	3.06	7.77	14.5	20.9	24.9	26.4	25.2	20.1	12.7	6.03	1.98	0.56	0.19	0.11	166	160
8	0.17	0.26	0.45	1.16	4.22	11.4	22.0	32.3	39.0	41.0	37.8	29.9	18.4	8.38	2.54	0.61	0.19	0.11	250	244
0	0.17	0.25	0.43	1.14	4.24	11.6	22.6	33.5	40.8	42.8	39.0	30.7	18.8	8.47	2.54	0.60	0.18	0.10	258	252
-8	0.15	0.23	0.37	0.90	3.06	8.14	15.7	22.7	27.6	29.2	27.3	21.9	13.5	6.24	1.95	0.51	0.16	0.10	180	173
-16	0.13	0.20	0.29	0.62	1.82	4.56	8.26	11.1	13.8	14.8	13.8	12.1	8.02	3.82	1.29	0.39	0.14	0.09	95.1	87.4
-24	0.11	0.18	0.22	0.38	0.96	2.19	3.71	5.01	6.17	6.68	6.30	5.61	3.98	2.00	0.76	0.27	0.12	0.09	44.8	30.0
-32	0.10	0.15	0.17	0.24	0.50	1.01	1.66	2.36	2.89	3.12	2.96	2.42	1.75	0.95	0.42	0.18	0.11	0.07	21.0	0.00
-40	0.08	0.11	0.12	0.17	0.29	0.48	0.76	1.06	1.29	1.38	1.29	1.04	0.74	0.44	0.23	0.13	0.10	0.06	9.78	0.00
-48	0.07	0.08	0.10	0.13	0.19	0.27	0.37	0.49	0.58	0.61	0.56	0.46	0.33	0.22	0.15	0.10	0.08	0.05	4.83	0.00
-56	0.05	0.06	0.07	0.10	0.12	0.16	0.21	0.27	0.31	0.32	0.28	0.23	0.18	0.13	0.10	0.08	0.06	0.04	2.76	0.00
-64	0.03	0.04	0.05	0.07	0.08	0.09	0.12	0.14	0.17	0.17	0.15	0.12	0.10	0.08	0.07	0.05	0.04	0.03	1.58	0.00
-72	0.03	0.04	0.05	0.07	0.08	0.09	0.12	0.14	0.17	0.17	0.15	0.12	0.10	0.08	0.07	0.05	0.04	0.03	1.58	0.00
-72 -64 -56 -48 -40 -32 -24 -16 HORIZONTAL (DEG) 16 24 32 40 48 56 64 72																				
F t	1.94	2.96	4.33	8.47	23.5	57.4	106	151	183	194	181	147	94.0	45.2	16.0	5.36	2.38	1.44	1226	---
F a	0.00	0.00	0.00	0.00	8.41	45.2	93.9	139	171	182	169	136	83.1	33.2	2.24	0.00	0.00	0.00	---	1063


one-half-peak spread: U:14.0,D:14.4 , L:25.0,NEZ:0.0 Beam Type: Type 5 x 4 (H x V)

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-18

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:BlazeLine Slim-600mm-3000K-3050D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:30X50 DEG	DIM.:600MM	SERIAL No.:IES001910
MFR.:	SUR.:	Shielding Angle:

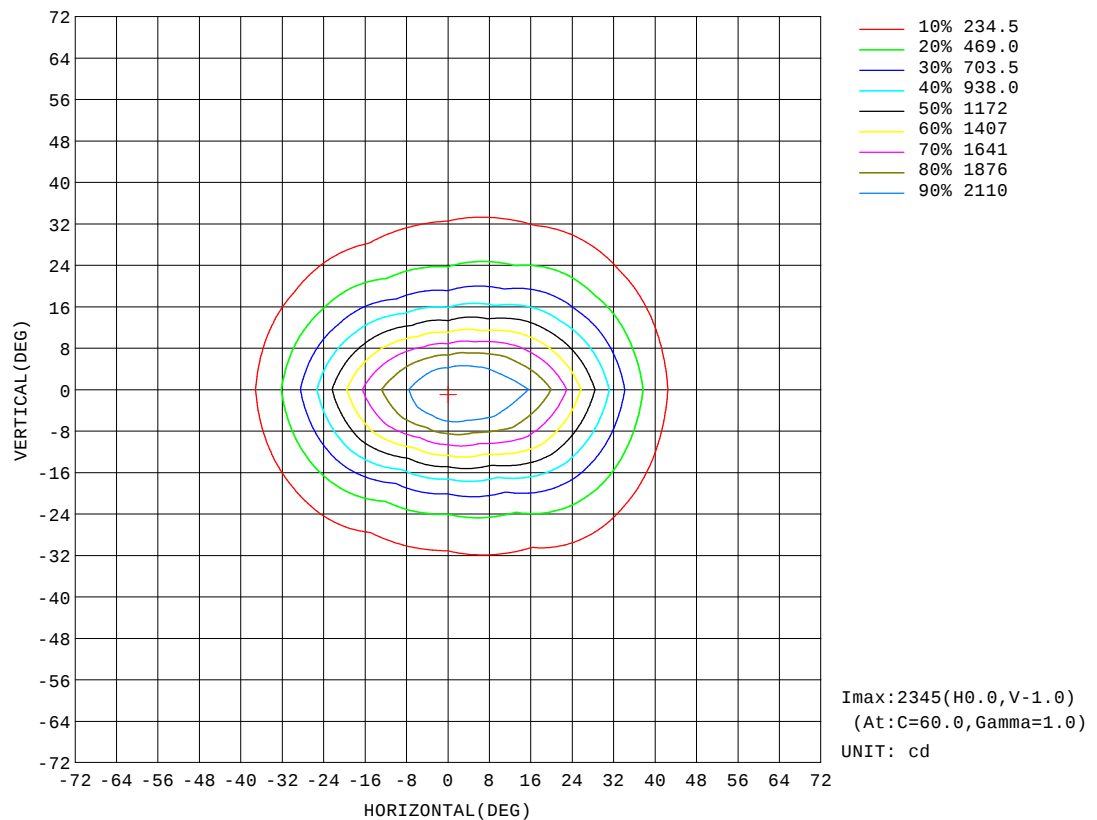


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:BlazeLine Slim-600mm-3000K-3050D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:30X50 DEG	DIM.:600MM	SERIAL No.:IES001910
MFR.:	SUR.:	Shielding Angle:

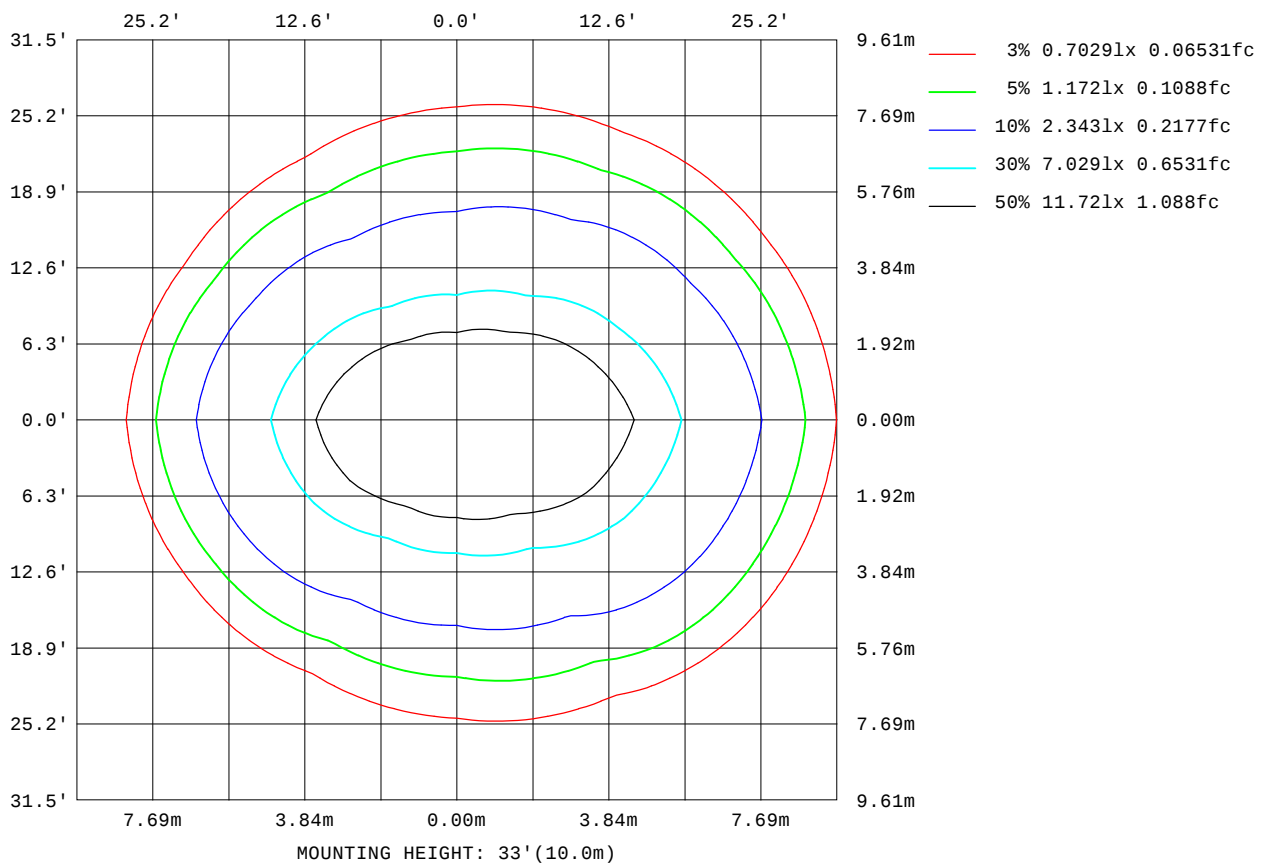

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-18

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

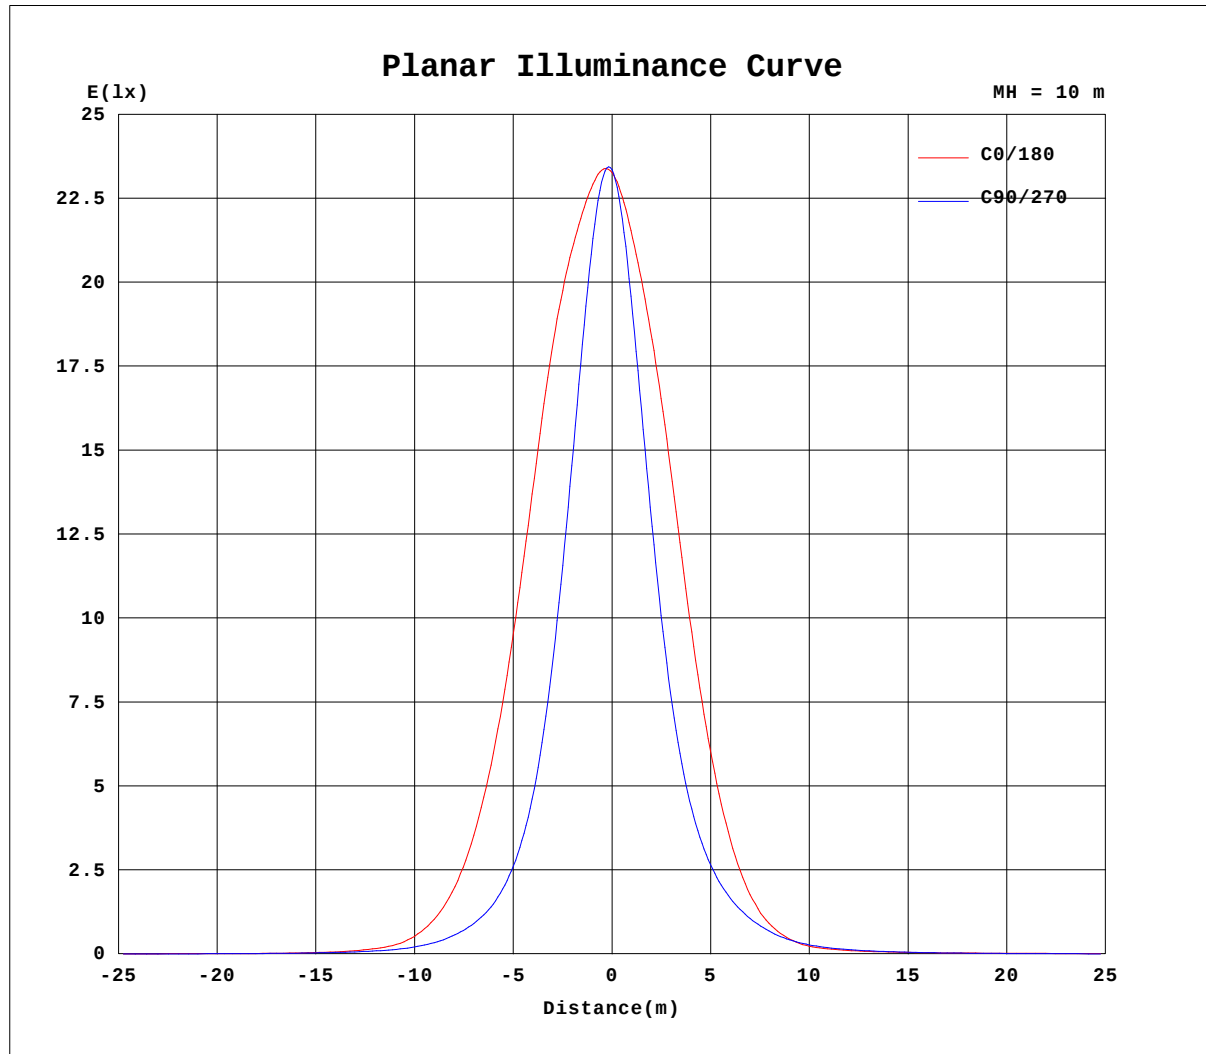


H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-18

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:BlazeLine Slim-600mm-3000K-3050D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:30X50 DEG	DIM.:600MM	SERIAL No.:IES001910
MFR.:	SUR.:	Shielding Angle:

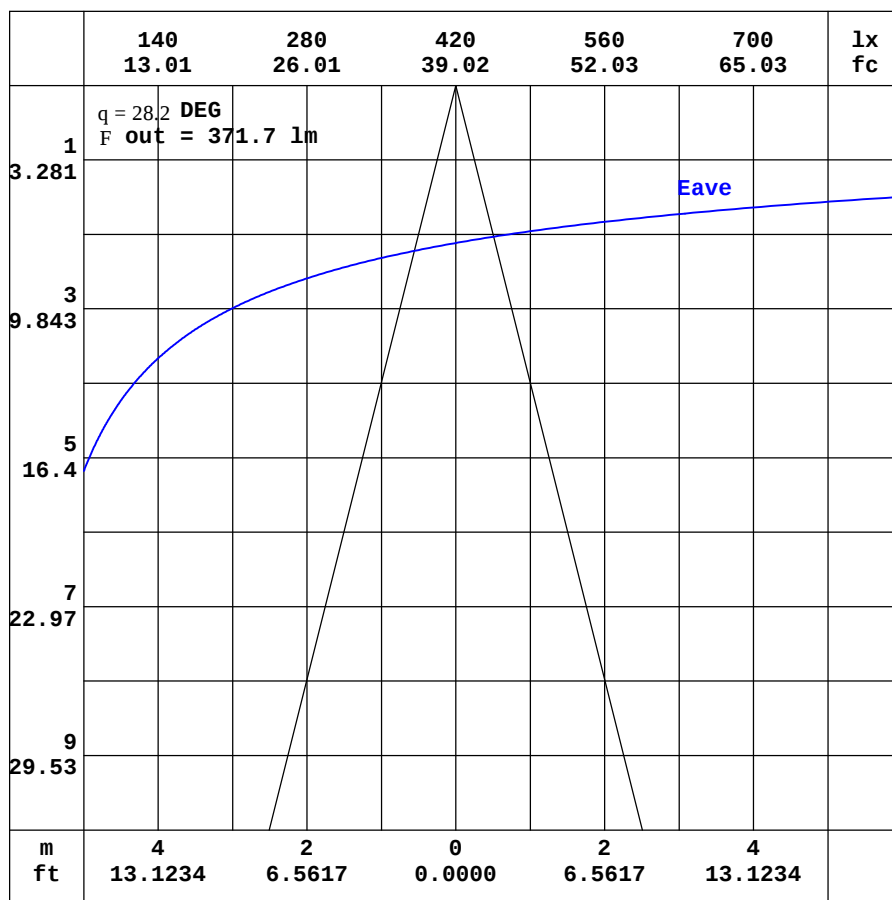

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeLine Slim-600mm-3000K-3050D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:30X50 DEG	DIM.:600MM	SERIAL No.:IES001910
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	4.55	4.29	4.27	4.37	4.71	5.25	5.95	6.75	7.57	8.35	9.03	9.58	9.93	10.00	9.89	9.64	9.40	9.17	9.29
-170	4.55	4.23	4.14	4.15	4.34	4.69	5.15	5.67	6.21	6.76	7.25	7.62	7.50	7.53	7.40	7.42	7.89	8.25	8.55
-160	4.55	4.17	4.01	3.91	3.97	4.11	4.31	4.52	4.75	5.00	5.27	5.47	5.60	5.65	6.17	6.71	7.14	7.37	7.42
-150	4.55	4.13	3.89	3.70	3.60	3.56	3.52	3.46	3.36	3.28	3.29	3.79	4.20	4.55	4.84	5.10	5.37	5.51	5.49
-140	4.55	4.09	3.78	3.53	3.30	3.11	2.90	2.63	2.29	2.21	2.39	2.57	2.76	2.93	3.04	3.26	3.40	3.45	3.41
-130	4.55	4.07	3.70	3.40	3.07	2.78	2.47	2.10	1.93	1.93	1.92	1.91	1.88	1.86	1.90	1.95	1.97	1.96	1.91
-120	4.55	4.06	3.66	3.31	2.96	2.58	2.21	1.92	1.93	1.91	1.88	1.83	1.77	1.72	1.68	1.65	1.63	1.60	1.57
-110	4.55	4.08	3.65	3.26	2.89	2.53	2.13	2.00	2.00	2.01	2.02	2.03	2.02	1.98	1.95	1.92	1.90	1.88	1.87
-100	4.55	4.10	3.68	3.28	2.89	2.51	2.14	2.11	2.11	2.11	2.12	2.13	2.14	2.13	2.10	2.08	2.06	2.04	2.02
-90	4.55	4.15	3.74	3.34	2.94	2.53	2.13	2.10	2.07	2.04	2.01	1.98	1.95	1.92	1.90	1.87	1.84	1.82	1.79
-80	4.55	4.21	3.85	3.48	3.21	2.78	2.25	2.23	2.27	2.29	2.30	2.28	2.23	2.28	2.34	2.41	2.47	2.52	2.55
-70	4.55	4.29	4.32	4.40	4.10	4.07	3.64	3.66	3.97	4.18	4.29	4.33	4.33	4.73	5.32	5.92	6.47	6.96	7.36
-60	4.55	4.39	5.10	5.13	6.74	7.09	6.49	5.98	6.41	6.81	7.31	7.95	8.75	9.87	11.4	12.9	14.3	15.5	16.4
-50	4.55	4.81	5.67	7.94	9.68	9.53	9.29	8.63	8.44	9.54	11.2	13.3	16.0	19.3	23.3	27.4	31.3	34.3	36.3
-40	4.55	5.19	6.37	11.5	11.9	12.3	13.5	12.6	11.6	13.4	17.6	24.0	34.0	46.6	59.5	74.2	87.1	97.1	103
-30	4.55	5.56	8.40	12.8	13.5	16.4	17.6	16.5	18.0	21.7	31.7	54.5	87.3	125	161	189	226	252	262
-20	4.55	5.88	9.75	14.6	16.1	21.1	20.4	21.4	26.3	37.8	66.1	125	213	330	446	534	594	690	714
-10	4.55	6.13	11.2	15.8	18.7	24.8	23.6	27.0	35.3	55.3	116	236	428	678	967	1247	1448	1593	1712
0	4.55	6.30	12.1	16.9	20.8	27.8	26.6	31.6	42.2	66.2	152	322	601	960	1368	1748	2011	2202	2327
10	4.55	6.24	11.4	16.3	19.5	26.1	25.5	29.9	39.0	58.9	119	235	415	644	896	1148	1339	1457	1513
20	4.55	6.09	10.2	15.4	17.6	23.6	24.1	26.6	33.3	45.7	73.3	128	208	315	426	510	566	638	646
30	4.55	5.85	9.05	14.0	15.5	19.7	22.5	23.3	27.2	33.5	44.3	66.1	98.1	138	176	207	245	273	284
40	4.55	5.56	7.19	12.9	14.1	15.9	18.9	20.1	21.5	25.0	30.2	37.5	47.9	61.7	76.9	92.7	107	118	124
50	4.55	5.24	6.62	9.51	12.0	13.0	14.4	15.8	17.0	18.9	21.3	24.2	27.5	31.3	36.0	40.9	45.5	49.0	51.3
60	4.55	4.86	6.14	6.78	9.11	10.3	10.8	11.6	12.8	13.9	14.9	16.0	17.2	18.6	20.5	22.2	23.8	25.1	26.1
70	4.55	4.79	5.39	6.10	6.44	7.12	7.50	7.89	8.54	9.14	9.65	10.1	10.3	10.9	11.6	12.3	12.9	13.3	13.7
80	4.55	4.72	4.90	5.10	5.45	5.68	5.80	5.90	6.02	6.14	6.26	6.36	6.44	6.55	6.66	6.77	6.85	6.91	6.94
90	4.55	4.65	4.75	4.84	4.94	5.04	5.14	5.11	5.09	5.06	5.03	5.01	4.98	4.94	4.90	4.86	4.83	4.79	4.75
100	4.55	4.58	4.61	4.63	4.65	4.61	4.59	4.52	4.49	4.43	4.35	4.25	4.15	4.10	4.06	4.03	4.02	4.02	4.02
110	4.55	4.52	4.49	4.43	4.42	4.41	4.37	4.29	4.20	4.14	4.12	4.11	4.07	4.03	3.99	3.96	3.92	3.88	3.84
120	4.55	4.46	4.38	4.36	4.33	4.30	4.30	4.30	4.35	4.39	4.45	4.51	4.59	4.65	4.71	4.73	4.72	4.68	4.60
130	4.55	4.42	4.32	4.31	4.29	4.33	4.46	4.66	4.88	5.12	5.41	5.66	5.92	6.16	6.39	6.59	6.74	6.81	6.79
140	4.55	4.37	4.31	4.29	4.34	4.51	4.80	5.21	5.69	6.16	6.62	7.12	7.64	8.11	8.48	8.83	9.09	9.25	9.30
150	4.55	4.34	4.29	4.29	4.44	4.75	5.21	5.79	6.43	7.11	7.89	8.61	9.24	9.70	10.1	10.3	10.5	10.7	10.7
160	4.55	4.32	4.28	4.32	4.56	4.98	5.58	6.28	7.04	7.89	8.77	9.58	10.2	10.4	10.6	10.8	10.9	11.0	11.1
170	4.55	4.30	4.28	4.36	4.65	5.16	5.84	6.61	7.44	8.29	9.11	9.76	10.1	10.2	10.3	10.1	9.94	9.95	10.3
180	4.55	4.29	4.27	4.37	4.71	5.25	5.95	6.75	7.57	8.35	9.03	9.58	9.93	10.00	9.89	9.64	9.40	9.17	9.33

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeLine Slim-600mm-3000K-3050D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:30X50 DEG	DIM.:600MM	SERIAL No.:IES001910
MFR.:	SUR.:	Shielding Angle:

Table--2
UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	8.12	7.44	6.79	6.14	5.43	4.69	3.98	3.37	2.89	2.51	2.24	2.07	1.96	1.93	1.87	1.78	1.61	1.42	
-170	8.12	7.59	6.95	6.32	5.74	4.95	4.21	3.56	3.04	2.58	2.25	2.07	1.97	1.94	1.88	1.79	1.61	1.42	
-160	7.16	6.75	6.28	5.76	5.24	4.73	4.10	3.52	2.98	2.50	2.19	2.03	1.97	1.94	1.89	1.79	1.61	1.42	
-150	5.36	5.08	4.66	4.31	3.98	3.69	3.44	3.15	2.66	2.29	2.08	2.00	1.97	1.94	1.90	1.78	1.60	1.42	
-140	3.36	3.22	3.01	2.77	2.68	2.60	2.48	2.34	2.21	2.09	2.02	1.99	1.97	1.94	1.89	1.77	1.59	1.42	
-130	1.93	1.92	1.89	1.85	1.84	1.90	1.94	1.96	1.98	2.01	2.01	2.00	1.97	1.93	1.86	1.74	1.57	1.42	
-120	1.61	1.66	1.70	1.75	1.81	1.87	1.93	1.97	2.01	2.02	2.02	1.99	1.96	1.91	1.82	1.70	1.55	1.42	
-110	1.90	1.93	1.97	2.01	2.05	2.08	2.08	2.06	2.05	2.02	2.01	1.99	1.93	1.86	1.76	1.65	1.52	1.42	
-100	2.03	2.04	2.04	2.05	2.06	2.07	2.05	2.03	2.00	1.98	1.96	1.93	1.86	1.78	1.69	1.59	1.49	1.42	
-90	1.78	1.77	1.77	1.76	1.75	1.74	1.75	1.77	1.78	1.79	1.80	1.81	1.75	1.68	1.62	1.55	1.49	1.42	
-80	2.48	2.40	2.30	2.20	2.10	2.02	2.06	2.07	2.05	2.00	1.95	1.89	1.88	1.86	1.80	1.68	1.54	1.42	
-70	7.02	6.58	6.06	5.49	4.90	4.47	4.42	4.34	4.20	3.97	3.59	3.35	3.35	2.65	2.26	1.94	1.65	1.42	
-60	15.8	14.9	13.7	12.3	10.7	9.57	8.58	7.74	7.09	6.56	6.08	5.71	5.74	5.46	3.37	2.37	1.79	1.42	
-50	36.8	35.9	33.3	29.6	25.1	20.9	16.8	13.4	10.8	9.11	8.42	8.49	7.47	7.00	6.38	2.94	1.94	1.42	
-40	107	104	96.2	83.7	73.0	57.9	42.1	28.9	19.5	13.6	10.8	10.5	10.4	8.06	8.04	4.10	2.09	1.42	
-30	280	276	252	246	217	164	112	69.2	40.0	23.4	15.0	11.6	12.3	10.4	8.34	6.43	2.23	1.42	
-20	754	708	705	655	545	404	261	148	74.5	39.1	21.3	13.8	12.8	12.7	8.56	7.70	2.39	1.42	
-10	1709	1670	1571	1344	1048	747	473	258	121	55.7	27.7	16.1	13.1	14.4	9.29	8.48	2.52	1.42	
0	2330	2255	2131	1869	1465	1033	644	341	151	64.4	31.3	17.5	13.7	15.6	9.84	8.98	2.58	1.42	
10	1565	1551	1449	1241	982	713	459	256	123	59.1	30.7	18.4	14.8	15.4	9.83	8.77	2.64	1.42	
20	699	678	671	614	503	369	250	151	80.9	45.9	27.1	18.1	15.8	14.6	9.59	8.25	2.63	1.42	
30	303	302	281	260	222	170	121	79.7	51.3	33.3	22.9	17.4	16.3	12.9	9.73	7.22	2.58	1.42	
40	129	127	120	107	91.7	73.6	56.6	42.3	32.3	25.1	19.7	17.0	14.8	10.8	9.70	5.08	2.52	1.42	
50	52.3	51.6	49.1	44.6	39.2	34.1	29.2	25.1	21.9	19.4	17.1	14.8	11.7	9.79	8.25	4.07	2.45	1.42	
60	25.7	24.9	23.8	22.4	20.9	19.3	18.0	16.7	15.5	14.3	13.0	11.0	9.58	8.31	5.33	3.60	2.34	1.42	
70	13.6	13.3	12.9	12.4	11.8	11.2	10.9	10.5	10.1	9.38	8.69	7.98	7.03	5.44	4.26	3.20	2.23	1.42	
80	6.97	6.97	6.94	6.88	6.81	6.72	6.66	6.57	6.47	6.35	6.24	6.07	5.29	4.49	3.69	2.90	2.13	1.42	
90	4.80	4.84	4.89	4.94	4.98	5.03	5.07	5.11	5.15	5.19	5.24	5.28	4.64	3.99	3.35	2.71	2.07	1.42	
100	4.03	4.05	4.07	4.10	4.15	4.20	4.29	4.38	4.47	4.56	4.66	4.72	4.25	3.75	3.21	2.64	2.04	1.42	
110	3.86	3.88	3.91	3.93	3.95	3.98	4.02	4.07	4.13	4.20	4.31	4.28	3.91	3.53	3.09	2.58	2.02	1.42	
120	4.61	4.59	4.55	4.48	4.40	4.32	4.25	4.19	4.16	4.17	4.21	3.97	3.65	3.32	2.95	2.52	1.99	1.42	
130	6.70	6.53	6.29	6.00	5.71	5.46	5.19	4.90	4.65	4.45	4.16	3.75	3.42	3.12	2.80	2.43	1.95	1.42	
140	9.14	8.87	8.50	8.02	7.63	7.19	6.68	6.12	5.58	4.87	4.12	3.58	3.20	2.91	2.65	2.32	1.90	1.42	
150	10.6	10.4	10.1	9.72	9.27	8.74	8.14	7.48	6.17	4.93	4.00	3.38	2.97	2.69	2.48	2.20	1.84	1.42	
160	11.1	11.0	10.9	10.6	10.2	9.77	8.37	6.97	5.70	4.57	3.69	3.07	2.70	2.47	2.28	2.07	1.77	1.42	
170	10.4	10.6	10.7	9.84	8.89	7.69	6.53	5.46	4.53	3.72	3.07	2.63	2.35	2.20	2.08	1.93	1.70	1.42	
180	8.12	7.44	6.79	6.14	5.43	4.69	3.98	3.37	2.89	2.51	2.24	2.07	1.96	1.93	1.87	1.78	1.61	1.42	

H_b Range:-90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks: