

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	2744.7 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	--

Beam Spread	At 10% of Imax	58.3V x 59.0H
	At 50% of Imax	29.6V x 29.7H
	At 90% of Imax	11.8V x 10.7H

Beam Flux	Total	1000.3 lumens per klm.
	To 10% of Imax	812.1 lumens per klm.
	To 50% of Imax	412.9 lumens per klm.
	To 90% of Imax	80.9 lumens per klm.

Upward LOR	2.3 %
Downward LOR	97.7 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:BlazeLine Slim-600mm-3000K-30D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:30 DEG	DIM.:600MM	SERIAL No.:IES001908
MFR.:	SUR.:	Shielding Angle:

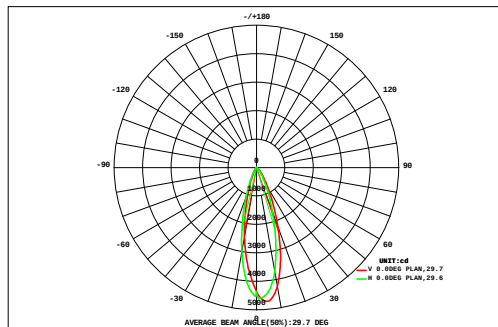

DATA OF LAMP		Eff:92.79lm/W	
MODEL		Imax(cd)	4762
NOMINAL POWER(W)	18.7	AVAILABILITY(%)	81.1
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	1407
NOMINAL FLUX(lm)	1735	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1735
TEST VOLTAGE(V)	220	q @50%(H,V)	30,30DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		F t	F a
	0.15	0.20	0.27	0.37	0.48	0.62	0.79	0.95	1.09	1.19	1.23	1.20	1.10	0.95	0.76	0.57	0.41	0.28	12.6	0.00
45	0.15	0.20	0.27	0.37	0.48	0.62	0.79	0.95	1.09	1.19	1.23	1.20	1.10	0.95	0.76	0.57	0.41	0.28	12.6	0.00
40	0.18	0.25	0.36	0.50	0.68	0.92	1.21	1.51	1.77	1.96	2.04	1.97	1.77	1.46	1.14	0.85	0.59	0.38	19.6	0.00
35	0.21	0.31	0.46	0.67	0.97	1.38	1.93	2.53	3.03	3.37	3.47	3.28	2.84	2.23	1.67	1.20	0.83	0.52	30.9	5.33
30	0.24	0.37	0.57	0.89	1.39	2.16	3.20	4.36	5.34	5.94	6.01	5.49	4.46	3.32	2.38	1.65	1.11	0.67	49.6	33.8
25	0.28	0.44	0.70	1.16	1.99	3.35	5.22	7.37	9.20	10.3	10.3	9.00	6.83	4.83	3.29	2.18	1.38	0.82	78.6	66.6
20	0.32	0.51	0.84	1.46	2.73	4.91	8.03	11.7	14.9	16.7	16.4	13.7	10.0	6.76	4.35	2.72	1.65	0.96	119	109
15	0.35	0.57	0.98	1.80	3.51	6.53	11.2	17.0	22.2	24.8	23.7	19.0	13.6	8.89	5.44	3.25	1.90	1.08	166	156
10	0.37	0.61	1.07	2.06	4.15	7.86	13.7	21.3	28.4	32.2	30.0	23.9	16.9	10.8	6.39	3.68	2.09	1.16	207	198
5	0.37	0.62	1.08	2.12	4.33	8.39	14.8	22.9	30.8	35.6	33.6	27.3	19.2	12.0	6.95	3.92	2.18	1.19	227	219
0	0.35	0.58	1.02	2.01	4.15	8.11	14.5	22.5	29.9	33.7	32.2	26.4	18.7	11.6	6.73	3.79	2.10	1.14	219	211
-5	0.31	0.52	0.91	1.78	3.65	7.08	12.4	18.7	24.5	27.4	26.0	21.5	15.4	9.80	5.77	3.30	1.86	1.03	182	173
-10	0.26	0.43	0.75	1.39	2.79	5.28	8.87	12.9	17.1	19.1	18.2	15.3	11.3	7.45	4.52	2.68	1.56	0.88	131	121
-15	0.21	0.34	0.56	0.99	1.90	3.45	5.60	8.13	10.4	11.6	11.2	9.61	7.38	5.10	3.28	2.04	1.23	0.71	83.9	72.8
-20	0.16	0.25	0.40	0.70	1.21	2.04	3.17	4.59	5.79	6.46	6.38	5.55	4.44	3.25	2.24	1.46	0.92	0.54	49.6	35.1
-25	0.12	0.18	0.29	0.48	0.76	1.17	1.73	2.41	2.98	3.34	3.40	3.07	2.56	2.00	1.45	1.00	0.65	0.39	28.0	4.63
-30	0.08	0.13	0.21	0.32	0.48	0.68	0.96	1.27	1.52	1.71	1.78	1.68	1.45	1.18	0.91	0.65	0.43	0.26	15.7	0.00
-35	0.06	0.09	0.14	0.21	0.29	0.41	0.55	0.69	0.81	0.90	0.95	0.92	0.80	0.67	0.54	0.40	0.27	0.17	8.88	0.00
-40	0.05	0.07	0.10	0.13	0.18	0.24	0.31	0.38	0.43	0.48	0.50	0.49	0.43	0.36	0.30	0.23	0.16	0.10	4.94	0.00
-45	0.05	0.07	0.10	0.13	0.18	0.24	0.31	0.38	0.43	0.48	0.50	0.49	0.43	0.36	0.30	0.23	0.16	0.10	4.94	0.00
	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)	10	15	20	25	30	35	40	45			
F t	4.08	6.48	10.7	19.0	35.6	64.6	108	161	210	237	227	189	139	92.7	58.1	35.6	21.3	12.3	1633	---
F a	0.00	0.00	0.00	0.00	16.6	51.3	96.5	150	200	227	217	179	128	80.5	44.1	16.4	0.00	0.00	---	1407

one-half-peak spread: U:14.7,D:15.1 , L:15.1,R:14.8


NEMA Beam Type: Type 4

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-10-18

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:BlazeLine Slim-600mm-3000K-30D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:30 DEG	DIM.:600MM	SERIAL No.:IES001908
MFR.:	SUR.:	Shielding Angle:

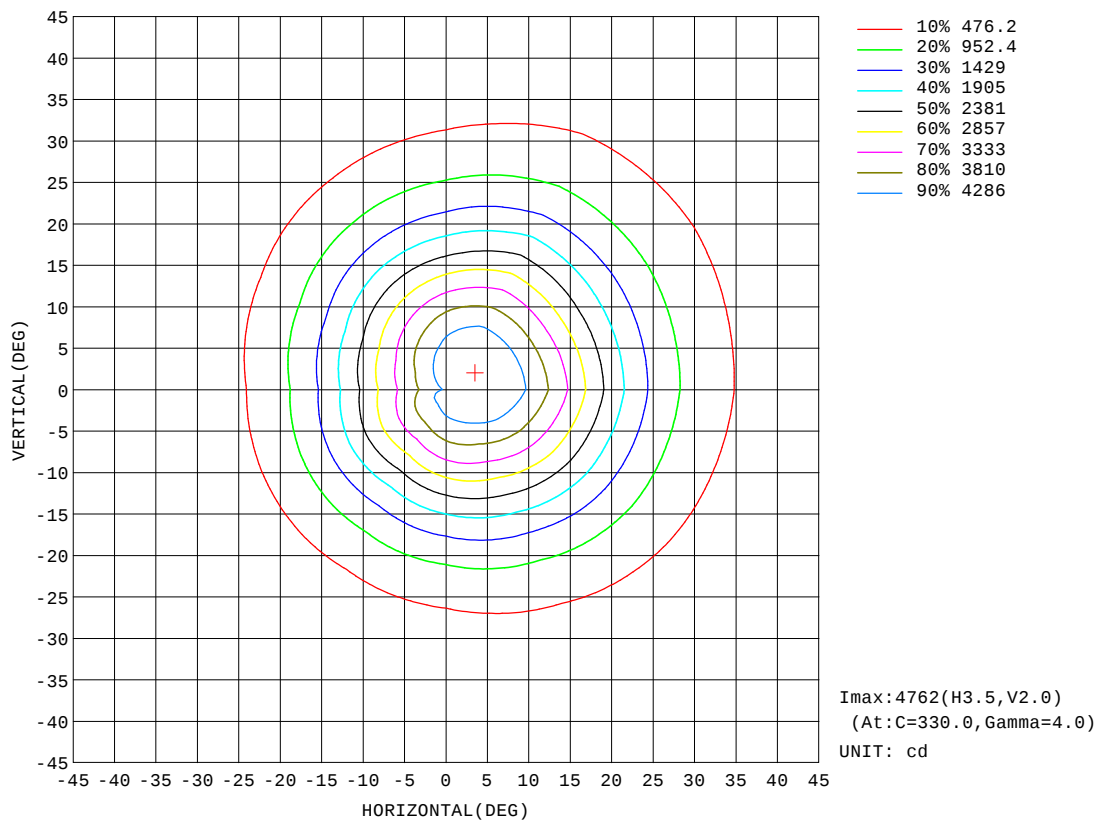


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-18

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:BlazeLine Slim-600mm-3000K-30D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:30 DEG	DIM.:600MM	SERIAL No.:IES001908
MFR.:	SUR.:	Shielding Angle:

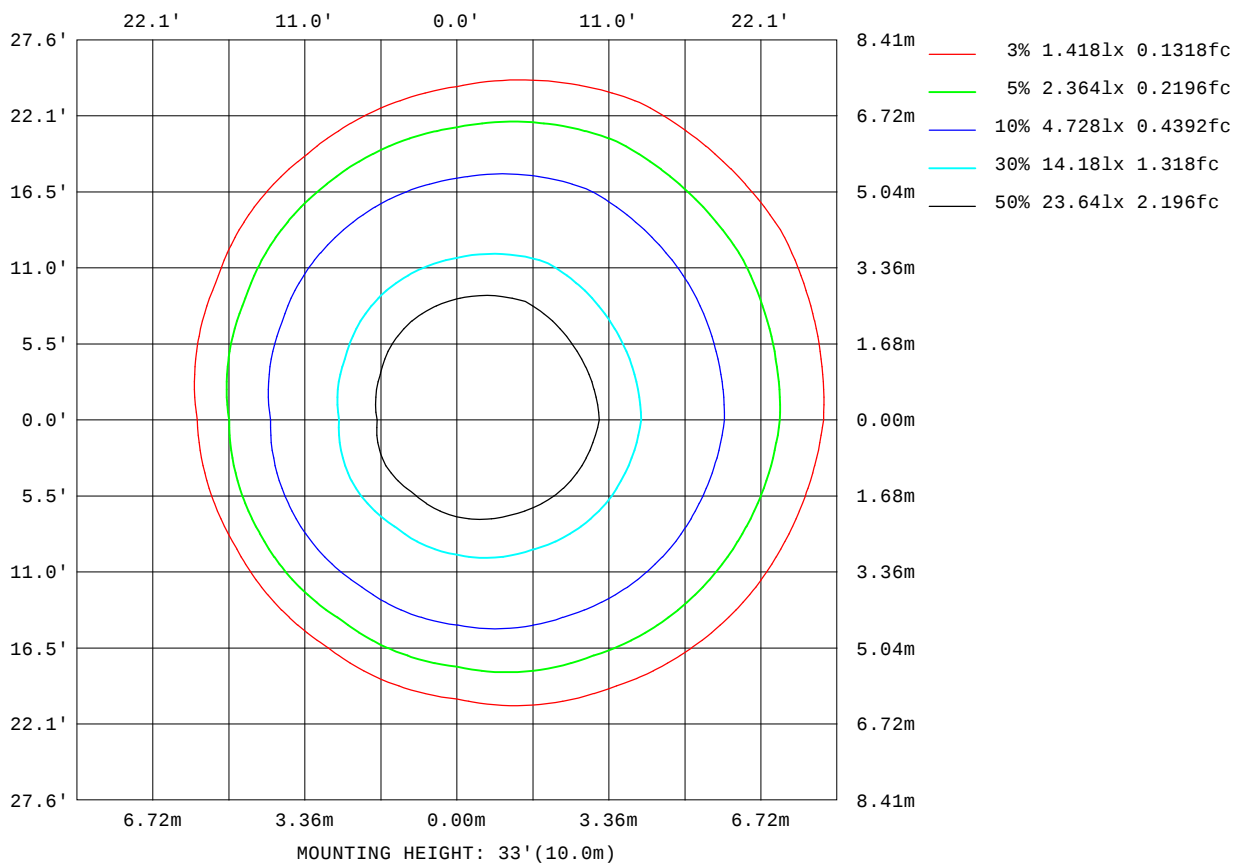

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-18

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

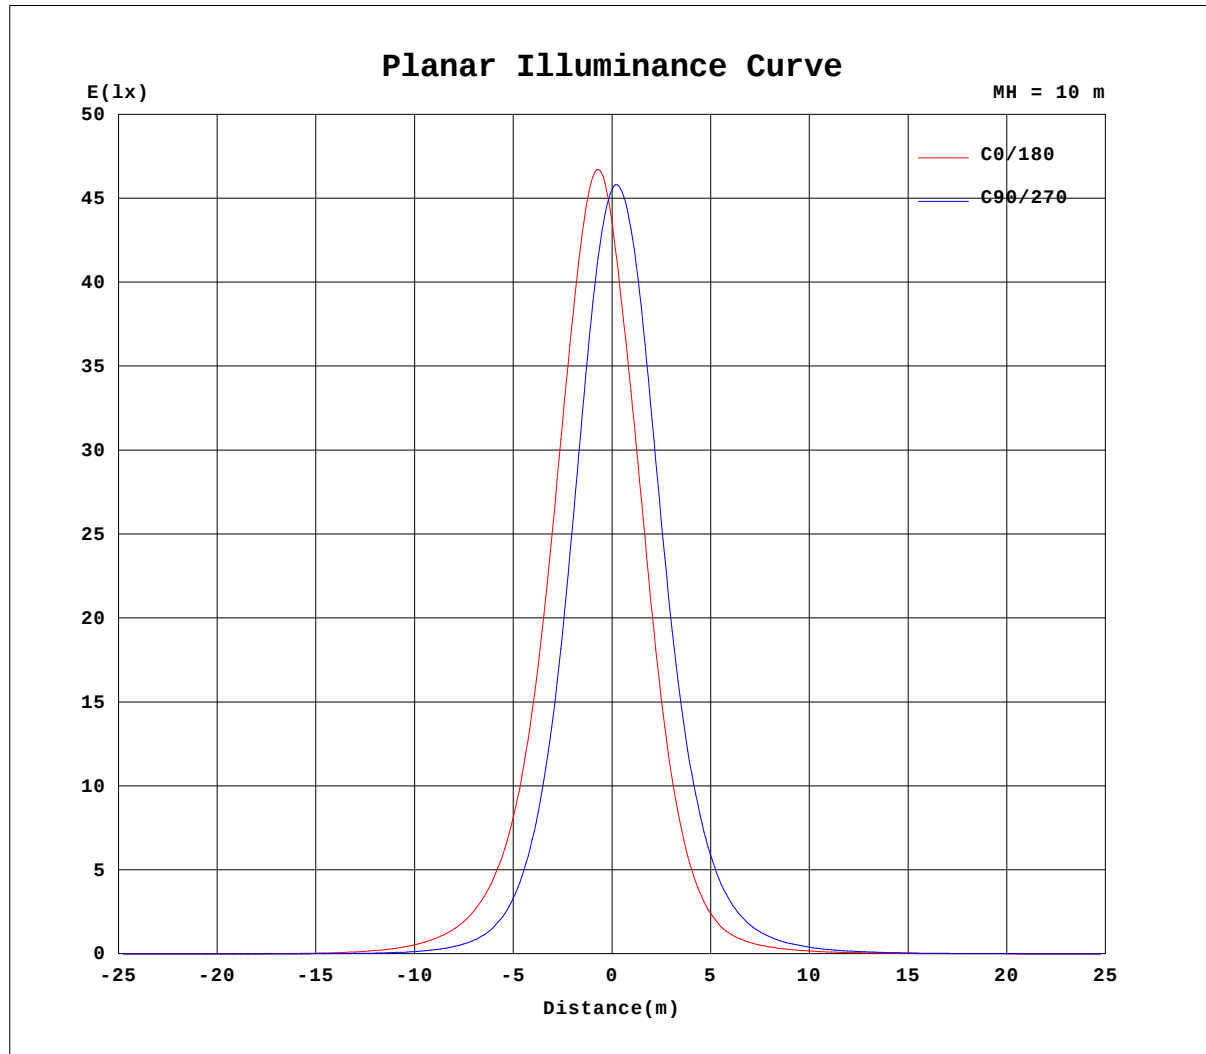


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-18

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:BlazeLine Slim-600mm-3000K-30D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:30 DEG	DIM.:600MM	SERIAL No.:IES001908
MFR.:	SUR.:	Shielding Angle:

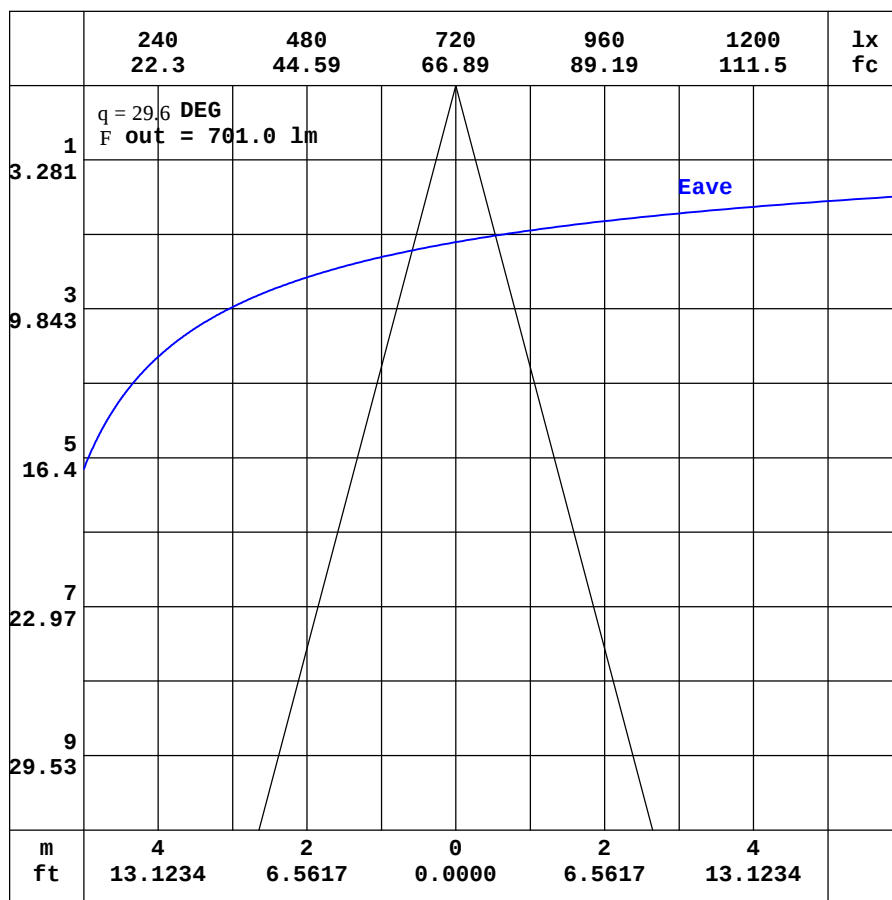

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeLine Slim-600mm-3000K-30D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:30 DEG	DIM.:600MM	SERIAL No.:IES001908
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	5.74	5.37	5.20	5.27	5.68	6.51	7.77	9.36	11.1	12.6	13.8	14.4	14.6	14.5	14.1	13.5	12.9	12.5	13.5
-170	5.74	5.31	5.07	5.05	5.28	5.81	6.65	7.70	8.82	9.85	10.6	11.2	11.3	11.3	11.2	11.3	11.8	12.0	12.0
-160	5.74	5.26	4.96	4.83	4.86	5.06	5.45	5.93	6.42	6.86	7.22	7.46	7.75	8.63	9.59	10.4	10.9	11.0	11.0
-150	5.74	5.23	4.86	4.63	4.48	4.40	4.39	4.36	4.28	4.11	4.05	4.92	5.83	6.72	7.51	8.13	8.48	8.60	8.49
-140	5.74	5.20	4.79	4.49	4.20	3.93	3.61	3.26	2.77	2.67	2.97	3.39	3.86	4.37	4.85	5.19	5.41	5.47	5.37
-130	5.74	5.19	4.76	4.39	4.04	3.66	3.23	2.70	2.43	2.41	2.42	2.47	2.58	2.73	2.88	3.00	3.07	3.07	3.01
-120	5.74	5.20	4.75	4.35	3.98	3.58	3.14	2.75	2.66	2.57	2.49	2.43	2.38	2.34	2.31	2.30	2.28	2.27	2.25
-110	5.74	5.23	4.77	4.36	3.98	3.61	3.21	3.05	3.00	2.96	2.93	2.88	2.85	2.79	2.73	2.69	2.66	2.63	2.62
-100	5.74	5.26	4.82	4.40	4.00	3.63	3.27	3.23	3.23	3.22	3.22	3.22	3.23	3.20	3.16	3.13	3.09	3.06	3.02
-90	5.74	5.31	4.89	4.46	4.04	3.61	3.19	3.16	3.13	3.10	3.07	3.05	3.02	2.99	2.96	2.93	2.90	2.87	2.83
-80	5.74	5.38	4.98	4.57	4.26	3.72	3.03	2.91	2.85	2.78	2.71	2.65	2.59	2.56	2.53	2.51	2.48	2.45	2.42
-70	5.74	5.46	5.49	5.35	4.73	4.09	3.26	3.01	3.07	3.09	3.10	3.10	3.09	3.22	3.44	3.67	3.88	4.07	4.21
-60	5.74	5.57	6.15	5.86	5.63	4.91	4.34	3.90	4.14	4.35	4.57	4.85	5.19	5.67	6.48	7.25	7.97	8.58	9.04
-50	5.74	6.03	6.50	6.80	6.44	6.37	6.29	5.65	5.42	6.05	6.94	8.12	9.63	11.5	13.8	16.5	19.1	21.3	22.7
-40	5.74	6.41	7.07	7.41	7.79	8.63	9.44	8.78	7.79	8.71	11.4	15.4	20.9	28.0	36.9	48.9	61.4	72.6	80.3
-30	5.74	6.76	7.73	8.29	9.53	11.7	12.8	11.9	13.0	15.3	20.0	30.6	46.9	69.8	101	144	198	255	293
-20	5.74	7.06	8.43	9.28	11.6	15.4	15.1	16.4	20.4	27.5	39.5	58.9	92.6	160	282	458	685	933	1094
-10	5.74	7.29	9.02	10.2	13.6	18.3	17.8	21.5	28.8	41.6	63.0	99.0	168	327	627	1120	1764	2417	2996
0	5.74	7.46	9.48	10.9	15.2	20.8	20.6	25.8	35.6	52.6	79.8	125	213	418	819	1496	2472	3498	4357
10	5.74	7.42	9.36	10.8	14.7	20.1	20.5	25.6	35.2	51.6	78.4	123	208	395	740	1299	2123	3015	3688
20	5.74	7.31	9.07	10.5	13.7	18.7	20.1	23.8	31.5	44.1	64.4	95.8	147	249	431	706	1054	1405	1654
30	5.74	7.11	8.64	10.0	12.4	16.1	19.2	21.1	26.2	34.3	46.7	66.3	94.7	136	194	280	383	483	553
40	5.74	6.86	8.17	9.44	11.1	13.6	16.5	18.6	21.1	25.7	32.6	42.2	55.2	71.2	91.0	116	144	169	189
50	5.74	6.55	7.72	9.00	9.90	11.5	13.4	15.1	16.9	19.5	22.6	26.5	31.8	37.3	44.2	51.8	59.4	66.3	71.4
60	5.74	6.14	7.44	8.05	8.99	9.66	10.8	12.1	13.3	14.6	16.1	17.6	19.4	21.4	23.4	25.6	27.6	29.3	30.5
70	5.74	6.04	6.77	7.45	7.79	8.27	8.74	9.28	9.97	10.7	11.4	12.0	12.6	13.4	14.3	15.1	15.8	16.4	16.9
80	5.74	5.96	6.20	6.50	6.95	7.23	7.42	7.61	7.82	8.02	8.24	8.46	8.66	8.89	9.12	9.33	9.53	9.70	9.84
90	5.74	5.88	6.02	6.16	6.30	6.44	6.58	6.60	6.62	6.64	6.65	6.67	6.69	6.68	6.68	6.67	6.67	6.66	6.65
100	5.74	5.79	5.85	5.90	5.94	5.98	6.01	5.92	5.76	5.75	5.71	5.63	5.55	5.49	5.46	5.45	5.45	5.45	5.47
110	5.74	5.72	5.69	5.67	5.53	5.59	5.56	5.45	5.34	5.29	5.28	5.27	5.24	5.18	5.15	5.12	5.09	5.06	5.02
120	5.74	5.64	5.56	5.45	5.42	5.37	5.34	5.34	5.35	5.42	5.51	5.61	5.73	5.83	5.92	5.96	5.96	5.91	5.82
130	5.74	5.57	5.39	5.35	5.31	5.33	5.42	5.64	5.95	6.33	6.75	7.17	7.56	7.90	8.23	8.47	8.60	8.61	8.50
140	5.74	5.51	5.34	5.29	5.31	5.47	5.82	6.35	7.09	7.90	8.73	9.54	10.3	11.0	11.5	11.9	12.1	12.2	12.1
150	5.74	5.46	5.28	5.25	5.38	5.76	6.40	7.34	8.46	9.68	10.9	12.0	12.9	13.6	14.1	14.4	14.6	14.7	14.7
160	5.74	5.42	5.24	5.26	5.51	6.09	7.03	8.29	9.73	11.2	12.5	13.6	14.4	14.8	15.1	15.3	15.5	15.6	15.7
170	5.74	5.39	5.22	5.27	5.62	6.36	7.52	9.00	10.6	12.2	13.4	14.3	14.7	14.9	14.8	14.5	14.3	14.4	14.9
180	5.74	5.37	5.20	5.27	5.68	6.51	7.77	9.36	11.1	12.6	13.8	14.4	14.6	14.5	14.1	13.5	12.9	12.5	13.6

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeLine Slim-600mm-3000K-30D-Rev1	TYPE:3000K	WEIGHT:
SPEC.:30 DEG	DIM.:600MM	SERIAL No.:IES001908
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	11.2	10.5	9.69	8.62	7.36	6.01	4.74	3.67	2.89	2.46	2.42	2.57	2.80	2.99	2.96	2.78	2.39	1.93
-170	11.1	10.5	9.64	8.62	7.48	6.13	4.84	3.75	2.96	2.50	2.44	2.56	2.80	2.98	2.96	2.79	2.40	1.93
-160	10.4	9.71	8.84	7.80	6.64	5.48	4.38	3.46	2.79	2.48	2.46	2.60	2.83	2.98	2.96	2.77	2.39	1.93
-150	8.11	7.51	6.72	5.87	5.01	4.19	3.48	2.92	2.55	2.45	2.50	2.69	2.90	2.98	2.96	2.74	2.37	1.93
-140	5.12	4.75	4.27	3.74	3.30	2.91	2.61	2.45	2.42	2.47	2.63	2.83	2.96	2.98	2.92	2.69	2.33	1.93
-130	2.91	2.77	2.61	2.44	2.32	2.31	2.34	2.40	2.51	2.67	2.83	2.95	3.00	2.98	2.86	2.62	2.28	1.93
-120	2.26	2.27	2.29	2.33	2.39	2.49	2.60	2.72	2.84	2.93	2.99	3.00	2.99	2.92	2.75	2.51	2.22	1.93
-110	2.66	2.71	2.77	2.84	2.92	2.98	3.03	3.05	3.06	3.04	3.03	3.01	2.92	2.77	2.60	2.39	2.16	1.93
-100	3.04	3.05	3.07	3.09	3.09	3.10	3.07	3.04	3.00	2.94	2.88	2.81	2.69	2.56	2.41	2.25	2.08	1.93
-90	2.80	2.77	2.74	2.71	2.68	2.65	2.62	2.59	2.56	2.53	2.50	2.47	2.38	2.29	2.20	2.11	2.02	1.93
-80	2.39	2.35	2.31	2.27	2.23	2.19	2.19	2.18	2.18	2.18	2.18	2.18	2.23	2.27	2.26	2.18	2.05	1.93
-70	4.09	3.92	3.72	3.48	3.23	3.05	2.98	2.87	2.76	2.63	2.47	2.33	2.32	2.34	2.27	2.29	2.13	1.93
-60	8.80	8.37	7.78	7.08	6.29	5.83	5.49	5.08	4.65	4.23	3.78	3.36	2.95	2.61	2.52	2.29	2.24	1.93
-50	24.3	24.6	23.4	20.8	17.8	15.4	12.4	9.78	7.96	6.59	5.64	5.12	4.20	3.29	2.72	2.48	2.30	1.93
-40	89.1	90.8	85.6	74.7	64.7	53.0	40.4	28.1	18.0	11.3	7.96	6.69	5.97	4.31	3.20	2.69	2.31	1.93
-30	322	315	283	241	193	147	106	71.3	43.9	24.5	12.9	8.00	7.24	5.63	3.65	2.82	2.31	1.93
-20	1154	1065	891	681	482	330	216	139	83.9	45.9	22.2	10.6	7.72	6.93	4.15	2.91	2.32	1.93
-10	3051	2753	2175	1517	968	591	361	218	128	68.2	32.6	13.7	8.12	7.84	4.63	3.02	2.33	1.93
0	4709	4230	3268	2192	1332	791	466	273	157	82.1	39.1	15.6	8.38	8.42	4.90	3.09	2.34	1.93
10	3807	3298	2504	1734	1112	684	420	256	152	81.9	40.4	18.0	10.7	9.40	5.56	3.50	2.51	1.93
20	1759	1665	1329	964	673	463	308	200	122	68.2	35.2	18.2	12.4	9.87	5.92	3.83	2.68	1.93
30	599	587	535	437	338	253	187	132	82.8	48.9	27.8	17.5	13.4	9.63	6.08	4.12	2.82	1.93
40	205	207	199	182	152	123	93.4	68.3	47.9	32.9	22.5	16.8	12.9	8.97	6.09	4.26	2.95	1.93
50	75.9	77.3	75.6	70.6	62.4	53.0	41.9	33.6	27.4	23.0	19.1	15.0	11.3	8.20	5.84	4.23	3.04	1.93
60	31.0	30.8	29.8	28.2	26.4	24.2	22.2	20.3	18.5	16.8	15.1	12.5	9.71	7.38	5.66	4.13	3.05	1.93
70	16.9	16.8	16.6	16.2	15.7	15.0	14.4	13.7	12.9	12.1	11.3	10.1	8.30	6.71	5.27	4.13	2.97	1.93
80	9.89	9.91	9.90	9.85	9.78	9.68	9.53	9.34	9.15	8.94	8.73	8.45	7.25	6.12	5.03	3.93	2.89	1.93
90	6.74	6.82	6.90	6.98	7.07	7.15	7.18	7.21	7.24	7.27	7.30	7.32	6.43	5.53	4.63	3.73	2.83	1.93
100	5.49	5.53	5.57	5.63	5.70	5.79	5.89	6.00	6.12	6.24	6.39	6.48	5.88	5.22	4.49	3.70	2.84	1.93
110	5.02	5.01	5.01	5.02	5.04	5.10	5.17	5.26	5.36	5.50	5.67	5.71	5.34	4.89	4.34	3.66	2.85	1.93
120	5.76	5.66	5.53	5.40	5.27	5.15	5.07	5.03	5.05	5.11	5.23	5.12	4.89	4.58	4.16	3.59	2.84	1.93
130	8.31	8.01	7.60	7.14	6.66	6.25	5.85	5.50	5.23	5.07	4.94	4.69	4.50	4.29	3.97	3.49	2.80	1.93
140	11.9	11.4	10.8	10.1	9.29	8.44	7.53	6.74	6.03	5.32	4.69	4.37	4.18	4.01	3.79	3.38	2.76	1.93
150	14.5	14.1	13.6	12.9	12.0	11.0	9.74	8.45	6.67	5.32	4.47	4.03	3.88	3.75	3.60	3.25	2.69	1.93
160	15.5	15.4	15.0	14.5	13.8	12.9	10.5	8.22	6.28	4.90	4.06	3.65	3.53	3.49	3.38	3.11	2.60	1.93
170	14.9	15.0	15.0	13.8	12.1	10.2	8.26	6.45	4.95	3.87	3.34	3.14	3.17	3.24	3.17	2.95	2.51	1.93
180	11.2	10.5	9.69	8.62	7.36	6.01	4.74	3.67	2.89	2.46	2.42	2.57	2.80	2.99	2.96	2.78	2.39	1.93

H_(b) Range: -90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-10-18

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: