

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	2935.5 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	59.9V x 58.3H
	At 50% of Imax	27.3V x 25.6H
	At 90% of Imax	7.8V x 7.4H

Beam Flux	Total	1000.2 lumens per klm.
	To 10% of Imax	776.2 lumens per klm.
	To 50% of Imax	320.3 lumens per klm.
	To 90% of Imax	40.2 lumens per klm.

Upward LOR	2.2 %
Downward LOR	97.8 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-05

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:BlazeLine Slim-600mm-RGBW DS-3000K-25D-Rev1	TYPE:RGBW DS-3000K	WEIGHT:
SPEC.:25 DEG	DIM.:600MM	SERIAL No.:IES001641
MFR.:	SUR.:	Shielding Angle:

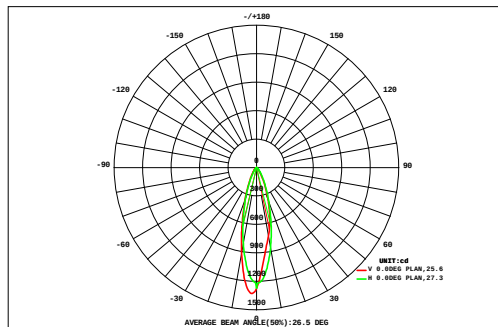

DATA OF LAMP		Eff:75.32lm/W	
MODEL		Imax(cd)	1327
NOMINAL POWER(W)	6	AVAILABILITY(%)	77.6
RATED VOLTAGE(V)	24	Avai. FLUX(lm)	350.6
NOMINAL FLUX(lm)	451.9	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	451.9
TEST VOLTAGE(V)	24	q @50%(H,V)	26,27DEG

		AREA FLUX DIAGRAM															UNIT:lm				F t	F a
		0.08	0.11	0.15	0.19	0.23	0.27	0.30	0.33	0.33	0.33	0.31	0.27	0.23	0.19	0.14	0.11	0.08	0.06	3.71	0.00	
VERTICAL (DEG)	45	0.10	0.14	0.20	0.26	0.33	0.40	0.46	0.51	0.52	0.52	0.48	0.42	0.34	0.26	0.19	0.14	0.10	0.07	5.44	0.00	
	40	0.13	0.18	0.26	0.35	0.46	0.59	0.71	0.81	0.86	0.84	0.77	0.66	0.53	0.38	0.26	0.18	0.12	0.08	8.18	0.41	
	35	0.15	0.23	0.33	0.47	0.65	0.88	1.11	1.31	1.41	1.39	1.26	1.04	0.79	0.55	0.36	0.23	0.14	0.09	12.4	7.20	
	30	0.18	0.28	0.41	0.61	0.90	1.28	1.72	2.09	2.29	2.25	1.99	1.60	1.17	0.78	0.48	0.29	0.17	0.11	18.6	14.8	
	25	0.21	0.32	0.50	0.78	1.21	1.81	2.58	3.29	3.64	3.53	3.03	2.35	1.66	1.07	0.63	0.36	0.20	0.12	27.3	24.1	
	20	0.23	0.36	0.58	0.94	1.53	2.43	3.64	4.92	5.52	5.20	4.30	3.21	2.20	1.40	0.80	0.44	0.23	0.12	38.1	35.2	
	15	0.24	0.39	0.64	1.07	1.81	3.01	4.76	6.76	7.78	6.82	5.38	3.98	2.73	1.73	0.96	0.50	0.25	0.13	48.9	46.3	
	10	0.25	0.40	0.66	1.12	1.95	3.33	5.44	8.08	9.59	7.78	5.99	4.59	3.14	1.94	1.04	0.53	0.26	0.13	56.2	53.8	
	5	0.24	0.39	0.65	1.11	1.94	3.33	5.45	8.03	9.23	8.05	6.16	4.66	3.17	1.94	1.04	0.52	0.25	0.12	56.3	53.8	
	0	0.23	0.36	0.60	1.02	1.77	2.99	4.72	6.49	7.33	6.70	5.42	4.08	2.77	1.72	0.94	0.48	0.23	0.12	48.0	45.4	
	-5	0.20	0.32	0.52	0.87	1.45	2.34	3.44	4.51	5.12	4.91	4.10	3.13	2.18	1.37	0.77	0.40	0.20	0.10	36.0	33.2	
	-10	0.17	0.27	0.43	0.68	1.08	1.63	2.29	2.91	3.28	3.22	2.77	2.17	1.55	1.00	0.57	0.30	0.16	0.09	24.6	21.4	
	-15	0.14	0.22	0.33	0.50	0.75	1.07	1.44	1.78	1.98	1.96	1.73	1.38	1.00	0.65	0.39	0.22	0.12	0.07	15.7	11.8	
	-20	0.12	0.17	0.25	0.36	0.50	0.67	0.86	1.03	1.13	1.11	1.00	0.81	0.60	0.41	0.26	0.16	0.10	0.06	9.60	3.09	
	-25	0.09	0.13	0.18	0.25	0.33	0.42	0.51	0.58	0.62	0.61	0.55	0.46	0.36	0.26	0.17	0.11	0.07	0.05	5.75	0.00	
	-30	0.07	0.10	0.13	0.17	0.22	0.26	0.31	0.34	0.35	0.34	0.31	0.27	0.22	0.17	0.12	0.08	0.06	0.04	3.55	0.00	
-35	0.05	0.07	0.09	0.12	0.15	0.17	0.19	0.21	0.21	0.20	0.19	0.17	0.14	0.11	0.08	0.06	0.04	0.03	2.28	0.00		
-40	0.05	0.07	0.09	0.12	0.15	0.17	0.19	0.21	0.21	0.20	0.19	0.17	0.14	0.11	0.08	0.06	0.04	0.03	2.28	0.00		
-45	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)				10	15	20	25	30	35	40	45		
F t	2.87	4.45	6.91	10.9	17.2	26.9	40.0	54.0	61.2	55.8	45.7	35.2	24.8	15.9	9.21	5.10	2.81	1.59	421	---		
F a	0.00	0.00	0.00	5.18	12.9	23.2	36.6	50.8	58.1	52.7	42.6	32.0	21.2	11.8	3.39	0.00	0.00	0.00	---	351		

one-half-peak spread: U:13.3,D:14.2 , L:11.8,R:14.1


NEMA Beam Type: Type 4

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-09-05

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:BlazeLine Slim-600mm-RGBW DS-3000K-25D-Rev1	TYPE:RGBW DS-3000K	WEIGHT:
SPEC.:25 DEG	DIM.:600MM	SERIAL No.:IES001641
MFR.:	SUR.:	Shielding Angle:

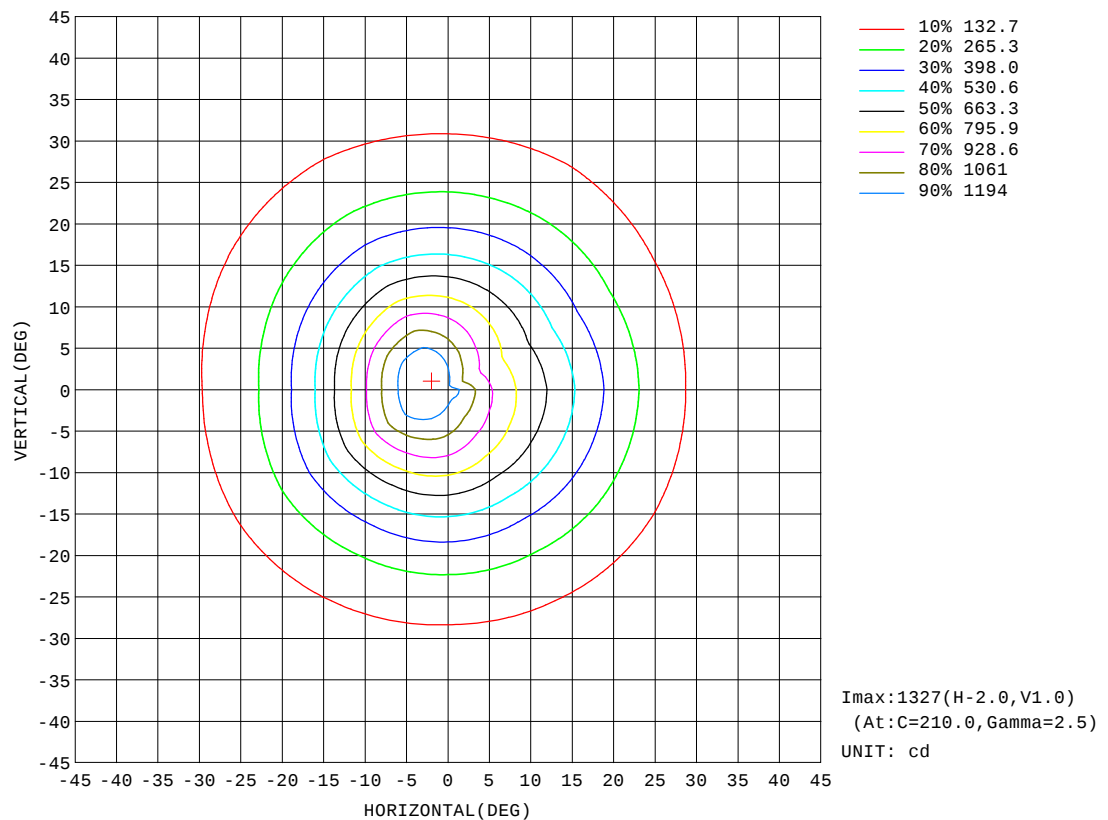


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-05

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:BlazeLine Slim-600mm-RGBW DS-3000K-25D-Rev1	TYPE:RGBW DS-3000K	WEIGHT:
SPEC.:25 DEG	DIM.:600MM	SERIAL No.:IES001641
MFR.:	SUR.:	Shielding Angle:

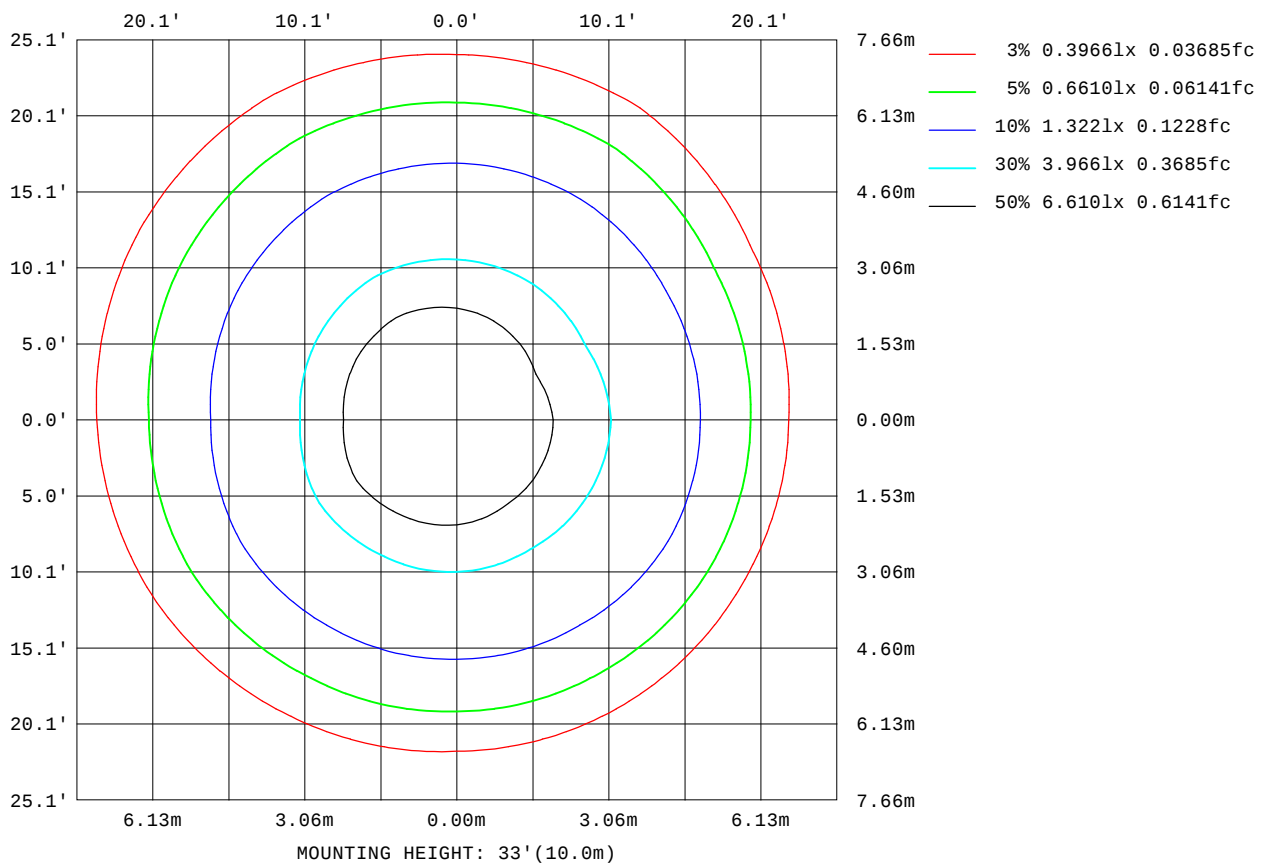

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-09-05

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

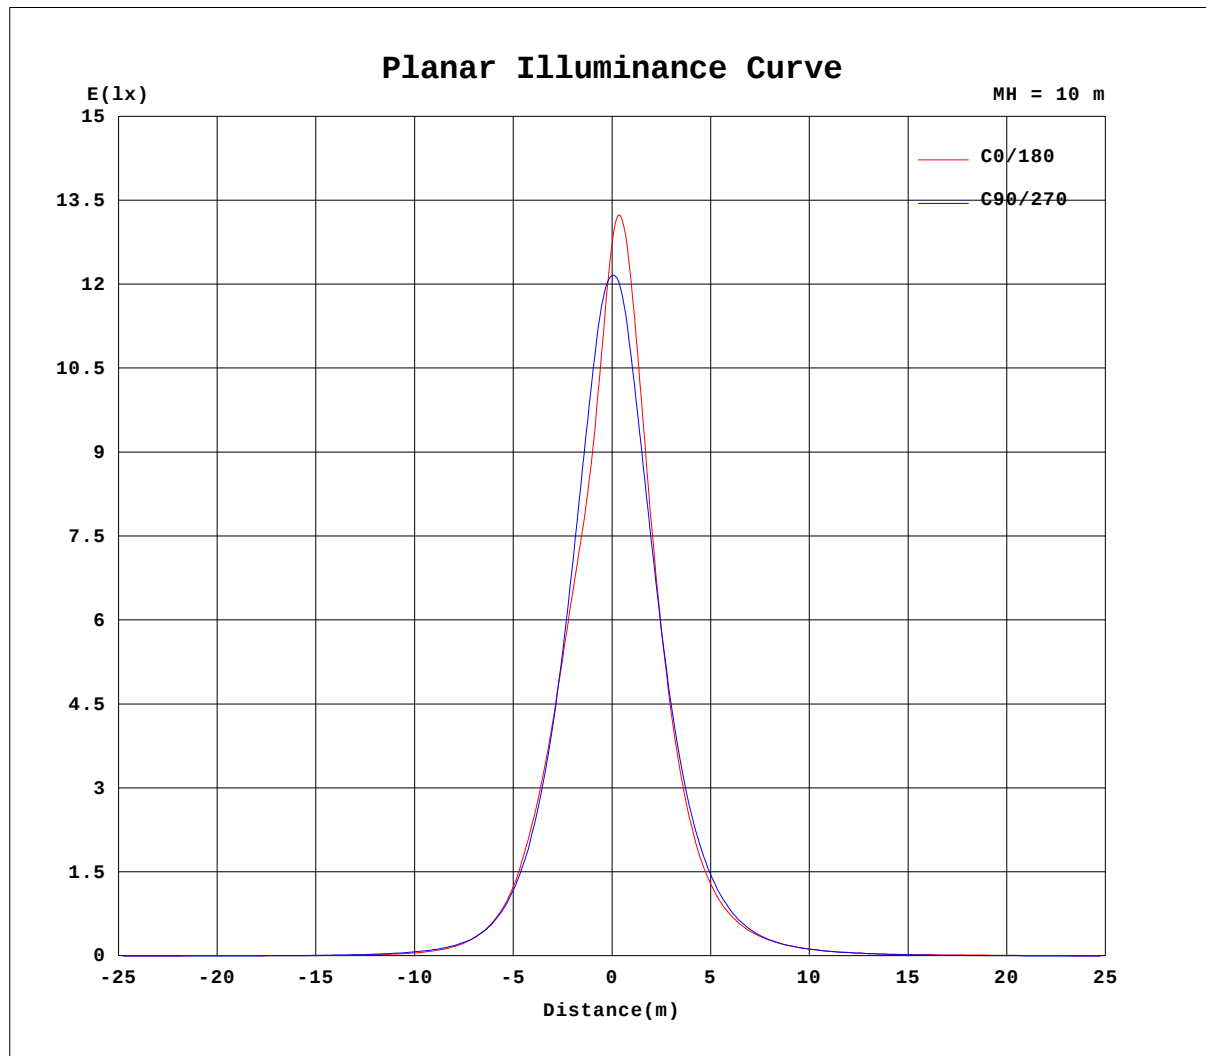


H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-09-05

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:BlazeLine Slim-600mm-RGBW DS-3000K-25D-Rev1	TYPE:RGBW DS-3000K	WEIGHT:
SPEC.:25 DEG	DIM.:600MM	SERIAL No.:IES001641
MFR.:	SUR.:	Shielding Angle:

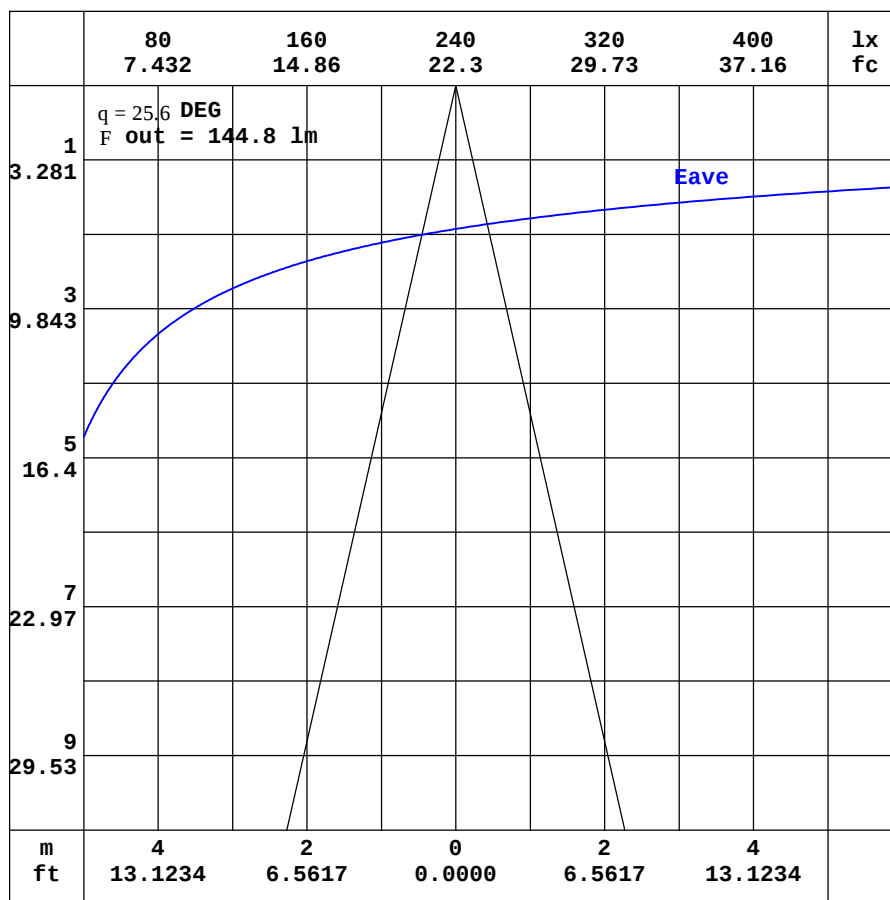

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-05

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeLine Slim-600mm-RGBW DS-3000K-25D-Rev1	TYPE:RGBW DS-3000K	WEIGHT:
SPEC.:25 DEG	DIM.:600MM	SERIAL No.:IES001641
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	1.68	1.49	1.37	1.34	1.37	1.47	1.68	1.98	2.37	2.79	3.17	3.45	3.61	3.61	3.58	3.51	3.43	3.34	3.44
-170	1.68	1.47	1.33	1.28	1.27	1.32	1.45	1.63	1.86	2.12	2.34	2.50	2.59	2.60	2.58	2.62	2.82	2.96	3.10
-160	1.68	1.45	1.29	1.21	1.17	1.17	1.21	1.27	1.34	1.42	1.47	1.50	1.53	1.82	2.09	2.33	2.54	2.67	2.76
-150	1.68	1.44	1.26	1.16	1.10	1.04	1.00	0.96	0.91	0.83	0.77	0.93	1.12	1.33	1.54	1.73	1.89	2.00	2.06
-140	1.68	1.44	1.24	1.11	1.03	0.94	0.85	0.75	0.63	0.59	0.61	0.67	0.75	0.85	0.96	1.08	1.17	1.24	1.27
-130	1.68	1.43	1.24	1.09	0.97	0.87	0.76	0.64	0.58	0.58	0.57	0.57	0.57	0.57	0.60	0.64	0.68	0.71	0.73
-120	1.68	1.43	1.24	1.08	0.94	0.82	0.71	0.63	0.62	0.61	0.60	0.60	0.59	0.58	0.57	0.57	0.56	0.56	0.56
-110	1.68	1.44	1.25	1.08	0.93	0.79	0.67	0.63	0.63	0.63	0.63	0.63	0.63	0.63	0.63	0.62	0.62	0.61	0.60
-100	1.68	1.46	1.26	1.08	0.92	0.77	0.62	0.62	0.62	0.62	0.62	0.62	0.62	0.63	0.63	0.63	0.64	0.64	0.64
-90	1.68	1.48	1.29	1.10	0.91	0.72	0.53	0.52	0.52	0.51	0.50	0.50	0.49	0.50	0.51	0.52	0.52	0.53	0.54
-80	1.68	1.51	1.33	1.14	0.94	0.71	0.47	0.43	0.42	0.42	0.41	0.41	0.40	0.40	0.40	0.40	0.39	0.39	0.39
-70	1.68	1.55	1.41	1.25	1.07	0.86	0.55	0.48	0.60	0.72	0.85	0.96	1.06	1.17	1.27	1.35	1.41	1.44	1.44
-60	1.68	1.59	1.52	1.49	1.43	1.30	1.21	1.16	1.46	1.80	2.17	2.58	3.01	3.46	3.96	4.38	4.66	4.79	4.78
-50	1.68	1.65	1.68	1.86	1.98	2.20	2.32	2.39	2.86	3.90	5.31	6.95	8.64	10.3	11.7	12.8	13.5	13.8	13.5
-40	1.68	1.72	1.93	2.26	2.79	3.33	4.15	5.75	6.25	8.46	11.7	15.4	19.3	23.4	27.3	30.8	33.5	34.8	34.3
-30	1.68	1.78	2.20	2.79	3.65	4.86	8.33	9.88	11.1	15.3	21.0	28.7	38.2	50.1	64.1	79.9	95.2	106	109
-20	1.68	1.85	2.46	3.34	4.57	7.12	12.5	12.5	16.5	23.6	33.6	48.5	71.2	105	153	213	275	324	340
-10	1.68	1.91	2.69	3.81	5.46	10.1	15.1	14.7	21.3	31.2	46.1	70.1	110	179	295	457	644	787	815
0	1.68	1.96	2.86	4.16	6.14	12.5	17.1	16.6	24.3	35.8	53.2	80.9	128	211	356	585	914	1252	1273
10	1.68	1.95	2.80	4.01	5.80	10.7	15.9	16.0	23.4	34.2	50.5	76.2	117	188	300	465	674	855	856
20	1.68	1.93	2.68	3.74	5.22	8.14	14.1	14.8	20.0	28.7	41.0	58.9	85.0	122	176	244	320	368	381
30	1.68	1.90	2.50	3.34	4.54	6.23	10.3	12.8	15.3	21.3	29.2	39.1	51.8	68.0	87.8	110	128	141	145
40	1.68	1.87	2.30	2.92	3.82	4.88	6.35	8.82	10.4	13.8	18.4	23.7	29.5	35.7	42.2	47.5	51.6	53.9	53.7
50	1.68	1.83	2.10	2.59	3.08	3.79	4.53	5.35	6.43	8.04	10.2	12.8	15.6	18.4	20.7	22.4	23.6	24.1	24.0
60	1.68	1.78	1.96	2.22	2.54	2.82	3.24	3.69	4.27	4.91	5.63	6.43	7.29	8.20	9.01	9.71	10.2	10.5	10.5
70	1.68	1.75	1.85	1.96	2.10	2.26	2.37	2.50	2.72	2.99	3.27	3.54	3.79	4.03	4.23	4.40	4.52	4.59	4.60
80	1.68	1.72	1.76	1.80	1.86	1.91	1.96	1.99	2.03	2.06	2.10	2.13	2.15	2.17	2.20	2.22	2.23	2.23	2.23
90	1.68	1.68	1.69	1.70	1.70	1.71	1.72	1.71	1.70	1.69	1.67	1.66	1.65	1.66	1.66	1.66	1.66	1.67	1.67
100	1.68	1.65	1.62	1.59	1.58	1.55	1.53	1.50	1.47	1.44	1.41	1.39	1.37	1.36	1.36	1.36	1.36	1.37	1.37
110	1.68	1.61	1.56	1.51	1.47	1.43	1.41	1.37	1.34	1.32	1.31	1.31	1.30	1.30	1.31	1.31	1.30	1.30	1.30
120	1.68	1.58	1.50	1.44	1.39	1.36	1.34	1.32	1.32	1.32	1.34	1.38	1.42	1.46	1.49	1.52	1.54	1.55	1.55
130	1.68	1.56	1.46	1.39	1.35	1.33	1.33	1.33	1.38	1.46	1.56	1.68	1.81	1.94	2.05	2.15	2.22	2.27	2.28
140	1.68	1.54	1.42	1.36	1.34	1.33	1.36	1.43	1.57	1.75	1.96	2.20	2.43	2.65	2.84	2.99	3.09	3.15	3.17
150	1.68	1.52	1.40	1.34	1.34	1.36	1.45	1.61	1.83	2.12	2.43	2.75	3.05	3.28	3.47	3.60	3.68	3.73	3.74
160	1.68	1.51	1.38	1.34	1.34	1.41	1.55	1.78	2.10	2.46	2.83	3.17	3.42	3.58	3.70	3.77	3.82	3.88	3.95
170	1.68	1.50	1.37	1.34	1.36	1.45	1.64	1.92	2.29	2.70	3.08	3.38	3.56	3.65	3.65	3.66	3.63	3.61	3.73
180	1.68	1.49	1.37	1.34	1.37	1.47	1.68	1.98	2.37	2.79	3.17	3.45	3.61	3.61	3.58	3.51	3.43	3.34	3.46

H_b Range:-90 - 90DEG
 H_b Interval: 0.5DEG
 Test Speed: LOW
 Temperature:25.3DEG
 Operators:Fan
 Test Date:2023-09-05

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:8.630m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeLine Slim-600mm-RGBW DS-3000K-25D-Rev1	TYPE:RGBW DS-3000K	WEIGHT:
SPEC.:25 DEG	DIM.:600MM	SERIAL No.:IES001641
MFR.:	SUR.:	Shielding Angle:

Table--2
UNIT: cd

H(DEC) V(DEC)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	3.03	2.86	2.68	2.46	2.16	1.83	1.50	1.18	0.91	0.70	0.60	0.60	0.63	0.64	0.64	0.63	0.57	0.48	
-170	2.94	2.85	2.68	2.44	2.14	1.81	1.47	1.15	0.89	0.70	0.61	0.60	0.62	0.64	0.64	0.63	0.57	0.48	
-160	2.69	2.56	2.37	2.13	1.86	1.57	1.27	1.01	0.80	0.65	0.60	0.60	0.62	0.64	0.64	0.63	0.57	0.48	
-150	2.01	1.91	1.76	1.58	1.38	1.17	0.98	0.82	0.68	0.61	0.60	0.60	0.62	0.64	0.64	0.62	0.56	0.48	
-140	1.25	1.19	1.10	0.99	0.89	0.79	0.69	0.63	0.60	0.60	0.60	0.61	0.63	0.64	0.64	0.61	0.55	0.48	
-130	0.71	0.69	0.66	0.62	0.58	0.59	0.58	0.59	0.59	0.59	0.60	0.63	0.64	0.64	0.63	0.60	0.54	0.48	
-120	0.56	0.56	0.57	0.58	0.58	0.59	0.60	0.61	0.62	0.63	0.64	0.64	0.64	0.64	0.63	0.62	0.58	0.53	0.48
-110	0.61	0.62	0.62	0.63	0.64	0.64	0.64	0.64	0.64	0.64	0.64	0.64	0.63	0.62	0.60	0.56	0.52	0.48	
-100	0.64	0.64	0.63	0.63	0.63	0.63	0.62	0.62	0.63	0.63	0.63	0.63	0.60	0.58	0.55	0.53	0.50	0.48	
-90	0.53	0.53	0.52	0.51	0.51	0.50	0.51	0.51	0.52	0.52	0.53	0.54	0.53	0.52	0.51	0.50	0.49	0.48	
-80	0.38	0.38	0.38	0.37	0.37	0.36	0.37	0.38	0.39	0.41	0.43	0.44	0.46	0.47	0.48	0.49	0.49	0.48	
-70	1.37	1.27	1.15	1.02	0.89	0.77	0.69	0.60	0.52	0.44	0.41	0.44	0.51	0.51	0.48	0.48	0.48	0.48	
-60	4.54	4.18	3.72	3.20	2.69	2.25	1.89	1.55	1.25	1.00	0.78	0.69	0.64	0.68	0.61	0.49	0.48	0.48	
-50	13.0	12.0	10.7	9.27	7.70	6.15	4.70	3.52	2.60	1.91	1.57	1.32	1.06	0.84	0.79	0.56	0.48	0.48	
-40	32.9	29.8	25.8	21.3	16.7	12.8	9.60	7.00	4.95	3.67	3.52	2.60	1.70	1.20	0.91	0.71	0.49	0.48	
-30	103	89.9	72.1	53.7	37.8	25.4	16.8	11.4	8.01	5.65	5.03	5.06	2.81	1.64	1.08	0.84	0.50	0.48	
-20	316	263	203	143	89.2	52.5	30.4	17.9	11.5	7.75	5.58	6.63	4.60	2.15	1.29	0.94	0.50	0.48	
-10	707	566	413	279	169	91.9	48.7	25.9	14.8	9.37	6.37	7.09	6.48	2.67	1.48	1.01	0.51	0.48	
0	950	733	544	358	211	112	58.6	30.0	16.3	10.0	6.83	7.58	7.75	3.03	1.60	1.06	0.51	0.48	
10	730	570	407	278	172	96.7	53.5	29.5	17.4	11.1	7.55	7.87	6.98	2.98	1.67	1.11	0.55	0.48	
20	352	297	226	159	102	63.1	38.7	24.2	15.9	10.8	7.69	8.04	5.53	2.75	1.65	1.14	0.58	0.48	
30	138	121	101	76.2	54.2	37.3	25.9	18.5	13.2	9.40	7.71	6.89	4.05	2.45	1.58	1.11	0.61	0.48	
40	51.7	47.5	41.6	35.0	27.7	21.7	16.8	12.9	9.79	7.54	6.33	4.62	3.12	2.15	1.51	1.05	0.63	0.48	
50	23.0	21.5	19.5	17.2	14.7	12.2	9.95	8.04	6.43	5.18	4.26	3.33	2.51	1.85	1.44	0.94	0.64	0.48	
60	10.1	9.53	8.82	7.98	7.15	6.28	5.47	4.75	4.12	3.58	3.09	2.55	2.04	1.67	1.28	0.89	0.66	0.48	
70	4.48	4.32	4.12	3.88	3.62	3.36	3.11	2.87	2.62	2.41	2.24	2.07	1.77	1.44	1.13	0.88	0.66	0.48	
80	2.21	2.18	2.15	2.11	2.07	2.03	2.00	1.96	1.92	1.89	1.85	1.79	1.54	1.31	1.08	0.87	0.67	0.48	
90	1.65	1.64	1.63	1.62	1.60	1.59	1.59	1.60	1.60	1.60	1.61	1.61	1.42	1.23	1.05	0.86	0.67	0.48	
100	1.36	1.35	1.35	1.34	1.34	1.35	1.36	1.38	1.40	1.42	1.44	1.45	1.32	1.18	1.02	0.85	0.67	0.48	
110	1.30	1.31	1.31	1.31	1.31	1.31	1.31	1.31	1.32	1.33	1.35	1.34	1.23	1.12	0.99	0.84	0.67	0.48	
120	1.56	1.55	1.53	1.51	1.47	1.44	1.40	1.36	1.33	1.32	1.32	1.25	1.16	1.06	0.95	0.83	0.67	0.48	
130	2.29	2.26	2.19	2.11	1.99	1.87	1.73	1.61	1.50	1.41	1.30	1.19	1.09	1.01	0.92	0.80	0.66	0.48	
140	3.16	3.12	3.04	2.91	2.74	2.53	2.30	2.06	1.82	1.57	1.29	1.13	1.02	0.94	0.87	0.77	0.65	0.48	
150	3.74	3.71	3.64	3.52	3.34	3.13	2.86	2.56	2.04	1.59	1.27	1.06	0.95	0.88	0.82	0.74	0.63	0.48	
160	3.92	3.89	3.86	3.78	3.67	3.49	2.98	2.42	1.90	1.45	1.14	0.96	0.86	0.81	0.76	0.71	0.61	0.48	
170	3.69	3.76	3.80	3.57	3.21	2.81	2.36	1.92	1.50	1.15	0.91	0.80	0.75	0.73	0.71	0.67	0.59	0.48	
180	3.03	2.86	2.68	2.46	2.16	1.83	1.50	1.18	0.91	0.70	0.60	0.60	0.63	0.64	0.64	0.63	0.57	0.48	

H_b Range:-90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-05

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks: