

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	2929.3 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	--

Beam Spread	At 10% of Imax	60.3V x 59.1H
	At 50% of Imax	27.5V x 25.3H
	At 90% of Imax	7.7V x 7.3H

Beam Flux	Total	1000.3 lumens per klm.
	To 10% of Imax	770.0 lumens per klm.
	To 50% of Imax	316.8 lumens per klm.
	To 90% of Imax	36.0 lumens per klm.

Upward LOR	2.3 %
Downward LOR	97.7 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-05

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:BlazeLine Slim-600mm-RGBW DS-ALL-25D-Rev1	TYPE:RGBW-DS W=3000K	WEIGHT:
SPEC.:25 DEG	DIM.:600MM	SERIAL No.:IES001637
MFR.:	SUR.:	Shielding Angle:

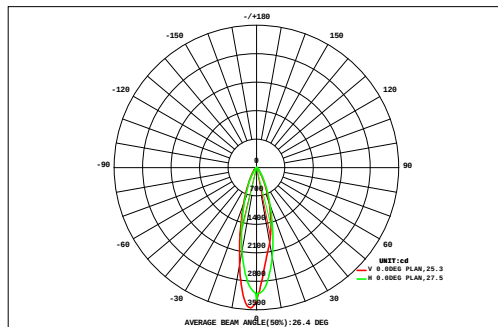

DATA OF LAMP		Eff:48.13lm/W	
MODEL		Imax(cd)	3451
NOMINAL POWER(W)	24.48	AVAILABILITY(%)	77.1
RATED VOLTAGE(V)	24	Avai. FLUX(lm)	908.4
NOMINAL FLUX(lm)	1178	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1178
TEST VOLTAGE(V)	24	q @50%(H,V)	25,27DEG

		AREA FLUX DIAGRAM																UNIT:lm				F t	F a
VERTICAL (DEG)	45	0.21	0.29	0.39	0.49	0.61	0.71	0.78	0.83	0.84	0.82	0.77	0.68	0.58	0.48	0.37	0.29	0.22	0.16	9.52	0.00		
	40	0.27	0.38	0.51	0.67	0.85	1.03	1.18	1.29	1.33	1.30	1.20	1.04	0.86	0.67	0.50	0.37	0.27	0.19	13.9	0.00		
	35	0.34	0.48	0.67	0.91	1.20	1.52	1.83	2.06	2.17	2.13	1.94	1.64	1.30	0.96	0.68	0.48	0.33	0.23	20.9	0.53		
	30	0.41	0.60	0.86	1.22	1.69	2.28	2.88	3.35	3.58	3.52	3.17	2.62	1.99	1.40	0.94	0.61	0.40	0.26	31.8	17.8		
	25	0.48	0.72	1.09	1.61	2.35	3.32	4.45	5.38	5.86	5.72	5.04	4.05	2.96	2.00	1.27	0.78	0.48	0.30	47.9	37.9		
	20	0.54	0.85	1.32	2.05	3.14	4.69	6.66	8.50	9.38	9.05	7.73	5.94	4.20	2.74	1.67	0.99	0.56	0.33	70.4	61.7		
	15	0.60	0.96	1.53	2.48	4.00	6.31	9.48	12.9	14.4	13.4	11.0	8.13	5.53	3.56	2.13	1.20	0.65	0.36	98.6	91.1		
	-15	0.64	1.03	1.69	2.83	4.73	7.85	12.4	17.7	20.4	17.6	13.8	10.1	6.88	4.38	2.55	1.38	0.72	0.38	127	120		
		0.66	1.06	1.77	3.00	5.12	8.73	14.3	21.3	24.9	19.8	15.2	11.7	7.96	4.94	2.82	1.49	0.75	0.38	146	139		
		0.65	1.04	1.74	2.97	5.11	8.74	14.4	21.1	23.7	20.4	15.7	11.9	8.04	4.96	2.82	1.48	0.74	0.37	146	139		
		0.60	0.97	1.62	2.75	4.68	7.85	12.4	16.9	18.8	17.1	13.9	10.4	7.07	4.42	2.55	1.35	0.68	0.35	124	118		
		0.54	0.87	1.40	2.34	3.87	6.14	8.96	11.6	13.2	12.6	10.5	8.03	5.58	3.60	2.11	1.13	0.59	0.31	93.4	86.2		
		0.47	0.73	1.15	1.84	2.89	4.30	5.96	7.52	8.45	8.27	7.11	5.56	4.02	2.67	1.59	0.88	0.48	0.27	64.2	56.0		
		0.39	0.59	0.90	1.36	2.02	2.85	3.78	4.64	5.14	5.08	4.49	3.60	2.68	1.80	1.11	0.65	0.38	0.22	41.7	31.2		
		0.31	0.46	0.68	0.97	1.36	1.82	2.32	2.77	3.02	2.99	2.69	2.20	1.65	1.15	0.75	0.47	0.29	0.18	26.1	9.39		
	-30	0.24	0.35	0.50	0.68	0.90	1.15	1.40	1.59	1.69	1.67	1.52	1.27	0.99	0.72	0.50	0.33	0.22	0.15	15.9	0.00		
-35	0.18	0.26	0.36	0.47	0.60	0.72	0.84	0.93	0.96	0.93	0.86	0.74	0.59	0.46	0.34	0.24	0.17	0.12	9.76	0.00			
-40	0.13	0.19	0.26	0.33	0.40	0.47	0.52	0.56	0.57	0.55	0.51	0.45	0.38	0.30	0.23	0.17	0.13	0.09	6.23	0.00			
-45	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)				10	15	20	25	30	35	40	45			
F t	7.66	11.9	18.4	29.0	45.5	70.5	105	141	158	143	117	90.0	63.3	41.2	24.9	14.3	8.06	4.63	1093	---			
F a	0.00	0.00	0.00	14.3	34.5	60.8	95.8	133	151	135	109	81.4	53.8	30.4	9.92	0.00	0.00	0.00	---	908			

one-half-peak spread: U:13.4,D:14.3 , L:11.4,R:14.2


NEMA Beam Type: Type 4

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature:25.3DEG
 Operators:Fan
 Test Date:2023-09-05

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:BlazeLine Slim-600mm-RGBW DS-ALL-25D-Rev1	TYPE:RGBW-DS W=3000K	WEIGHT:
SPEC.:25 DEG	DIM.:600MM	SERIAL No.:IES001637
MFR.:	SUR.:	Shielding Angle:

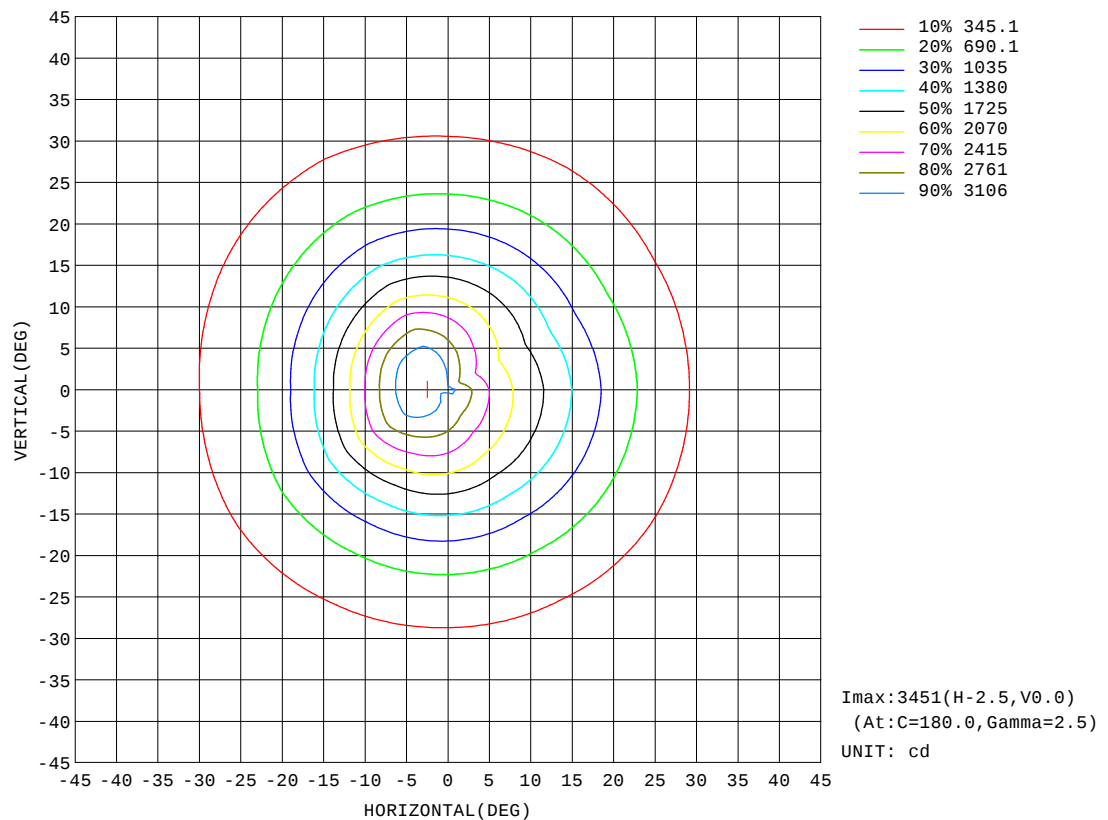


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-05

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:BlazeLine Slim-600mm-RGBW DS-ALL-25D-Rev1	TYPE:RGBW-DS W=3000K	WEIGHT:
SPEC.:25 DEG	DIM.:600MM	SERIAL No.:IES001637
MFR.:	SUR.:	Shielding Angle:

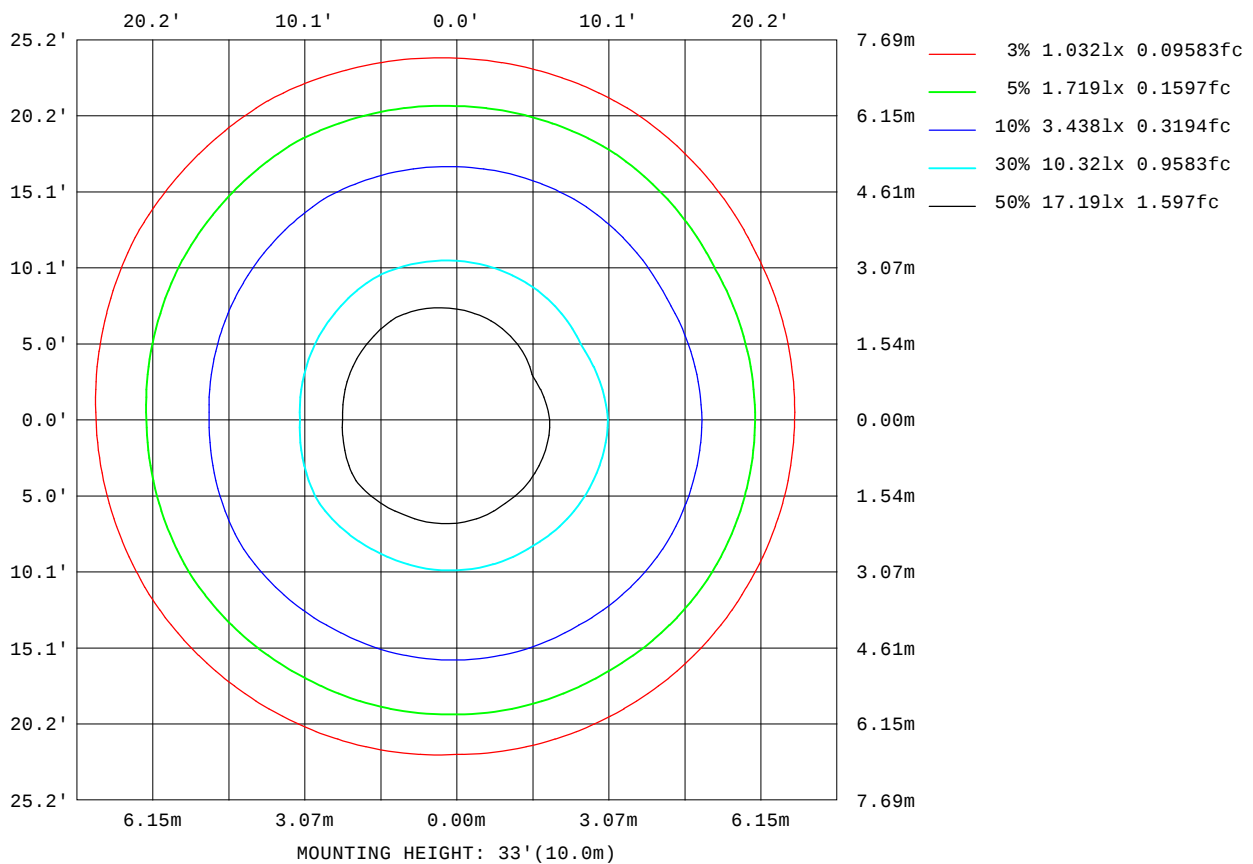

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-09-05

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

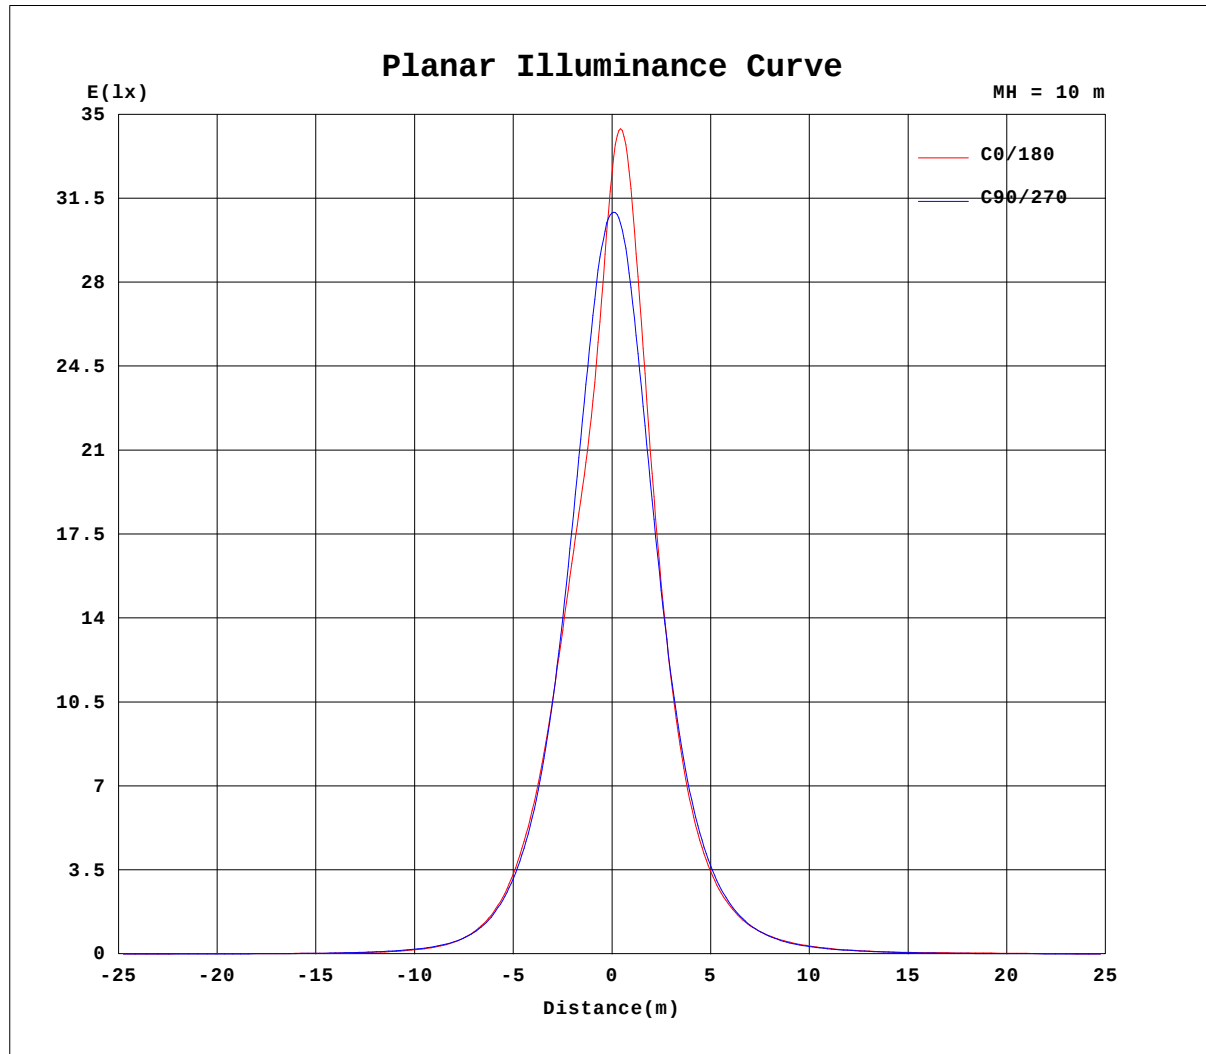


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-09-05

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:BlazeLine Slim-600mm-RGBW DS-ALL-25D-Rev1	TYPE:RGBW-DS W=3000K	WEIGHT:
SPEC.:25 DEG	DIM.:600MM	SERIAL No.:IES001637
MFR.:	SUR.:	Shielding Angle:

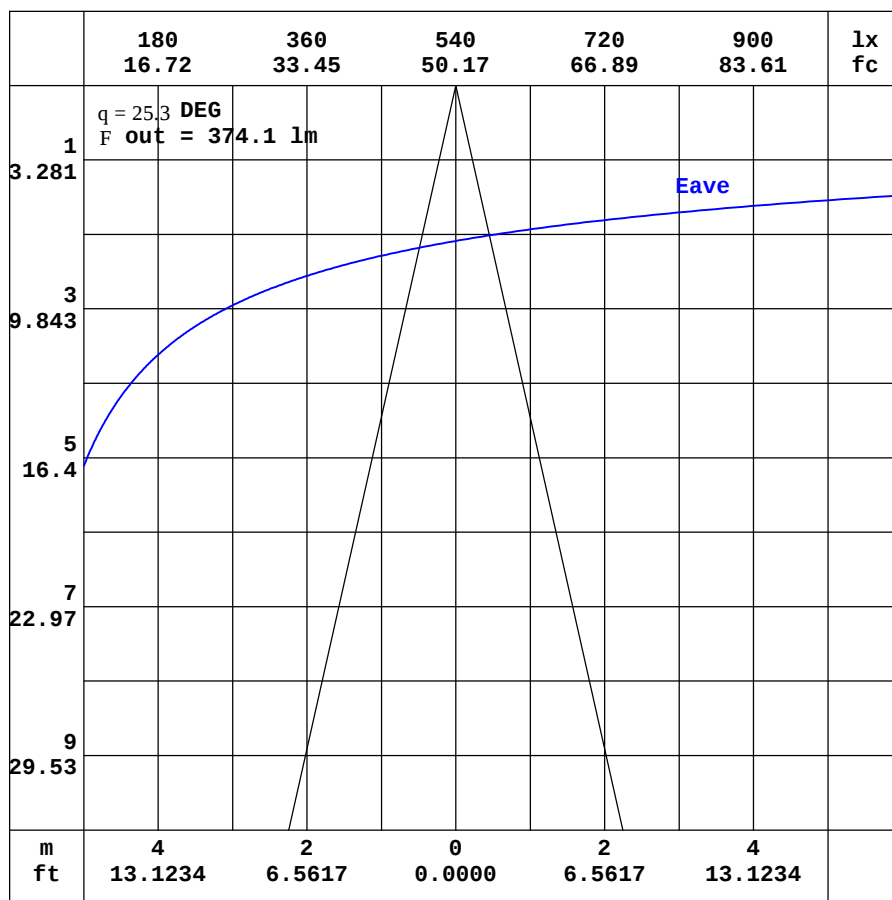

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-05

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeLine Slim-600mm-RGBW DS-ALL-25D-Rev1	TYPE:RGBW-DS W=3000K	WEIGHT:
SPEC.:25 DEG	DIM.:600MM	SERIAL No.:IES001637
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	4.65	4.20	3.86	3.68	3.71	3.96	4.45	5.19	6.17	7.27	8.29	9.06	9.52	9.67	9.64	9.49	9.28	9.06	9.04
-170	4.65	4.13	3.75	3.52	3.48	3.59	3.88	4.33	4.91	5.55	6.13	6.56	6.79	6.79	6.69	6.79	7.35	7.79	8.15
-160	4.65	4.08	3.65	3.36	3.25	3.22	3.29	3.44	3.62	3.79	3.91	3.95	3.99	4.74	5.43	6.13	6.70	7.07	7.32
-150	4.65	4.04	3.58	3.24	3.05	2.90	2.78	2.69	2.56	2.35	2.17	2.55	3.04	3.58	4.12	4.64	5.06	5.36	5.51
-140	4.65	4.01	3.52	3.16	2.88	2.66	2.43	2.16	1.87	1.75	1.80	1.93	2.14	2.40	2.68	2.97	3.21	3.38	3.47
-130	4.65	4.00	3.49	3.09	2.75	2.49	2.22	1.91	1.74	1.70	1.68	1.67	1.66	1.67	1.74	1.84	1.92	1.98	2.00
-120	4.65	4.00	3.48	3.04	2.69	2.36	2.07	1.86	1.85	1.81	1.77	1.73	1.70	1.66	1.63	1.61	1.59	1.58	1.57
-110	4.65	4.02	3.49	3.02	2.61	2.26	1.94	1.86	1.86	1.86	1.86	1.87	1.87	1.86	1.83	1.80	1.78	1.75	1.73
-100	4.65	4.06	3.52	3.02	2.56	2.14	1.74	1.73	1.75	1.77	1.78	1.80	1.81	1.82	1.83	1.84	1.85	1.85	1.85
-90	4.65	4.12	3.59	3.06	2.53	2.00	1.47	1.47	1.47	1.47	1.47	1.47	1.46	1.47	1.48	1.49	1.50	1.51	1.51
-80	4.65	4.19	3.70	3.17	2.60	1.99	1.34	1.25	1.23	1.21	1.20	1.18	1.17	1.17	1.17	1.17	1.17	1.16	1.16
-70	4.65	4.28	3.87	3.43	2.96	2.39	1.57	1.41	1.68	1.99	2.31	2.63	2.91	3.21	3.50	3.74	3.92	4.03	4.06
-60	4.65	4.39	4.16	4.02	3.87	3.53	3.22	3.14	4.01	4.94	6.00	7.17	8.40	9.72	11.1	12.2	13.0	13.4	13.3
-50	4.65	4.54	4.58	5.01	5.27	5.72	6.16	6.51	8.02	11.0	15.0	19.5	24.0	28.3	32.1	35.0	36.9	37.5	36.7
-40	4.65	4.70	5.19	6.09	7.23	8.62	10.9	15.2	17.3	23.5	32.3	42.0	52.6	63.5	74.1	83.8	91.2	94.8	93.6
-30	4.65	4.87	5.90	7.35	9.41	12.6	21.2	25.7	30.2	41.8	57.0	77.6	104	137	176	219	259	290	298
-20	4.65	5.04	6.57	8.70	11.7	18.2	31.2	32.8	44.6	63.6	90.6	131	192	285	409	560	713	837	874
-10	4.65	5.20	7.16	9.86	13.8	25.5	37.4	39.3	57.4	83.8	124	187	298	478	772	1199	1677	2025	2087
0	4.65	5.33	7.61	10.8	15.5	31.0	42.3	44.4	65.2	95.6	142	215	344	563	934	1541	2421	3302	3258
10	4.65	5.32	7.45	10.4	14.7	26.9	39.5	42.5	62.3	90.9	134	202	313	493	780	1214	1758	2245	2224
20	4.65	5.27	7.14	9.73	13.4	20.9	35.0	38.4	53.0	75.9	108	156	225	322	458	635	825	947	975
30	4.65	5.19	6.69	8.77	11.7	16.1	26.2	32.8	40.3	56.1	76.7	102	136	177	227	284	329	358	364
40	4.65	5.11	6.16	7.81	9.96	12.6	16.6	22.8	27.6	36.5	48.4	62.1	77.1	93.2	110	122	132	137	137
50	4.65	5.01	5.68	6.92	8.14	9.88	11.8	14.2	17.1	21.4	27.1	33.7	40.7	47.9	53.6	57.7	60.4	61.3	60.4
60	4.65	4.91	5.32	5.97	6.79	7.50	8.56	9.70	11.3	13.1	15.0	17.1	19.3	21.7	23.7	25.3	26.4	27.0	26.9
70	4.65	4.83	5.05	5.34	5.69	6.06	6.33	6.68	7.30	8.03	8.74	9.48	10.2	10.8	11.3	11.8	12.1	12.2	12.2
80	4.65	4.73	4.84	4.95	5.07	5.19	5.31	5.41	5.51	5.60	5.69	5.77	5.83	5.89	5.93	5.96	5.98	5.97	5.96
90	4.65	4.65	4.65	4.66	4.66	4.66	4.67	4.65	4.63	4.61	4.60	4.58	4.56	4.55	4.53	4.51	4.49	4.47	4.45
100	4.65	4.56	4.49	4.42	4.36	4.29	4.23	4.16	4.07	4.01	3.93	3.88	3.82	3.78	3.75	3.73	3.71	3.70	3.70
110	4.65	4.48	4.34	4.21	4.08	3.98	3.90	3.80	3.71	3.65	3.61	3.58	3.57	3.56	3.55	3.55	3.54	3.53	3.52
120	4.65	4.41	4.21	4.03	3.89	3.77	3.70	3.66	3.64	3.64	3.68	3.76	3.84	3.93	4.03	4.11	4.18	4.23	4.24
130	4.65	4.35	4.09	3.89	3.74	3.67	3.67	3.67	3.82	4.01	4.26	4.53	4.84	5.13	5.43	5.70	5.93	6.07	6.14
140	4.65	4.30	4.01	3.79	3.68	3.67	3.73	3.96	4.32	4.77	5.28	5.85	6.43	6.98	7.47	7.88	8.18	8.36	8.44
150	4.65	4.25	3.94	3.72	3.67	3.71	3.96	4.38	4.96	5.68	6.48	7.30	8.04	8.65	9.13	9.48	9.71	9.84	9.90
160	4.65	4.22	3.89	3.68	3.68	3.82	4.19	4.79	5.57	6.51	7.50	8.38	9.05	9.48	9.80	10.0	10.1	10.3	10.4
170	4.65	4.21	3.87	3.68	3.70	3.91	4.38	5.08	6.01	7.07	8.10	8.92	9.42	9.67	9.72	9.69	9.67	9.63	9.79
180	4.65	4.20	3.86	3.68	3.71	3.96	4.45	5.19	6.17	7.27	8.29	9.06	9.52	9.67	9.64	9.49	9.28	9.06	9.07

H_(b) Range:-90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature:25.3DEG
 Operators:Fan
 Test Date:2023-09-05

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:8.630m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeLine Slim-600mm-RGBW DS-ALL-25D-Rev1	TYPE:RGBW-DS W=3000K	WEIGHT:
SPEC.:25 DEG	DIM.:600MM	SERIAL No.:IES001637
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	8.16	7.67	7.24	6.69	5.96	5.15	4.28	3.45	2.71	2.12	1.77	1.67	1.71	1.80	1.86	1.82	1.67	1.47
-170	7.85	7.61	7.44	6.82	6.16	5.29	4.37	3.46	2.67	2.10	1.76	1.67	1.70	1.80	1.85	1.81	1.67	1.47
-160	7.23	6.99	6.59	6.12	5.51	4.82	3.92	3.09	2.41	1.95	1.71	1.67	1.71	1.81	1.85	1.80	1.67	1.47
-150	5.47	5.27	4.94	4.54	4.06	3.53	2.98	2.46	2.04	1.78	1.67	1.68	1.74	1.83	1.84	1.79	1.66	1.47
-140	3.45	3.34	3.15	2.89	2.63	2.35	2.08	1.87	1.74	1.68	1.66	1.71	1.79	1.84	1.83	1.77	1.64	1.47
-130	2.01	1.97	1.91	1.83	1.74	1.68	1.64	1.64	1.64	1.66	1.71	1.78	1.83	1.83	1.81	1.74	1.62	1.47
-120	1.58	1.58	1.58	1.59	1.60	1.63	1.65	1.69	1.73	1.77	1.80	1.83	1.83	1.82	1.77	1.69	1.58	1.47
-110	1.74	1.75	1.76	1.78	1.80	1.82	1.81	1.82	1.82	1.82	1.82	1.82	1.81	1.77	1.70	1.64	1.55	1.47
-100	1.84	1.83	1.82	1.81	1.80	1.78	1.79	1.78	1.78	1.77	1.75	1.73	1.70	1.66	1.61	1.56	1.51	1.47
-90	1.51	1.51	1.50	1.50	1.49	1.49	1.49	1.50	1.51	1.52	1.52	1.53	1.52	1.51	1.50	1.49	1.48	1.47
-80	1.16	1.16	1.15	1.15	1.15	1.15	1.17	1.20	1.23	1.26	1.29	1.32	1.37	1.40	1.42	1.44	1.45	1.47
-70	3.91	3.69	3.41	3.09	2.75	2.43	2.20	1.96	1.73	1.51	1.36	1.36	1.54	1.54	1.44	1.42	1.43	1.47
-60	12.8	11.9	10.8	9.47	8.07	6.89	5.86	4.89	4.01	3.26	2.61	2.27	2.02	1.97	1.82	1.47	1.43	1.47
-50	35.2	32.6	29.2	25.4	21.4	17.6	14.1	10.9	8.27	6.15	5.03	4.20	3.33	2.56	2.26	1.72	1.43	1.47
-40	89.7	81.3	70.1	57.7	46.2	36.1	27.7	20.8	15.3	11.5	10.5	7.95	5.31	3.66	2.63	2.09	1.45	1.47
-30	283	246	199	150	107	73.6	49.9	34.2	24.3	17.4	14.7	14.3	8.51	5.02	3.17	2.41	1.48	1.47
-20	812	679	529	382	250	151	90.1	54.3	34.6	23.5	16.8	18.2	13.3	6.56	3.78	2.66	1.50	1.47
-10	1815	1451	1055	712	449	259	141	77.1	44.6	28.2	19.4	19.3	18.2	8.07	4.34	2.84	1.52	1.47
0	2410	1870	1376	905	555	312	168	88.4	49.2	30.2	20.7	20.5	21.4	9.07	4.69	2.96	1.53	1.47
10	1885	1452	1027	698	446	264	150	84.8	50.6	32.4	22.3	21.2	19.5	8.87	4.81	3.09	1.62	1.47
20	898	750	573	406	269	171	107	68.3	45.1	30.9	22.0	21.7	15.7	8.07	4.68	3.15	1.70	1.47
30	346	305	249	190	139	98.6	70.3	51.1	36.9	26.6	21.2	18.9	11.6	7.08	4.44	3.11	1.76	1.47
40	131	119	104	87.8	71.2	56.9	45.0	35.2	27.2	21.0	17.6	13.0	8.90	6.06	4.15	2.94	1.81	1.47
50	58.2	54.6	49.8	44.4	38.6	32.6	27.0	22.1	17.9	14.4	11.8	9.30	7.01	5.11	3.93	2.68	1.84	1.47
60	26.2	24.9	23.3	21.4	19.3	17.1	15.0	13.1	11.4	9.87	8.50	6.95	5.55	4.52	3.53	2.49	1.88	1.47
70	12.0	11.6	11.2	10.6	9.94	9.24	8.56	7.88	7.20	6.58	6.05	5.52	4.76	3.93	3.10	2.45	1.91	1.47
80	5.92	5.87	5.80	5.72	5.62	5.52	5.42	5.31	5.20	5.08	4.95	4.80	4.16	3.55	2.97	2.43	1.92	1.47
90	4.43	4.41	4.39	4.37	4.35	4.33	4.33	4.32	4.32	4.31	4.31	4.30	3.83	3.36	2.89	2.41	1.94	1.47
100	3.69	3.68	3.68	3.68	3.68	3.69	3.72	3.75	3.78	3.83	3.88	3.89	3.56	3.20	2.82	2.40	1.95	1.47
110	3.53	3.53	3.54	3.53	3.53	3.53	3.54	3.55	3.56	3.59	3.63	3.59	3.33	3.05	2.73	2.37	1.95	1.47
120	4.25	4.22	4.17	4.10	4.00	3.90	3.80	3.71	3.63	3.58	3.58	3.38	3.14	2.90	2.63	2.32	1.94	1.47
130	6.14	6.06	5.89	5.66	5.36	5.06	4.73	4.41	4.12	3.88	3.58	3.22	2.99	2.76	2.53	2.26	1.92	1.47
140	8.42	8.29	8.07	7.74	7.32	6.81	6.23	5.62	5.03	4.33	3.60	3.10	2.80	2.61	2.42	2.19	1.89	1.47
150	9.88	9.79	9.60	9.28	8.87	8.36	7.73	6.96	5.62	4.40	3.51	2.94	2.61	2.45	2.29	2.11	1.84	1.47
160	10.4	10.3	10.2	9.98	9.67	9.25	8.00	6.62	5.24	4.06	3.18	2.64	2.36	2.24	2.16	2.02	1.79	1.47
170	9.74	9.81	9.89	9.44	8.56	7.55	6.44	5.31	4.21	3.27	2.58	2.21	2.05	2.02	2.01	1.92	1.73	1.47
180	8.16	7.67	7.24	6.69	5.96	5.15	4.28	3.45	2.71	2.12	1.77	1.67	1.71	1.80	1.86	1.82	1.67	1.47

H_(b) Range: -90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-09-05

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: