

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		3194.4 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	57.9V x 56.3H
	At 50% of Imax	27.1V x 24.3H
	At 90% of Imax	7.6V x 6.6H
Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	771.1 lumens per klm.
	To 50% of Imax	324.4 lumens per klm.
	To 90% of Imax	37.7 lumens per klm.
	Upward LOR	1.8 %
	Downward LOR	98.3 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-05

V(θ) Range:-180 - 180DEG
V(θ) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:BlazeLine Slim-600mm-RGBW DS-RED-25D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:25 DEG	DIM.:600MM	SERIAL No.:IES001638
MFR.:	SUR.:	Shielding Angle:

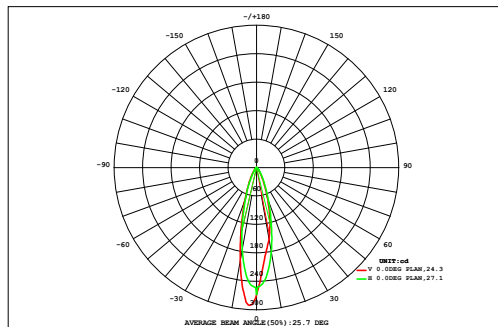

DATA OF LAMP		Eff:14.69lm/W	
MODEL		Imax(cd)	290.6
NOMINAL POWER(W)	6.192	AVAILABILITY(%)	77.1
RATED VOLTAGE(V)	24	Avai. FLUX(lm)	70.13
NOMINAL FLUX(lm)	90.97	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	90.97
TEST VOLTAGE(V)	24	q @50%(H,V)	24,27DEG

45 40 35 30 25 20 15 10 5 0 -5 -10 -15 -20 -25 -30 -35 -40 -45	AREA FLUX DIAGRAM																UNIT:lm				F t	F a
	0.01	0.02	0.03	0.04	0.05	0.05	0.06	0.06	0.06	0.06	0.06	0.05	0.04	0.03	0.03	0.02	0.02	0.01	0.70	0.00		
	0.02	0.03	0.04	0.05	0.06	0.08	0.09	0.10	0.10	0.10	0.09	0.08	0.06	0.05	0.04	0.03	0.02	0.01	1.02	0.00		
	0.02	0.03	0.05	0.06	0.09	0.11	0.13	0.15	0.16	0.15	0.14	0.12	0.09	0.07	0.05	0.04	0.02	0.02	1.51	0.00		
	0.03	0.04	0.06	0.09	0.12	0.17	0.21	0.24	0.26	0.25	0.23	0.19	0.14	0.10	0.07	0.05	0.03	0.02	2.29	0.89		
	0.03	0.05	0.08	0.12	0.17	0.25	0.33	0.40	0.44	0.42	0.37	0.29	0.21	0.14	0.09	0.06	0.04	0.02	3.51	2.61		
	0.04	0.06	0.09	0.15	0.23	0.35	0.51	0.65	0.73	0.70	0.59	0.44	0.31	0.20	0.12	0.07	0.04	0.02	5.30	4.55		
	0.04	0.06	0.11	0.18	0.30	0.49	0.74	1.02	1.15	1.07	0.87	0.63	0.41	0.26	0.15	0.09	0.05	0.03	7.66	7.01		
	0.04	0.07	0.12	0.21	0.36	0.61	1.01	1.46	1.66	1.43	1.12	0.80	0.52	0.32	0.18	0.10	0.05	0.03	10.1	9.49		
	0.04	0.07	0.13	0.22	0.39	0.69	1.17	1.78	2.07	1.61	1.25	0.94	0.61	0.36	0.20	0.11	0.05	0.03	11.7	11.2		
	0.04	0.07	0.12	0.22	0.39	0.70	1.18	1.79	2.02	1.68	1.28	0.95	0.62	0.36	0.20	0.10	0.05	0.03	11.8	11.3		
	0.04	0.07	0.12	0.21	0.36	0.63	1.03	1.44	1.60	1.44	1.15	0.83	0.54	0.32	0.18	0.09	0.05	0.03	10.1	9.55		
	0.04	0.06	0.10	0.18	0.30	0.49	0.73	0.97	1.10	1.05	0.86	0.63	0.42	0.26	0.15	0.08	0.04	0.02	7.46	6.84		
	0.03	0.05	0.08	0.14	0.22	0.33	0.47	0.60	0.68	0.66	0.56	0.42	0.29	0.19	0.11	0.06	0.03	0.02	4.95	4.22		
	0.02	0.04	0.07	0.10	0.15	0.22	0.29	0.36	0.39	0.39	0.34	0.26	0.19	0.13	0.08	0.05	0.03	0.02	3.10	2.16		
	0.02	0.03	0.05	0.07	0.10	0.14	0.17	0.20	0.22	0.22	0.19	0.15	0.11	0.08	0.05	0.03	0.02	0.01	1.88	0.38		
	0.02	0.02	0.03	0.05	0.07	0.08	0.10	0.12	0.12	0.12	0.11	0.09	0.07	0.05	0.04	0.02	0.02	0.01	1.13	0.00		
	0.01	0.02	0.02	0.03	0.04	0.05	0.06	0.07	0.07	0.07	0.06	0.05	0.04	0.03	0.02	0.02	0.01	0.01	0.69	0.00		
	0.01	0.01	0.02	0.02	0.03	0.03	0.04	0.04	0.04	0.04	0.04	0.03	0.03	0.02	0.02	0.01	0.01	0.01	0.45	0.00		
	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)				10	15	20	25	30	35	40	45		
F t	0.50	0.80	1.31	2.14	3.45	5.47	8.32	11.5	12.9	11.5	9.28	6.95	4.71	2.96	1.78	1.03	0.59	0.34	85	---		
F a	0.00	0.00	0.00	0.74	2.48	4.64	7.56	10.7	12.2	10.8	8.57	6.20	3.89	1.98	0.40	0.00	0.00	0.00	---	70		

one-half-peak spread: U:13.5,D:13.9 , L:10.5,R:14.1


NEMA Beam Type: Type 4

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-05

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:BlazeLine Slim-600mm-RGBW DS-RED-25D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:25 DEG	DIM.:600MM	SERIAL No.:IES001638
MFR.:	SUR.:	Shielding Angle:

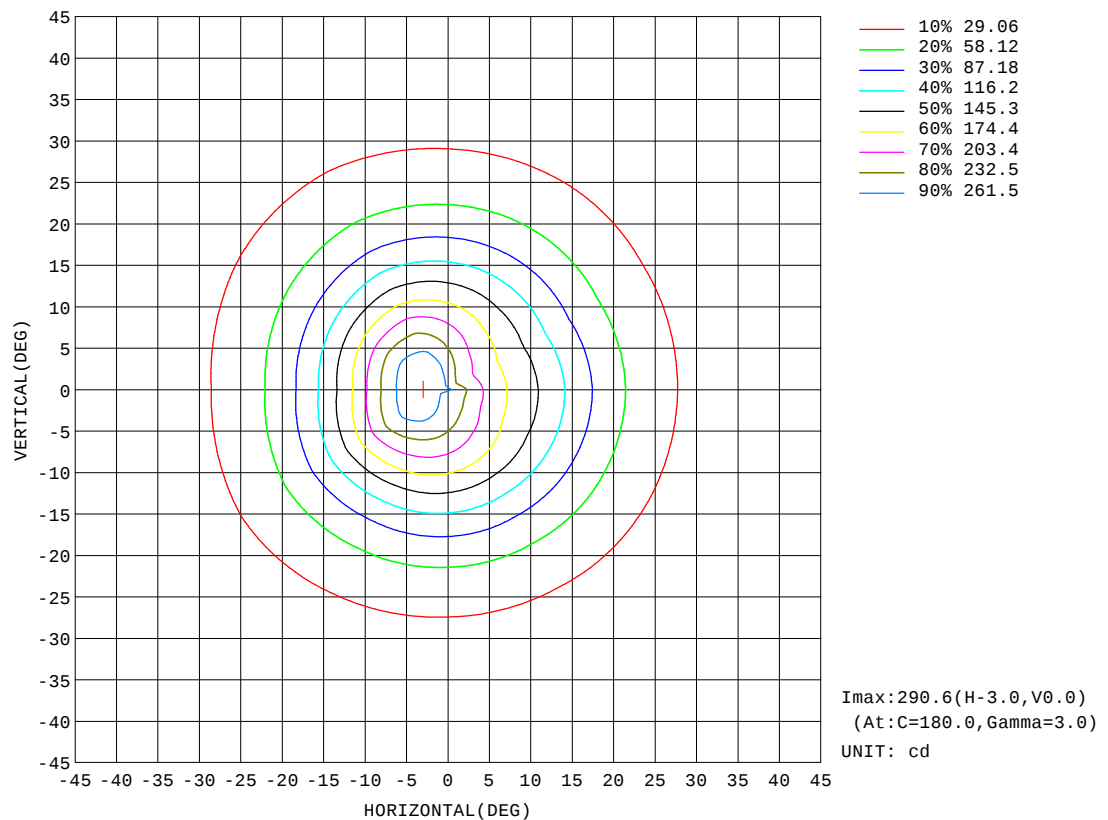


H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-05

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:BlazeLine Slim-600mm-RGBW DS-RED-25D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:25 DEG	DIM.:600MM	SERIAL No.:IES001638
MFR.:	SUR.:	Shielding Angle:

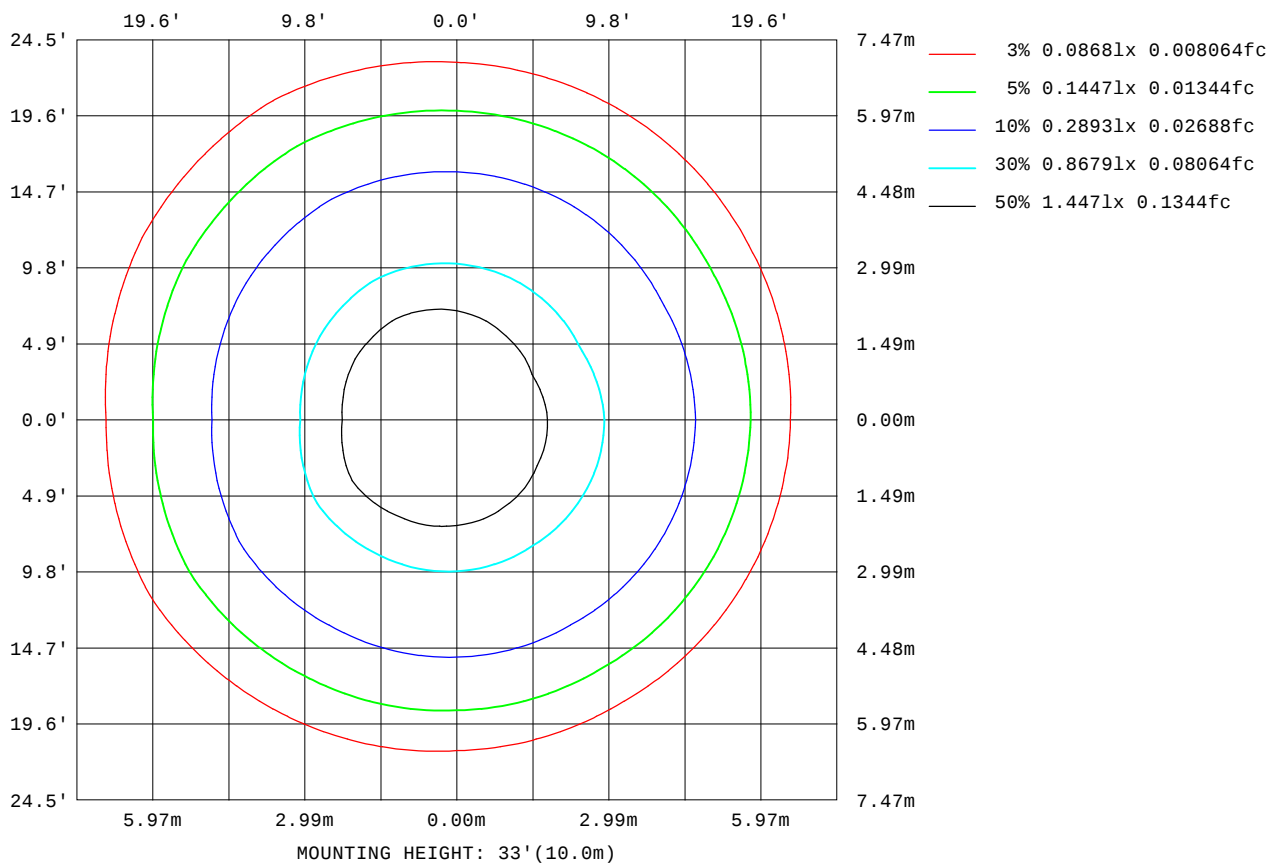

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-05

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

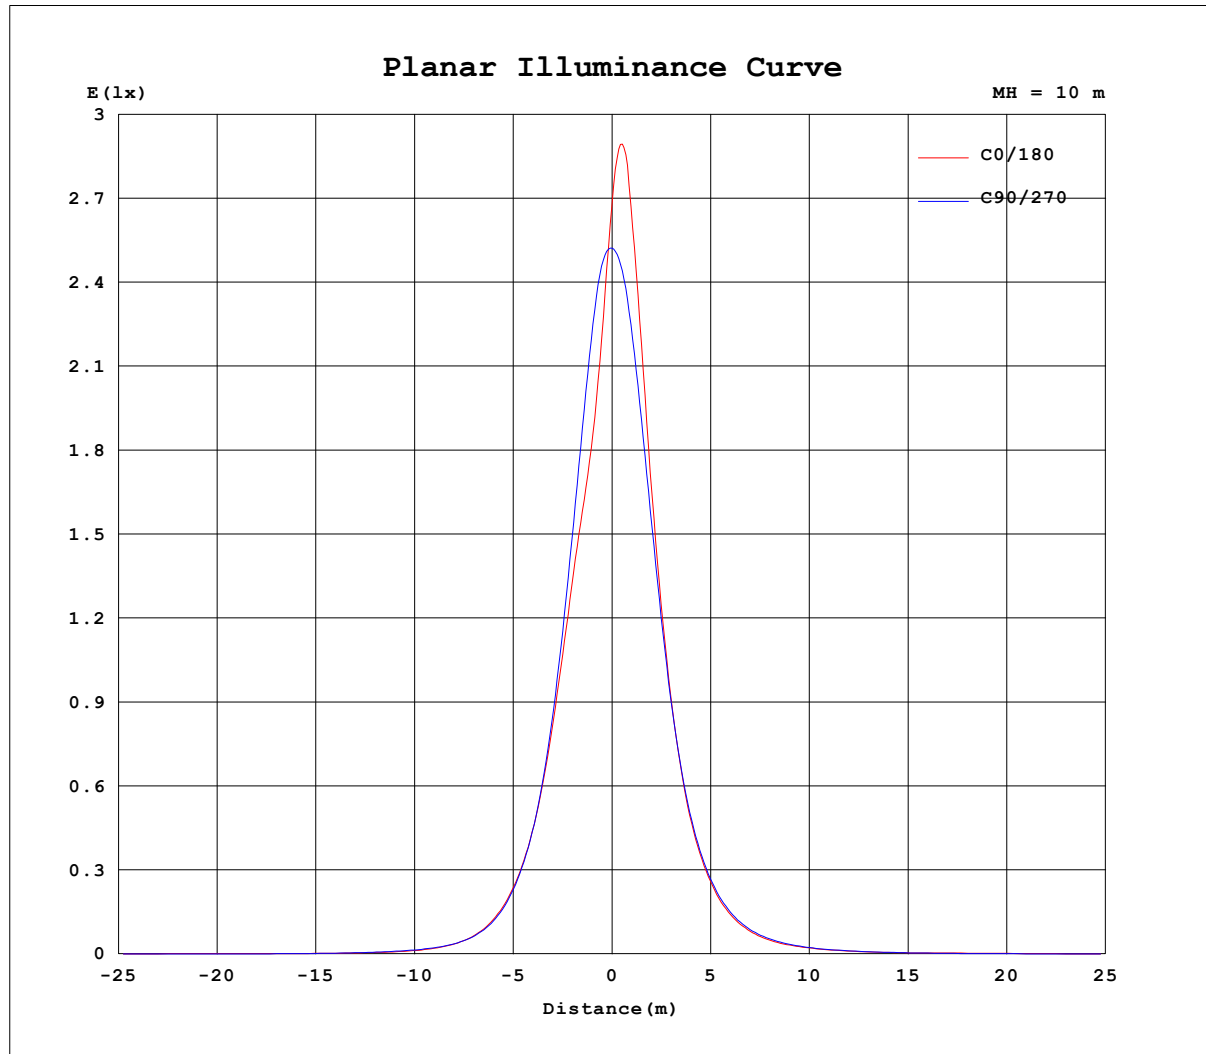


H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-05

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:BlazeLine Slim-600mm-RGBW DS-RED-25D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:25 DEG	DIM.:600MM	SERIAL No.:IES001638
MFR.:	SUR.:	Shielding Angle:

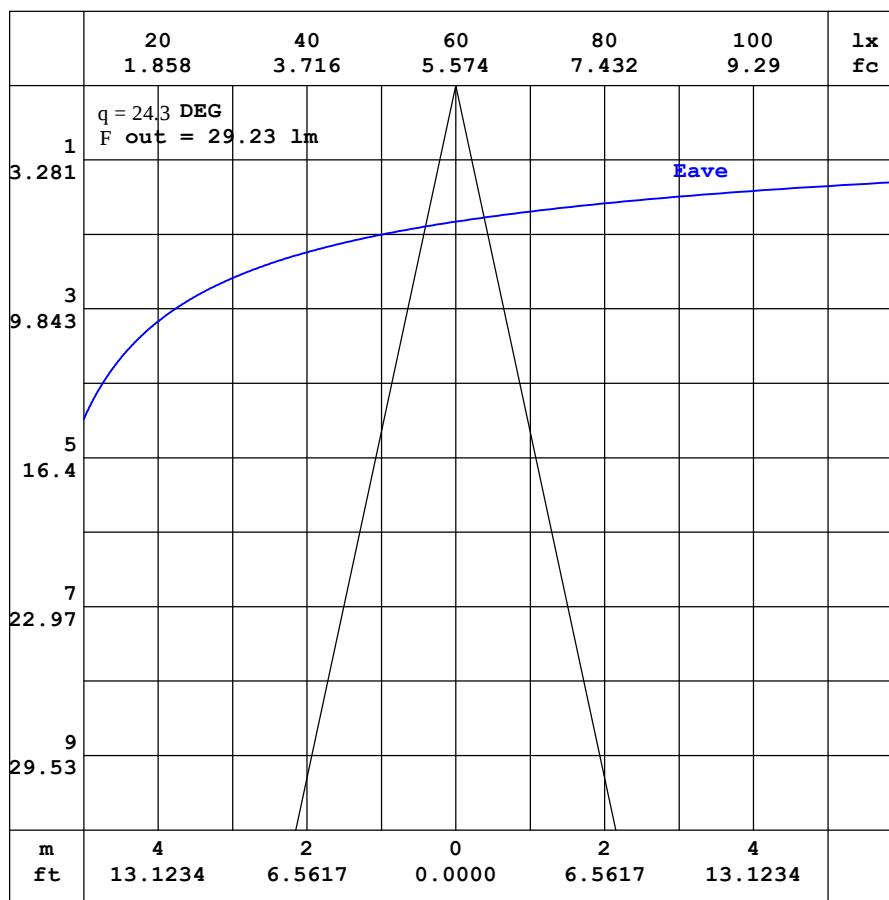

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-05

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeLine Slim-600mm-RGBW DS-RED-25D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:25 DEG	DIM.:600MM	SERIAL No.:IES001638
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.27	0.21	0.21	0.21	0.21	0.23	0.27	0.32	0.40	0.50	0.58	0.65	0.66	0.66	0.66	0.65	0.64	0.63	0.63
-170	0.27	0.21	0.20	0.19	0.19	0.20	0.22	0.26	0.30	0.35	0.40	0.44	0.45	0.46	0.46	0.47	0.51	0.53	0.59
-160	0.27	0.21	0.19	0.18	0.17	0.17	0.18	0.19	0.20	0.21	0.22	0.22	0.23	0.28	0.34	0.39	0.43	0.49	0.53
-150	0.27	0.21	0.18	0.17	0.15	0.14	0.14	0.13	0.11	0.10	0.08	0.10	0.14	0.17	0.21	0.26	0.30	0.34	0.37
-140	0.27	0.21	0.17	0.16	0.14	0.12	0.10	0.09	0.06	0.05	0.06	0.06	0.06	0.07	0.09	0.12	0.15	0.18	0.20
-130	0.27	0.21	0.17	0.15	0.13	0.10	0.08	0.06	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.06	0.07	0.07	0.08
-120	0.27	0.20	0.17	0.14	0.12	0.09	0.07	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05
-110	0.27	0.21	0.17	0.14	0.11	0.09	0.06	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05
-100	0.27	0.22	0.17	0.14	0.12	0.08	0.06	0.05	0.05	0.04	0.04	0.04	0.05	0.05	0.05	0.05	0.05	0.05	0.05
-90	0.27	0.23	0.19	0.15	0.11	0.07	0.04	0.03	0.03	0.02	0.02	0.01	0.01	0.02	0.02	0.03	0.04	0.05	0.05
-80	0.27	0.23	0.19	0.15	0.11	0.07	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02
-70	0.27	0.23	0.20	0.16	0.13	0.09	0.03	0.01	0.02	0.04	0.07	0.10	0.13	0.15	0.17	0.18	0.19	0.20	0.19
-60	0.27	0.24	0.21	0.20	0.20	0.15	0.12	0.10	0.16	0.23	0.31	0.41	0.51	0.61	0.71	0.80	0.86	0.89	0.89
-50	0.27	0.24	0.25	0.28	0.28	0.30	0.31	0.32	0.41	0.60	0.88	1.24	1.64	2.04	2.35	2.57	2.69	2.72	2.65
-40	0.27	0.25	0.28	0.35	0.42	0.50	0.64	0.91	0.98	1.39	2.05	2.80	3.65	4.56	5.47	6.18	6.67	6.85	6.69
-30	0.27	0.26	0.33	0.43	0.58	0.79	1.38	1.63	1.85	2.59	3.59	5.16	7.39	10.0	13.0	16.1	19.0	21.0	21.3
-20	0.27	0.27	0.39	0.53	0.74	1.20	2.06	2.10	2.83	4.07	5.94	9.32	14.4	21.4	31.0	43.0	55.5	65.5	68.4
-10	0.27	0.28	0.44	0.62	0.90	1.75	2.53	2.52	3.70	5.44	8.27	13.2	21.9	36.4	60.5	97.4	140	172	176
0	0.27	0.29	0.47	0.69	1.03	2.17	2.92	2.89	4.25	6.23	9.22	14.8	24.9	42.5	72.6	124	199	278	268
10	0.27	0.29	0.46	0.67	0.98	1.87	2.71	2.78	4.07	5.95	8.80	14.0	22.8	37.0	59.8	95.3	142	182	180
20	0.27	0.29	0.43	0.62	0.89	1.42	2.38	2.56	3.49	4.99	7.12	10.5	16.1	23.7	34.1	47.4	61.9	71.6	73.6
30	0.27	0.29	0.40	0.56	0.78	1.09	1.81	2.22	2.67	3.71	5.08	6.93	9.41	12.8	16.7	20.7	23.9	26.0	26.3
40	0.27	0.28	0.36	0.49	0.65	0.85	1.13	1.56	1.84	2.44	3.28	4.32	5.49	6.82	8.20	9.16	9.85	10.2	10.1
50	0.27	0.28	0.33	0.43	0.52	0.66	0.81	0.97	1.16	1.44	1.83	2.30	2.83	3.43	3.94	4.28	4.51	4.58	4.51
60	0.27	0.28	0.31	0.36	0.43	0.49	0.57	0.66	0.77	0.88	1.01	1.14	1.30	1.47	1.65	1.79	1.90	1.97	2.00
70	0.27	0.27	0.29	0.32	0.35	0.39	0.41	0.44	0.47	0.51	0.56	0.61	0.65	0.71	0.76	0.80	0.84	0.87	0.88
80	0.27	0.27	0.28	0.30	0.31	0.33	0.34	0.35	0.34	0.34	0.35	0.34	0.34	0.35	0.36	0.37	0.38	0.39	0.40
90	0.27	0.27	0.28	0.28	0.29	0.30	0.30	0.29	0.28	0.27	0.27	0.26	0.25	0.25	0.26	0.27	0.27	0.28	0.28
100	0.27	0.26	0.25	0.26	0.26	0.26	0.26	0.25	0.24	0.23	0.22	0.21	0.20	0.21	0.21	0.21	0.22	0.22	0.23
110	0.27	0.24	0.24	0.23	0.24	0.23	0.23	0.22	0.22	0.21	0.21	0.21	0.21	0.20	0.20	0.20	0.20	0.20	0.20
120	0.27	0.24	0.23	0.23	0.22	0.22	0.22	0.21	0.21	0.21	0.21	0.21	0.21	0.22	0.23	0.24	0.23	0.23	0.22
130	0.27	0.23	0.22	0.22	0.22	0.21	0.21	0.21	0.21	0.21	0.23	0.26	0.30	0.33	0.35	0.36	0.38	0.38	0.38
140	0.27	0.23	0.22	0.21	0.21	0.21	0.21	0.21	0.21	0.26	0.30	0.35	0.41	0.47	0.53	0.55	0.57	0.57	0.57
150	0.27	0.23	0.21	0.21	0.21	0.21	0.22	0.23	0.28	0.32	0.38	0.46	0.54	0.60	0.65	0.69	0.70	0.70	0.70
160	0.27	0.22	0.21	0.21	0.21	0.22	0.24	0.28	0.33	0.40	0.48	0.55	0.60	0.65	0.68	0.70	0.71	0.72	0.73
170	0.27	0.21	0.21	0.21	0.21	0.22	0.25	0.31	0.38	0.46	0.55	0.61	0.65	0.67	0.68	0.69	0.69	0.67	0.72
180	0.27	0.21	0.21	0.21	0.21	0.23	0.27	0.32	0.40	0.50	0.58	0.65	0.66	0.66	0.66	0.65	0.64	0.63	0.66

H_b) Range:-90 - 90DEGH_b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-09-05

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeLine Slim-600mm-RGBW DS-RED-25D-Rev1	TYPE:RGBW-RED	WEIGHT:
SPEC.:25 DEG	DIM.:600MM	SERIAL No.:IES001638
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	0.55	0.50	0.49	0.43	0.38	0.31	0.25	0.18	0.11	0.06	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	
-170	0.54	0.54	0.52	0.47	0.40	0.33	0.25	0.18	0.11	0.07	0.06	0.05	0.05	0.05	0.05	0.05	0.05	0.05	
-160	0.50	0.46	0.43	0.39	0.35	0.30	0.22	0.16	0.10	0.07	0.06	0.05	0.05	0.05	0.05	0.05	0.05	0.05	
-150	0.36	0.33	0.29	0.26	0.22	0.19	0.15	0.12	0.08	0.06	0.06	0.05	0.05	0.05	0.05	0.05	0.05	0.05	
-140	0.19	0.17	0.15	0.12	0.10	0.08	0.08	0.07	0.06	0.06	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	
-130	0.07	0.07	0.06	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	
-120	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	
-110	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	
-100	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	
-90	0.05	0.05	0.04	0.04	0.04	0.03	0.04	0.04	0.04	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	
-80	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.04	0.04	0.04	0.04	0.05	0.05	0.06	0.06	0.06	0.05	0.05	
-70	0.20	0.20	0.19	0.17	0.16	0.14	0.12	0.08	0.06	0.05	0.04	0.05	0.07	0.07	0.06	0.06	0.06	0.05	
-60	0.86	0.81	0.74	0.66	0.57	0.48	0.39	0.31	0.24	0.18	0.12	0.09	0.10	0.11	0.09	0.06	0.06	0.05	
-50	2.53	2.33	2.09	1.81	1.52	1.26	1.00	0.77	0.56	0.40	0.31	0.26	0.19	0.15	0.13	0.09	0.06	0.05	
-40	6.38	5.77	4.92	4.02	3.27	2.59	2.00	1.50	1.10	0.82	0.82	0.59	0.36	0.23	0.17	0.12	0.06	0.05	
-30	20.1	17.3	13.7	10.3	7.47	5.22	3.60	2.50	1.77	1.27	1.11	1.25	0.65	0.34	0.21	0.15	0.06	0.05	
-20	62.8	51.2	38.6	26.8	17.3	10.6	6.40	3.94	2.53	1.72	1.24	1.55	1.14	0.48	0.27	0.17	0.07	0.05	
-10	152	117	81.8	52.3	31.6	18.1	9.97	5.55	3.25	2.07	1.44	1.58	1.68	0.61	0.31	0.19	0.07	0.05	
0	194	152	108	67.5	39.5	22.2	11.9	6.37	3.57	2.21	1.55	1.63	2.03	0.70	0.35	0.20	0.07	0.05	
10	151	115	79.0	51.4	32.0	18.9	10.8	6.25	3.74	2.42	1.68	1.74	1.79	0.68	0.35	0.21	0.08	0.05	
20	67.3	55.3	41.5	29.1	19.4	12.5	8.00	5.12	3.40	2.34	1.67	1.85	1.34	0.61	0.34	0.21	0.08	0.05	
30	24.8	21.7	17.7	13.7	10.1	7.32	5.30	3.88	2.82	2.03	1.66	1.64	0.91	0.52	0.32	0.20	0.09	0.05	
40	9.59	8.71	7.60	6.41	5.25	4.24	3.39	2.67	2.07	1.61	1.41	1.02	0.67	0.44	0.30	0.18	0.09	0.05	
50	4.34	4.06	3.69	3.29	2.86	2.44	2.03	1.66	1.34	1.08	0.89	0.69	0.51	0.37	0.27	0.16	0.10	0.05	
60	1.94	1.85	1.72	1.57	1.41	1.25	1.10	0.96	0.83	0.72	0.62	0.50	0.40	0.31	0.23	0.14	0.09	0.05	
70	0.86	0.83	0.79	0.74	0.68	0.63	0.58	0.53	0.49	0.45	0.42	0.39	0.32	0.26	0.19	0.14	0.09	0.05	
80	0.39	0.38	0.37	0.35	0.34	0.33	0.33	0.33	0.33	0.33	0.32	0.32	0.27	0.23	0.18	0.13	0.09	0.05	
90	0.28	0.27	0.26	0.25	0.24	0.23	0.24	0.24	0.25	0.26	0.27	0.27	0.24	0.20	0.16	0.13	0.09	0.05	
100	0.22	0.22	0.21	0.21	0.21	0.20	0.21	0.21	0.22	0.23	0.24	0.24	0.21	0.19	0.16	0.12	0.09	0.05	
110	0.20	0.20	0.21	0.21	0.21	0.20	0.20	0.20	0.21	0.21	0.21	0.21	0.19	0.17	0.14	0.12	0.09	0.05	
120	0.23	0.24	0.24	0.24	0.24	0.24	0.22	0.21	0.21	0.21	0.21	0.19	0.17	0.15	0.13	0.11	0.08	0.05	
130	0.39	0.39	0.39	0.39	0.37	0.33	0.30	0.26	0.23	0.21	0.20	0.18	0.15	0.13	0.12	0.10	0.08	0.05	
140	0.58	0.59	0.58	0.57	0.52	0.47	0.42	0.36	0.30	0.25	0.18	0.16	0.14	0.12	0.10	0.09	0.08	0.05	
150	0.70	0.70	0.71	0.68	0.64	0.59	0.53	0.47	0.35	0.25	0.19	0.14	0.12	0.11	0.09	0.08	0.07	0.05	
160	0.72	0.72	0.71	0.71	0.68	0.64	0.54	0.43	0.32	0.22	0.16	0.12	0.10	0.09	0.08	0.07	0.07	0.05	
170	0.68	0.70	0.70	0.66	0.59	0.50	0.41	0.32	0.23	0.15	0.12	0.09	0.08	0.07	0.07	0.06	0.06	0.05	
180	0.55	0.50	0.49	0.43	0.38	0.31	0.25	0.18	0.11	0.06	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	

H_b Range:-90 - 90DEGH_b Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-09-05

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: