

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	1661.4 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	--

Beam Spread	At 10% of Imax	62.9V x 94.5H
	At 50% of Imax	29.1V x 51.9H
	At 90% of Imax	10.4V x 20.9H

Beam Flux	Total	1000.0 lumens per klm.
	To 10% of Imax	834.2 lumens per klm.
	To 50% of Imax	423.4 lumens per klm.
	To 90% of Imax	76.3 lumens per klm.

Upward LOR	2.2 %
Downward LOR	97.8 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-06

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:BlazeLine Slim-600mm-RGBW DS-3000K-3050D-Rev1	TYPE:RGBW DS-3000K	WEIGHT:
SPEC.:30x50 DEG	DIM.:600MM	SERIAL No.:IES001658
MFR.:	SUR.:	Shielding Angle:

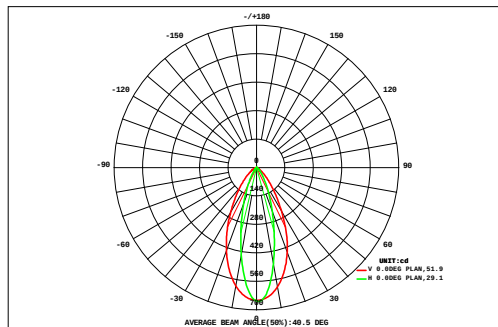

DATA OF LAMP		Eff:66.10lm/W	
MODEL		Imax(cd)	658.9
NOMINAL POWER(W)	6	AVAILABILITY(%)	83.2
RATED VOLTAGE(V)	24	Avai. FLUX(lm)	330.0
NOMINAL FLUX(lm)	396.6	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	396.6
TEST VOLTAGE(V)	24	q @50%(H,V)	52,29DEG

		AREA FLUX DIAGRAM																UNIT:lm				F t	F a
		0.02	0.03	0.04	0.06	0.07	0.08	0.09	0.09	0.09	0.08	0.08	0.08	0.07	0.06	0.05	0.04	0.03	0.01	1.06	0.00		
VERTICAL (DEG)	72	0.02	0.03	0.04	0.06	0.07	0.08	0.09	0.09	0.09 <td>0.08</td> <td>0.08</td> <td>0.08</td> <td>0.07</td> <td>0.06</td> <td>0.05</td> <td>0.04</td> <td>0.03</td> <td>0.01</td> <td>1.06</td> <td>0.00</td>	0.08	0.08	0.08	0.07	0.06	0.05	0.04	0.03	0.01	1.06	0.00		
	64	0.02	0.04	0.07	0.10	0.13	0.14	0.15	0.16	0.15	0.15	0.15	0.14	0.12	0.10	0.08	0.06	0.03	0.02	1.81	0.00		
	56	0.03	0.06	0.11	0.17	0.22	0.25	0.27	0.29	0.28	0.28	0.28	0.26	0.22	0.18	0.13	0.09	0.05	0.02	3.20	0.00		
	48	0.04	0.09	0.17	0.27	0.37	0.46	0.50	0.56	0.55	0.55	0.54	0.48	0.40	0.30	0.20	0.12	0.06	0.03	5.69	0.00		
	40	0.05	0.12	0.24	0.41	0.62	0.83	0.96	1.09	1.11	1.10	1.07	0.91	0.73	0.50	0.31	0.17	0.08	0.03	10.3	1.61		
	32	0.07	0.16	0.33	0.61	1.00	1.46	1.86	2.13	2.29	2.29	2.13	1.79	1.31	0.82	0.46	0.23	0.10	0.04	19.1	15.4		
	24	0.08	0.20	0.43	0.84	1.50	2.43	3.42	4.10	4.55	4.56	4.11	3.34	2.23	1.28	0.65	0.30	0.12	0.04	34.2	31.7		
		0.09	0.23	0.53	1.09	2.07	3.60	5.55	7.29	8.24	8.25	7.30	5.51	3.43	1.82	0.86	0.36	0.14	0.05	56.4	54.3		
		0.09	0.26	0.60	1.30	2.58	4.65	7.35	10.1	11.8	11.8	10.1	7.42	4.51	2.30	1.03	0.41	0.15	0.05	76.5	74.7		
		0.09	0.25	0.59	1.26	2.50	4.48	7.02	9.48	11.1	11.3	9.76	7.21	4.41	2.25	1.00	0.40	0.15	0.05	73.3	71.4		
		0.08	0.22	0.48	0.99	1.87	3.17	4.77	6.26	7.19	7.33	6.55	5.00	3.17	1.69	0.79	0.33	0.13	0.04	50.1	47.9		
	-24	0.07	0.17	0.37	0.70	1.22	1.93	2.71	3.28	3.71	3.78	3.42	2.82	1.92	1.10	0.55	0.25	0.10	0.04	28.1	25.3		
	-32	0.06	0.13	0.26	0.45	0.72	1.06	1.30	1.47	1.61	1.63	1.52	1.32	1.01	0.63	0.34	0.17	0.08	0.03	13.8	7.60		
	-40	0.04	0.09	0.17	0.27	0.41	0.53	0.57	0.64	0.66	0.67	0.65	0.57	0.49	0.34	0.20	0.11	0.06	0.02	6.50	0.00		
	-48	0.03	0.06	0.10	0.16	0.22	0.25	0.26	0.29	0.28	0.28	0.29	0.26	0.23	0.18	0.12	0.07	0.04	0.02	3.13	0.00		
	-56	0.02	0.04	0.06	0.09	0.11	0.12	0.12	0.13	0.12	0.12	0.13	0.12	0.10	0.09	0.06	0.04	0.02	0.01	1.49	0.00		
-64	0.01	0.02	0.03	0.04	0.05	0.05	0.05	0.06	0.05	0.05	0.05	0.05	0.05	0.04	0.03	0.02	0.01	0.01	0.70	0.00			
-72	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.03	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.00	0.32	0.00			
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)				16	24	32	40	48	56	64	72			
F t	0.90	2.20	4.60	8.83	15.7	25.5	37.0	47.4	53.8	54.2	48.2	37.3	24.4	13.7	6.88	3.19	1.37	0.51	386	---			
F a	0.00	0.00	0.07	4.44	12.0	22.1	33.7	44.1	50.6	51.0	44.9	34.1	21.1	9.97	2.03	0.00	0.00	0.00	---	330			


one-half-peak spread: U:14.3,D:15.0 , L:26.7,MEAS Beam Type: Type 5 x 4 (H x V)

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-06

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:BlazeLine Slim-600mm-RGBW DS-3000K-3050D-Rev1	TYPE:RGBW DS-3000K	WEIGHT:
SPEC.:30x50 DEG	DIM.:600MM	SERIAL No.:IES001658
MFR.:	SUR.:	Shielding Angle:

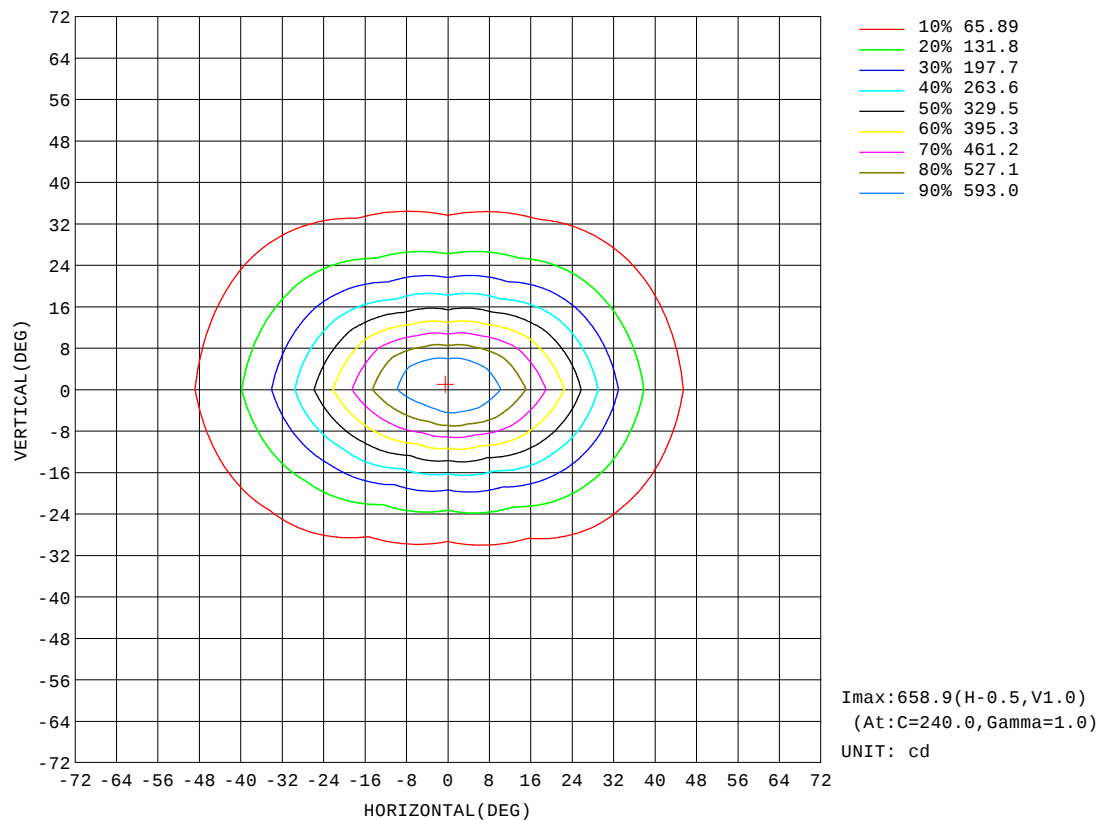


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-06

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:BlazeLine Slim-600mm-RGBW DS-3000K-3050D-Rev1	TYPE:RGBW DS-3000K	WEIGHT:
SPEC.:30x50 DEG	DIM.:600MM	SERIAL No.:IES001658
MFR.:	SUR.:	Shielding Angle:

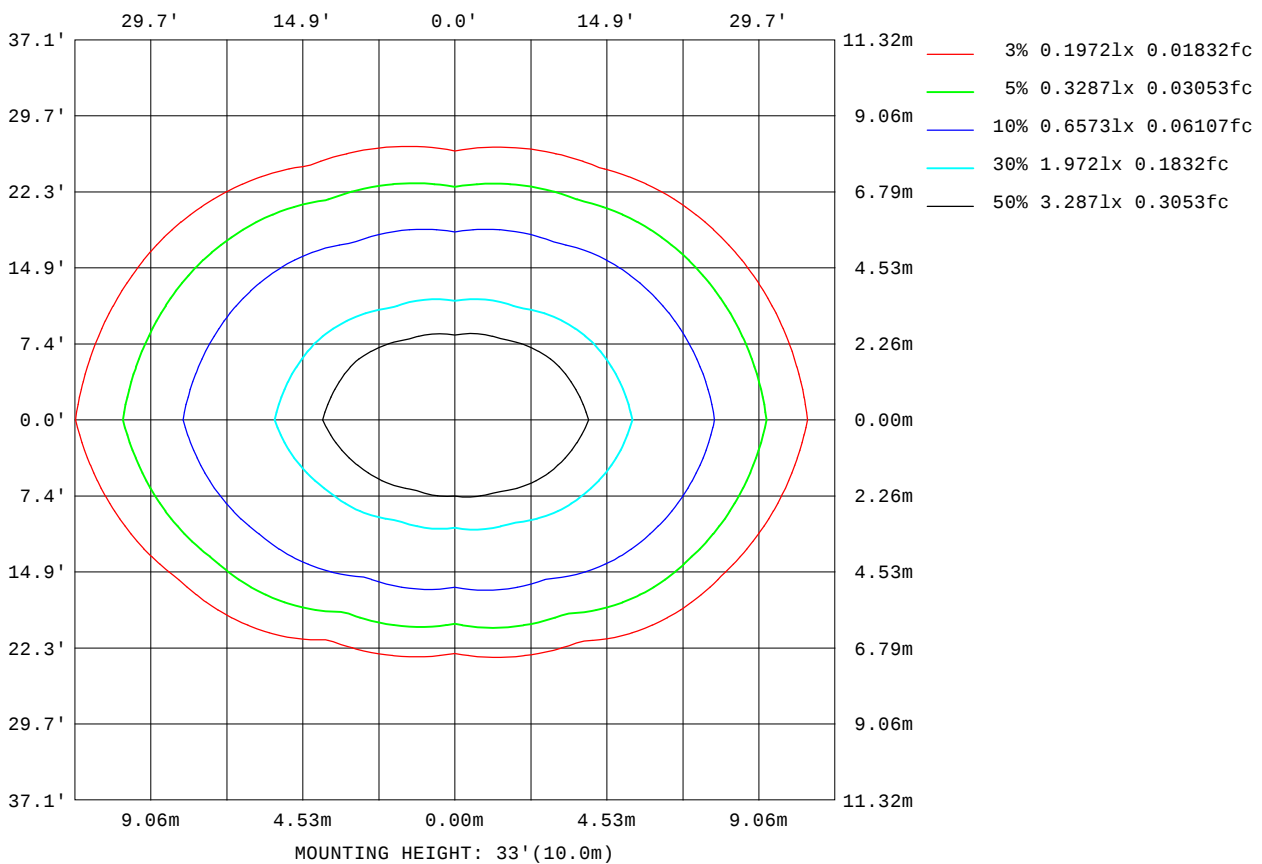

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-09-06

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

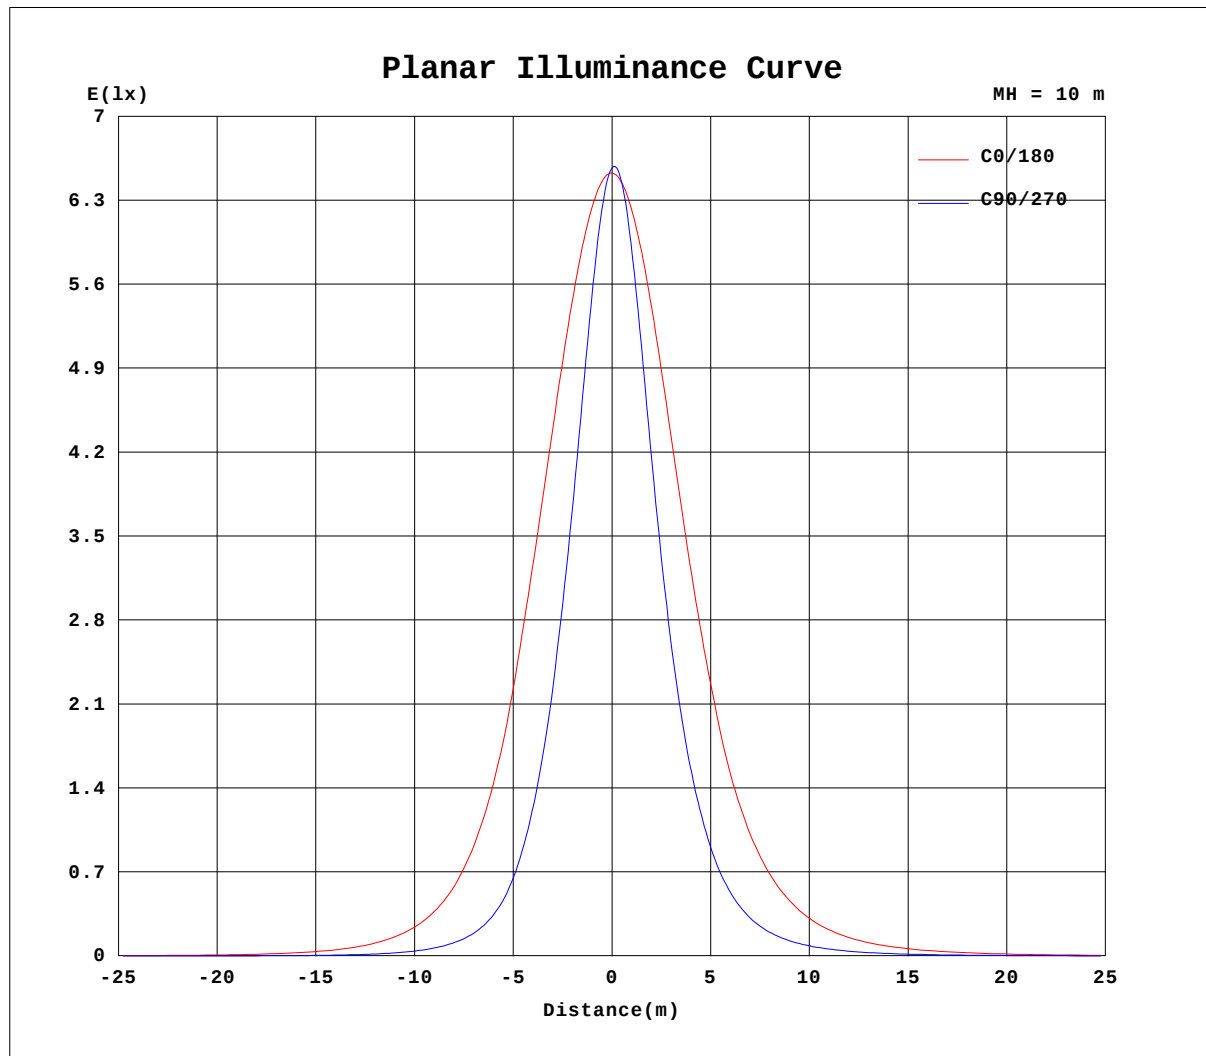


H(b) Range: -90 - 90DEG
H(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-09-06

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:BlazeLine Slim-600mm-RGBW DS-3000K-3050D-Rev1	TYPE:RGBW DS-3000K	WEIGHT:
SPEC.:30x50 DEG	DIM.:600MM	SERIAL No.:IES001658
MFR.:	SUR.:	Shielding Angle:

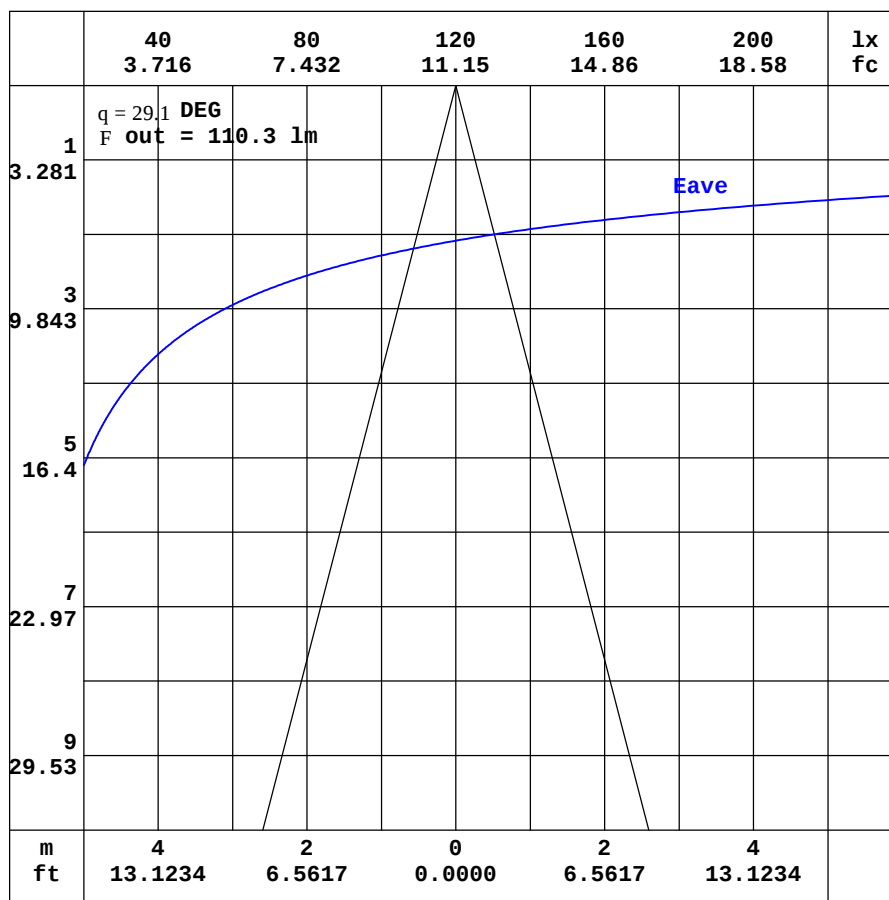

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-06

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeLine Slim-600mm-RGBW DS-3000K-3050D-Rev1	TYPE:RGBW DS-3000K	WEIGHT:
SPEC.:30x50 DEG	DIM.:600MM	SERIAL No.:IES001658
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	1.68	1.52	1.46	1.46	1.51	1.62	1.78	1.97	2.19	2.39	2.58	2.74	2.85	2.87	2.87	2.86	2.81	2.79	2.81
-170	1.68	1.49	1.40	1.37	1.39	1.45	1.54	1.65	1.78	1.90	2.01	2.10	2.14	2.14	2.10	2.12	2.28	2.40	2.57
-160	1.68	1.47	1.34	1.29	1.26	1.27	1.29	1.32	1.36	1.39	1.41	1.41	1.42	1.58	1.75	1.91	2.06	2.18	2.26
-150	1.68	1.45	1.29	1.21	1.14	1.09	1.06	1.02	0.96	0.91	0.87	0.97	1.09	1.21	1.33	1.44	1.56	1.64	1.69
-140	1.68	1.44	1.25	1.14	1.04	0.95	0.86	0.77	0.66	0.62	0.66	0.70	0.74	0.79	0.85	0.92	0.99	1.02	1.04
-130	1.68	1.43	1.23	1.08	0.96	0.83	0.72	0.59	0.53	0.53	0.53	0.53	0.51	0.50	0.52	0.55	0.57	0.58	0.59
-120	1.68	1.42	1.22	1.04	0.89	0.75	0.61	0.51	0.51	0.50	0.50	0.49	0.47	0.45	0.45	0.44	0.44	0.44	0.43
-110	1.68	1.43	1.21	1.02	0.84	0.69	0.53	0.49	0.49	0.49	0.48	0.48	0.47	0.47	0.46	0.46	0.45	0.44	0.44
-100	1.68	1.45	1.23	1.02	0.83	0.65	0.47	0.46	0.46	0.46	0.46	0.45	0.45	0.46	0.47	0.48	0.48	0.49	0.49
-90	1.68	1.47	1.26	1.05	0.84	0.63	0.42	0.42	0.41	0.41	0.40	0.39	0.39	0.39	0.40	0.40	0.41	0.41	0.41
-80	1.68	1.51	1.31	1.12	0.91	0.68	0.43	0.41	0.42	0.44	0.45	0.44	0.43	0.43	0.42	0.41	0.39	0.37	0.36
-70	1.68	1.54	1.42	1.29	1.14	1.01	0.87	0.92	1.06	1.16	1.20	1.17	1.06	1.04	1.06	1.06	1.03	0.98	0.91
-60	1.68	1.60	1.58	1.60	1.74	1.93	2.09	2.28	2.75	3.12	3.32	3.32	3.07	2.79	2.91	2.93	2.84	2.66	2.40
-50	1.68	1.68	1.79	2.13	2.75	3.52	4.34	5.02	5.91	7.00	7.88	8.33	8.33	7.58	7.71	7.98	7.94	7.55	6.81
-40	1.68	1.76	2.06	2.86	4.14	5.83	7.70	9.67	11.6	14.0	16.8	19.3	20.9	21.1	19.6	21.5	22.3	22.0	20.4
-30	1.68	1.84	2.37	3.72	5.83	8.67	12.2	16.4	21.2	26.7	32.8	41.0	48.9	54.7	56.9	56.8	63.1	64.9	61.0
-20	1.68	1.93	2.69	4.55	7.60	11.8	17.4	24.7	34.3	46.5	62.0	80.5	101	125	147	163	174	189	186
-10	1.68	2.00	3.00	5.29	9.16	14.7	22.5	33.4	48.6	69.7	98.5	136	182	236	292	347	391	417	435
0	1.68	2.05	3.20	5.79	10.3	16.9	26.4	40.1	60.2	89.2	130	185	256	344	435	520	591	636	653
10	1.68	2.04	3.11	5.53	9.62	15.6	23.9	35.6	52.2	75.1	107	148	201	264	333	401	449	478	481
20	1.68	2.02	2.91	5.01	8.45	13.3	19.9	28.7	40.4	55.7	75.4	99.7	127	159	186	205	217	232	227
30	1.68	1.97	2.68	4.33	6.95	10.6	15.3	21.1	28.4	37.1	47.2	58.2	69.1	78.7	85.0	88.6	95.8	97.4	92.2
40	1.68	1.92	2.44	3.58	5.37	7.85	10.8	14.4	18.4	22.7	27.1	31.1	34.4	36.2	36.3	39.2	40.3	39.6	37.0
50	1.68	1.86	2.23	2.88	3.99	5.44	7.20	9.12	11.1	13.0	14.6	15.9	16.7	16.6	17.2	17.7	17.7	17.1	15.9
60	1.68	1.80	2.03	2.36	2.90	3.61	4.45	5.40	6.24	6.99	7.56	7.91	7.97	7.89	8.13	8.18	8.02	7.68	7.16
70	1.68	1.75	1.88	2.03	2.22	2.45	2.76	3.07	3.35	3.60	3.79	3.89	3.86	3.92	4.00	4.01	3.96	3.86	3.71
80	1.68	1.72	1.76	1.81	1.88	1.94	1.99	2.03	2.05	2.08	2.10	2.11	2.10	2.13	2.15	2.16	2.16	2.14	2.12
90	1.68	1.68	1.69	1.69	1.69	1.69	1.69	1.66	1.63	1.60	1.56	1.53	1.50	1.49	1.49	1.48	1.48	1.47	1.47
100	1.68	1.65	1.62	1.59	1.57	1.54	1.52	1.47	1.43	1.38	1.34	1.31	1.27	1.26	1.25	1.24	1.23	1.23	1.23
110	1.68	1.62	1.56	1.52	1.48	1.45	1.42	1.38	1.34	1.31	1.28	1.26	1.23	1.21	1.21	1.20	1.19	1.17	1.16
120	1.68	1.59	1.52	1.46	1.43	1.41	1.40	1.37	1.35	1.33	1.34	1.34	1.35	1.35	1.37	1.37	1.36	1.35	1.32
130	1.68	1.57	1.49	1.44	1.42	1.41	1.40	1.40	1.43	1.48	1.54	1.60	1.67	1.74	1.80	1.85	1.89	1.91	1.91
140	1.68	1.56	1.46	1.44	1.43	1.43	1.46	1.52	1.62	1.73	1.85	1.98	2.12	2.24	2.37	2.47	2.56	2.61	2.64
150	1.68	1.54	1.45	1.44	1.44	1.47	1.55	1.68	1.82	1.98	2.16	2.34	2.51	2.67	2.81	2.94	3.01	3.07	3.10
160	1.68	1.53	1.45	1.44	1.47	1.54	1.66	1.81	2.00	2.20	2.39	2.58	2.74	2.86	2.98	3.06	3.13	3.19	3.26
170	1.68	1.52	1.45	1.45	1.49	1.59	1.74	1.92	2.12	2.33	2.53	2.71	2.82	2.89	2.92	2.94	2.95	2.96	3.13
180	1.68	1.52	1.46	1.46	1.51	1.62	1.78	1.97	2.19	2.39	2.58	2.74	2.85	2.87	2.87	2.86	2.81	2.79	2.85

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-09-06

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeLine Slim-600mm-RGBW DS-3000K-3050D-Rev1	TYPE:RGBW DS-3000K	WEIGHT:
SPEC.:30x50 DEG	DIM.:600MM	SERIAL No.:IES001658
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	2.51	2.31	2.16	1.95	1.74	1.55	1.35	1.15	1.00	0.86	0.74	0.65	0.59	0.55	0.49	0.45	0.40	0.37
-170	2.45	2.35	2.20	2.00	1.78	1.55	1.34	1.15	0.98	0.85	0.73	0.64	0.59	0.55	0.49	0.45	0.40	0.37
-160	2.20	2.10	1.95	1.78	1.60	1.43	1.23	1.06	0.92	0.79	0.71	0.63	0.58	0.54	0.49	0.44	0.40	0.37
-150	1.65	1.59	1.48	1.37	1.25	1.12	1.01	0.92	0.82	0.73	0.66	0.61	0.57	0.52	0.49	0.44	0.39	0.37
-140	1.04	1.02	0.97	0.90	0.86	0.81	0.76	0.73	0.70	0.66	0.62	0.59	0.55	0.52	0.47	0.44	0.38	0.37
-130	0.60	0.60	0.59	0.58	0.58	0.59	0.59	0.59	0.60	0.60	0.59	0.56	0.53	0.50	0.46	0.43	0.38	0.37
-120	0.44	0.45	0.46	0.48	0.49	0.51	0.53	0.54	0.55	0.56	0.55	0.53	0.51	0.47	0.45	0.42	0.38	0.37
-110	0.45	0.46	0.47	0.48	0.49	0.49	0.50	0.51	0.52	0.52	0.50	0.49	0.47	0.45	0.43	0.39	0.38	0.37
-100	0.49	0.48	0.48	0.47	0.46	0.45	0.45	0.46	0.46	0.46	0.46	0.45	0.44	0.41	0.40	0.39	0.38	0.37
-90	0.40	0.39	0.38	0.37	0.36	0.35	0.36	0.37	0.37	0.38	0.39	0.40	0.39	0.39	0.38	0.38	0.37	0.37
-80	0.36	0.37	0.37	0.37	0.37	0.37	0.39	0.39	0.38	0.37	0.37	0.37	0.38	0.39	0.38	0.37	0.37	0.37
-70	0.95	0.97	0.97	0.95	0.91	0.89	0.95	0.94	0.90	0.82	0.72	0.63	0.58	0.50	0.43	0.40	0.37	0.37
-60	2.63	2.79	2.84	2.78	2.64	2.67	2.68	2.55	2.32	2.01	1.66	1.39	1.12	0.88	0.64	0.44	0.38	0.37
-50	7.54	7.92	7.95	7.64	7.27	7.19	6.69	5.96	5.11	4.25	3.44	2.73	2.03	1.43	0.97	0.57	0.40	0.37
-40	22.1	22.5	21.6	19.7	19.8	18.3	15.8	13.0	10.2	8.03	6.30	4.71	3.34	2.19	1.37	0.75	0.42	0.37
-30	65.9	64.7	58.5	57.2	53.2	45.2	35.5	26.5	19.8	14.5	10.4	7.32	4.92	3.08	1.78	0.93	0.44	0.37
-20	193	181	171	153	127	98.9	73.1	51.6	35.5	23.8	15.7	10.3	6.62	4.01	2.20	1.11	0.46	0.37
-10	428	407	365	307	241	178	125	83.0	54.1	34.4	21.3	13.2	8.14	4.78	2.55	1.25	0.47	0.37
0	639	596	528	442	344	246	168	108	68.7	42.4	25.4	15.3	9.16	5.27	2.76	1.33	0.47	0.37
10	479	449	400	332	258	189	132	88.2	57.9	37.0	23.0	14.3	8.78	5.16	2.76	1.36	0.51	0.37
20	232	218	205	182	150	115	85.2	60.7	42.2	28.3	18.7	12.2	7.79	4.71	2.60	1.32	0.54	0.37
30	97.3	95.5	88.1	81.8	72.3	60.1	47.9	37.0	27.6	19.9	14.1	9.69	6.45	4.01	2.33	1.23	0.56	0.37
40	39.3	39.7	38.1	34.9	32.8	29.4	25.3	21.0	16.9	13.3	9.97	7.21	4.99	3.26	2.02	1.11	0.58	0.37
50	16.8	17.2	17.0	16.3	15.3	14.4	13.0	11.5	9.88	8.34	6.76	5.08	3.67	2.54	1.68	0.98	0.57	0.37
60	7.52	7.71	7.74	7.56	7.24	6.98	6.63	6.15	5.59	4.94	4.29	3.45	2.64	1.97	1.36	0.87	0.57	0.37
70	3.78	3.81	3.78	3.71	3.60	3.49	3.42	3.29	3.12	2.91	2.69	2.39	1.94	1.52	1.13	0.83	0.57	0.37
80	2.12	2.11	2.10	2.07	2.03	2.00	1.99	1.97	1.95	1.91	1.88	1.83	1.55	1.29	1.03	0.79	0.58	0.37
90	1.47	1.46	1.46	1.46	1.46	1.46	1.48	1.51	1.53	1.55	1.58	1.60	1.40	1.19	0.99	0.78	0.58	0.37
100	1.23	1.23	1.24	1.24	1.24	1.25	1.30	1.33	1.35	1.39	1.43	1.46	1.29	1.12	0.94	0.76	0.57	0.37
110	1.17	1.19	1.20	1.21	1.22	1.24	1.26	1.28	1.31	1.33	1.36	1.35	1.20	1.05	0.90	0.73	0.55	0.37
120	1.35	1.38	1.38	1.38	1.38	1.37	1.36	1.35	1.33	1.34	1.36	1.27	1.14	1.00	0.86	0.71	0.54	0.37
130	1.92	1.91	1.88	1.83	1.77	1.70	1.63	1.57	1.50	1.45	1.35	1.20	1.07	0.94	0.81	0.68	0.52	0.37
140	2.63	2.59	2.52	2.43	2.30	2.15	2.01	1.87	1.75	1.58	1.34	1.14	1.00	0.88	0.76	0.64	0.50	0.37
150	3.11	3.08	3.03	2.90	2.74	2.56	2.37	2.18	1.86	1.54	1.29	1.08	0.93	0.81	0.71	0.59	0.48	0.37
160	3.28	3.30	3.24	3.12	2.98	2.82	2.44	2.06	1.71	1.41	1.18	0.98	0.84	0.73	0.64	0.55	0.46	0.37
170	3.15	3.18	3.17	2.95	2.63	2.31	1.99	1.69	1.41	1.18	0.99	0.83	0.72	0.64	0.57	0.50	0.43	0.37
180	2.51	2.31	2.16	1.95	1.74	1.55	1.35	1.15	1.00	0.86	0.74	0.65	0.59	0.55	0.49	0.45	0.40	0.37

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-09-06

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks: