

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	1589.4 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	65.3V x 97.6H
	At 50% of Imax	30.3V x 52.9H
	At 90% of Imax	11.0V x 21.3H

Beam Flux	Total	1000.2 lumens per klm.
	To 10% of Imax	853.4 lumens per klm.
	To 50% of Imax	431.6 lumens per klm.
	To 90% of Imax	79.1 lumens per klm.

Upward LOR	1.2 %
Downward LOR	98.8 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-06

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:BlazeLine Slim-600mm-RGBW DS-BLUE-3050D-Rev1	TYPE:RGBW DS-BLUE	WEIGHT:
SPEC.:30x50 DEG	DIM.:600MM	SERIAL No.:IES001657
MFR.:	SUR.:	Shielding Angle:

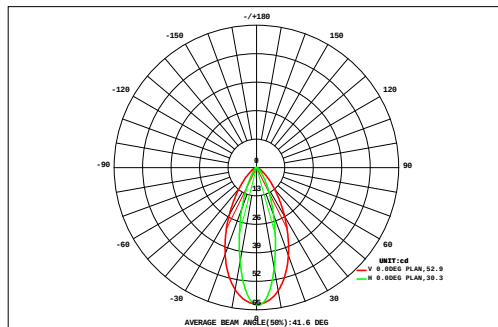

DATA OF LAMP		Eff:6.35lm/W	
MODEL		Imax(cd)	62.96
NOMINAL POWER(W)	6.24	AVAILABILITY(%)	85.2
RATED VOLTAGE(V)	24	Avai. FLUX(lm)	33.73
NOMINAL FLUX(lm)	39.61	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	39.61
TEST VOLTAGE(V)	24	q @50%(H,V)	53,30DEG

		AREA FLUX DIAGRAM																UNIT:lm			F t	F a
		0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.09	0.00	
VERTICAL (DEG)	72	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.18	0.00	
	64	0.00	0.01	0.01	0.01	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.01	0.01	0.00	0.33	0.00	
	56	0.00	0.01	0.01	0.02	0.04	0.05	0.05	0.06	0.06	0.06	0.06	0.05	0.05	0.04	0.03	0.02	0.01	0.00	0.61	0.00	
	48	0.00	0.01	0.02	0.04	0.06	0.08	0.10	0.11	0.12	0.12	0.12	0.10	0.08	0.06	0.04	0.02	0.01	0.00	1.11	0.31	
	40	0.01	0.01	0.03	0.06	0.10	0.15	0.19	0.22	0.24	0.24	0.22	0.19	0.15	0.10	0.06	0.03	0.01	0.00	2.00	1.68	
	32	0.01	0.02	0.04	0.08	0.15	0.24	0.34	0.41	0.46	0.46	0.41	0.34	0.24	0.15	0.08	0.04	0.02	0.01	3.49	3.26	
	24	0.01	0.02	0.05	0.10	0.20	0.35	0.55	0.71	0.80	0.80	0.71	0.54	0.36	0.21	0.11	0.05	0.02	0.01	5.60	5.41	
		0.01	0.02	0.05	0.12	0.25	0.45	0.71	0.97	1.13	1.13	0.97	0.72	0.46	0.26	0.13	0.06	0.02	0.01	7.48	7.31	
		0.01	0.02	0.05	0.12	0.24	0.44	0.69	0.93	1.08	1.10	0.95	0.71	0.45	0.25	0.13	0.06	0.02	0.01	7.26	7.09	
		0.01	0.02	0.04	0.09	0.19	0.32	0.49	0.64	0.73	0.74	0.66	0.51	0.34	0.20	0.10	0.05	0.02	0.01	5.14	4.94	
	-24	0.01	0.01	0.03	0.07	0.12	0.20	0.28	0.34	0.39	0.40	0.36	0.30	0.21	0.13	0.07	0.04	0.01	0.00	2.99	2.74	
	-32	0.00	0.01	0.02	0.04	0.07	0.11	0.14	0.16	0.17	0.18	0.17	0.15	0.12	0.08	0.05	0.02	0.01	0.00	1.50	0.99	
	-40	0.00	0.01	0.01	0.03	0.04	0.05	0.06	0.07	0.07	0.07	0.07	0.06	0.06	0.04	0.03	0.02	0.01	0.00	0.70	0.00	
	-48	0.00	0.00	0.01	0.01	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.01	0.00	0.00	0.33	0.00	
	-56	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.15	0.00	
	-64	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.00	
-72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.00		
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)				16	24	32	40	48	56	64	72		
F t	0.07	0.18	0.41	0.83	1.53	2.54	3.70	4.72	5.34	5.39	4.80	3.77	2.60	1.59	0.87	0.43	0.18	0.06	39	---		
F a	0.00	0.00	0.00	0.41	1.19	2.22	3.39	4.41	5.04	5.09	4.49	3.46	2.29	1.25	0.47	0.01	0.00	0.00	---	34		


one-half-peak spread: U:15.2,D:15.4 , L:27.5, ~~NEZ~~ Beam Type: Type 5 x 4 (H x V)

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-09-06

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:BlazeLine Slim-600mm-RGBW DS-BLUE-3050D-Rev1	TYPE:RGBW DS-BLUE	WEIGHT:
SPEC.:30x50 DEG	DIM.:600MM	SERIAL No.:IES001657
MFR.:	SUR.:	Shielding Angle:

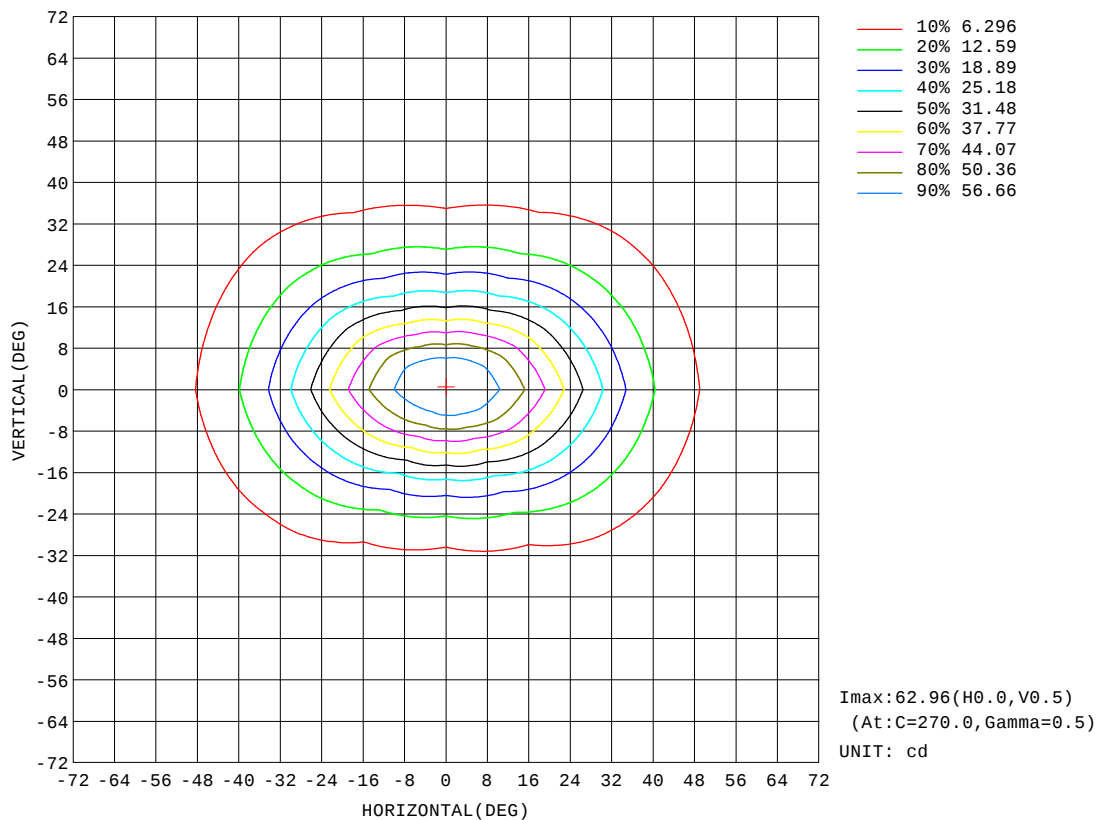


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-09-06

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:BlazeLine Slim-600mm-RGBW DS-BLUE-3050D-Rev1	TYPE:RGBW DS-BLUE	WEIGHT:
SPEC.:30x50 DEG	DIM.:600MM	SERIAL No.:IES001657
MFR.:	SUR.:	Shielding Angle:

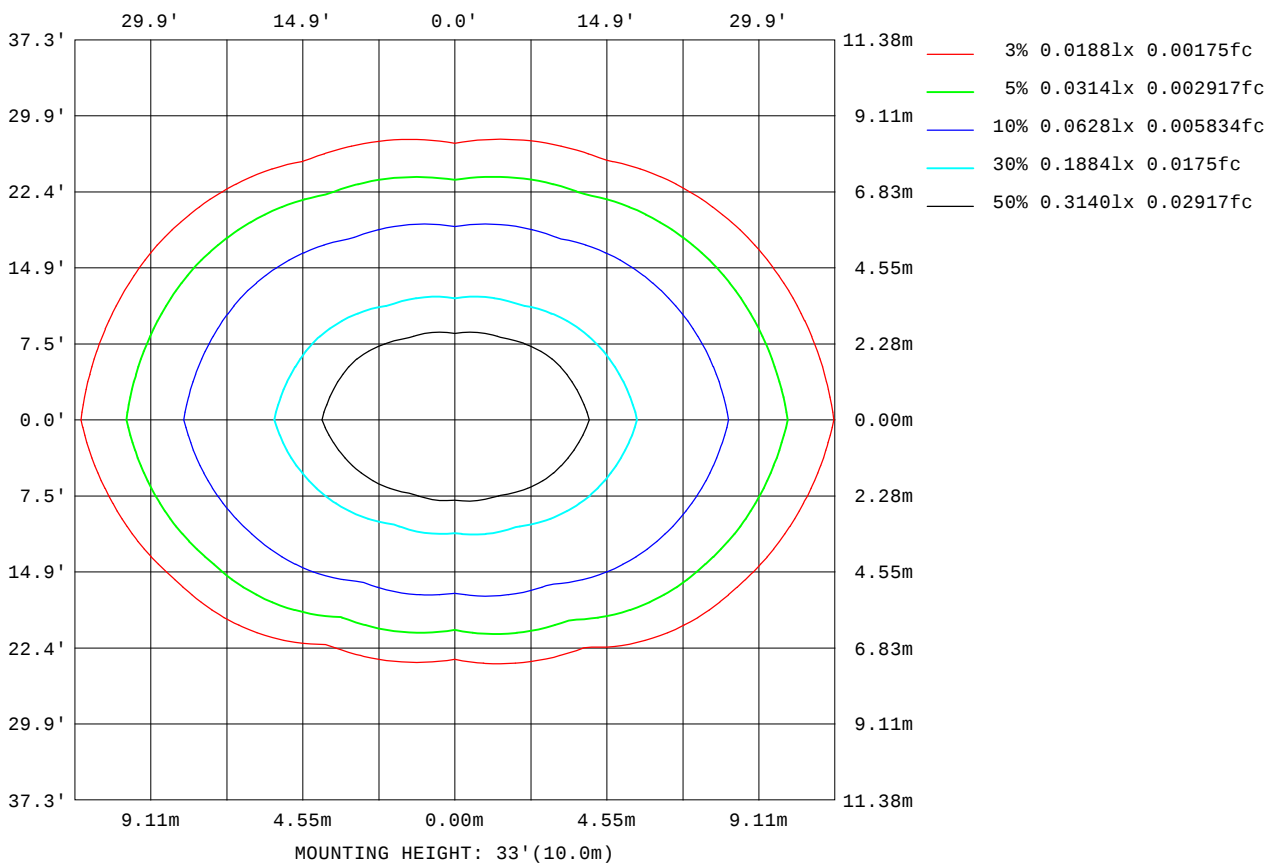

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-09-06

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

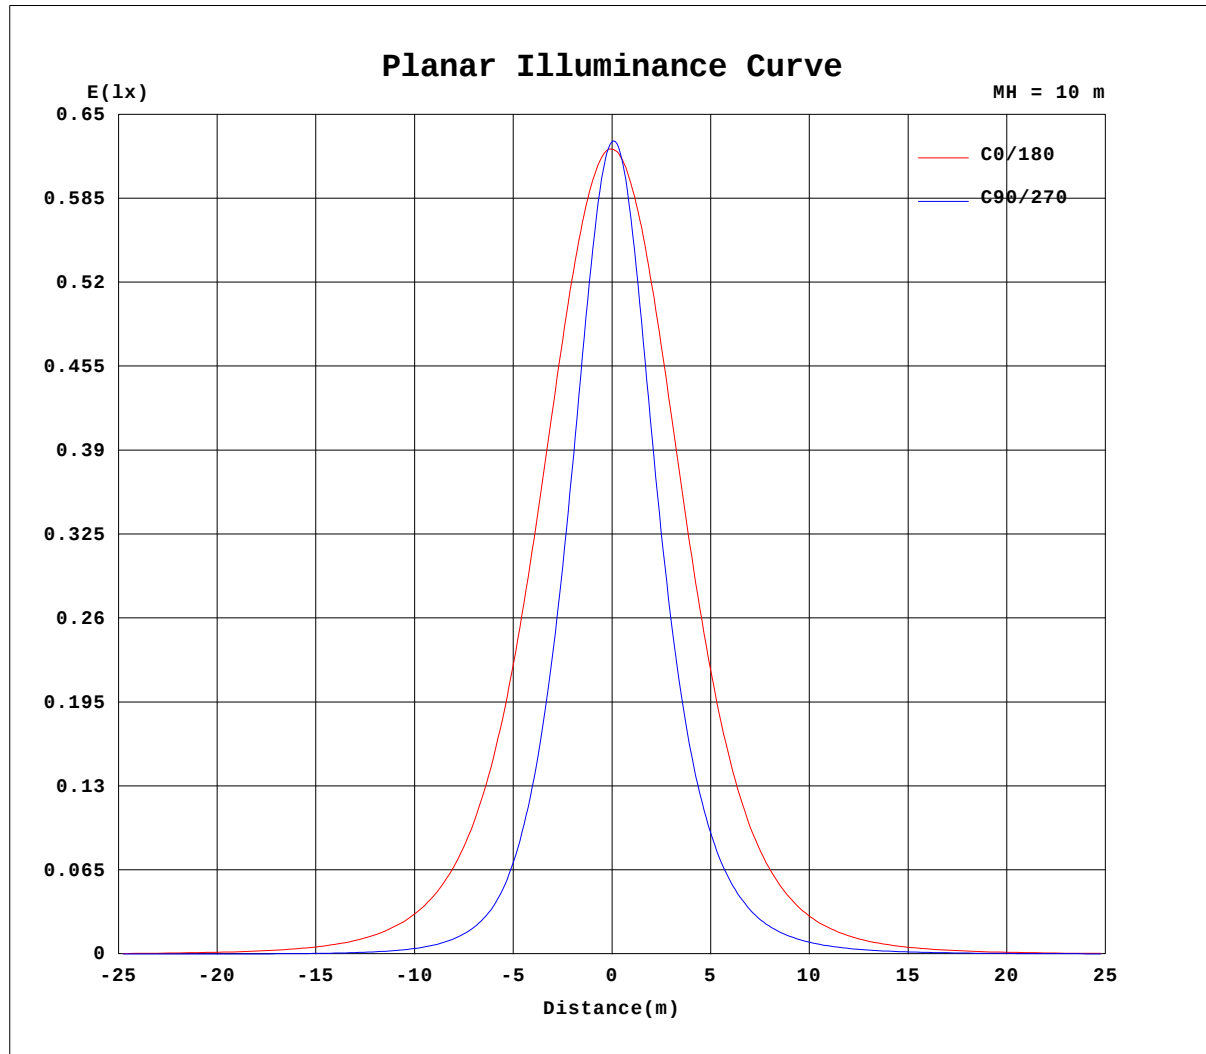


H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-09-06

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:BlazeLine Slim-600mm-RGBW DS-BLUE-3050D-Rev1	TYPE:RGBW DS-BLUE	WEIGHT:
SPEC.:30x50 DEG	DIM.:600MM	SERIAL No.:IES001657
MFR.:	SUR.:	Shielding Angle:

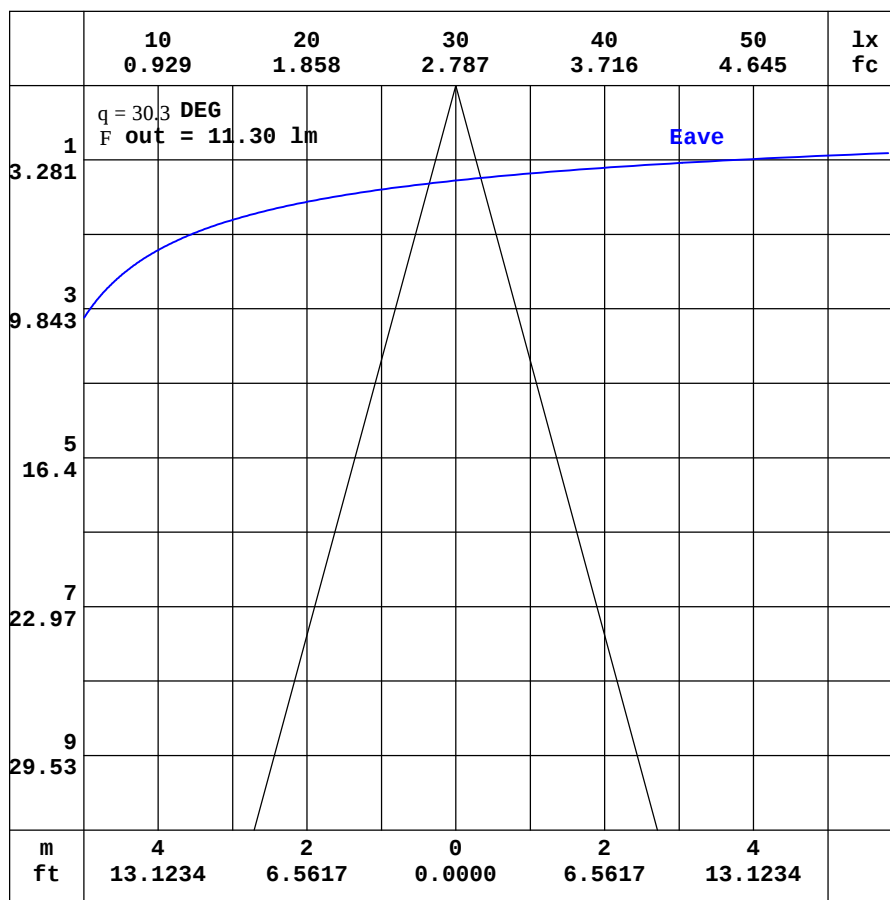

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-06

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeLine Slim-600mm-RGBW DS-BLUE-3050D-Rev1	TYPE:RGBW DS-BLUE	WEIGHT:
SPEC.:30x50 DEG	DIM.:600MM	SERIAL No.:IES001657
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.09	0.09	0.09	0.09	0.10	0.10	0.12	0.14	0.15	0.18	0.20	0.21	0.21	0.21	0.21	0.20	0.20	0.20	0.20
-170	0.09	0.09	0.08	0.08	0.08	0.09	0.09	0.10	0.12	0.14	0.17	0.17	0.14	0.14	0.14	0.14	0.15	0.14	0.19
-160	0.09	0.08	0.08	0.07	0.07	0.07	0.07	0.07	0.08	0.10	0.12	0.14	0.12	0.09	0.09	0.11	0.12	0.14	0.16
-150	0.09	0.08	0.07	0.07	0.06	0.06	0.05	0.04	0.03	0.05	0.05	0.07	0.08	0.06	0.06	0.06	0.07	0.09	0.11
-140	0.09	0.08	0.07	0.06	0.05	0.04	0.03	0.02	0.01	0.00	0.01	0.02	0.02	0.02	0.00	0.01	0.02	0.03	0.04
-130	0.09	0.08	0.07	0.06	0.04	0.03	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-120	0.09	0.08	0.06	0.05	0.04	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.09	0.08	0.06	0.05	0.03	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.09	0.08	0.06	0.05	0.03	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.09	0.08	0.06	0.05	0.03	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.09	0.08	0.06	0.05	0.03	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.09	0.08	0.06	0.06	0.05	0.03	0.01	0.00	0.00	0.02	0.03	0.04	0.05	0.05	0.05	0.04	0.03	0.02	0.01
-60	0.09	0.08	0.08	0.08	0.08	0.07	0.07	0.09	0.15	0.20	0.24	0.26	0.25	0.24	0.25	0.26	0.25	0.23	0.20
-50	0.09	0.08	0.09	0.11	0.13	0.20	0.27	0.34	0.45	0.57	0.68	0.76	0.78	0.74	0.76	0.80	0.79	0.76	0.68
-40	0.09	0.08	0.11	0.15	0.26	0.40	0.57	0.77	0.98	1.26	1.57	1.86	2.08	2.14	2.03	2.24	2.34	2.32	2.16
-30	0.09	0.09	0.13	0.22	0.40	0.65	0.97	1.38	1.89	2.50	3.22	4.12	5.01	5.68	6.00	6.09	6.79	7.00	6.62
-20	0.09	0.10	0.15	0.31	0.55	0.92	1.44	2.14	3.11	4.41	6.08	8.12	10.5	13.1	15.4	17.1	18.2	19.9	19.7
-10	0.09	0.10	0.17	0.37	0.68	1.17	1.88	2.92	4.44	6.58	9.57	13.5	18.4	23.9	29.7	35.1	39.4	42.0	43.7
0	0.09	0.11	0.19	0.41	0.77	1.36	2.21	3.50	5.48	8.33	12.5	17.9	25.1	33.4	42.1	50.2	56.6	60.8	62.3
10	0.09	0.11	0.19	0.39	0.73	1.26	2.02	3.13	4.77	7.07	10.3	14.5	19.8	25.9	32.6	39.0	43.5	46.1	46.5
20	0.09	0.11	0.18	0.36	0.64	1.07	1.67	2.51	3.68	5.24	7.29	9.82	12.7	15.8	18.6	20.7	22.0	23.3	22.7
30	0.09	0.10	0.16	0.29	0.52	0.84	1.28	1.84	2.56	3.47	4.53	5.70	6.92	8.00	8.74	9.22	10.00	10.2	9.72
40	0.09	0.10	0.15	0.23	0.40	0.62	0.89	1.24	1.64	2.09	2.54	3.00	3.40	3.68	3.79	4.12	4.28	4.24	3.99
50	0.09	0.10	0.13	0.19	0.27	0.42	0.58	0.76	0.96	1.15	1.33	1.48	1.59	1.63	1.73	1.81	1.83	1.79	1.69
60	0.09	0.10	0.12	0.15	0.20	0.25	0.35	0.43	0.51	0.58	0.64	0.69	0.71	0.73	0.77	0.79	0.79	0.78	0.74
70	0.09	0.10	0.11	0.13	0.15	0.17	0.20	0.22	0.25	0.28	0.29	0.30	0.29	0.31	0.33	0.35	0.35	0.35	0.35
80	0.09	0.10	0.10	0.11	0.12	0.14	0.14	0.14	0.14	0.14	0.14	0.13	0.12	0.13	0.14	0.15	0.16	0.17	0.17
90	0.09	0.10	0.10	0.11	0.11	0.12	0.12	0.11	0.10	0.09	0.08	0.07	0.06	0.07	0.07	0.08	0.08	0.09	0.09
100	0.09	0.09	0.10	0.10	0.10	0.10	0.10	0.09	0.09	0.08	0.07	0.07	0.06	0.06	0.07	0.07	0.07	0.07	0.07
110	0.09	0.09	0.09	0.10	0.09	0.09	0.09	0.09	0.08	0.08	0.07	0.07	0.06	0.06	0.06	0.06	0.06	0.06	0.05
120	0.09	0.09	0.09	0.09	0.09	0.09	0.08	0.08	0.08	0.07	0.07	0.07	0.08	0.07	0.07	0.07	0.06	0.06	0.05
130	0.09	0.09	0.09	0.09	0.09	0.09	0.08	0.08	0.08	0.08	0.08	0.09	0.10	0.11	0.11	0.11	0.10	0.10	0.09
140	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.08	0.08	0.10	0.13	0.15	0.17	0.18	0.17	0.17	0.17	0.16
150	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.10	0.13	0.15	0.18	0.20	0.22	0.22	0.21	0.21	0.21	0.20
160	0.09	0.09	0.09	0.09	0.09	0.10	0.10	0.11	0.13	0.15	0.19	0.21	0.24	0.22	0.21	0.21	0.21	0.22	0.22
170	0.09	0.09	0.09	0.09	0.09	0.10	0.11	0.12	0.14	0.17	0.20	0.22	0.21	0.21	0.21	0.22	0.21	0.21	0.23
180	0.09	0.09	0.09	0.09	0.10	0.10	0.12	0.14	0.15	0.18	0.20	0.21	0.21	0.21	0.21	0.20	0.20	0.20	0.21

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-09-06

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeLine Slim-600mm-RGBW DS-BLUE-3050D-Rev1	TYPE:RGBW DS-BLUE	WEIGHT:
SPEC.:30x50 DEG	DIM.:600MM	SERIAL No.:IES001657
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	0.14	0.14	0.13	0.09	0.06	0.05	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-170	0.14	0.15	0.15	0.13	0.10	0.08	0.05	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-160	0.14	0.13	0.11	0.10	0.09	0.08	0.05	0.03	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-150	0.09	0.07	0.05	0.06	0.04	0.04	0.03	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-140	0.03	0.02	0.01	0.00	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.02	0.03	0.04	0.05	0.06	0.05	0.05	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.24	0.26	0.28	0.28	0.27	0.29	0.29	0.27	0.24	0.19	0.12	0.06	0.03	0.02	0.00	0.00	0.00	0.00
-50	0.78	0.83	0.85	0.83	0.81	0.87	0.85	0.77	0.65	0.52	0.39	0.28	0.15	0.06	0.02	0.00	0.00	0.00
-40	2.36	2.42	2.34	2.15	2.31	2.27	2.06	1.75	1.41	1.11	0.84	0.59	0.38	0.16	0.06	0.00	0.00	0.00
-30	7.16	7.07	6.43	6.39	6.10	5.42	4.53	3.56	2.75	2.06	1.49	1.01	0.63	0.31	0.10	0.02	0.00	0.00
-20	20.3	19.0	18.0	16.3	13.9	11.3	8.76	6.56	4.77	3.34	2.28	1.49	0.91	0.47	0.16	0.03	0.00	0.00
-10	43.0	40.7	36.5	30.8	24.8	19.1	14.1	10.1	7.01	4.71	3.09	1.94	1.16	0.61	0.20	0.04	0.00	0.00
0	61.1	57.1	50.7	42.6	34.0	25.7	18.6	13.0	8.78	5.77	3.70	2.28	1.33	0.69	0.23	0.05	0.00	0.00
10	46.4	43.5	38.9	32.5	25.9	19.9	14.7	10.6	7.39	5.00	3.29	2.07	1.24	0.66	0.23	0.06	0.00	0.00
20	23.4	22.0	20.7	18.5	15.7	12.7	9.90	7.47	5.46	3.85	2.63	1.72	1.05	0.56	0.21	0.05	0.01	0.00
30	10.2	10.0	9.26	8.76	8.02	6.98	5.79	4.66	3.61	2.69	1.92	1.31	0.82	0.43	0.18	0.05	0.01	0.00
40	4.26	4.31	4.17	3.85	3.75	3.49	3.11	2.66	2.19	1.73	1.29	0.91	0.59	0.30	0.14	0.04	0.02	0.00
50	1.80	1.86	1.85	1.78	1.70	1.66	1.56	1.40	1.21	1.02	0.80	0.58	0.36	0.21	0.10	0.04	0.02	0.00
60	0.78	0.81	0.82	0.80	0.76	0.75	0.73	0.68	0.62	0.54	0.44	0.32	0.22	0.14	0.08	0.04	0.02	0.00
70	0.36	0.36	0.35	0.34	0.32	0.31	0.30	0.29	0.27	0.25	0.23	0.20	0.15	0.11	0.07	0.04	0.02	0.00
80	0.17	0.16	0.15	0.14	0.13	0.13	0.14	0.14	0.14	0.14	0.15	0.15	0.12	0.09	0.06	0.04	0.02	0.00
90	0.09	0.08	0.08	0.07	0.06	0.06	0.07	0.08	0.09	0.10	0.11	0.12	0.10	0.08	0.06	0.04	0.02	0.00
100	0.07	0.07	0.06	0.06	0.06	0.06	0.06	0.07	0.08	0.09	0.09	0.10	0.08	0.07	0.05	0.04	0.02	0.00
110	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.07	0.07	0.08	0.08	0.09	0.07	0.06	0.05	0.03	0.02	0.00
120	0.06	0.07	0.07	0.07	0.08	0.08	0.08	0.07	0.07	0.08	0.08	0.08	0.06	0.05	0.04	0.03	0.02	0.00
130	0.10	0.11	0.11	0.12	0.11	0.10	0.09	0.08	0.08	0.08	0.08	0.06	0.06	0.04	0.03	0.03	0.01	0.00
140	0.17	0.18	0.18	0.18	0.16	0.14	0.13	0.09	0.08	0.08	0.07	0.06	0.05	0.04	0.03	0.02	0.01	0.00
150	0.21	0.21	0.22	0.21	0.19	0.16	0.14	0.13	0.09	0.06	0.05	0.04	0.04	0.03	0.02	0.02	0.01	0.00
160	0.22	0.22	0.21	0.21	0.20	0.19	0.14	0.10	0.08	0.05	0.04	0.03	0.02	0.02	0.01	0.01	0.01	0.00
170	0.22	0.21	0.20	0.18	0.16	0.13	0.09	0.06	0.04	0.03	0.02	0.02	0.01	0.01	0.01	0.01	0.00	0.00
180	0.14	0.14	0.13	0.09	0.06	0.05	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-09-06

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks: