

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		1675.4 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	61.7V x 96.1H
	At 50% of Imax	28.3V x 52.2H
	At 90% of Imax	10.1V x 20.9H
Beam Flux	Total	1000.0 lumens per klm.
	To 10% of Imax	829.5 lumens per klm.
	To 50% of Imax	414.9 lumens per klm.
	To 90% of Imax	73.2 lumens per klm.
Upward LOR		2.3 %
Downward LOR		97.7 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-06

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:BlazeLine Slim-600mm-RGBW DS-GREEN-3050D-Rev1	TYPE:RGBW DS-GREEN	WEIGHT:
SPEC.:30x50 DEG	DIM.:600MM	SERIAL No.:IES001656
MFR.:	SUR.:	Shielding Angle:

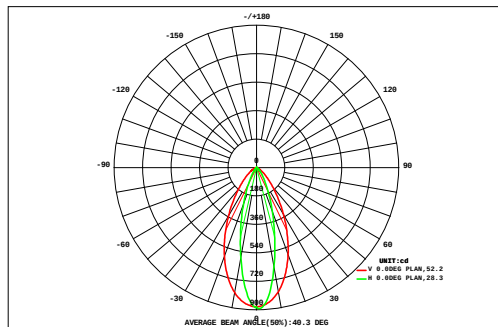

DATA OF LAMP		Eff:84.99lm/W	
MODEL		Imax(cd)	892.0
NOMINAL POWER(W)	6.264	AVAILABILITY(%)	82.8
RATED VOLTAGE(V)	24	Avai. FLUX(lm)	440.6
NOMINAL FLUX(lm)	532.4	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	532.4
TEST VOLTAGE(V)	24	q @50%(H,V)	52,28DEG

72 64 56 48 40 32 24 16 8 0 -8 -16 -24 -32 -40 -48 -56 -64 -72 -72	AREA FLUX DIAGRAM																UNIT:lm				F t	F a
	0.02	0.04	0.06	0.08	0.09	0.10	0.11	0.11	0.11	0.11	0.11	0.11	0.10	0.09	0.07	0.05	0.04	0.02	1.43	0.00		
	0.03	0.06	0.09	0.13	0.16	0.18	0.20	0.20	0.19	0.19	0.20	0.19	0.17	0.15	0.12	0.08	0.05	0.02	2.42	0.00		
	0.04	0.08	0.15	0.22	0.29	0.33	0.36	0.38	0.36	0.36	0.37	0.34	0.31	0.26	0.19	0.13	0.07	0.03	4.25	0.00		
	0.05	0.12	0.23	0.35	0.49	0.60	0.65	0.72	0.71	0.70	0.70	0.62	0.55	0.43	0.30	0.18	0.10	0.04	7.54	0.00		
	0.06	0.16	0.32	0.55	0.82	1.08	1.23	1.39	1.41	1.40	1.35	1.17	0.99	0.73	0.47	0.26	0.13	0.05	13.6	1.19		
	0.08	0.21	0.45	0.81	1.33	1.94	2.42	2.73	2.91	2.90	2.68	2.31	1.78	1.18	0.69	0.35	0.16	0.06	25.0	19.9		
	0.10	0.27	0.58	1.14	2.03	3.26	4.53	5.40	5.92	5.90	5.32	4.36	3.03	1.82	0.97	0.46	0.19	0.07	45.4	42.0		
	0.11	0.31	0.72	1.49	2.84	4.91	7.48	9.77	10.9	10.9	9.63	7.23	4.63	2.59	1.28	0.57	0.23	0.08	75.7	73.0		
	0.12	0.35	0.82	1.78	3.57	6.41	10.0	13.7	16.0	15.9	13.5	9.80	6.12	3.29	1.55	0.65	0.25	0.08	104	101		
	0.12	0.34	0.80	1.74	3.46	6.20	9.60	12.9	15.0	15.2	13.0	9.50	5.97	3.21	1.51	0.64	0.24	0.08	99.4	96.9		
	0.10	0.29	0.66	1.36	2.56	4.33	6.48	8.40	9.55	9.66	8.56	6.53	4.22	2.39	1.18	0.52	0.21	0.07	67.1	64.2		
	0.09	0.23	0.50	0.95	1.65	2.59	3.63	4.33	4.85	4.89	4.39	3.64	2.53	1.53	0.82	0.39	0.17	0.06	37.2	33.4		
	0.07	0.18	0.35	0.60	0.97	1.41	1.71	1.91	2.07	2.08	1.91	1.68	1.35	0.88	0.51	0.27	0.13	0.05	18.1	8.79		
	0.05	0.12	0.22	0.36	0.54	0.71	0.75	0.83	0.85	0.84	0.81	0.72	0.66	0.48	0.30	0.18	0.09	0.04	8.55	0.00		
	0.04	0.08	0.13	0.21	0.29	0.34	0.34	0.38	0.37	0.36	0.37	0.32	0.31	0.25	0.18	0.11	0.06	0.03	4.16	0.00		
	0.03	0.05	0.08	0.12	0.15	0.16	0.16	0.17	0.16	0.16	0.17	0.15	0.14	0.13	0.10	0.06	0.04	0.02	2.03	0.00		
	0.02	0.03	0.04	0.06	0.07	0.07	0.07	0.08	0.07	0.07	0.08	0.07	0.07	0.06	0.05	0.04	0.02	0.01	0.98	0.00		
	0.01	0.01	0.02	0.03	0.03	0.03	0.03	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.01	0.01	0.46	0.00		
	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)				16	24	32	40	48	56	64	72			
F t	1.13	2.93	6.22	12.0	21.3	34.6	49.8	63.4	71.5	71.6	63.2	48.8	33.0	19.5	10.3	4.97	2.16	0.81	517	---		
F a	0.00	0.00	0.09	6.12	16.4	30.1	45.3	58.8	67.0	67.1	58.6	44.4	28.4	14.5	3.98	0.00	0.00	0.00	---	441		


one-half-peak spread: U:14.5,D:14.1 , L:26.6,NEZ:0.0 Beam Type: Type 5 x 4 (H x V)

H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-09-06

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:BlazeLine Slim-600mm-RGBW DS-GREEN-3050D-Rev1	TYPE:RGBW DS-GREEN	WEIGHT:
SPEC.:30x50 DEG	DIM.:600MM	SERIAL No.:IES001656
MFR.:	SUR.:	Shielding Angle:

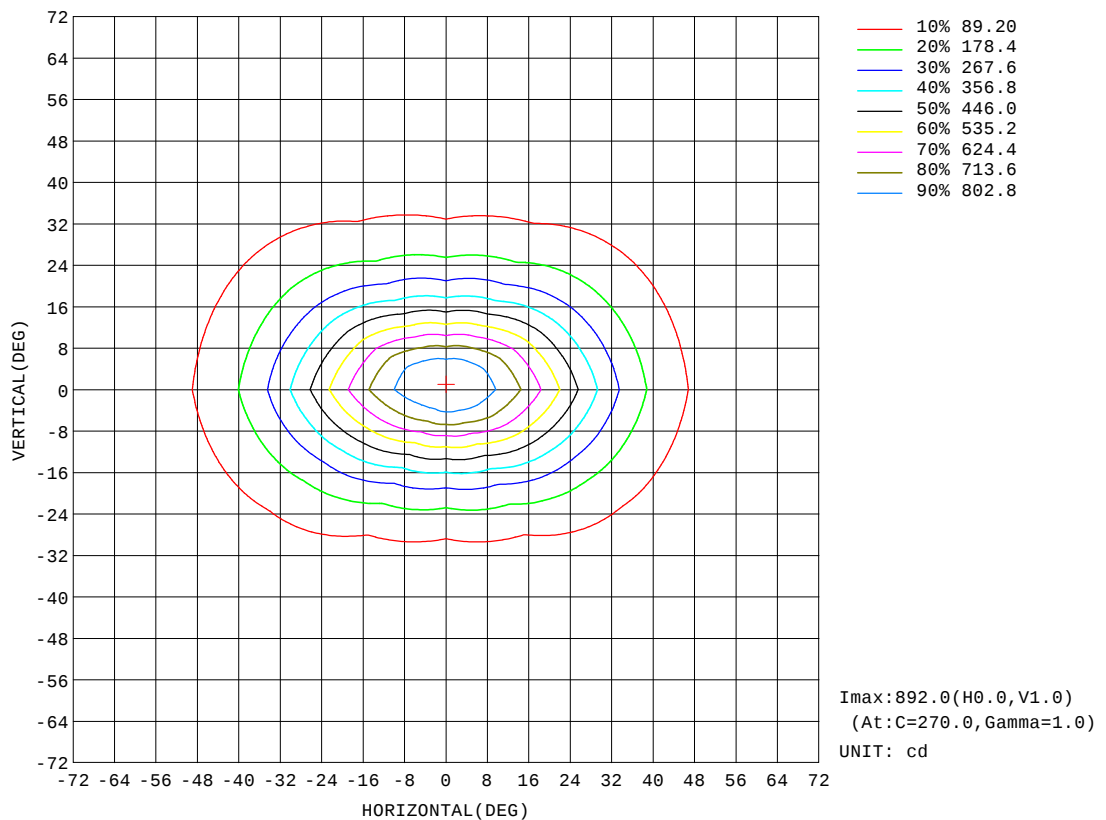


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-06

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:BlazeLine Slim-600mm-RGBW DS-GREEN-3050D-Rev1	TYPE:RGBW DS-GREEN	WEIGHT:
SPEC.:30x50 DEG	DIM.:600MM	SERIAL No.:IES001656
MFR.:	SUR.:	Shielding Angle:

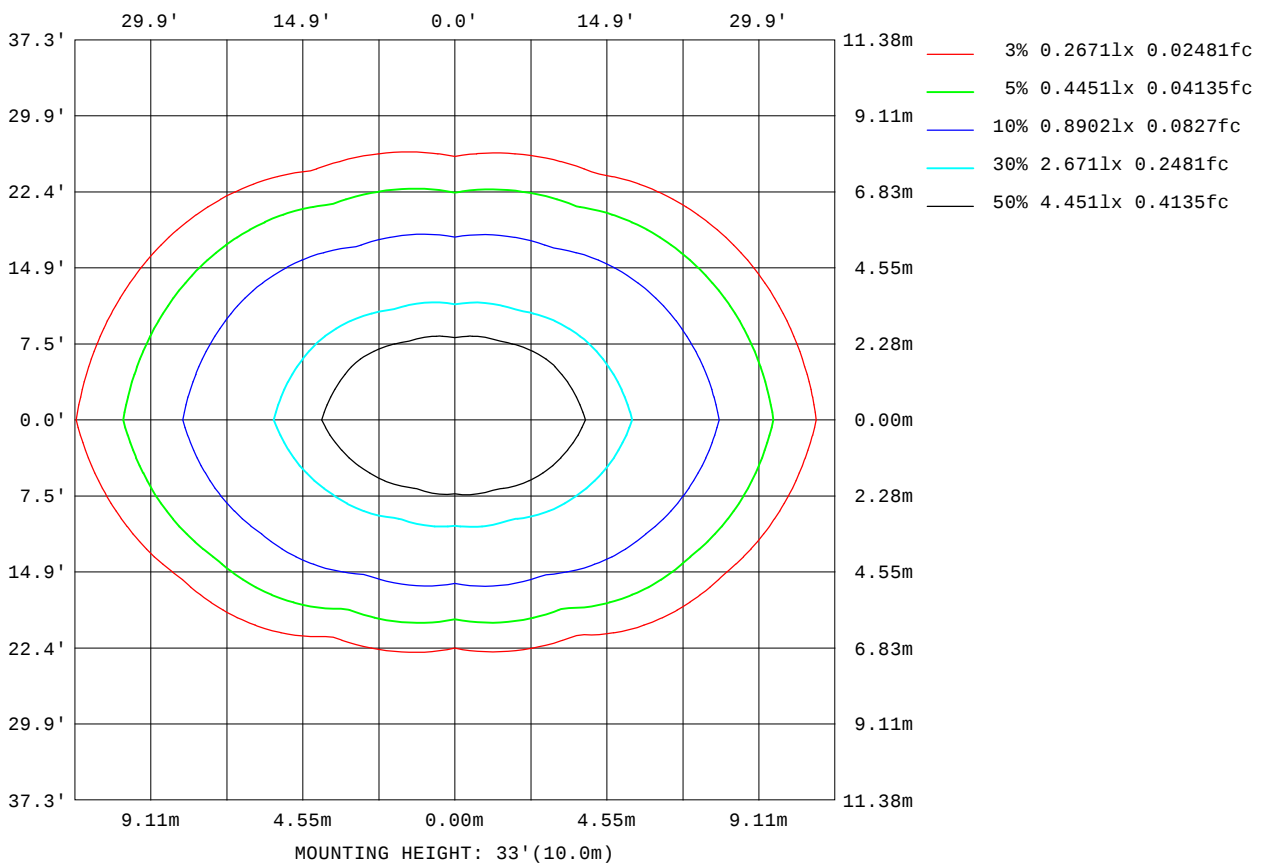

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-09-06

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

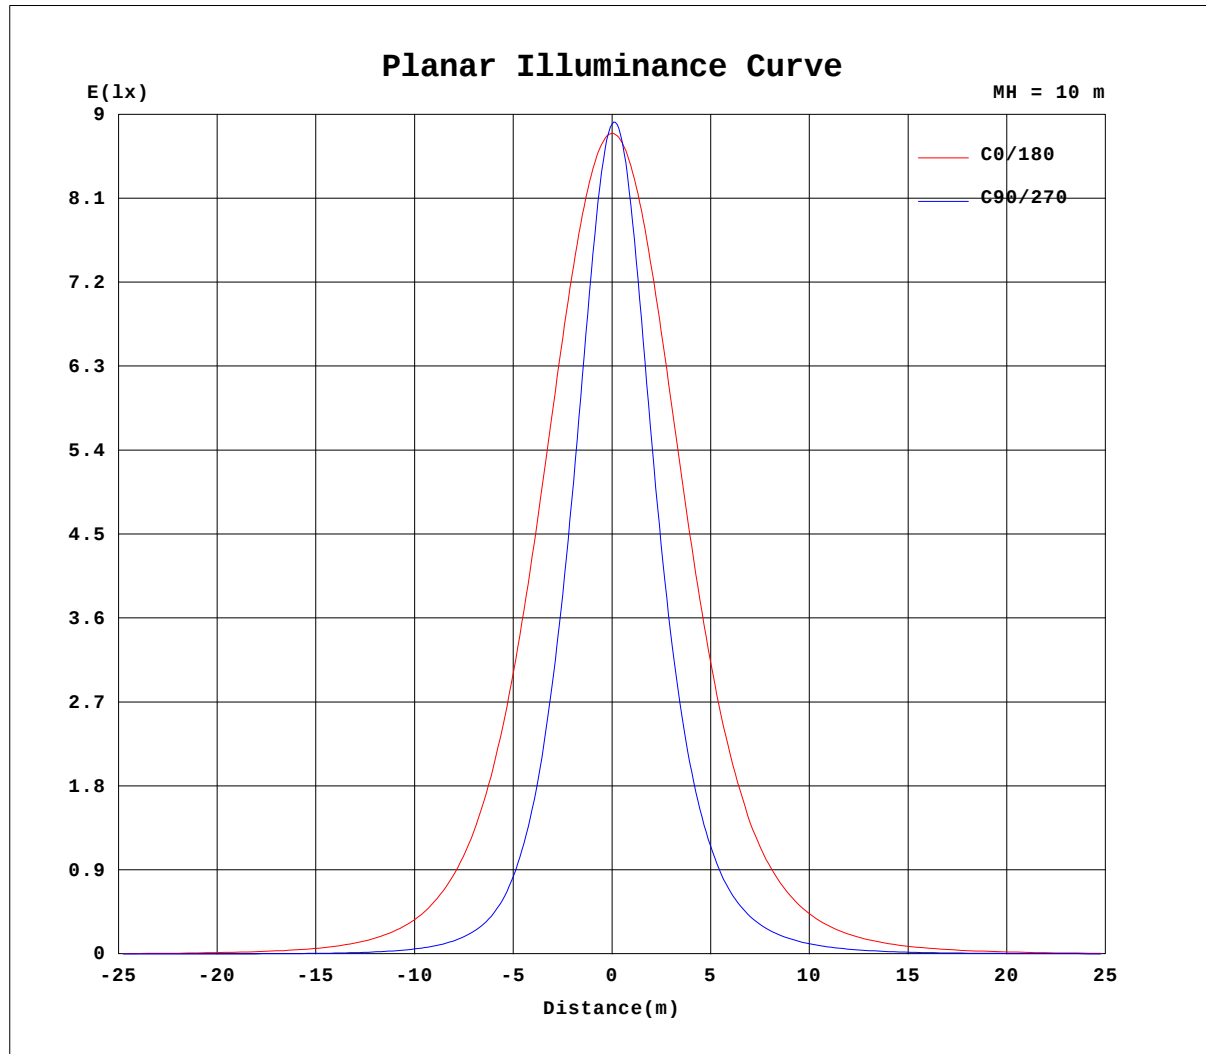


H(b) Range: -90 - 90DEG
H(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-09-06

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:BlazeLine Slim-600mm-RGBW DS-GREEN-3050D-Rev1	TYPE:RGBW DS-GREEN	WEIGHT:
SPEC.:30x50 DEG	DIM.:600MM	SERIAL No.:IES001656
MFR.:	SUR.:	Shielding Angle:

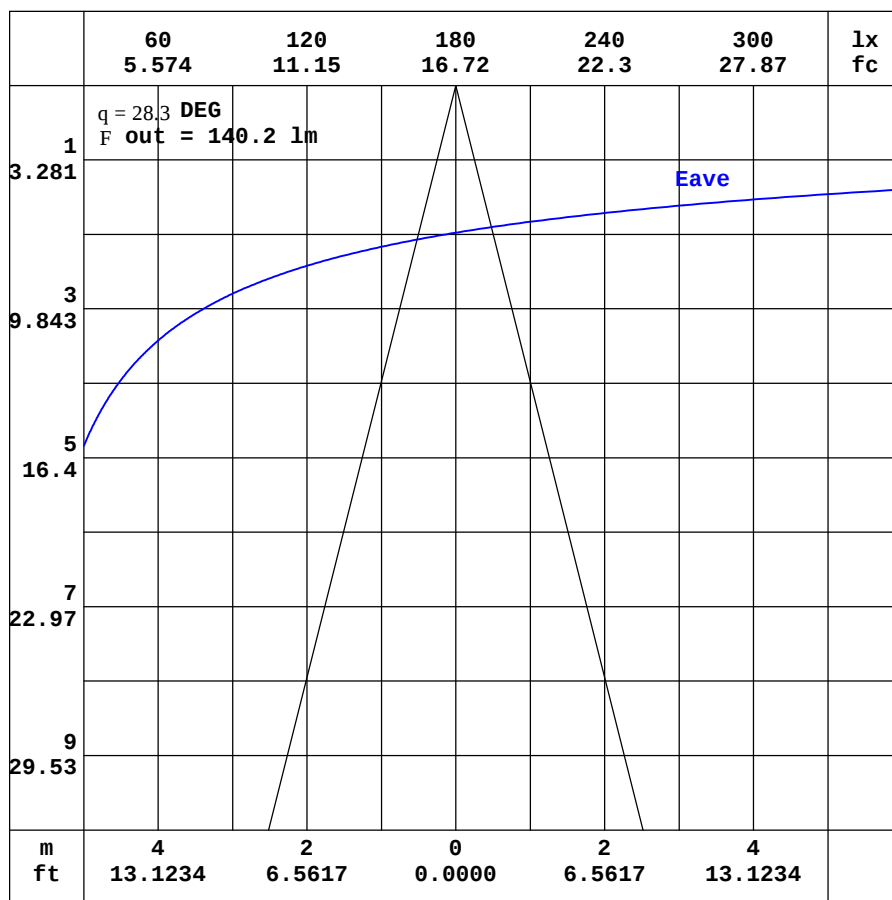

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-06

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeLine Slim-600mm-RGBW DS-GREEN-3050D-Rev1	TYPE:RGBW DS-GREEN	WEIGHT:
SPEC.:30x50 DEG	DIM.:600MM	SERIAL No.:IES001656
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	2.33	2.13	2.01	2.01	2.06	2.19	2.39	2.64	2.92	3.19	3.45	3.66	3.82	3.91	3.91	3.89	3.84	3.79	3.79
-170	2.33	2.09	1.94	1.90	1.91	1.98	2.11	2.26	2.44	2.58	2.73	2.82	2.83	2.84	2.79	2.81	3.05	3.24	3.49
-160	2.33	2.06	1.87	1.80	1.76	1.76	1.78	1.87	1.89	1.97	1.98	1.97	1.93	2.10	2.35	2.61	2.80	2.99	3.16
-150	2.33	2.03	1.81	1.70	1.61	1.55	1.50	1.49	1.40	1.42	1.35	1.45	1.57	1.71	1.86	2.03	2.19	2.31	2.37
-140	2.33	2.01	1.76	1.61	1.48	1.38	1.27	1.14	1.06	1.04	1.04	1.11	1.14	1.19	1.25	1.35	1.43	1.49	1.51
-130	2.33	2.00	1.73	1.53	1.37	1.23	1.09	0.94	0.87	0.84	0.87	0.86	0.79	0.77	0.79	0.82	0.84	0.85	0.83
-120	2.33	2.00	1.72	1.48	1.28	1.11	0.94	0.82	0.82	0.81	0.80	0.77	0.74	0.71	0.69	0.67	0.65	0.63	0.62
-110	2.33	2.00	1.72	1.46	1.22	1.01	0.82	0.78	0.78	0.77	0.77	0.75	0.74	0.73	0.71	0.70	0.68	0.66	0.64
-100	2.33	2.03	1.74	1.46	1.20	0.96	0.72	0.71	0.71	0.72	0.73	0.73	0.73	0.73	0.73	0.72	0.72	0.71	0.71
-90	2.33	2.06	1.78	1.51	1.23	0.96	0.69	0.68	0.67	0.66	0.65	0.64	0.63	0.63	0.63	0.62	0.62	0.62	0.62
-80	2.33	2.10	1.85	1.59	1.32	1.03	0.71	0.67	0.67	0.68	0.68	0.68	0.66	0.65	0.64	0.62	0.60	0.58	0.55
-70	2.33	2.15	1.97	1.77	1.57	1.38	1.16	1.20	1.37	1.50	1.58	1.60	1.51	1.50	1.52	1.52	1.49	1.42	1.33
-60	2.33	2.22	2.13	2.14	2.26	2.43	2.56	2.82	3.60	4.21	4.50	4.53	4.20	3.84	3.98	4.00	3.88	3.63	3.26
-50	2.33	2.29	2.37	2.77	3.42	4.30	5.45	6.61	7.92	9.35	10.5	11.2	11.1	10.1	10.3	10.6	10.6	10.0	9.09
-40	2.33	2.39	2.72	3.62	5.06	7.18	9.87	13.0	15.4	18.6	22.3	25.7	27.8	27.9	25.6	27.9	28.9	28.4	26.3
-30	2.33	2.48	3.11	4.58	7.06	10.8	16.4	22.1	28.6	35.7	43.8	54.8	65.1	72.6	74.7	73.6	81.5	83.3	77.4
-20	2.33	2.57	3.49	5.60	9.18	15.1	23.5	33.5	46.5	63.1	83.9	109	136	168	197	217	227	247	241
-10	2.33	2.66	3.83	6.48	11.0	19.6	30.6	45.4	66.3	95.3	135	187	251	323	398	469	525	556	577
0	2.33	2.72	4.07	7.09	12.3	22.7	35.9	54.9	82.5	123	179	256	359	475	597	711	802	860	880
10	2.33	2.72	3.99	6.79	11.5	20.7	32.4	48.5	71.0	102	146	203	276	359	451	541	602	638	640
20	2.33	2.69	3.79	6.18	10.2	17.1	26.8	38.8	54.6	75.2	102	134	173	212	246	270	286	303	292
30	2.33	2.65	3.52	5.38	8.42	13.2	20.5	28.4	38.1	49.6	62.9	77.3	91.3	104	111	113	122	124	116
40	2.33	2.60	3.23	4.54	6.63	9.51	14.0	19.3	24.6	30.2	35.9	41.2	45.2	47.3	46.8	50.3	51.9	51.0	47.6
50	2.33	2.54	2.94	3.77	5.01	6.71	8.77	11.9	14.8	17.2	19.3	21.0	21.8	21.6	22.3	22.9	22.8	22.0	20.4
60	2.33	2.49	2.73	3.16	3.79	4.61	5.58	6.65	7.71	8.89	9.97	10.4	10.3	10.2	10.5	10.6	10.3	9.86	9.17
70	2.33	2.43	2.57	2.75	3.00	3.31	3.65	3.99	4.32	4.61	4.86	5.01	5.03	5.13	5.23	5.24	5.18	5.05	4.86
80	2.33	2.38	2.45	2.52	2.59	2.67	2.76	2.78	2.81	2.82	2.82	2.82	2.79	2.82	2.84	2.85	2.86	2.84	2.82
90	2.33	2.34	2.34	2.35	2.36	2.37	2.38	2.33	2.28	2.23	2.18	2.13	2.09	2.07	2.05	2.04	2.02	2.00	1.99
100	2.33	2.30	2.26	2.23	2.20	2.19	2.17	2.10	2.03	1.96	1.90	1.83	1.77	1.75	1.73	1.71	1.69	1.68	1.67
110	2.33	2.25	2.19	2.15	2.10	2.06	2.01	1.94	1.89	1.84	1.78	1.74	1.70	1.68	1.66	1.64	1.62	1.60	1.57
120	2.33	2.22	2.14	2.07	2.01	1.97	1.96	1.92	1.88	1.87	1.85	1.85	1.84	1.84	1.85	1.85	1.85	1.84	1.81
130	2.33	2.19	2.09	2.01	1.98	1.95	1.95	1.99	2.02	2.06	2.14	2.21	2.27	2.32	2.41	2.49	2.56	2.59	2.59
140	2.33	2.17	2.06	1.99	1.98	1.98	2.04	2.11	2.28	2.43	2.56	2.72	2.88	3.06	3.22	3.37	3.48	3.56	3.60
150	2.33	2.16	2.03	1.99	1.99	2.04	2.14	2.32	2.53	2.76	2.98	3.20	3.42	3.63	3.82	3.99	4.11	4.19	4.24
160	2.33	2.14	2.02	2.00	2.01	2.10	2.26	2.49	2.74	3.00	3.26	3.51	3.71	3.85	4.02	4.15	4.23	4.34	4.47
170	2.33	2.13	2.01	2.00	2.04	2.16	2.35	2.60	2.87	3.14	3.41	3.64	3.79	3.91	3.95	3.98	4.01	4.04	4.24
180	2.33	2.13	2.01	2.01	2.06	2.19	2.39	2.64	2.92	3.19	3.45	3.66	3.82	3.91	3.91	3.89	3.84	3.79	3.82

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-09-06

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeLine Slim-600mm-RGBW DS-GREEN-3050D-Rev1	TYPE:RGBW DS-GREEN	WEIGHT:
SPEC.:30x50 DEG	DIM.:600MM	SERIAL No.:IES001656
MFR.:	SUR.:	Shielding Angle:

Table--2
UNIT: cd

H(°) V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	3.43	3.16	2.92	2.69	2.44	2.17	1.91	1.65	1.42	1.23	1.07	0.93	0.84	0.76	0.70	0.64	0.58	0.55
-170	3.37	3.26	3.35	3.16	2.80	2.51	2.22	1.88	1.53	1.26	1.07	0.93	0.84	0.76	0.71	0.65	0.58	0.55
-160	3.16	3.12	3.00	2.85	2.75	2.67	2.33	1.90	1.47	1.21	1.02	0.90	0.82	0.76	0.70	0.65	0.58	0.55
-150	2.41	2.37	2.28	2.20	2.14	2.03	1.82	1.56	1.30	1.08	0.95	0.86	0.80	0.75	0.70	0.64	0.57	0.55
-140	1.53	1.51	1.45	1.36	1.34	1.28	1.21	1.12	1.03	0.95	0.87	0.82	0.77	0.73	0.68	0.63	0.57	0.55
-130	0.86	0.88	0.88	0.87	0.85	0.84	0.85	0.85	0.84	0.84	0.82	0.78	0.75	0.71	0.66	0.61	0.56	0.55
-120	0.63	0.65	0.66	0.68	0.69	0.71	0.74	0.76	0.77	0.77	0.77	0.74	0.71	0.68	0.64	0.60	0.56	0.55
-110	0.65	0.66	0.67	0.68	0.69	0.69	0.70	0.71	0.71	0.71	0.71	0.70	0.67	0.64	0.61	0.58	0.55	0.55
-100	0.70	0.69	0.68	0.66	0.65	0.64	0.64	0.64	0.65	0.65	0.65	0.65	0.62	0.60	0.58	0.56	0.55	0.55
-90	0.60	0.58	0.57	0.55	0.53	0.52	0.53	0.54	0.55	0.55	0.56	0.57	0.57	0.56	0.56	0.55	0.55	0.55
-80	0.56	0.57	0.57	0.57	0.56	0.56	0.56	0.56	0.55	0.54	0.54	0.55	0.56	0.57	0.56	0.55	0.55	0.55
-70	1.40	1.44	1.46	1.44	1.39	1.38	1.47	1.47	1.40	1.28	1.12	0.98	0.81	0.70	0.64	0.58	0.55	0.55
-60	3.59	3.81	3.91	3.86	3.71	3.88	4.00	3.87	3.59	3.15	2.62	2.19	1.75	1.30	0.85	0.67	0.57	0.55
-50	9.92	10.3	10.3	9.91	9.62	10.1	9.79	8.95	7.84	6.53	5.37	4.32	3.24	2.23	1.37	0.79	0.59	0.55
-40	28.1	28.2	27.0	24.6	26.1	25.3	22.6	19.2	15.6	12.4	9.89	7.43	5.31	3.49	2.08	0.98	0.61	0.55
-30	83.3	81.2	72.9	72.8	69.6	61.1	50.0	38.6	30.0	22.6	16.5	11.7	7.87	4.95	2.76	1.21	0.65	0.55
-20	249	231	220	197	166	132	102	75.0	53.6	37.2	25.1	16.6	10.6	6.41	3.47	1.50	0.68	0.55
-10	565	535	477	400	319	241	175	122	81.7	53.6	34.2	21.4	13.1	7.68	4.06	1.76	0.71	0.55
0	858	797	702	585	459	341	239	162	105	66.5	41.2	24.9	14.9	8.48	4.41	1.90	0.72	0.55
10	638	596	529	436	343	259	187	130	87.6	57.6	36.8	23.0	14.1	8.21	4.35	1.90	0.76	0.55
20	302	283	264	237	199	159	121	89.2	63.7	44.0	29.6	19.3	12.3	7.40	4.02	1.76	0.79	0.55
30	123	120	110	105	96.3	83.2	68.8	54.6	41.7	30.7	21.8	15.1	10.0	6.27	3.51	1.60	0.81	0.55
40	50.3	50.6	48.6	44.7	43.9	41.0	36.4	31.0	25.5	20.1	15.2	11.0	7.66	4.97	2.96	1.46	0.82	0.55
50	21.8	22.4	22.2	21.6	20.7	20.1	18.7	16.8	14.7	12.4	10.1	7.65	5.53	3.74	2.28	1.34	0.82	0.55
60	9.81	10.2	10.4	10.3	10.0	9.85	9.51	8.94	8.17	7.28	6.31	5.03	3.81	2.70	1.82	1.24	0.82	0.55
70	5.04	5.15	5.20	5.18	5.07	4.95	4.89	4.71	4.45	4.14	3.80	3.26	2.61	2.06	1.58	1.16	0.82	0.55
80	2.84	2.85	2.85	2.84	2.81	2.77	2.75	2.71	2.67	2.62	2.58	2.51	2.14	1.78	1.44	1.12	0.82	0.55
90	1.99	1.99	1.99	2.00	2.00	2.00	2.03	2.07	2.10	2.13	2.17	2.20	1.92	1.65	1.37	1.10	0.82	0.55
100	1.67	1.68	1.69	1.70	1.71	1.72	1.76	1.81	1.86	1.91	1.96	1.99	1.77	1.55	1.31	1.07	0.81	0.55
110	1.60	1.62	1.64	1.66	1.68	1.70	1.72	1.76	1.79	1.83	1.87	1.85	1.66	1.46	1.25	1.03	0.79	0.55
120	1.85	1.87	1.89	1.89	1.89	1.88	1.87	1.87	1.85	1.85	1.88	1.75	1.57	1.38	1.20	0.99	0.77	0.55
130	2.62	2.61	2.57	2.51	2.43	2.35	2.25	2.17	2.09	2.03	1.89	1.65	1.48	1.31	1.13	0.95	0.75	0.55
140	3.59	3.55	3.46	3.32	3.16	2.98	2.79	2.60	2.44	2.20	1.87	1.60	1.38	1.22	1.06	0.91	0.72	0.55
150	4.25	4.22	4.15	4.00	3.80	3.57	3.32	3.06	2.59	2.16	1.81	1.52	1.29	1.13	1.00	0.85	0.69	0.55
160	4.48	4.50	4.50	4.39	4.20	3.96	3.43	2.89	2.41	1.99	1.65	1.38	1.17	1.02	0.90	0.78	0.66	0.55
170	4.26	4.26	4.33	4.23	3.76	3.26	2.81	2.38	2.00	1.67	1.40	1.18	1.03	0.90	0.81	0.72	0.62	0.55
180	3.43	3.16	2.92	2.69	2.44	2.17	1.91	1.65	1.42	1.23	1.07	0.93	0.84	0.76	0.70	0.64	0.58	0.55

H_b Range:-90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-06

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks: