

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		1763.6 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	62.3V x 92.6H
	At 50% of Imax	27.8V x 49.8H
	At 90% of Imax	9.9V x 20.6H
Beam Flux	Total	1000.0 lumens per klm.
	To 10% of Imax	833.9 lumens per klm.
	To 50% of Imax	414.3 lumens per klm.
	To 90% of Imax	75.5 lumens per klm.
	Upward LOR	1.7 %
	Downward LOR	98.3 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(B) Range:-90 - 90DEG
H(B) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-06

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:BlazeLine Slim-600mm-RGBW DS-RED-3050D-Rev1	TYPE:RGBW DS-RED	WEIGHT:
SPEC.:30x50 DEG	DIM.:600MM	SERIAL No.:IES001655
MFR.:	SUR.:	Shielding Angle:

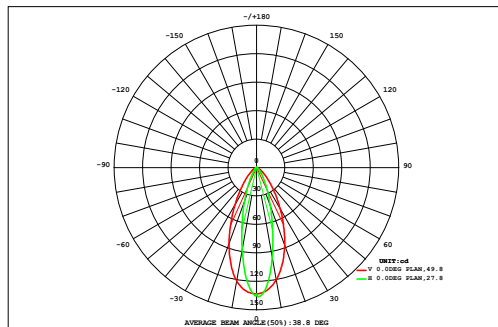

DATA OF LAMP		Eff:12.52lm/W	
MODEL		Imax(cd)	136.2
NOMINAL POWER(W)	6.168	AVAILABILITY(%)	83.3
RATED VOLTAGE(V)	24	Avai. FLUX(lm)	64.28
NOMINAL FLUX(lm)	77.2	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	77.20
TEST VOLTAGE(V)	24	q @50%(H,V)	50,28DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		F t	F a
	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.18	0.00
72	0.00	0.01	0.01	0.01	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.01	0.01	0.00	0.33	0.00
64	0.00	0.01	0.02	0.02	0.03	0.04	0.05	0.05	0.05	0.05	0.06	0.05	0.05	0.04	0.03	0.02	0.01	0.00	0.59	0.00
56	0.01	0.01	0.02	0.04	0.06	0.08	0.09	0.10	0.11	0.11	0.11	0.10	0.09	0.07	0.05	0.03	0.01	0.01	1.08	0.00
48	0.01	0.02	0.04	0.06	0.10	0.14	0.17	0.21	0.22	0.22	0.21	0.18	0.15	0.11	0.07	0.04	0.02	0.01	1.97	0.17
40	0.01	0.02	0.05	0.09	0.16	0.25	0.34	0.40	0.43	0.43	0.40	0.35	0.27	0.18	0.11	0.06	0.02	0.01	3.59	2.75
32	0.01	0.03	0.06	0.13	0.24	0.42	0.63	0.79	0.87	0.87	0.79	0.65	0.45	0.27	0.15	0.07	0.03	0.01	6.48	5.93
24	0.01	0.03	0.08	0.17	0.35	0.64	1.05	1.43	1.63	1.63	1.44	1.08	0.68	0.39	0.20	0.09	0.04	0.01	10.9	10.5
	0.01	0.04	0.09	0.20	0.44	0.85	1.43	2.04	2.41	2.42	2.04	1.46	0.90	0.49	0.23	0.10	0.04	0.01	15.2	14.8
	0.01	0.04	0.09	0.20	0.43	0.83	1.39	1.96	2.30	2.30	1.95	1.42	0.88	0.48	0.23	0.10	0.04	0.01	14.7	14.3
	0.01	0.03	0.07	0.16	0.32	0.60	0.97	1.29	1.46	1.47	1.29	0.98	0.63	0.36	0.18	0.08	0.03	0.01	9.94	9.48
	0.01	0.02	0.05	0.11	0.21	0.36	0.54	0.66	0.75	0.75	0.67	0.55	0.39	0.24	0.13	0.06	0.03	0.01	5.53	4.93
-24	0.01	0.02	0.04	0.07	0.12	0.19	0.26	0.30	0.33	0.33	0.30	0.27	0.21	0.14	0.08	0.04	0.02	0.01	2.74	1.44
-32	0.01	0.01	0.02	0.04	0.07	0.10	0.11	0.13	0.14	0.14	0.13	0.12	0.11	0.08	0.05	0.03	0.01	0.01	1.30	0.00
-40	0.00	0.01	0.01	0.02	0.03	0.04	0.05	0.06	0.06	0.06	0.06	0.05	0.05	0.04	0.03	0.02	0.01	0.00	0.61	0.00
-48	0.00	0.00	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.03	0.02	0.02	0.02	0.02	0.01	0.00	0.00	0.28	0.00
-56	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.12	0.00
-64	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.00
-72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)	16	24	32	40	48	56	64	72			
F t	0.12	0.30	0.67	1.37	2.61	4.60	7.15	9.52	10.8	10.9	9.55	7.33	4.93	2.94	1.58	0.78	0.34	0.12	76	---
F a	0.00	0.00	0.00	0.35	1.83	3.90	6.49	8.84	10.2	10.2	8.85	6.65	4.22	2.16	0.60	0.00	0.00	0.00	---	64


one-half-peak spread: U:13.9,D:14.2 , L:24.7,NEMA Beam Type: Type 5 x 4 (H x V)

H(B) Range:-90 - 90DEG
H(B) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-06

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:BlazeLine Slim-600mm-RGBW DS-RED-3050D-Rev1	TYPE:RGBW DS-RED	WEIGHT:
SPEC.:30x50 DEG	DIM.:600MM	SERIAL No.:IES001655
MFR.:	SUR.:	Shielding Angle:

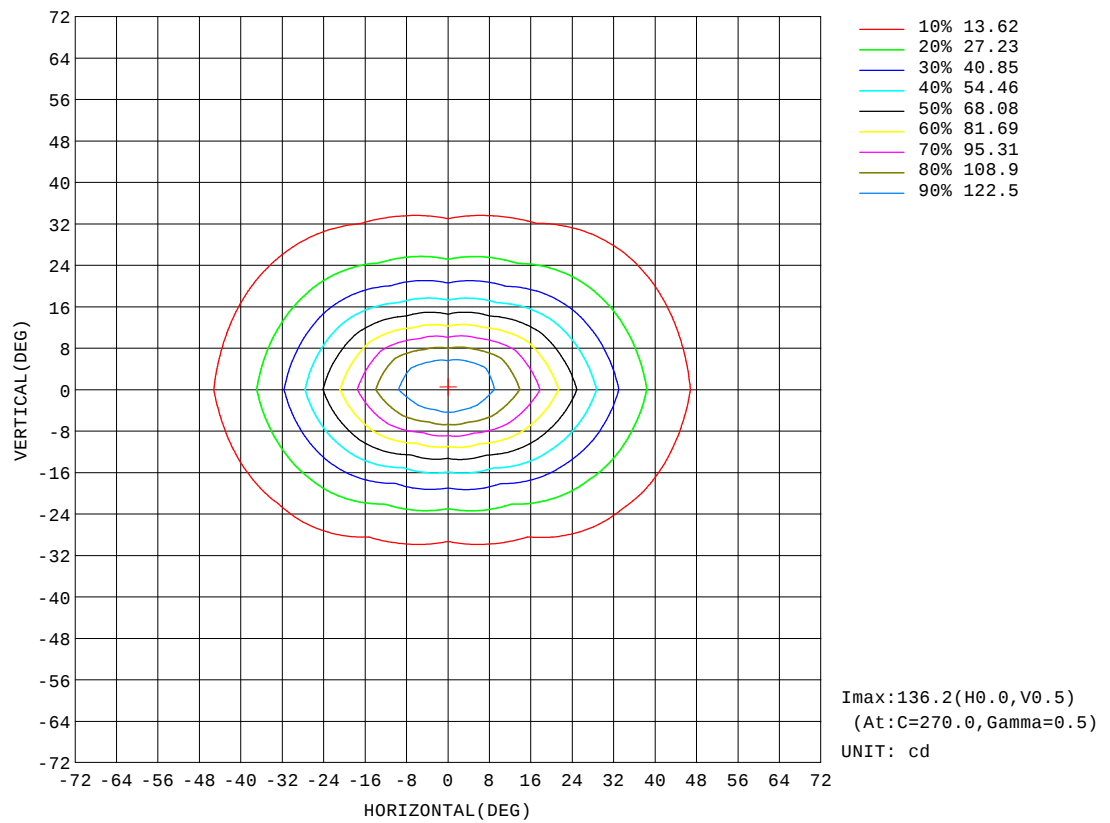


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-06

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:BlazeLine Slim-600mm-RGBW DS-RED-3050D-Rev1	TYPE:RGBW DS-RED	WEIGHT:
SPEC.:30x50 DEG	DIM.:600MM	SERIAL No.:IES001655
MFR.:	SUR.:	Shielding Angle:

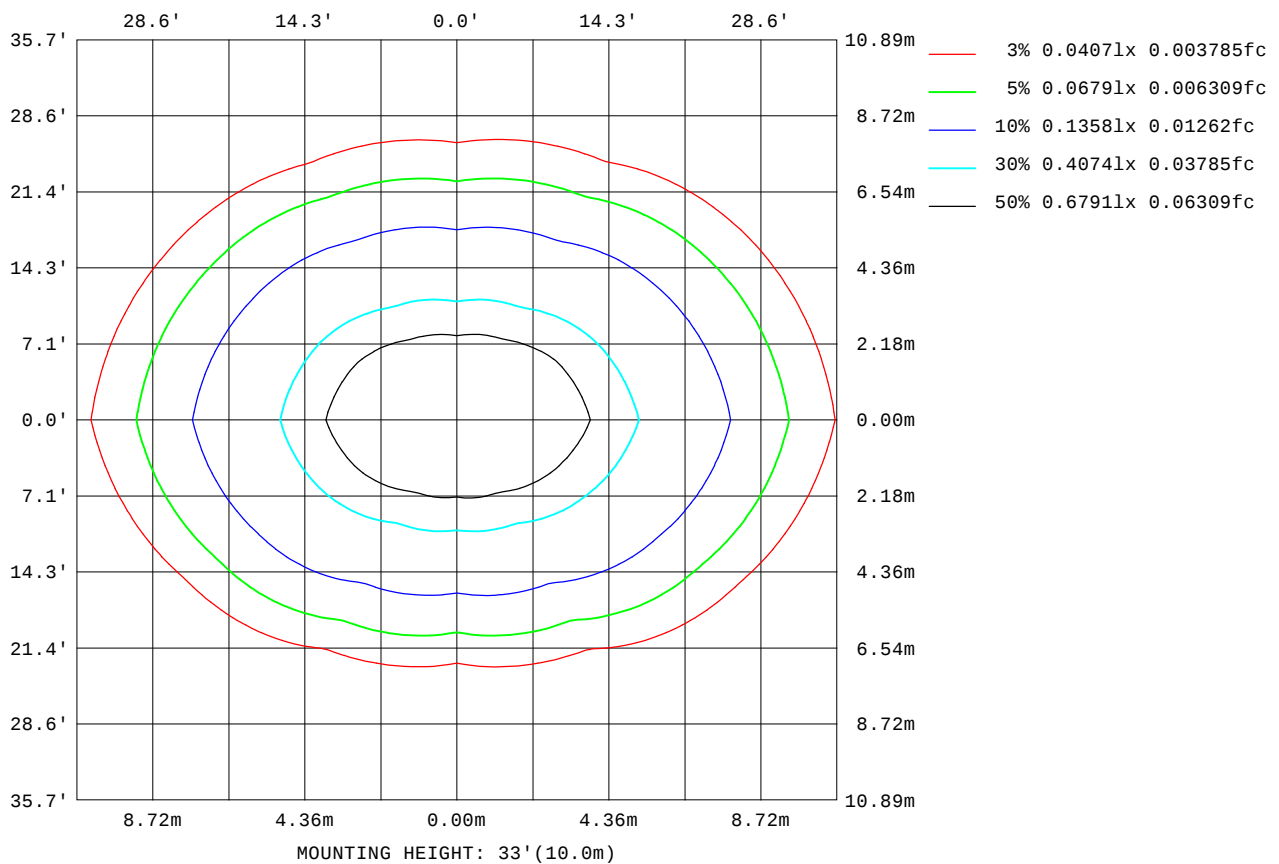

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-06

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

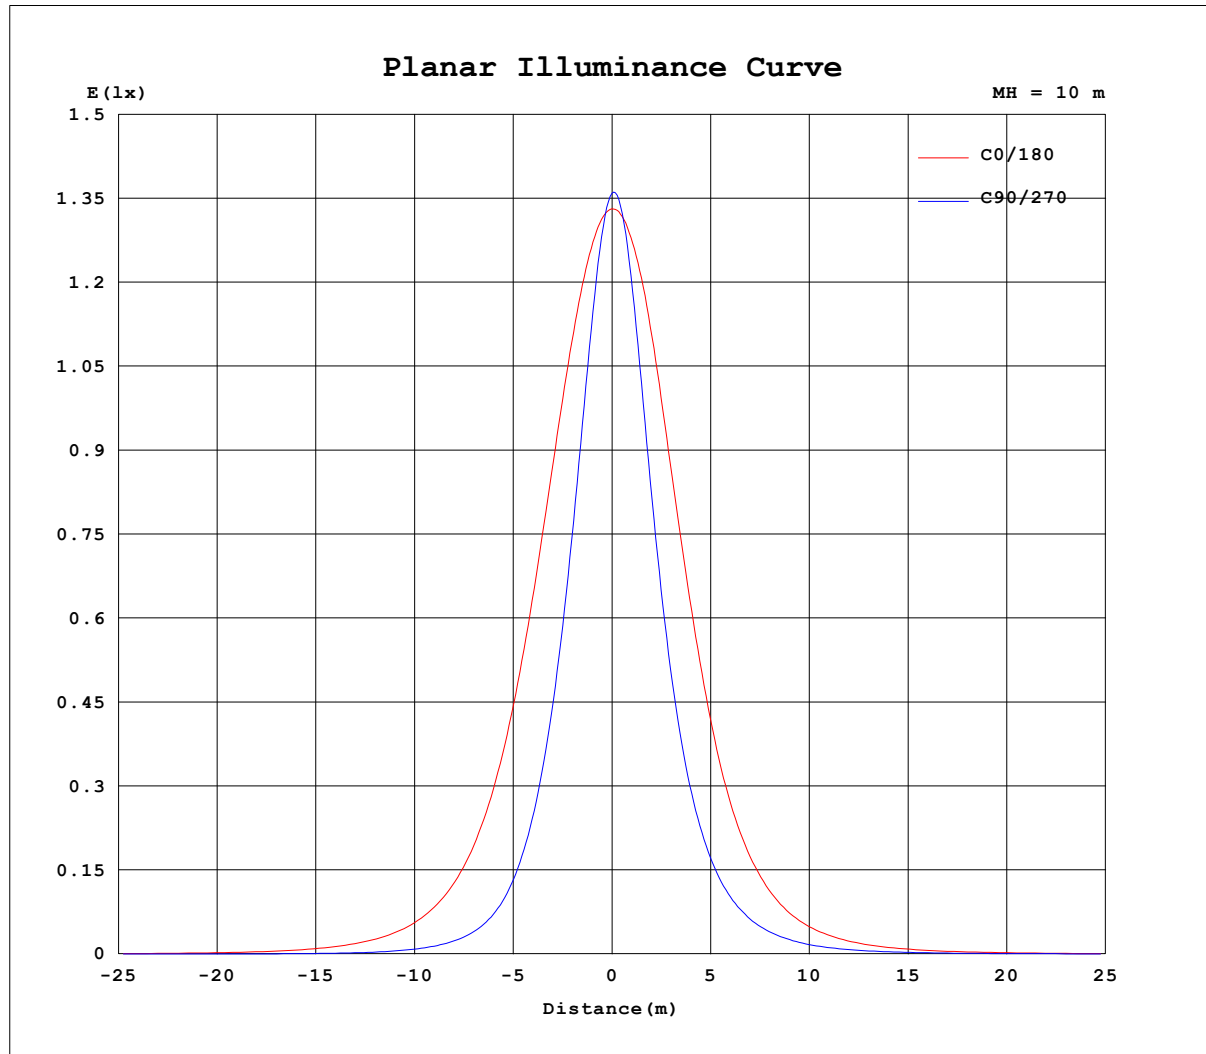


H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-06

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:BlazeLine Slim-600mm-RGBW DS-RED-3050D-Rev1	TYPE:RGBW DS-RED	WEIGHT:
SPEC.:30x50 DEG	DIM.:600MM	SERIAL No.:IES001655
MFR.:	SUR.:	Shielding Angle:

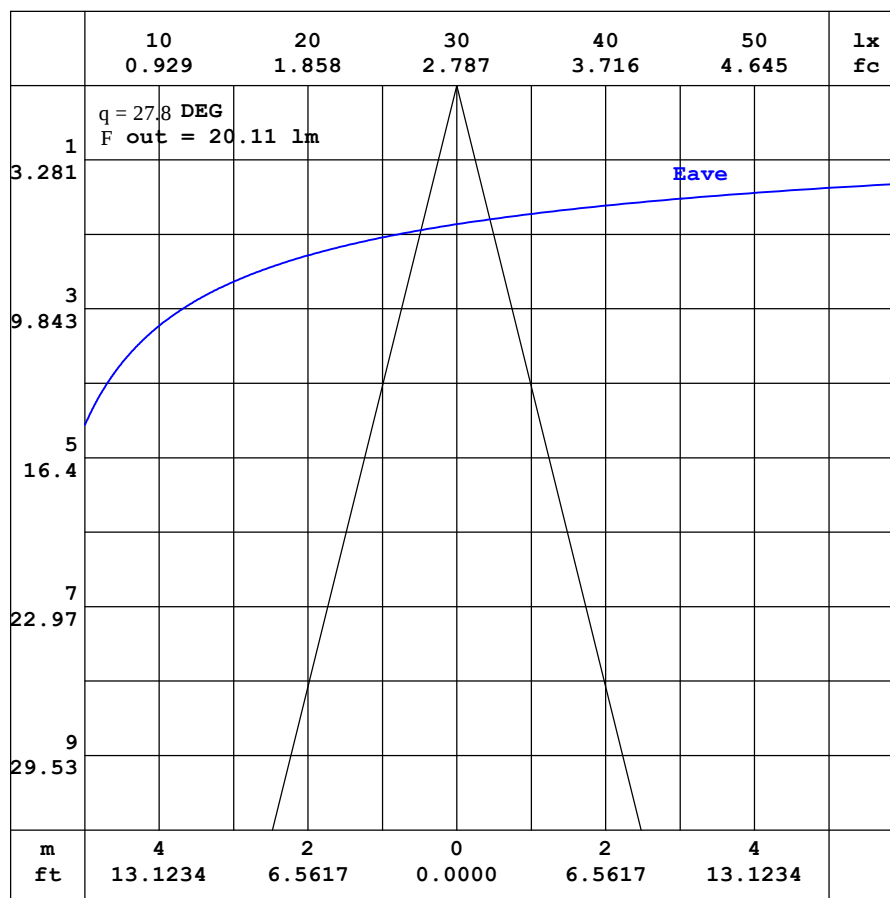

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-06

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeLine Slim-600mm-RGBW DS-RED-3050D-Rev1	TYPE:RGBW DS-RED	WEIGHT:
SPEC.:30x50 DEG	DIM.:600MM	SERIAL No.:IES001655
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.23	0.22	0.22	0.22	0.24	0.26	0.29	0.33	0.38	0.42	0.46	0.49	0.50	0.50	0.50	0.50	0.50	0.50	0.50
-170	0.23	0.22	0.21	0.21	0.21	0.22	0.25	0.27	0.29	0.32	0.34	0.36	0.36	0.37	0.36	0.36	0.39	0.42	0.47
-160	0.23	0.21	0.20	0.19	0.19	0.19	0.19	0.20	0.21	0.21	0.21	0.22	0.21	0.24	0.28	0.30	0.33	0.37	0.41
-150	0.23	0.21	0.19	0.17	0.16	0.16	0.15	0.14	0.13	0.12	0.11	0.12	0.13	0.15	0.17	0.20	0.23	0.26	0.28
-140	0.23	0.20	0.18	0.16	0.14	0.13	0.12	0.10	0.08	0.06	0.06	0.06	0.07	0.06	0.06	0.09	0.11	0.13	0.15
-130	0.23	0.20	0.17	0.15	0.13	0.11	0.08	0.06	0.05	0.04	0.04	0.03	0.02	0.01	0.01	0.02	0.03	0.04	0.05
-120	0.23	0.19	0.17	0.14	0.12	0.09	0.07	0.04	0.04	0.04	0.03	0.02	0.01	0.01	0.01	0.01	0.01	0.02	0.02
-110	0.23	0.19	0.16	0.13	0.10	0.08	0.05	0.04	0.03	0.03	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01
-100	0.23	0.19	0.16	0.13	0.09	0.07	0.03	0.03	0.03	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01
-90	0.23	0.19	0.16	0.13	0.09	0.06	0.03	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01
-80	0.23	0.20	0.17	0.14	0.10	0.06	0.02	0.01	0.01	0.01	0.01	0.01	0.02	0.01	0.01	0.01	0.01	0.01	0.00
-70	0.23	0.21	0.18	0.15	0.12	0.09	0.03	0.03	0.05	0.07	0.09	0.09	0.09	0.10	0.09	0.09	0.09	0.08	0.07
-60	0.23	0.22	0.20	0.19	0.18	0.19	0.18	0.19	0.27	0.34	0.39	0.42	0.42	0.40	0.43	0.45	0.45	0.43	0.39
-50	0.23	0.23	0.23	0.26	0.31	0.39	0.48	0.59	0.74	0.95	1.13	1.26	1.32	1.29	1.38	1.49	1.54	1.51	1.41
-40	0.23	0.24	0.26	0.35	0.49	0.70	0.97	1.29	1.62	2.07	2.61	3.13	3.59	3.87	3.90	4.36	4.62	4.61	4.30
-30	0.23	0.25	0.31	0.46	0.72	1.11	1.63	2.30	3.13	4.10	5.29	6.90	8.66	10.3	11.3	11.8	13.1	13.5	12.6
-20	0.23	0.26	0.36	0.59	0.96	1.56	2.40	3.56	5.12	7.27	10.1	13.8	18.6	24.3	29.5	33.1	34.9	37.9	37.1
-10	0.23	0.27	0.40	0.68	1.18	1.98	3.15	4.85	7.31	10.9	16.1	23.6	33.5	45.8	59.1	71.9	80.9	85.5	88.2
0	0.23	0.28	0.43	0.76	1.34	2.28	3.70	5.83	9.02	13.9	21.1	31.7	46.0	64.6	85.1	105	121	130	133
10	0.23	0.28	0.42	0.73	1.26	2.11	3.37	5.19	7.82	11.7	17.2	24.9	35.3	48.5	63.4	78.4	89.4	95.1	95.7
20	0.23	0.28	0.40	0.67	1.11	1.80	2.78	4.16	6.01	8.57	11.9	16.2	21.6	27.9	34.2	39.0	41.9	44.6	42.9
30	0.23	0.27	0.37	0.58	0.92	1.43	2.12	3.04	4.20	5.62	7.35	9.30	11.5	13.7	15.5	16.8	18.2	18.6	17.7
40	0.23	0.27	0.34	0.49	0.73	1.06	1.50	2.04	2.69	3.40	4.16	4.94	5.67	6.26	6.65	7.33	7.75	7.79	7.44
50	0.23	0.26	0.31	0.41	0.55	0.74	0.99	1.28	1.58	1.90	2.20	2.47	2.67	2.78	2.98	3.17	3.26	3.24	3.12
60	0.23	0.26	0.29	0.34	0.42	0.52	0.63	0.76	0.88	1.00	1.10	1.18	1.22	1.26	1.33	1.38	1.40	1.38	1.33
70	0.23	0.25	0.27	0.30	0.33	0.37	0.42	0.45	0.49	0.51	0.55	0.56	0.57	0.59	0.62	0.64	0.65	0.65	0.65
80	0.23	0.24	0.26	0.27	0.29	0.30	0.32	0.31	0.31	0.31	0.31	0.30	0.30	0.31	0.32	0.33	0.34	0.35	0.36
90	0.23	0.23	0.24	0.25	0.25	0.26	0.27	0.25	0.24	0.23	0.22	0.21	0.20	0.20	0.21	0.22	0.23	0.23	0.24
100	0.23	0.23	0.23	0.23	0.24	0.24	0.24	0.23	0.22	0.21	0.20	0.19	0.18	0.18	0.18	0.18	0.19	0.19	0.19
110	0.23	0.23	0.23	0.23	0.23	0.22	0.22	0.21	0.20	0.20	0.19	0.19	0.18	0.18	0.18	0.18	0.18	0.17	0.17
120	0.23	0.22	0.23	0.22	0.22	0.21	0.21	0.21	0.20	0.20	0.20	0.20	0.21	0.21	0.21	0.20	0.19	0.18	0.17
130	0.23	0.22	0.22	0.22	0.22	0.21	0.21	0.21	0.21	0.21	0.23	0.24	0.27	0.28	0.30	0.30	0.30	0.30	0.29
140	0.23	0.22	0.22	0.22	0.22	0.22	0.22	0.22	0.23	0.25	0.27	0.31	0.35	0.38	0.42	0.43	0.44	0.44	0.44
150	0.23	0.22	0.22	0.22	0.22	0.23	0.23	0.25	0.28	0.30	0.33	0.37	0.42	0.47	0.51	0.54	0.54	0.54	0.54
160	0.23	0.22	0.22	0.22	0.23	0.24	0.25	0.28	0.31	0.35	0.39	0.42	0.48	0.51	0.53	0.55	0.56	0.56	0.57
170	0.23	0.22	0.22	0.22	0.23	0.25	0.28	0.31	0.35	0.39	0.43	0.48	0.50	0.50	0.51	0.52	0.52	0.51	0.57
180	0.23	0.22	0.22	0.22	0.24	0.26	0.29	0.33	0.38	0.42	0.46	0.49	0.50	0.50	0.50	0.50	0.50	0.50	0.51

H(°) Range:-90 - 90DEG

H(°) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-09-06

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeLine Slim-600mm-RGBW DS-RED-3050D-Rev1	TYPE:RGBW DS-RED	WEIGHT:
SPEC.:30x50 DEG	DIM.:600MM	SERIAL No.:IES001655
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	0.41	0.37	0.34	0.30	0.27	0.22	0.19	0.14	0.11	0.07	0.05	0.03	0.02	0.02	0.02	0.02	0.02	0.02	
-170	0.42	0.41	0.38	0.35	0.30	0.24	0.20	0.15	0.11	0.08	0.06	0.04	0.03	0.03	0.02	0.02	0.02	0.02	
-160	0.37	0.34	0.31	0.30	0.26	0.24	0.19	0.15	0.11	0.08	0.06	0.04	0.03	0.03	0.03	0.02	0.02	0.02	
-150	0.27	0.24	0.21	0.20	0.17	0.16	0.14	0.12	0.09	0.08	0.06	0.04	0.03	0.03	0.03	0.03	0.02	0.02	
-140	0.14	0.13	0.11	0.09	0.08	0.08	0.08	0.08	0.07	0.07	0.05	0.04	0.04	0.03	0.03	0.03	0.02	0.02	
-130	0.04	0.04	0.04	0.02	0.02	0.03	0.04	0.05	0.05	0.05	0.05	0.04	0.04	0.03	0.03	0.03	0.02	0.02	
-120	0.02	0.02	0.02	0.02	0.02	0.02	0.03	0.03	0.04	0.04	0.04	0.04	0.04	0.03	0.03	0.03	0.02	0.02	
-110	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.03	0.03	0.03	0.04	0.04	0.04	0.04	0.03	0.03	0.03	0.02	0.02
-100	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.03	0.03	0.03	0.04	0.04	0.03	0.03	0.03	0.02	0.02	0.02	
-90	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	
-80	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.02	0.02	
-70	0.09	0.11	0.13	0.14	0.15	0.16	0.16	0.15	0.13	0.10	0.07	0.04	0.04	0.04	0.04	0.04	0.03	0.02	
-60	0.47	0.53	0.56	0.57	0.56	0.59	0.59	0.56	0.49	0.41	0.31	0.23	0.16	0.10	0.07	0.05	0.04	0.02	
-50	1.57	1.65	1.67	1.62	1.58	1.64	1.57	1.42	1.21	0.98	0.77	0.58	0.40	0.24	0.12	0.06	0.05	0.02	
-40	4.62	4.66	4.44	4.04	4.24	4.09	3.68	3.12	2.51	1.98	1.54	1.12	0.74	0.43	0.21	0.09	0.05	0.02	
-30	13.5	13.1	11.8	11.6	11.0	9.63	7.91	6.19	4.83	3.66	2.64	1.82	1.17	0.68	0.32	0.12	0.05	0.02	
-20	38.1	35.1	33.3	29.9	25.3	20.1	15.5	11.6	8.40	5.93	4.04	2.65	1.64	0.92	0.43	0.15	0.06	0.02	
-10	86.1	81.1	71.8	59.7	47.3	35.9	26.1	18.4	12.6	8.41	5.50	3.44	2.06	1.14	0.52	0.18	0.06	0.02	
0	130	120	105	87.0	67.7	50.1	35.3	24.0	15.9	10.3	6.59	4.01	2.35	1.27	0.58	0.20	0.06	0.02	
10	95.7	89.7	79.4	65.0	50.8	38.2	27.7	19.5	13.4	8.97	5.87	3.67	2.21	1.22	0.57	0.21	0.07	0.02	
20	44.4	41.7	39.3	35.1	29.5	23.6	18.2	13.6	9.81	6.90	4.69	3.07	1.90	1.08	0.52	0.20	0.07	0.02	
30	18.5	18.2	16.7	16.0	14.6	12.7	10.5	8.43	6.49	4.82	3.44	2.35	1.51	0.89	0.45	0.18	0.08	0.02	
40	7.84	7.86	7.55	7.00	6.83	6.35	5.65	4.79	3.95	3.13	2.36	1.67	1.12	0.68	0.36	0.17	0.08	0.02	
50	3.33	3.44	3.42	3.31	3.16	3.08	2.87	2.58	2.24	1.89	1.51	1.12	0.77	0.49	0.29	0.15	0.08	0.02	
60	1.43	1.50	1.53	1.52	1.47	1.44	1.40	1.31	1.19	1.05	0.90	0.70	0.51	0.35	0.22	0.14	0.08	0.02	
70	0.67	0.69	0.70	0.69	0.67	0.65	0.65	0.63	0.59	0.55	0.51	0.45	0.35	0.26	0.19	0.13	0.08	0.02	
80	0.35	0.35	0.35	0.34	0.33	0.32	0.32	0.32	0.32	0.34	0.34	0.33	0.28	0.22	0.17	0.12	0.07	0.02	
90	0.23	0.23	0.22	0.21	0.21	0.20	0.21	0.23	0.24	0.25	0.26	0.27	0.23	0.19	0.15	0.11	0.06	0.02	
100	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.20	0.21	0.22	0.23	0.24	0.21	0.17	0.14	0.10	0.06	0.02	
110	0.18	0.18	0.18	0.19	0.19	0.19	0.19	0.20	0.20	0.21	0.21	0.21	0.18	0.15	0.12	0.09	0.06	0.02	
120	0.19	0.20	0.21	0.22	0.21	0.22	0.21	0.20	0.20	0.21	0.21	0.19	0.16	0.14	0.11	0.09	0.06	0.02	
130	0.30	0.31	0.31	0.31	0.30	0.28	0.26	0.24	0.21	0.21	0.20	0.17	0.15	0.12	0.10	0.08	0.05	0.02	
140	0.45	0.45	0.45	0.44	0.41	0.37	0.33	0.29	0.27	0.23	0.18	0.15	0.13	0.11	0.09	0.07	0.05	0.02	
150	0.54	0.55	0.56	0.53	0.48	0.44	0.40	0.35	0.28	0.22	0.16	0.12	0.11	0.09	0.07	0.06	0.04	0.02	
160	0.56	0.56	0.56	0.54	0.52	0.49	0.40	0.33	0.25	0.19	0.15	0.10	0.08	0.07	0.06	0.05	0.04	0.02	
170	0.55	0.55	0.56	0.51	0.44	0.37	0.31	0.24	0.19	0.14	0.11	0.07	0.05	0.05	0.04	0.03	0.03	0.02	
180	0.41	0.37	0.34	0.30	0.27	0.22	0.19	0.14	0.11	0.07	0.05	0.03	0.02	0.02	0.02	0.02	0.02	0.02	

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-09-06

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: