

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	2419.2 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	64.0V x 63.1H
	At 50% of Imax	30.6V x 30.3H
	At 90% of Imax	11.5V x 10.9H

Beam Flux	Total	1000.0 lumens per klm.
	To 10% of Imax	794.0 lumens per klm.
	To 50% of Imax	377.7 lumens per klm.
	To 90% of Imax	64.4 lumens per klm.

Upward LOR	2.2 %
Downward LOR	97.8 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-05

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:BlazeLine Slim-600mm-RGBW DS-3000K-30D-Rev1	TYPE:RGBW DS-3000K	WEIGHT:
SPEC.:30 DEG	DIM.:600MM	SERIAL No.:IES001646
MFR.:	SUR.:	Shielding Angle:

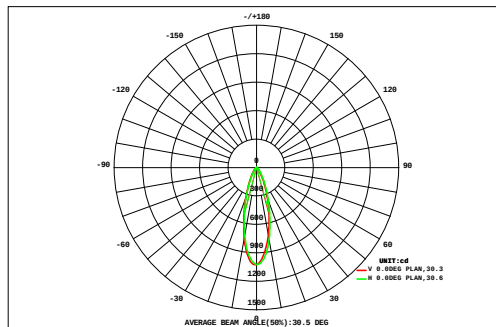

DATA OF LAMP		Eff:70.83lm/W	
MODEL		Imax(cd)	1028
NOMINAL POWER(W)	6	AVAILABILITY(%)	79.5
RATED VOLTAGE(V)	24	Avai. FLUX(lm)	337.7
NOMINAL FLUX(lm)	425	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	425.0
TEST VOLTAGE(V)	24	q @50%(H,V)	30,31DEG

		AREA FLUX DIAGRAM															UNIT:lm				F t	F a
		0.08	0.11	0.14	0.19	0.23	0.28	0.32	0.34	0.36	0.35	0.33	0.30	0.25	0.20	0.16	0.12	0.09	0.06	3.90	0.00	
VERTICAL (DEG)	45	0.10	0.14	0.19	0.25	0.33	0.41	0.47	0.53	0.55	0.55	0.51	0.45	0.38	0.29	0.21	0.15	0.11	0.08	5.70	0.00	
	40	0.12	0.18	0.25	0.34	0.46	0.60	0.73	0.82	0.88	0.87	0.80	0.69	0.56	0.41	0.29	0.20	0.13	0.09	8.43	2.90	
	35	0.15	0.22	0.32	0.46	0.65	0.88	1.11	1.30	1.42	1.40	1.27	1.07	0.82	0.58	0.39	0.25	0.16	0.10	12.6	9.18	
	30	0.17	0.26	0.40	0.60	0.89	1.26	1.68	2.04	2.23	2.21	1.97	1.60	1.18	0.80	0.52	0.32	0.19	0.12	18.4	15.8	
	25	0.19	0.31	0.48	0.76	1.18	1.76	2.47	3.10	3.42	3.35	2.93	2.31	1.64	1.08	0.66	0.39	0.23	0.13	26.4	24.1	
	20	0.21	0.35	0.56	0.92	1.49	2.32	3.37	4.43	4.98	4.81	4.07	3.08	2.15	1.38	0.83	0.47	0.26	0.14	35.8	33.8	
	15	0.23	0.37	0.62	1.04	1.73	2.81	4.24	5.73	6.60	6.29	5.12	3.77	2.63	1.68	0.97	0.53	0.28	0.15	44.8	42.9	
	10	0.23	0.38	0.64	1.08	1.85	3.07	4.72	6.48	7.56	7.13	5.88	4.39	3.00	1.88	1.05	0.56	0.29	0.15	50.3	48.5	
	5	0.23	0.37	0.63	1.06	1.82	3.04	4.68	6.42	7.39	7.20	6.02	4.46	3.03	1.89	1.05	0.56	0.29	0.15	50.3	48.5	
	0	0.21	0.35	0.58	0.98	1.66	2.73	4.11	5.44	6.23	6.10	5.15	3.89	2.70	1.70	0.96	0.51	0.27	0.14	43.7	41.8	
	-5	0.19	0.31	0.50	0.83	1.36	2.16	3.10	3.98	4.55	4.50	3.86	3.01	2.16	1.39	0.80	0.44	0.23	0.12	33.5	31.4	
	-10	0.16	0.26	0.41	0.66	1.02	1.52	2.11	2.66	3.01	3.00	2.64	2.12	1.55	1.02	0.61	0.35	0.19	0.11	23.4	21.0	
	-15	0.13	0.21	0.32	0.49	0.71	1.01	1.34	1.65	1.84	1.85	1.67	1.37	1.02	0.69	0.44	0.26	0.15	0.09	15.3	12.4	
	-20	0.11	0.16	0.24	0.35	0.48	0.65	0.82	0.98	1.07	1.08	0.99	0.83	0.64	0.45	0.30	0.19	0.11	0.07	9.51	5.42	
	-25	0.08	0.12	0.17	0.24	0.32	0.41	0.50	0.58	0.62	0.62	0.57	0.49	0.39	0.29	0.20	0.13	0.09	0.06	5.89	0.00	
	-30	0.06	0.09	0.13	0.17	0.21	0.26	0.31	0.35	0.36	0.36	0.34	0.30	0.24	0.19	0.14	0.10	0.07	0.04	3.70	0.00	
-35	0.04	0.06	0.09	0.12	0.14	0.17	0.20	0.21	0.22	0.22	0.20	0.18	0.15	0.12	0.09	0.07	0.05	0.03	2.38	0.00		
-40	0.04	0.06	0.09	0.12	0.14	0.17	0.20	0.21	0.22	0.22	0.20	0.18	0.15	0.12	0.09	0.07	0.05	0.03	2.38	0.00		
-45	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)				10	15	20	25	30	35	40	45		
F t	2.69	4.23	6.67	10.5	16.6	25.3	36.3	47.0	53.3	51.9	44.3	34.3	24.5	16.1	9.67	5.59	3.19	1.84	394	---		
F a	0.00	0.00	1.02	6.70	13.5	22.6	33.8	44.7	51.0	49.6	42.0	31.8	21.8	13.0	5.79	0.37	0.00	0.00	---	338		

one-half-peak spread: U:14.8,D:16.1 , L:14.9,R:15.7


NEMA Beam Type: Type 4

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-09-05

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:BlazeLine Slim-600mm-RGBW DS-3000K-30D-Rev1	TYPE:RGBW DS-3000K	WEIGHT:
SPEC.:30 DEG	DIM.:600MM	SERIAL No.:IES001646
MFR.:	SUR.:	Shielding Angle:

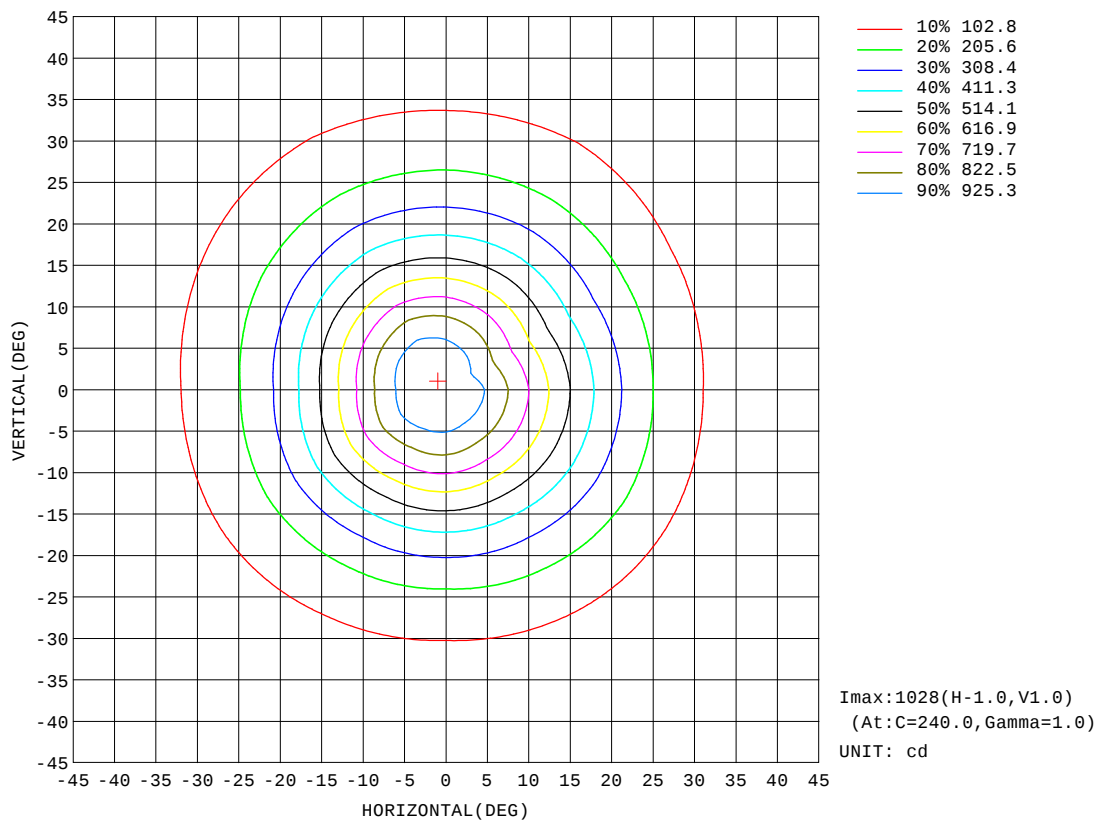


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-05

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:BlazeLine Slim-600mm-RGBW DS-3000K-30D-Rev1	TYPE:RGBW DS-3000K	WEIGHT:
SPEC.:30 DEG	DIM.:600MM	SERIAL No.:IES001646
MFR.:	SUR.:	Shielding Angle:

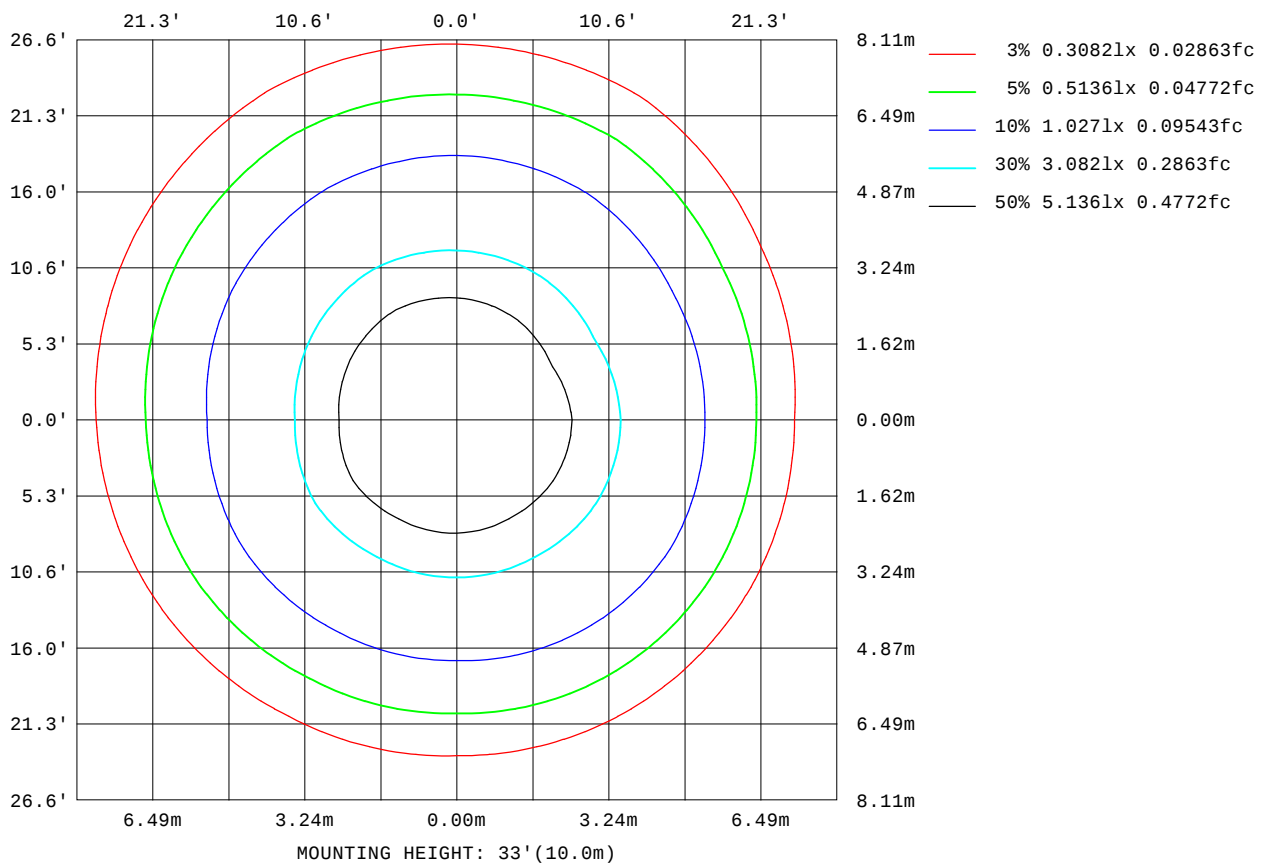

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-09-05

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

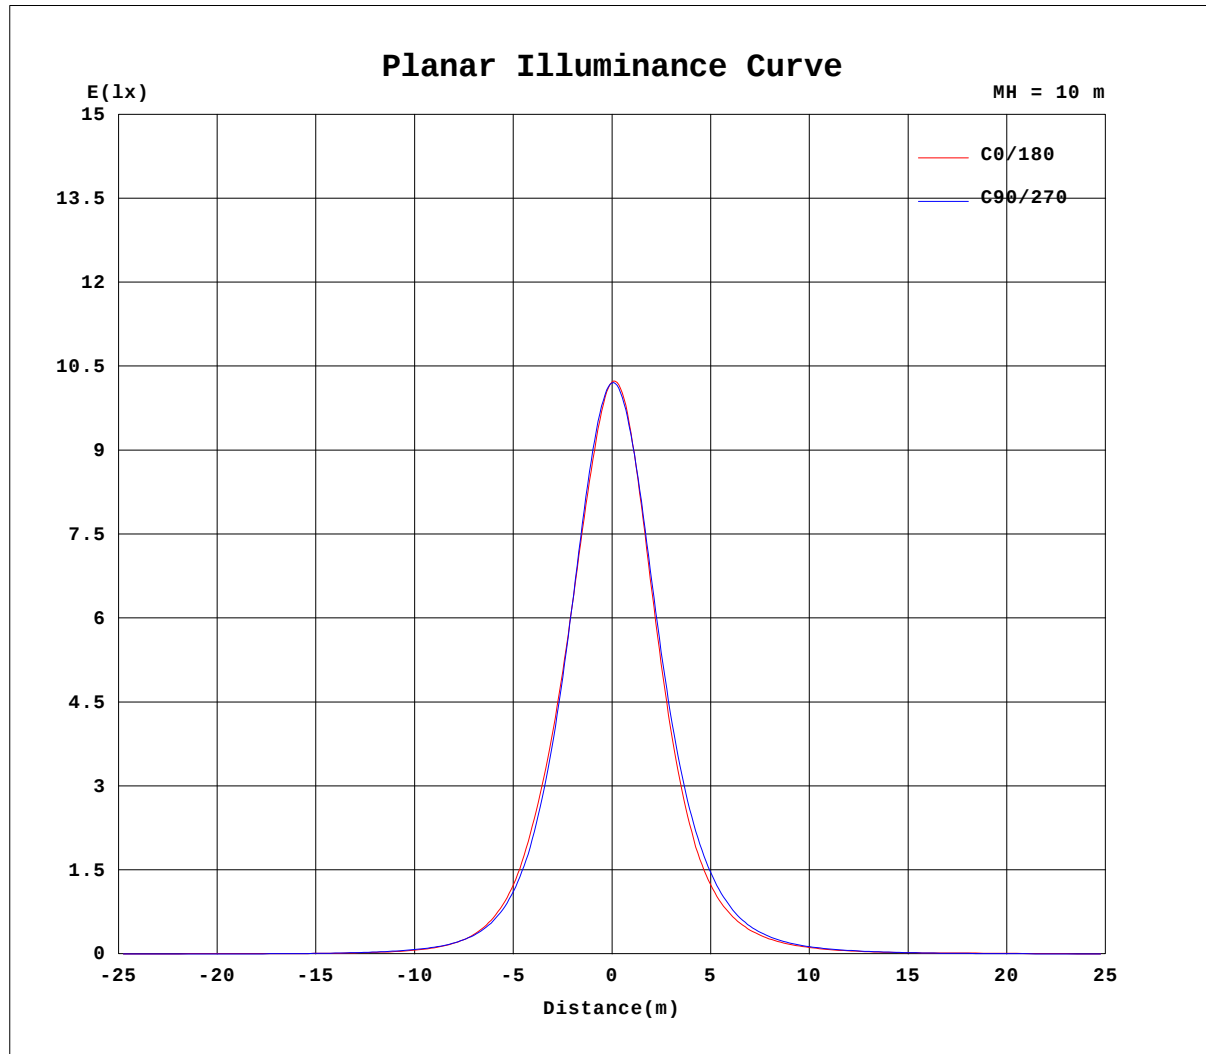


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-09-05

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:BlazeLine Slim-600mm-RGBW DS-3000K-30D-Rev1	TYPE:RGBW DS-3000K	WEIGHT:
SPEC.:30 DEG	DIM.:600MM	SERIAL No.:IES001646
MFR.:	SUR.:	Shielding Angle:

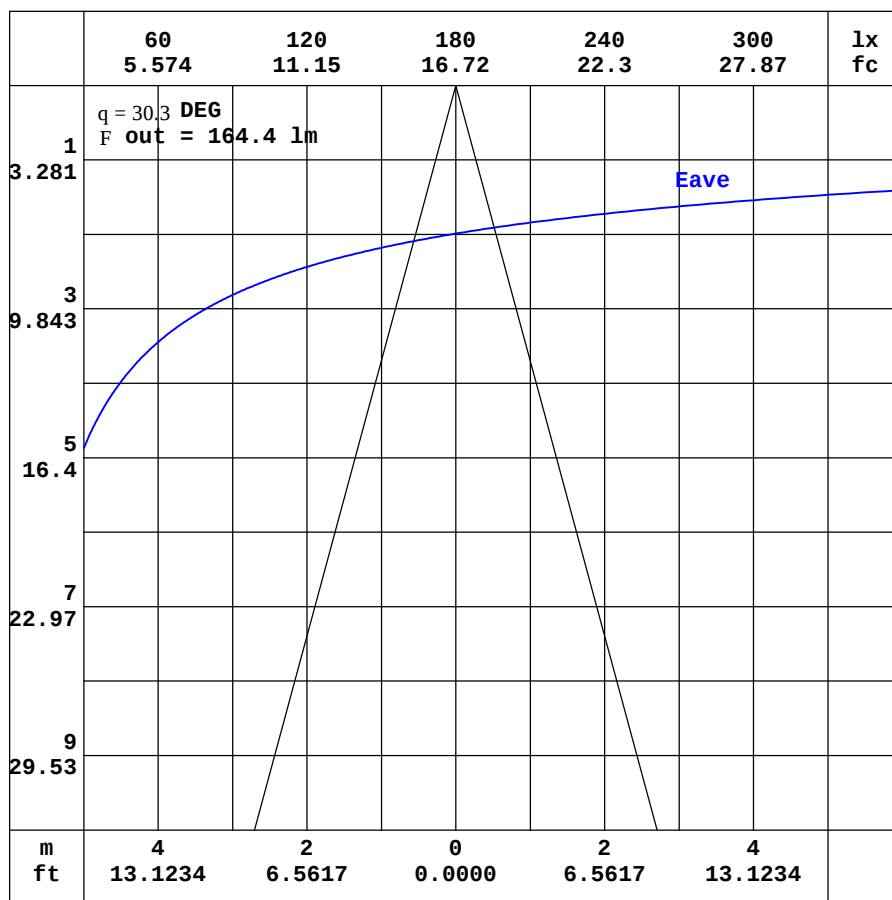

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-05

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeLine Slim-600mm-RGBW DS-3000K-30D-Rev1	TYPE:RGBW DS-3000K	WEIGHT:
SPEC.:30 DEG	DIM.:600MM	SERIAL No.:IES001646
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	1.56	1.40	1.29	1.28	1.32	1.43	1.63	1.91	2.27	2.64	2.96	3.21	3.35	3.37	3.36	3.29	3.21	3.14	3.22
-170	1.56	1.38	1.25	1.22	1.22	1.28	1.40	1.58	1.79	2.01	2.20	2.35	2.43	2.44	2.42	2.45	2.62	2.77	2.88
-160	1.56	1.36	1.22	1.16	1.13	1.13	1.17	1.23	1.30	1.37	1.42	1.44	1.46	1.73	1.96	2.19	2.36	2.48	2.55
-150	1.56	1.35	1.19	1.10	1.04	0.99	0.96	0.93	0.88	0.81	0.76	0.91	1.09	1.28	1.47	1.64	1.78	1.87	1.92
-140	1.56	1.34	1.18	1.05	0.97	0.89	0.81	0.72	0.60	0.56	0.59	0.65	0.74	0.83	0.93	1.04	1.12	1.19	1.21
-130	1.56	1.34	1.16	1.02	0.91	0.81	0.71	0.59	0.55	0.55	0.54	0.55	0.55	0.55	0.58	0.63	0.67	0.69	0.71
-120	1.56	1.34	1.16	1.01	0.87	0.76	0.65	0.56	0.56	0.56	0.56	0.56	0.56	0.55	0.54	0.54	0.54	0.54	0.54
-110	1.56	1.35	1.17	1.01	0.86	0.72	0.60	0.56	0.57	0.57	0.57	0.57	0.57	0.57	0.57	0.57	0.56	0.56	0.56
-100	1.56	1.36	1.18	1.01	0.85	0.71	0.57	0.56	0.56	0.56	0.56	0.56	0.56	0.57	0.57	0.57	0.58	0.58	0.58
-90	1.56	1.38	1.20	1.03	0.85	0.67	0.49	0.48	0.48	0.47	0.47	0.46	0.46	0.47	0.47	0.48	0.48	0.49	0.50
-80	1.56	1.41	1.25	1.07	0.88	0.67	0.45	0.42	0.42	0.41	0.41	0.41	0.41	0.41	0.40	0.40	0.40	0.40	0.39
-70	1.56	1.44	1.31	1.19	1.02	0.84	0.55	0.50	0.59	0.70	0.82	0.93	1.04	1.16	1.27	1.37	1.44	1.49	1.50
-60	1.56	1.48	1.45	1.41	1.42	1.31	1.19	1.11	1.41	1.75	2.13	2.53	2.95	3.40	3.87	4.33	4.68	4.88	4.95
-50	1.56	1.54	1.59	1.83	2.00	2.17	2.26	2.32	2.75	3.69	4.91	6.41	8.10	9.77	11.4	12.8	13.8	14.3	14.4
-40	1.56	1.60	1.84	2.30	2.78	3.25	4.07	5.53	5.69	7.60	10.7	14.4	18.4	22.7	26.8	30.8	34.1	36.2	36.5
-30	1.56	1.67	2.14	2.84	3.59	4.76	8.19	9.11	10.1	14.0	19.4	27.0	36.6	48.8	62.9	78.1	92.6	103	106
-20	1.56	1.74	2.41	3.38	4.47	7.15	11.8	11.3	15.1	21.8	31.4	46.2	68.7	101	145	198	254	300	316
-10	1.56	1.81	2.65	3.83	5.32	10.3	14.1	13.5	19.7	29.0	43.5	67.3	106	169	272	413	562	680	727
0	1.56	1.86	2.83	4.18	5.98	12.6	15.9	15.3	22.5	33.4	50.3	77.9	124	202	333	524	757	961	1022
10	1.56	1.85	2.75	4.03	5.66	10.8	14.9	14.8	21.7	32.0	48.0	73.5	115	182	287	433	601	743	770
20	1.56	1.82	2.61	3.75	5.10	8.14	13.4	13.6	18.6	26.9	38.8	56.6	82.8	121	173	238	309	353	367
30	1.56	1.79	2.42	3.36	4.45	6.08	10.2	12.0	14.3	19.9	27.6	37.6	50.6	67.6	88.3	110	129	143	147
40	1.56	1.75	2.19	2.93	3.78	4.74	6.20	8.55	9.88	13.0	17.5	22.9	28.8	35.6	42.8	48.8	53.8	57.1	57.9
50	1.56	1.71	1.98	2.52	3.06	3.69	4.38	5.18	6.21	7.81	9.91	12.5	15.3	18.3	20.8	22.8	24.4	25.3	25.4
60	1.56	1.67	1.86	2.11	2.47	2.78	3.13	3.55	4.13	4.78	5.51	6.33	7.24	8.21	9.12	9.92	10.5	10.9	11.1
70	1.56	1.63	1.73	1.86	1.99	2.15	2.28	2.42	2.64	2.89	3.15	3.43	3.68	3.94	4.16	4.34	4.47	4.55	4.57
80	1.56	1.60	1.65	1.69	1.74	1.80	1.85	1.89	1.93	1.97	2.01	2.04	2.07	2.10	2.13	2.15	2.17	2.18	2.18
90	1.56	1.57	1.58	1.59	1.60	1.61	1.62	1.61	1.60	1.59	1.58	1.58	1.57	1.57	1.57	1.58	1.58	1.58	1.58
100	1.56	1.54	1.52	1.50	1.48	1.46	1.45	1.43	1.40	1.37	1.35	1.33	1.31	1.30	1.30	1.30	1.31	1.31	1.32
110	1.56	1.51	1.47	1.42	1.39	1.36	1.34	1.31	1.28	1.27	1.26	1.25	1.25	1.26	1.26	1.26	1.25	1.25	1.24
120	1.56	1.48	1.42	1.37	1.32	1.30	1.28	1.27	1.27	1.27	1.29	1.33	1.37	1.41	1.44	1.46	1.48	1.48	1.47
130	1.56	1.46	1.38	1.32	1.29	1.28	1.28	1.28	1.33	1.41	1.51	1.63	1.74	1.85	1.95	2.04	2.10	2.13	2.14
140	1.56	1.44	1.35	1.29	1.28	1.28	1.31	1.40	1.52	1.69	1.89	2.10	2.30	2.49	2.65	2.78	2.86	2.92	2.93
150	1.56	1.42	1.32	1.29	1.28	1.31	1.40	1.56	1.78	2.03	2.31	2.59	2.84	3.05	3.22	3.35	3.41	3.45	3.46
160	1.56	1.41	1.31	1.28	1.29	1.36	1.51	1.73	2.02	2.34	2.67	2.96	3.18	3.33	3.45	3.51	3.56	3.61	3.67
170	1.56	1.40	1.30	1.28	1.31	1.41	1.59	1.85	2.19	2.55	2.88	3.15	3.32	3.39	3.41	3.42	3.39	3.38	3.47
180	1.56	1.40	1.29	1.28	1.32	1.43	1.63	1.91	2.27	2.64	2.96	3.21	3.35	3.37	3.36	3.29	3.21	3.14	3.25

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-09-05

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeLine Slim-600mm-RGBW DS-3000K-30D-Rev1	TYPE:RGBW DS-3000K	WEIGHT:
SPEC.:30 DEG	DIM.:600MM	SERIAL No.:IES001646
MFR.:	SUR.:	Shielding Angle:

Table--2
UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	2.83	2.65	2.47	2.26	1.99	1.68	1.38	1.09	0.84	0.66	0.57	0.57	0.59	0.58	0.58	0.56	0.50	0.44
-170	2.71	2.62	2.46	2.24	1.96	1.66	1.35	1.07	0.83	0.66	0.58	0.57	0.58	0.58	0.58	0.56	0.50	0.44
-160	2.47	2.34	2.18	1.96	1.71	1.45	1.18	0.95	0.75	0.63	0.58	0.57	0.58	0.58	0.58	0.56	0.50	0.44
-150	1.87	1.77	1.63	1.46	1.28	1.10	0.92	0.77	0.66	0.59	0.57	0.57	0.58	0.58	0.58	0.55	0.50	0.44
-140	1.19	1.13	1.05	0.95	0.85	0.75	0.67	0.61	0.59	0.57	0.57	0.58	0.58	0.58	0.58	0.55	0.50	0.44
-130	0.70	0.68	0.64	0.60	0.57	0.56	0.56	0.56	0.57	0.57	0.57	0.57	0.58	0.58	0.57	0.54	0.49	0.44
-120	0.54	0.55	0.55	0.55	0.56	0.56	0.57	0.58	0.57	0.57	0.58	0.58	0.58	0.58	0.57	0.56	0.52	0.48
-110	0.57	0.57	0.57	0.57	0.58	0.58	0.58	0.58	0.58	0.58	0.58	0.58	0.58	0.57	0.56	0.53	0.50	0.46
-100	0.58	0.58	0.57	0.57	0.56	0.56	0.56	0.56	0.57	0.57	0.57	0.57	0.54	0.52	0.50	0.47	0.45	0.44
-90	0.49	0.48	0.47	0.46	0.45	0.45	0.45	0.46	0.47	0.47	0.48	0.49	0.48	0.47	0.46	0.45	0.45	0.44
-80	0.39	0.39	0.38	0.38	0.38	0.37	0.38	0.38	0.39	0.39	0.41	0.41	0.43	0.44	0.44	0.44	0.44	0.44
-70	1.44	1.34	1.23	1.10	0.95	0.83	0.74	0.65	0.56	0.47	0.41	0.44	0.52	0.50	0.45	0.45	0.44	0.44
-60	4.75	4.41	3.96	3.44	2.92	2.46	2.06	1.69	1.37	1.09	0.84	0.74	0.70	0.73	0.63	0.46	0.44	0.44
-50	13.9	12.9	11.6	10.1	8.39	6.71	5.19	3.92	2.89	2.12	1.73	1.43	1.14	0.94	0.86	0.57	0.45	0.44
-40	35.4	32.6	28.5	23.7	18.8	14.5	10.9	7.98	5.63	4.03	3.68	2.94	1.84	1.30	1.00	0.75	0.47	0.44
-30	103	92.5	76.9	59.3	43.1	29.5	19.7	13.4	9.33	6.44	4.89	5.14	3.14	1.75	1.22	0.92	0.48	0.44
-20	300	257	203	146	95.5	59.8	35.8	21.3	13.7	9.00	6.04	6.04	5.15	2.30	1.44	1.05	0.48	0.44
-10	658	536	401	277	171	97.8	54.8	30.7	17.7	11.0	7.24	6.11	6.88	2.89	1.62	1.14	0.48	0.44
0	913	720	514	344	206	116	63.5	35.2	19.5	12.0	7.78	6.35	7.98	3.30	1.75	1.19	0.49	0.44
10	686	538	391	271	171	102	58.6	34.3	20.2	12.8	8.39	6.88	7.37	3.20	1.80	1.23	0.52	0.44
20	343	293	225	161	107	68.4	43.8	27.4	18.1	12.0	8.13	7.44	6.06	2.89	1.79	1.24	0.56	0.44
30	141	125	105	80.4	59.0	41.7	28.7	20.5	14.5	10.1	7.54	6.93	4.35	2.54	1.70	1.18	0.59	0.44
40	55.9	51.6	45.5	38.4	30.5	23.9	18.3	13.9	10.4	7.86	6.43	4.90	3.21	2.22	1.58	1.08	0.60	0.44
50	24.6	23.0	20.9	18.4	15.7	12.9	10.5	8.44	6.68	5.31	4.35	3.38	2.55	1.92	1.50	0.93	0.61	0.44
60	10.7	10.0	9.23	8.29	7.32	6.40	5.56	4.80	4.15	3.60	3.09	2.55	2.06	1.70	1.28	0.85	0.61	0.44
70	4.46	4.30	4.10	3.86	3.60	3.33	3.08	2.84	2.60	2.39	2.20	2.02	1.74	1.41	1.08	0.84	0.62	0.44
80	2.16	2.13	2.09	2.05	2.01	1.97	1.94	1.90	1.86	1.82	1.78	1.73	1.49	1.25	1.03	0.82	0.62	0.44
90	1.57	1.56	1.55	1.54	1.53	1.52	1.53	1.53	1.53	1.54	1.54	1.54	1.36	1.17	0.99	0.81	0.62	0.44
100	1.31	1.30	1.30	1.29	1.28	1.30	1.32	1.34	1.36	1.38	1.39	1.39	1.26	1.12	0.96	0.79	0.61	0.44
110	1.25	1.25	1.25	1.25	1.25	1.25	1.25	1.25	1.26	1.27	1.29	1.28	1.17	1.06	0.93	0.79	0.61	0.44
120	1.48	1.47	1.46	1.43	1.41	1.37	1.33	1.30	1.26	1.26	1.26	1.20	1.10	1.00	0.90	0.77	0.61	0.44
130	2.14	2.10	2.05	1.97	1.86	1.75	1.63	1.51	1.42	1.33	1.23	1.12	1.03	0.94	0.85	0.74	0.61	0.44
140	2.92	2.88	2.80	2.68	2.52	2.32	2.12	1.90	1.70	1.47	1.23	1.06	0.96	0.88	0.81	0.72	0.59	0.44
150	3.46	3.43	3.36	3.24	3.08	2.87	2.62	2.34	1.88	1.48	1.19	1.00	0.88	0.82	0.75	0.68	0.57	0.44
160	3.63	3.60	3.57	3.50	3.38	3.20	2.73	2.22	1.74	1.35	1.07	0.90	0.80	0.74	0.70	0.64	0.55	0.44
170	3.43	3.49	3.52	3.31	2.96	2.58	2.17	1.76	1.38	1.06	0.85	0.75	0.70	0.66	0.64	0.60	0.53	0.44
180	2.83	2.65	2.47	2.26	1.99	1.68	1.38	1.09	0.84	0.66	0.57	0.57	0.59	0.58	0.58	0.56	0.50	0.44

H_b Range:-90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-05

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks: