

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	2443.4 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	63.6V x 63.7H
	At 50% of Imax	30.0V x 29.8H
	At 90% of Imax	11.1V x 10.8H

Beam Flux	Total	999.7 lumens per klm.
	To 10% of Imax	791.2 lumens per klm.
	To 50% of Imax	367.2 lumens per klm.
	To 90% of Imax	64.6 lumens per klm.

Upward LOR	2.3 %
Downward LOR	97.7 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-05

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:BlazeLine Slim-600mm-RGBW DS-ALL-30D-Rev1	TYPE:RGBW-DS W=3000K	WEIGHT:
SPEC.:30 DEG	DIM.:600MM	SERIAL No.:IES001642
MFR.:	SUR.:	Shielding Angle:

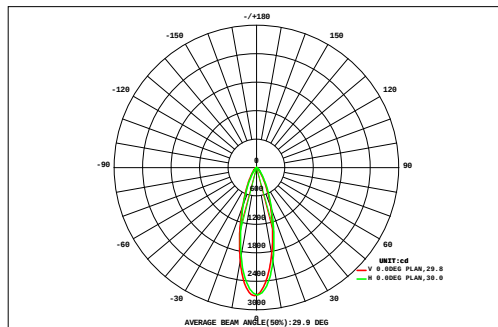

DATA OF LAMP		Eff:45.52lm/W	
MODEL		Imax(cd)	2705
NOMINAL POWER(W)	24.312	AVAILABILITY(%)	79.0
RATED VOLTAGE(V)	24	Avai. FLUX(lm)	875.0
NOMINAL FLUX(lm)	1107	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1107
TEST VOLTAGE(V)	24	q @50%(H,V)	30,30DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		F t	F a
	0.20	0.28	0.38	0.49	0.61	0.71	0.80	0.86	0.89	0.88	0.83	0.74	0.64	0.52	0.41	0.31	0.23	0.17	9.94	0.00
45	0.20	0.28	0.38	0.49	0.61	0.71	0.80	0.86	0.89	0.88	0.83	0.74	0.64	0.52	0.41	0.31	0.23	0.17	9.94	0.00
40	0.26	0.36	0.50	0.66	0.85	1.04	1.21	1.34	1.39	1.38	1.28	1.13	0.95	0.75	0.56	0.41	0.29	0.21	14.6	0.00
35	0.32	0.46	0.65	0.90	1.20	1.54	1.86	2.10	2.22	2.20	2.03	1.74	1.40	1.06	0.76	0.53	0.36	0.25	21.6	6.32
30	0.38	0.57	0.84	1.20	1.68	2.27	2.86	3.32	3.57	3.53	3.22	2.71	2.11	1.51	1.04	0.69	0.45	0.29	32.2	23.1
25	0.45	0.69	1.05	1.58	2.31	3.25	4.32	5.20	5.67	5.58	4.98	4.07	3.03	2.12	1.39	0.88	0.54	0.33	47.4	40.2
20	0.51	0.81	1.28	1.99	3.05	4.52	6.32	7.94	8.75	8.53	7.43	5.83	4.19	2.81	1.79	1.09	0.64	0.38	67.9	61.7
15	0.57	0.92	1.48	2.40	3.84	5.98	8.71	11.5	12.9	12.4	10.4	7.81	5.44	3.56	2.21	1.30	0.73	0.41	92.4	87.1
10	0.61	0.99	1.63	2.71	4.50	7.28	11.0	15.0	17.3	16.3	13.1	9.60	6.66	4.30	2.58	1.48	0.80	0.44	116	111
5	0.62	1.01	1.69	2.86	4.83	7.99	12.4	17.1	19.9	18.6	15.2	11.2	7.60	4.79	2.80	1.57	0.83	0.44	131	127
0	0.61	0.99	1.66	2.82	4.79	7.95	12.3	17.0	19.4	18.8	15.6	11.4	7.67	4.81	2.80	1.55	0.82	0.43	131	127
-5	0.57	0.93	1.54	2.61	4.39	7.17	10.9	14.4	16.4	15.8	13.2	9.89	6.81	4.34	2.56	1.42	0.76	0.40	114	109
-10	0.51	0.82	1.34	2.23	3.64	5.68	8.13	10.4	11.9	11.6	9.87	7.64	5.44	3.57	2.14	1.21	0.66	0.36	87.1	81.7
-15	0.43	0.69	1.10	1.76	2.73	4.02	5.51	6.92	7.78	7.69	6.72	5.35	3.94	2.66	1.64	0.96	0.54	0.31	60.7	54.6
-20	0.36	0.55	0.85	1.30	1.92	2.69	3.53	4.33	4.79	4.77	4.28	3.49	2.64	1.83	1.17	0.72	0.43	0.25	39.9	32.4
-25	0.28	0.43	0.64	0.92	1.30	1.74	2.19	2.60	2.83	2.82	2.58	2.15	1.66	1.19	0.80	0.52	0.32	0.20	25.2	14.2
-30	0.22	0.33	0.47	0.64	0.86	1.10	1.34	1.53	1.62	1.61	1.49	1.28	1.02	0.76	0.54	0.37	0.25	0.16	15.6	0.00
-35	0.16	0.24	0.34	0.45	0.57	0.70	0.82	0.92	0.95	0.94	0.88	0.77	0.63	0.49	0.37	0.26	0.18	0.13	9.80	0.00
-40	0.12	0.17	0.24	0.31	0.38	0.45	0.52	0.56	0.58	0.57	0.53	0.47	0.40	0.32	0.25	0.19	0.14	0.09	6.28	0.00
-45	0.12	0.17	0.24	0.31	0.38	0.45	0.52	0.56	0.58	0.57	0.53	0.47	0.40	0.32	0.25	0.19	0.14	0.09	6.28	0.00
	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)	10	15	20	25	30	35	40	45			
F t	7.17	11.2	17.7	27.8	43.4	66.1	94.7	123	139	134	114	87.3	62.2	41.4	25.8	15.4	8.98	5.25	1024	---
F a	0.00	0.00	2.92	17.9	35.4	58.9	88.2	117	133	128	108	80.7	55.2	33.5	16.1	1.51	0.00	0.00	---	875

one-half-peak spread: U:14.6,D:15.7 , L:14.3,R:15.7


NEMA Beam Type: Type 4

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-09-05

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:BlazeLine Slim-600mm-RGBW DS-ALL-30D-Rev1	TYPE:RGBW-DS W=3000K	WEIGHT:
SPEC.:30 DEG	DIM.:600MM	SERIAL No.:IES001642
MFR.:	SUR.:	Shielding Angle:

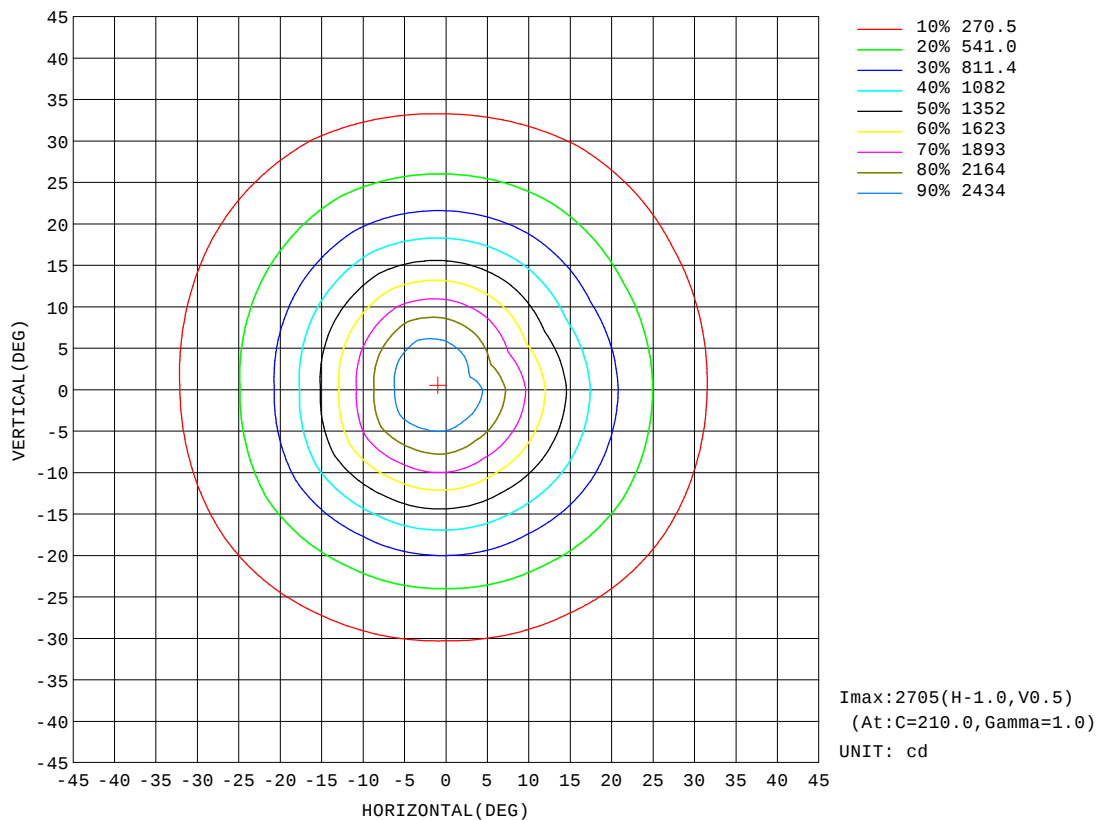


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-05

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:BlazeLine Slim-600mm-RGBW DS-ALL-30D-Rev1	TYPE:RGBW-DS W=3000K	WEIGHT:
SPEC.:30 DEG	DIM.:600MM	SERIAL No.:IES001642
MFR.:	SUR.:	Shielding Angle:

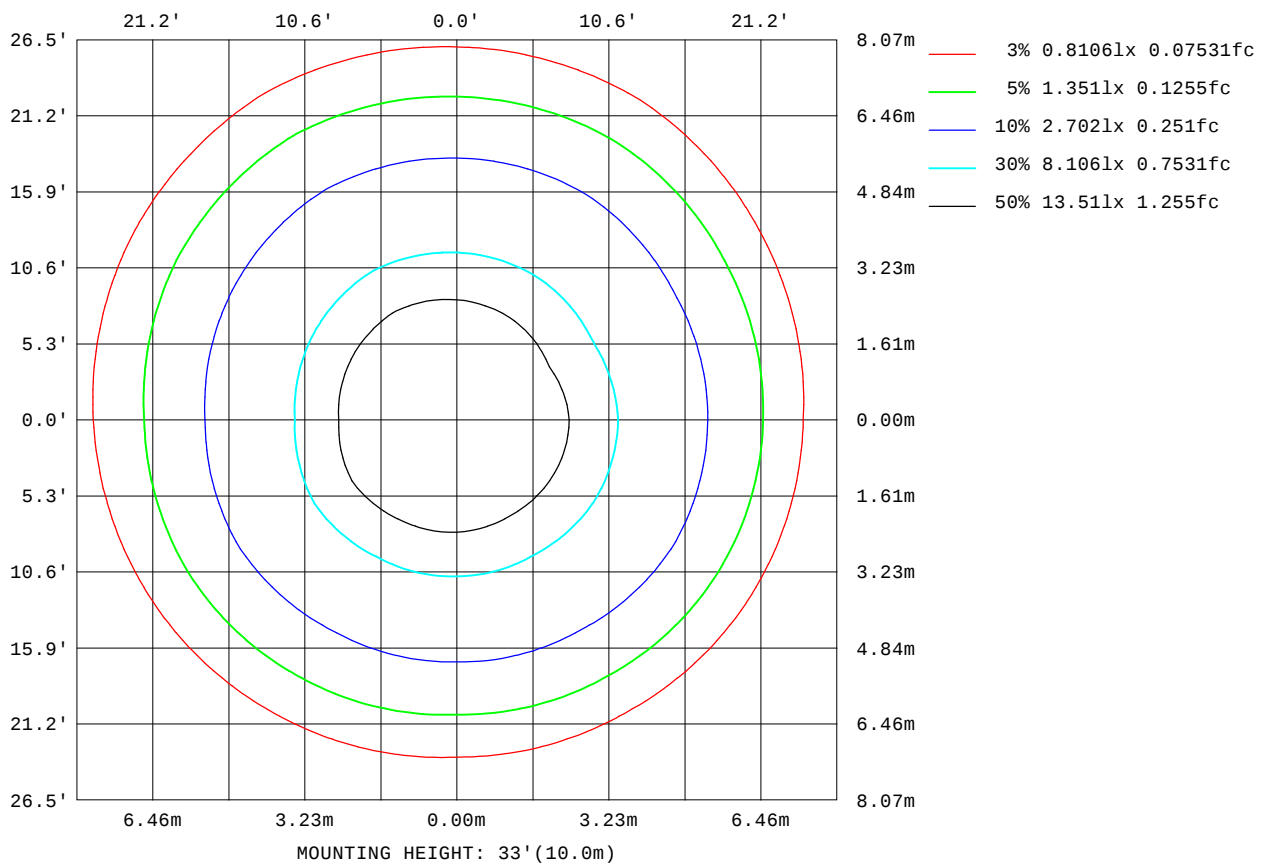

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-09-05

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

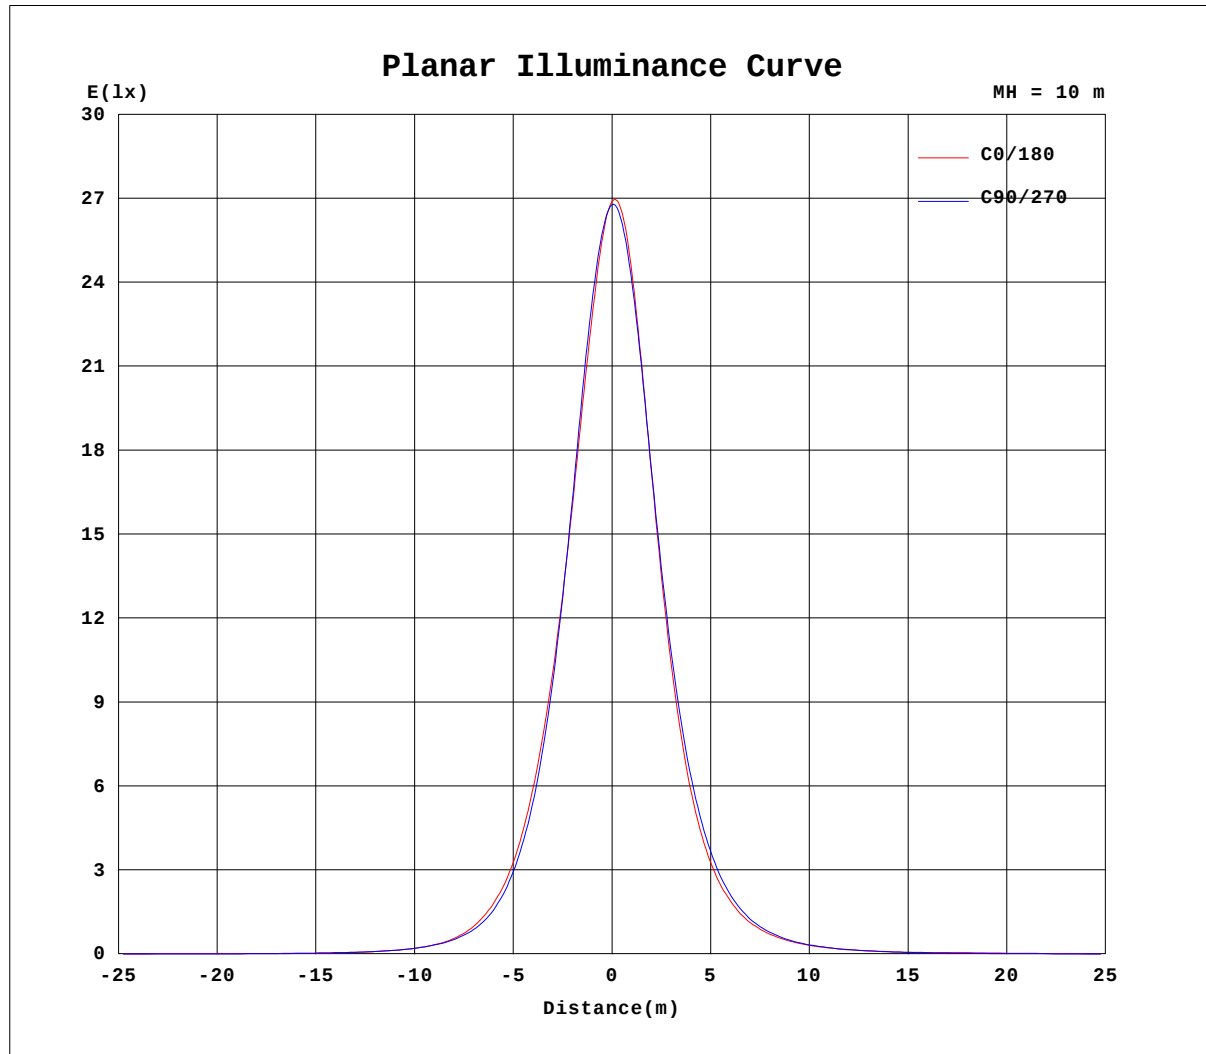


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-09-05

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:BlazeLine Slim-600mm-RGBW DS-ALL-30D-Rev1	TYPE:RGBW-DS W=3000K	WEIGHT:
SPEC.:30 DEG	DIM.:600MM	SERIAL No.:IES001642
MFR.:	SUR.:	Shielding Angle:

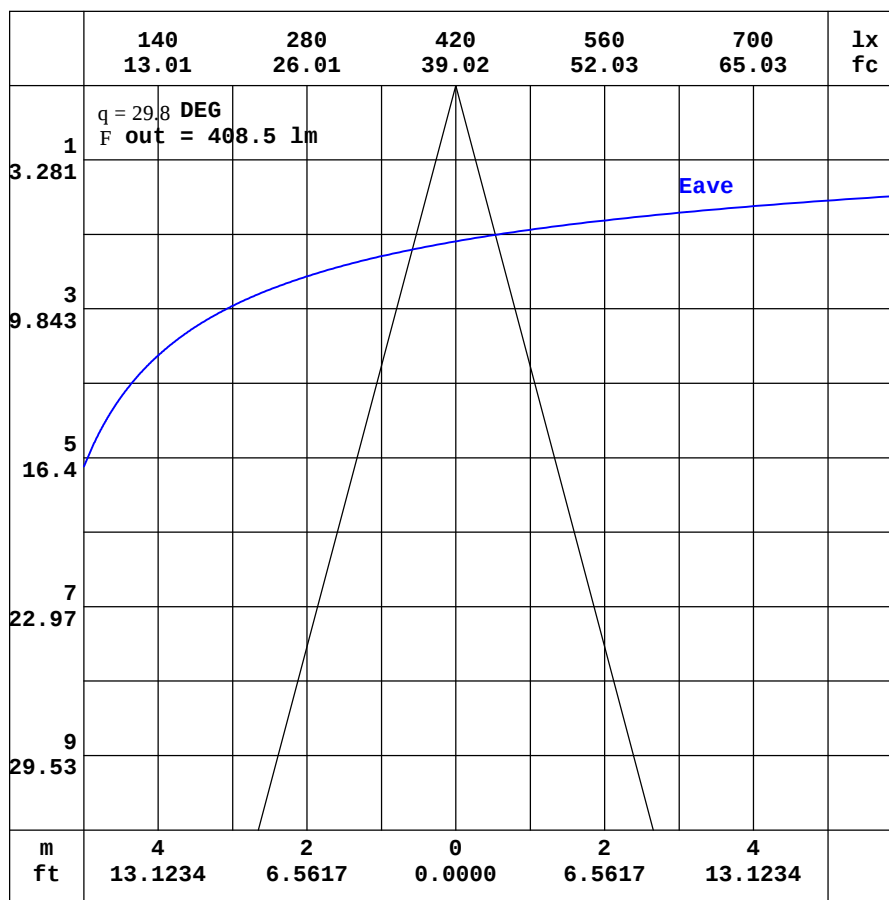

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-05

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeLine Slim-600mm-RGBW DS-ALL-30D-Rev1	TYPE:RGBW-DS W=3000K	WEIGHT:
SPEC.:30 DEG	DIM.:600MM	SERIAL No.:IES001642
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	4.33	3.93	3.65	3.52	3.57	3.82	4.30	5.02	5.92	6.89	7.76	8.42	8.84	8.99	8.98	8.85	8.63	8.42	8.47
-170	4.33	3.86	3.54	3.35	3.33	3.45	3.76	4.19	4.73	5.30	5.81	6.17	6.38	6.37	6.29	6.36	6.88	7.29	7.59
-160	4.33	3.81	3.44	3.20	3.10	3.09	3.17	3.33	3.51	3.67	3.78	3.81	3.85	4.53	5.13	5.76	6.26	6.56	6.77
-150	4.33	3.77	3.36	3.06	2.90	2.76	2.67	2.59	2.48	2.30	2.14	2.51	2.96	3.46	3.95	4.40	4.77	5.02	5.14
-140	4.33	3.75	3.30	2.97	2.72	2.51	2.29	2.07	1.80	1.70	1.76	1.91	2.11	2.35	2.61	2.87	3.09	3.24	3.30
-130	4.33	3.73	3.26	2.90	2.59	2.33	2.07	1.77	1.64	1.62	1.61	1.61	1.61	1.65	1.72	1.81	1.88	1.94	1.96
-120	4.33	3.73	3.25	2.84	2.51	2.21	1.91	1.71	1.70	1.68	1.64	1.62	1.60	1.57	1.55	1.54	1.53	1.52	1.51
-110	4.33	3.75	3.26	2.82	2.44	2.10	1.80	1.71	1.71	1.71	1.71	1.71	1.71	1.70	1.69	1.67	1.65	1.63	1.61
-100	4.33	3.79	3.29	2.82	2.40	1.99	1.62	1.61	1.62	1.64	1.65	1.66	1.66	1.67	1.68	1.69	1.69	1.70	1.70
-90	4.33	3.84	3.35	2.86	2.38	1.89	1.40	1.40	1.39	1.39	1.38	1.37	1.37	1.37	1.38	1.38	1.39	1.39	1.40
-80	4.33	3.91	3.45	2.97	2.45	1.90	1.30	1.24	1.22	1.21	1.20	1.19	1.18	1.19	1.18	1.18	1.18	1.17	1.17
-70	4.33	3.99	3.62	3.26	2.81	2.31	1.58	1.41	1.62	1.89	2.18	2.50	2.79	3.11	3.41	3.68	3.88	4.01	4.06
-60	4.33	4.09	3.93	3.82	3.79	3.47	3.06	2.91	3.79	4.68	5.65	6.73	7.86	9.11	10.4	11.5	12.3	12.9	13.0
-50	4.33	4.23	4.30	4.86	5.19	5.48	5.83	6.08	7.23	9.75	13.1	17.2	21.7	26.2	30.3	33.7	36.0	37.2	37.0
-40	4.33	4.38	4.92	6.04	7.00	8.21	10.3	14.1	15.1	20.4	28.9	38.5	49.1	60.4	71.6	82.2	90.4	95.3	95.6
-30	4.33	4.55	5.65	7.26	9.03	12.0	20.5	23.6	26.8	37.5	52.0	72.2	98.1	130	169	209	247	273	281
-20	4.33	4.72	6.35	8.53	11.2	17.6	29.9	29.5	40.4	58.3	84.2	123	183	271	385	523	663	776	813
-10	4.33	4.89	6.97	9.64	13.2	25.2	35.8	35.6	52.6	77.6	116	178	284	452	719	1087	1481	1788	1892
0	4.33	5.02	7.42	10.5	14.8	30.8	40.6	40.4	60.1	89.1	134	205	329	533	869	1370	1997	2539	2689
10	4.33	5.00	7.24	10.2	14.1	26.5	37.9	39.0	57.8	85.2	128	194	303	473	742	1119	1559	1934	1995
20	4.33	4.94	6.88	9.51	12.8	20.2	33.8	35.6	49.3	71.3	103	150	218	315	446	614	789	901	931
30	4.33	4.85	6.40	8.62	11.2	15.4	25.5	31.1	37.7	52.8	72.8	98.9	133	176	227	285	331	361	369
40	4.33	4.77	5.83	7.67	9.60	12.0	15.8	21.9	25.9	34.4	46.2	59.8	75.2	92.6	110	125	137	144	146
50	4.33	4.67	5.33	6.67	7.93	9.44	11.2	13.5	16.2	20.3	25.9	32.5	39.8	47.1	53.1	57.8	61.2	62.9	62.7
60	4.33	4.58	5.01	5.65	6.54	7.26	8.12	9.15	10.7	12.4	14.3	16.4	18.7	21.2	23.3	25.2	26.5	27.2	27.3
70	4.33	4.50	4.72	5.03	5.36	5.76	6.05	6.40	6.95	7.59	8.27	8.96	9.65	10.3	10.9	11.3	11.6	11.8	11.9
80	4.33	4.42	4.51	4.63	4.75	4.88	5.01	5.11	5.21	5.31	5.40	5.49	5.56	5.62	5.66	5.70	5.73	5.73	5.72
90	4.33	4.34	4.35	4.36	4.37	4.38	4.39	4.38	4.36	4.35	4.33	4.32	4.30	4.29	4.28	4.27	4.25	4.24	4.23
100	4.33	4.26	4.19	4.14	4.08	4.04	3.99	3.92	3.85	3.78	3.73	3.67	3.63	3.60	3.58	3.56	3.54	3.53	3.52
110	4.33	4.18	4.06	3.95	3.84	3.76	3.70	3.62	3.54	3.49	3.45	3.43	3.41	3.40	3.39	3.39	3.38	3.37	3.36
120	4.33	4.12	3.95	3.79	3.68	3.59	3.54	3.50	3.48	3.48	3.54	3.61	3.69	3.76	3.85	3.93	3.99	4.02	4.03
130	4.33	4.06	3.84	3.68	3.56	3.52	3.51	3.55	3.67	3.86	4.10	4.35	4.63	4.89	5.15	5.40	5.59	5.70	5.75
140	4.33	4.02	3.76	3.60	3.52	3.52	3.61	3.82	4.16	4.59	5.07	5.58	6.10	6.58	6.99	7.34	7.59	7.75	7.81
150	4.33	3.98	3.71	3.54	3.51	3.58	3.81	4.22	4.78	5.44	6.17	6.88	7.53	8.06	8.48	8.79	9.00	9.13	9.18
160	4.33	3.95	3.67	3.52	3.53	3.69	4.05	4.62	5.36	6.21	7.07	7.84	8.44	8.82	9.10	9.33	9.43	9.53	9.66
170	4.33	3.93	3.65	3.52	3.55	3.77	4.23	4.91	5.77	6.71	7.60	8.31	8.76	9.00	9.06	9.04	9.01	8.98	9.13
180	4.33	3.93	3.65	3.52	3.57	3.82	4.30	5.02	5.92	6.89	7.76	8.42	8.84	8.99	8.98	8.85	8.63	8.42	8.50

H_b Range:-90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-05

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeLine Slim-600mm-RGBW DS-ALL-30D-Rev1	TYPE:RGBW-DS W=3000K	WEIGHT:
SPEC.:30 DEG	DIM.:600MM	SERIAL No.:IES001642
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	7.60	7.11	6.68	6.15	5.47	4.71	3.92	3.15	2.49	1.99	1.68	1.59	1.61	1.68	1.67	1.64	1.51	1.32
-170	7.26	7.01	6.90	6.28	5.60	4.88	4.05	3.22	2.50	1.98	1.68	1.59	1.61	1.67	1.67	1.65	1.51	1.32
-160	6.68	6.47	6.09	5.62	5.13	4.55	3.72	2.92	2.27	1.86	1.63	1.59	1.62	1.67	1.67	1.64	1.51	1.32
-150	5.10	4.92	4.62	4.26	3.84	3.36	2.83	2.34	1.95	1.71	1.60	1.59	1.64	1.67	1.67	1.63	1.49	1.32
-140	3.28	3.17	2.98	2.73	2.50	2.24	2.00	1.80	1.67	1.61	1.59	1.60	1.66	1.67	1.67	1.60	1.48	1.32
-130	1.95	1.91	1.85	1.77	1.68	1.62	1.58	1.58	1.57	1.58	1.62	1.65	1.67	1.67	1.65	1.58	1.45	1.32
-120	1.52	1.52	1.53	1.53	1.54	1.55	1.57	1.59	1.63	1.65	1.66	1.67	1.67	1.66	1.61	1.53	1.43	1.32
-110	1.62	1.63	1.64	1.65	1.66	1.66	1.66	1.67	1.67	1.67	1.67	1.67	1.66	1.61	1.55	1.48	1.40	1.32
-100	1.69	1.68	1.67	1.66	1.65	1.64	1.63	1.62	1.62	1.61	1.60	1.58	1.54	1.50	1.46	1.41	1.37	1.32
-90	1.39	1.38	1.37	1.36	1.36	1.35	1.35	1.36	1.37	1.37	1.38	1.39	1.38	1.36	1.35	1.34	1.33	1.32
-80	1.17	1.16	1.16	1.16	1.15	1.15	1.16	1.18	1.19	1.20	1.22	1.25	1.29	1.31	1.31	1.31	1.31	1.32
-70	3.94	3.75	3.49	3.18	2.84	2.53	2.28	2.03	1.79	1.57	1.39	1.36	1.54	1.52	1.36	1.34	1.31	1.32
-60	12.6	11.9	10.9	9.66	8.33	7.16	6.10	5.11	4.20	3.41	2.72	2.35	2.13	2.05	1.85	1.40	1.31	1.32
-50	35.8	33.4	30.2	26.4	22.4	18.5	14.8	11.5	8.76	6.48	5.34	4.41	3.45	2.73	2.39	1.73	1.34	1.32
-40	92.5	85.0	74.2	61.7	49.7	39.1	30.1	22.6	16.6	12.1	11.2	8.88	5.57	3.81	2.80	2.17	1.39	1.32
-30	271	241	199	155	115	81.2	55.7	38.3	26.9	19.0	14.2	15.7	9.42	5.22	3.41	2.56	1.41	1.32
-20	765	651	516	378	255	162	100	62.0	39.4	26.2	17.9	17.4	15.7	6.89	3.99	2.85	1.42	1.32
-10	1693	1365	1012	698	446	267	154	88.2	51.7	32.1	21.3	17.0	21.1	8.56	4.56	3.04	1.45	1.32
0	2383	1852	1368	871	538	320	182	101	58.0	34.7	23.0	17.6	24.5	9.71	4.92	3.17	1.46	1.32
10	1762	1372	993	688	447	278	165	97.1	58.1	36.5	24.3	18.9	22.4	9.35	5.02	3.28	1.55	1.32
20	868	738	574	415	286	188	121	77.8	50.5	34.0	23.2	21.0	18.0	8.37	4.87	3.33	1.62	1.32
30	354	317	266	205	154	111	78.6	56.2	40.1	28.5	20.9	20.3	12.5	7.23	4.63	3.23	1.68	1.32
40	141	129	115	97.7	78.5	62.2	48.8	37.7	28.9	21.9	18.3	13.9	9.09	6.15	4.28	3.00	1.74	1.32
50	60.9	57.5	52.6	47.0	40.8	34.3	28.3	23.0	18.4	14.7	12.0	9.40	7.04	5.20	4.01	2.66	1.74	1.32
60	26.6	25.4	23.8	21.8	19.6	17.3	15.1	13.1	11.4	9.85	8.46	6.90	5.55	4.53	3.51	2.38	1.75	1.32
70	11.7	11.3	10.9	10.3	9.71	9.02	8.38	7.72	7.05	6.44	5.93	5.40	4.67	3.84	2.98	2.34	1.77	1.32
80	5.69	5.65	5.58	5.51	5.42	5.33	5.23	5.13	5.02	4.89	4.78	4.62	4.00	3.41	2.82	2.28	1.77	1.32
90	4.21	4.20	4.18	4.17	4.16	4.14	4.14	4.13	4.13	4.13	4.12	4.12	3.65	3.19	2.72	2.25	1.78	1.32
100	3.51	3.51	3.51	3.51	3.51	3.52	3.55	3.59	3.63	3.67	3.72	3.73	3.39	3.04	2.65	2.24	1.80	1.32
110	3.37	3.37	3.37	3.37	3.37	3.37	3.37	3.38	3.40	3.43	3.47	3.43	3.17	2.89	2.57	2.21	1.79	1.32
120	4.03	4.01	3.96	3.88	3.79	3.71	3.62	3.53	3.45	3.41	3.41	3.22	2.98	2.74	2.48	2.16	1.78	1.32
130	5.74	5.65	5.49	5.28	5.01	4.73	4.44	4.15	3.90	3.67	3.40	3.06	2.81	2.59	2.37	2.10	1.75	1.32
140	7.78	7.66	7.44	7.13	6.74	6.27	5.76	5.21	4.69	4.07	3.40	2.94	2.64	2.44	2.26	2.03	1.72	1.32
150	9.16	9.06	8.89	8.60	8.20	7.69	7.07	6.38	5.18	4.10	3.30	2.78	2.46	2.27	2.12	1.95	1.68	1.32
160	9.61	9.54	9.53	9.37	9.05	8.61	7.38	6.05	4.82	3.77	2.98	2.50	2.23	2.08	1.98	1.86	1.63	1.32
170	9.06	9.14	9.20	8.98	8.08	7.03	5.95	4.87	3.87	3.03	2.42	2.09	1.94	1.89	1.83	1.75	1.58	1.32
180	7.60	7.11	6.68	6.15	5.47	4.71	3.92	3.15	2.49	1.99	1.68	1.59	1.61	1.68	1.67	1.64	1.51	1.32

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-09-05

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks: