

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	2481.8 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	--

Beam Spread	At 10% of Imax	62.9V x 63.6H
	At 50% of Imax	29.7V x 29.3H
	At 90% of Imax	11.2V x 10.7H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	790.0 lumens per klm.
	To 50% of Imax	365.6 lumens per klm.
	To 90% of Imax	64.8 lumens per klm.

Upward LOR	2.3 %
Downward LOR	97.7 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-05

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:BlazeLine Slim-600mm-RGBW DS-GREEN-30D-Rev1	TYPE:RGBW DS-GREEN	WEIGHT:
SPEC.:30 DEG	DIM.:600MM	SERIAL No.:IES001644
MFR.:	SUR.:	Shielding Angle:

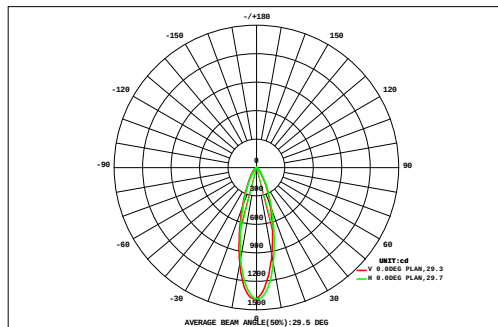

DATA OF LAMP		Eff:90.06lm/W	
MODEL		Imax(cd)	1395
NOMINAL POWER(W)	6.24	AVAILABILITY(%)	78.9
RATED VOLTAGE(V)	24	Avai. FLUX(lm)	443.4
NOMINAL FLUX(lm)	562	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	562.0
TEST VOLTAGE(V)	24	q @50%(H,V)	29,30DEG

45 40 35 30 25 20 15 10 5 -5 -10 -15 -20 -25 -30 -35 -40 -45	AREA FLUX DIAGRAM																UNIT:lm				F t	F a
	0.10	0.14	0.19	0.25	0.31	0.36	0.40	0.43	0.44	0.43	0.41	0.37	0.31	0.26	0.20	0.16	0.12	0.09	4.94	0.00		
	0.13	0.19	0.26	0.34	0.43	0.52	0.60	0.66	0.68	0.67	0.63	0.56	0.47	0.37	0.28	0.21	0.15	0.11	7.25	0.00		
	0.16	0.24	0.34	0.46	0.61	0.77	0.92	1.04	1.10	1.08	1.00	0.86	0.70	0.53	0.39	0.27	0.19	0.13	10.8	2.64		
	0.20	0.30	0.43	0.61	0.85	1.13	1.42	1.65	1.78	1.76	1.60	1.34	1.05	0.76	0.53	0.36	0.23	0.15	16.1	11.2		
	0.23	0.36	0.54	0.80	1.16	1.62	2.17	2.62	2.85	2.80	2.50	2.04	1.52	1.07	0.71	0.45	0.28	0.17	23.9	20.1		
	0.27	0.42	0.65	1.02	1.54	2.28	3.19	4.01	4.43	4.32	3.76	2.95	2.12	1.44	0.93	0.56	0.33	0.19	34.4	31.2		
	0.30	0.47	0.76	1.22	1.95	3.03	4.42	5.82	6.54	6.29	5.27	3.96	2.76	1.82	1.14	0.67	0.38	0.21	47.0	44.2		
	0.31	0.51	0.83	1.38	2.29	3.70	5.62	7.67	8.86	8.37	6.72	4.88	3.36	2.17	1.32	0.76	0.41	0.22	59.4	56.8		
	0.32	0.53	0.86	1.45	2.46	4.07	6.32	8.78	10.3	9.61	7.75	5.64	3.80	2.40	1.43	0.80	0.42	0.22	67.1	64.6		
	0.32	0.52	0.85	1.43	2.45	4.08	6.37	8.82	10.1	9.66	7.90	5.71	3.81	2.39	1.42	0.79	0.41	0.22	67.2	64.7		
	0.29	0.48	0.80	1.33	2.26	3.71	5.66	7.51	8.49	8.14	6.71	4.96	3.39	2.15	1.28	0.72	0.38	0.20	58.5	55.9		
	0.26	0.43	0.70	1.14	1.87	2.94	4.21	5.40	6.10	5.92	4.99	3.83	2.70	1.75	1.06	0.61	0.33	0.18	44.4	41.6		
	0.23	0.36	0.57	0.91	1.39	2.06	2.83	3.55	3.97	3.90	3.38	2.67	1.95	1.30	0.82	0.48	0.27	0.15	30.8	27.5		
	0.19	0.29	0.45	0.67	0.98	1.37	1.80	2.20	2.42	2.40	2.14	1.73	1.30	0.90	0.58	0.36	0.21	0.13	20.1	16.1		
	0.15	0.23	0.33	0.48	0.67	0.89	1.12	1.31	1.41	1.39	1.27	1.05	0.81	0.58	0.40	0.26	0.16	0.10	12.6	6.80		
	0.11	0.17	0.24	0.34	0.44	0.56	0.68	0.77	0.82	0.80	0.74	0.62	0.49	0.37	0.27	0.18	0.12	0.08	7.82	0.00		
	0.09	0.13	0.17	0.23	0.29	0.36	0.42	0.46	0.48	0.47	0.43	0.38	0.31	0.24	0.18	0.13	0.09	0.06	4.91	0.00		
	0.06	0.09	0.12	0.16	0.20	0.23	0.26	0.28	0.29	0.28	0.26	0.23	0.19	0.16	0.12	0.09	0.07	0.05	3.14	0.00		
	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)				10	15	20	25	30	35	40	45		
F t	3.73	5.85	9.10	14.2	22.1	33.7	48.4	63.0	71.0	68.3	57.5	43.8	31.0	20.7	13.1	7.85	4.58	2.68	520	---		
F a	0.00	0.00	1.37	9.07	17.9	29.9	45.0	59.8	67.9	65.2	54.2	40.4	27.4	16.5	7.98	0.63	0.00	0.00	---	443		

one-half-peak spread: U:15.0,D:15.0 , L:14.2,R:15.4


NEMA Beam Type: Type 4

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-09-05

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:BlazeLine Slim-600mm-RGBW DS-GREEN-30D-Rev1	TYPE:RGBW DS-GREEN	WEIGHT:
SPEC.:30 DEG	DIM.:600MM	SERIAL No.:IES001644
MFR.:	SUR.:	Shielding Angle:

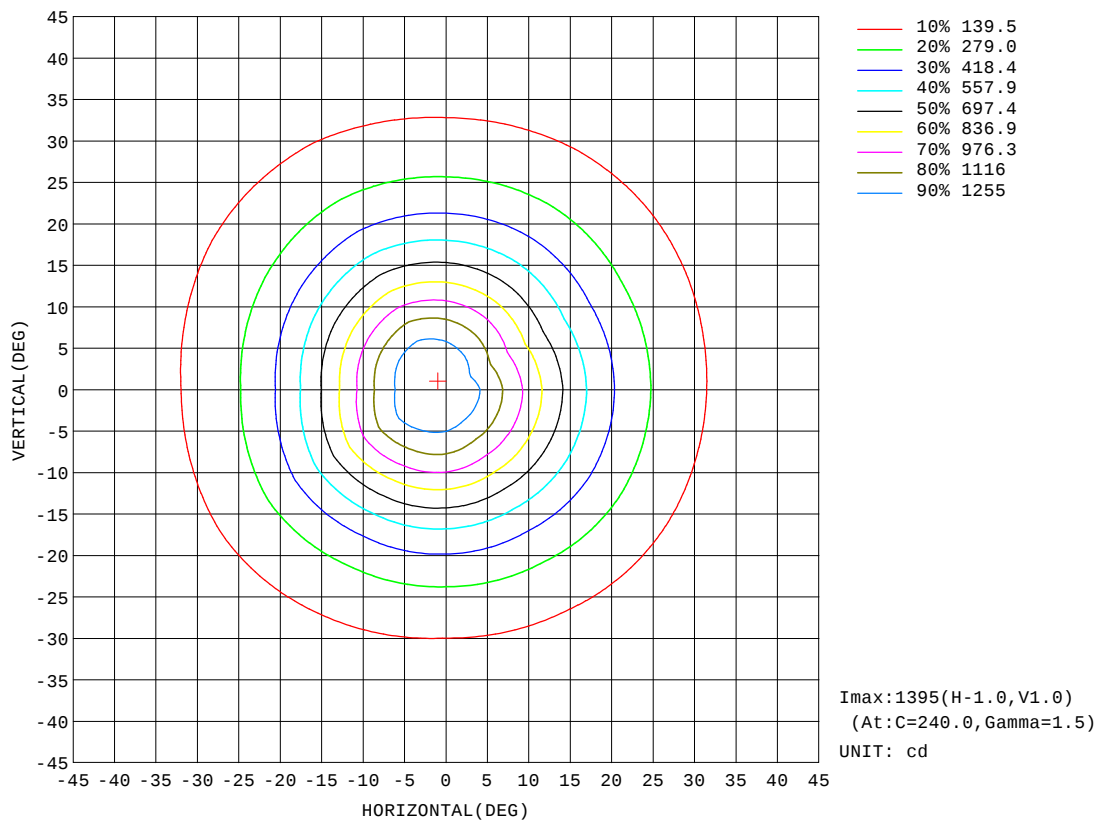


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-05

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:BlazeLine Slim-600mm-RGBW DS-GREEN-30D-Rev1	TYPE:RGBW DS-GREEN	WEIGHT:
SPEC.:30 DEG	DIM.:600MM	SERIAL No.:IES001644
MFR.:	SUR.:	Shielding Angle:

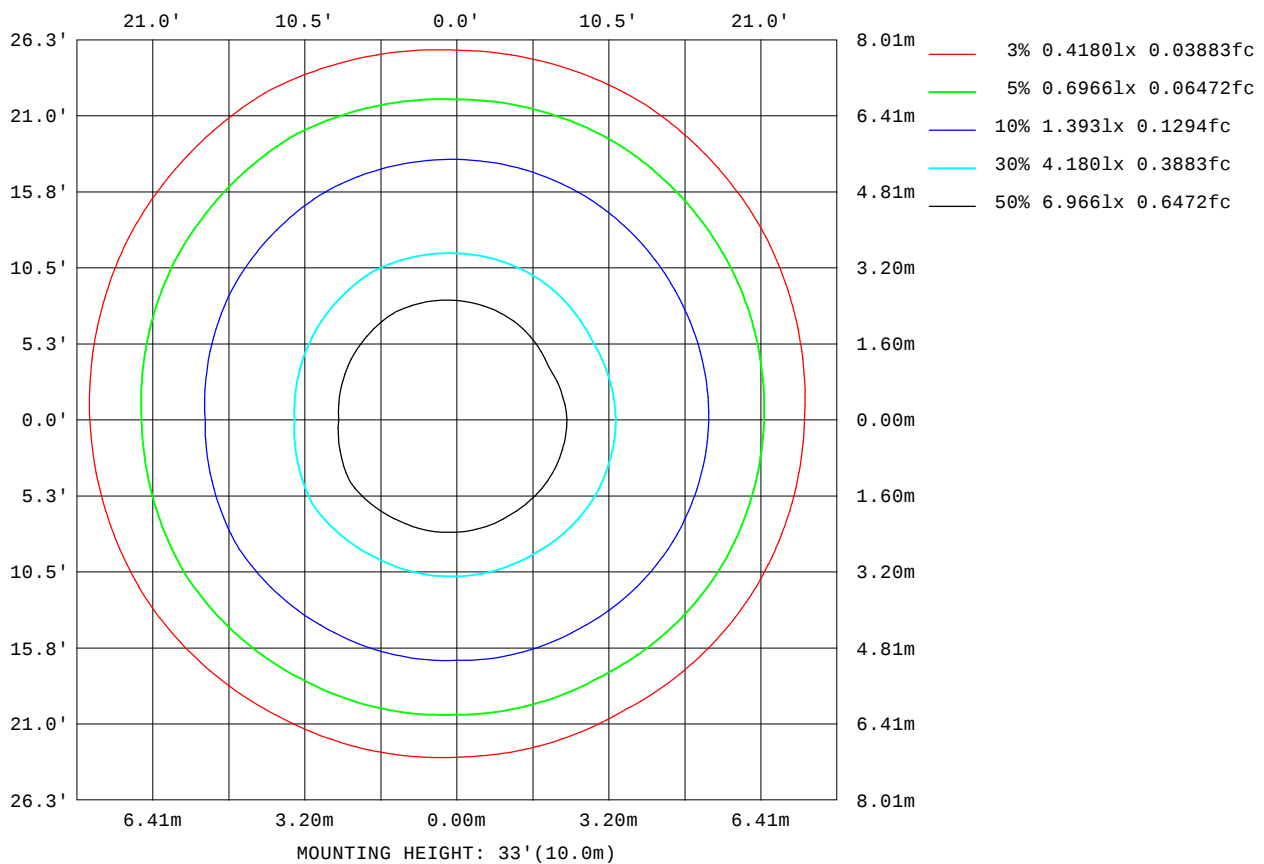

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-09-05

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

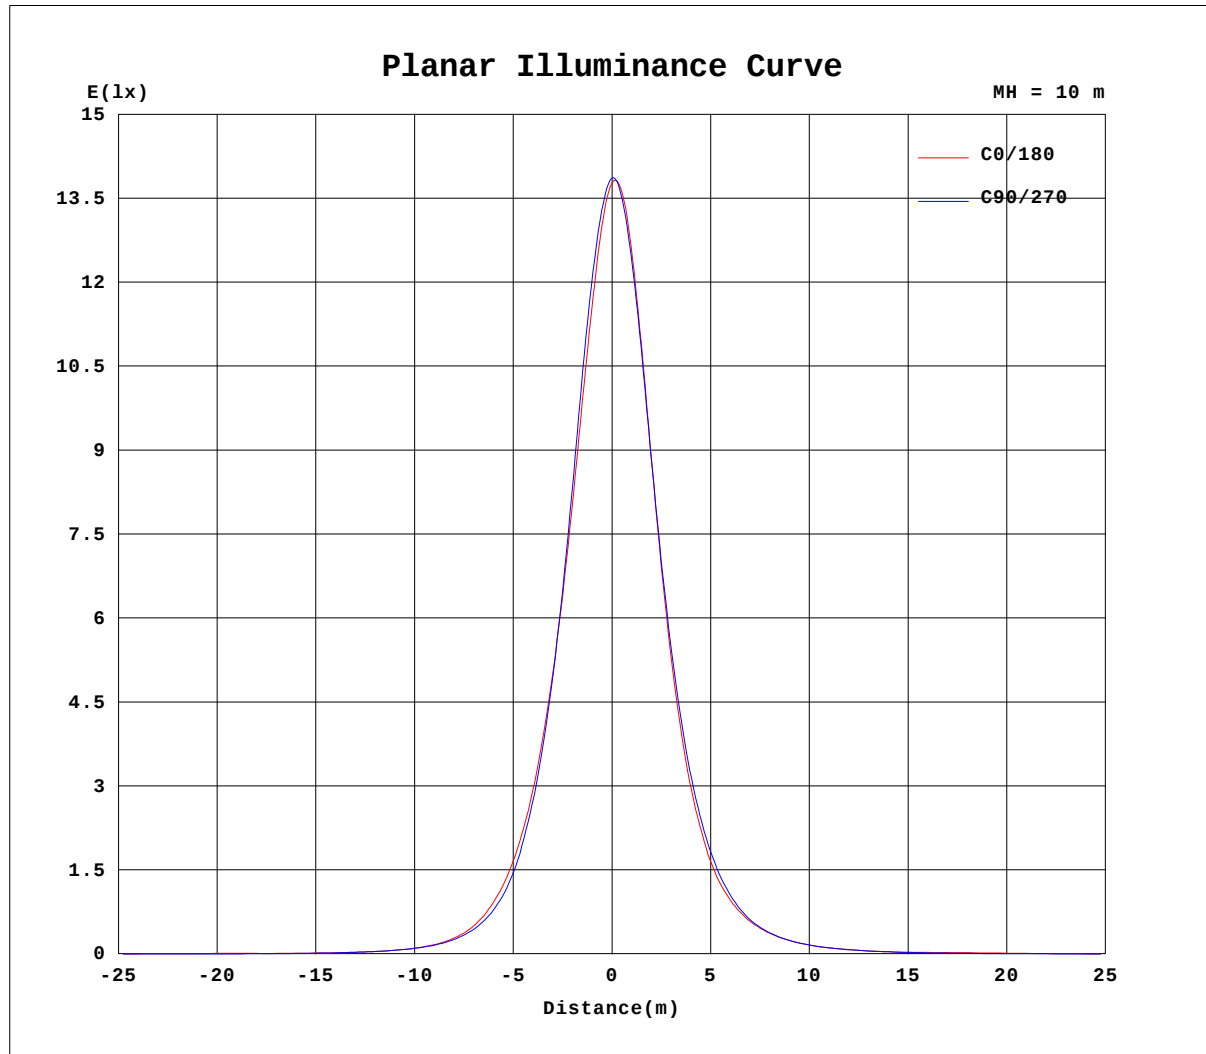


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-09-05

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:BlazeLine Slim-600mm-RGBW DS-GREEN-30D-Rev1	TYPE:RGBW DS-GREEN	WEIGHT:
SPEC.:30 DEG	DIM.:600MM	SERIAL No.:IES001644
MFR.:	SUR.:	Shielding Angle:

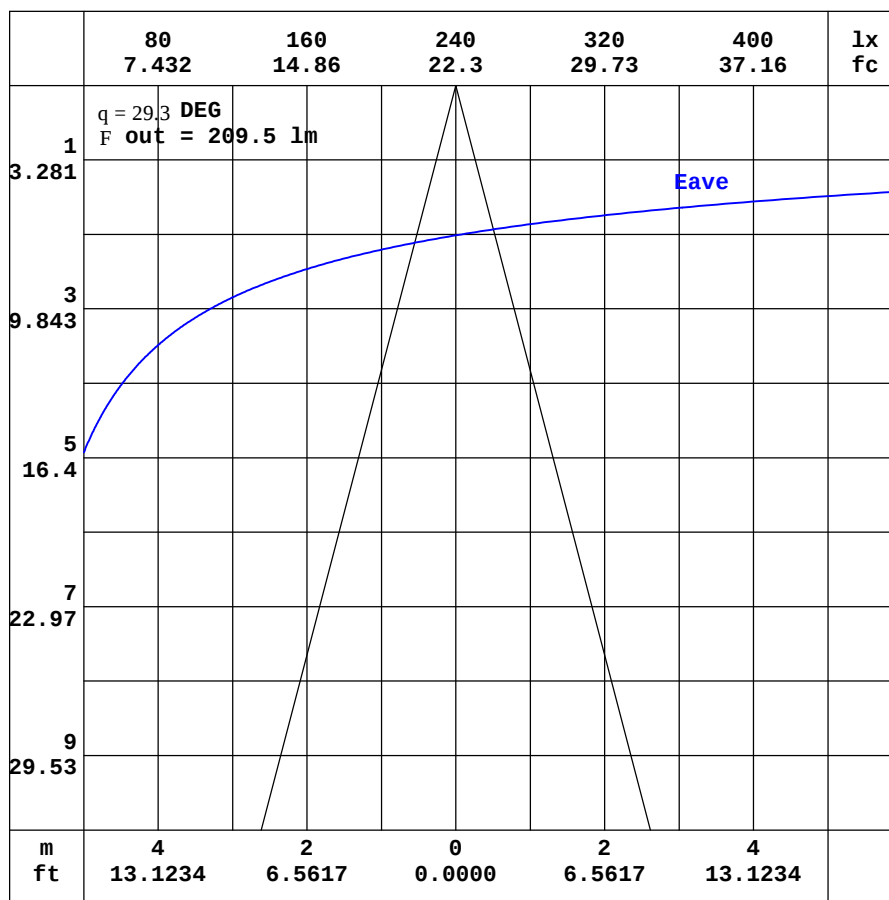

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-05

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeLine Slim-600mm-RGBW DS-GREEN-30D-Rev1	TYPE:RGBW DS-GREEN	WEIGHT:
SPEC.:30 DEG	DIM.:600MM	SERIAL No.:IES001644
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	2.13	1.93	1.78	1.73	1.75	1.88	2.12	2.47	2.92	3.41	3.85	4.20	4.41	4.48	4.47	4.41	4.32	4.20	4.25
-170	2.13	1.90	1.73	1.65	1.64	1.70	1.86	2.08	2.35	2.63	2.88	3.07	3.17	3.18	3.14	3.19	3.46	3.67	3.84
-160	2.13	1.87	1.69	1.58	1.53	1.53	1.58	1.67	1.76	1.84	1.89	1.90	1.91	2.24	2.56	2.88	3.15	3.31	3.45
-150	2.13	1.86	1.65	1.51	1.43	1.37	1.34	1.32	1.27	1.18	1.10	1.27	1.48	1.72	1.97	2.20	2.40	2.54	2.61
-140	2.13	1.84	1.63	1.47	1.35	1.25	1.15	1.05	0.94	0.90	0.91	0.97	1.06	1.17	1.30	1.43	1.55	1.63	1.67
-130	2.13	1.83	1.61	1.43	1.29	1.16	1.04	0.91	0.85	0.84	0.84	0.83	0.82	0.80	0.84	0.89	0.93	0.95	0.96
-120	2.13	1.83	1.61	1.41	1.25	1.10	0.97	0.87	0.86	0.85	0.84	0.83	0.81	0.80	0.78	0.77	0.76	0.75	0.74
-110	2.13	1.85	1.60	1.40	1.21	1.05	0.91	0.87	0.86	0.86	0.85	0.85	0.84	0.84	0.82	0.81	0.80	0.78	0.77
-100	2.13	1.86	1.62	1.40	1.20	1.00	0.83	0.82	0.82	0.82	0.82	0.82	0.82	0.82	0.82	0.82	0.82	0.82	0.81
-90	2.13	1.89	1.66	1.42	1.18	0.95	0.71	0.70	0.70	0.69	0.68	0.67	0.67	0.67	0.67	0.67	0.68	0.68	0.68
-80	2.13	1.92	1.71	1.47	1.22	0.95	0.67	0.63	0.62	0.62	0.61	0.60	0.60	0.60	0.60	0.60	0.59	0.59	0.59
-70	2.13	1.97	1.78	1.61	1.39	1.16	0.79	0.66	0.77	0.90	1.06	1.24	1.41	1.56	1.70	1.81	1.90	1.95	1.95
-60	2.13	2.01	1.93	1.87	1.89	1.68	1.43	1.38	1.89	2.36	2.86	3.41	3.98	4.61	5.21	5.71	6.08	6.27	6.28
-50	2.13	2.07	2.11	2.42	2.52	2.62	2.86	3.06	3.69	4.97	6.71	8.82	11.1	13.3	15.3	16.9	18.0	18.4	18.2
-40	2.13	2.15	2.41	2.99	3.38	4.00	5.06	7.09	7.75	10.6	15.1	20.1	25.4	31.1	36.6	41.8	45.7	47.8	47.6
-30	2.13	2.23	2.80	3.54	4.37	5.83	10.1	12.0	13.9	19.7	27.5	38.0	51.4	67.2	86.2	106	125	137	139
-20	2.13	2.31	3.16	4.14	5.41	8.49	14.9	15.2	20.9	30.6	44.4	64.8	95.8	139	197	268	338	395	412
-10	2.13	2.39	3.47	4.68	6.37	12.2	18.1	18.2	27.3	40.4	60.9	93.0	145	230	372	565	770	929	973
0	2.13	2.45	3.70	5.11	7.12	14.9	20.6	20.6	31.0	46.0	69.8	106	167	272	443	700	1027	1305	1378
10	2.13	2.44	3.61	4.94	6.79	12.9	19.1	19.9	29.8	44.2	66.2	99.8	154	240	376	569	794	988	1020
20	2.13	2.42	3.43	4.63	6.19	9.77	16.9	18.2	25.4	37.0	53.5	77.0	111	160	224	310	397	454	469
30	2.13	2.38	3.18	4.23	5.45	7.51	12.6	15.7	19.3	27.3	37.8	51.1	68.0	89.0	114	141	164	179	183
40	2.13	2.34	2.87	3.82	4.68	5.85	7.82	10.9	13.1	17.5	23.6	30.6	38.3	46.9	55.8	62.6	67.7	70.7	70.5
50	2.13	2.30	2.63	3.33	3.92	4.61	5.48	6.72	8.15	10.2	13.0	16.4	20.0	23.8	26.7	28.7	30.1	30.6	30.1
60	2.13	2.26	2.47	2.79	3.28	3.61	3.99	4.48	5.27	6.18	7.15	8.14	9.28	10.5	11.4	12.2	12.7	12.9	12.8
70	2.13	2.22	2.33	2.50	2.67	2.90	3.05	3.21	3.45	3.75	4.08	4.44	4.80	5.12	5.38	5.58	5.73	5.80	5.81
80	2.13	2.18	2.24	2.30	2.38	2.46	2.53	2.57	2.62	2.65	2.69	2.72	2.75	2.78	2.81	2.83	2.84	2.85	2.85
90	2.13	2.14	2.15	2.17	2.18	2.19	2.21	2.19	2.18	2.16	2.15	2.13	2.12	2.11	2.11	2.11	2.11	2.10	2.10
100	2.13	2.10	2.08	2.06	2.04	2.03	2.01	1.97	1.92	1.88	1.85	1.82	1.78	1.77	1.76	1.75	1.75	1.74	1.74
110	2.13	2.06	2.01	1.97	1.92	1.89	1.86	1.82	1.77	1.74	1.71	1.70	1.68	1.68	1.69	1.68	1.68	1.67	1.66
120	2.13	2.03	1.95	1.88	1.83	1.79	1.77	1.75	1.74	1.74	1.75	1.78	1.83	1.87	1.91	1.94	1.97	1.99	1.99
130	2.13	2.00	1.90	1.82	1.77	1.75	1.75	1.76	1.81	1.90	2.03	2.16	2.30	2.43	2.57	2.70	2.79	2.85	2.87
140	2.13	1.98	1.86	1.78	1.75	1.75	1.78	1.88	2.06	2.27	2.51	2.77	3.05	3.30	3.53	3.71	3.83	3.91	3.94
150	2.13	1.96	1.82	1.75	1.74	1.77	1.88	2.08	2.36	2.69	3.06	3.42	3.76	4.04	4.27	4.44	4.56	4.62	4.65
160	2.13	1.94	1.80	1.74	1.74	1.81	1.99	2.28	2.64	3.07	3.51	3.89	4.20	4.40	4.57	4.69	4.76	4.82	4.89
170	2.13	1.93	1.79	1.73	1.75	1.85	2.08	2.42	2.85	3.32	3.77	4.14	4.37	4.50	4.53	4.56	4.55	4.54	4.62
180	2.13	1.93	1.78	1.73	1.75	1.88	2.12	2.47	2.92	3.41	3.85	4.20	4.41	4.48	4.47	4.41	4.32	4.20	4.29

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-09-05

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeLine Slim-600mm-RGBW DS-GREEN-30D-Rev1	TYPE:RGBW DS-GREEN	WEIGHT:
SPEC.:30 DEG	DIM.:600MM	SERIAL No.:IES001644
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	3.79	3.55	3.33	3.07	2.74	2.36	1.96	1.57	1.23	0.97	0.80	0.77	0.78	0.79	0.79	0.78	0.71	0.63
-170	3.68	3.55	3.70	3.32	2.94	2.57	2.14	1.67	1.26	0.98	0.81	0.77	0.78	0.79	0.79	0.78	0.71	0.63
-160	3.42	3.34	3.18	2.96	2.77	2.51	2.03	1.53	1.16	0.93	0.79	0.77	0.78	0.79	0.79	0.77	0.71	0.63
-150	2.61	2.53	2.38	2.23	2.03	1.79	1.48	1.22	1.00	0.84	0.78	0.77	0.78	0.79	0.79	0.77	0.71	0.63
-140	1.66	1.60	1.50	1.36	1.25	1.13	1.01	0.90	0.82	0.79	0.77	0.78	0.78	0.79	0.79	0.77	0.70	0.63
-130	0.96	0.94	0.91	0.86	0.81	0.78	0.77	0.77	0.77	0.77	0.77	0.78	0.79	0.79	0.78	0.75	0.69	0.63
-120	0.74	0.74	0.74	0.74	0.75	0.75	0.77	0.78	0.78	0.78	0.79	0.79	0.79	0.79	0.77	0.73	0.67	0.63
-110	0.77	0.78	0.78	0.78	0.78	0.78	0.78	0.79	0.79	0.79	0.79	0.79	0.79	0.79	0.77	0.74	0.71	0.66
-100	0.81	0.80	0.79	0.79	0.78	0.77	0.77	0.77	0.78	0.78	0.78	0.78	0.78	0.75	0.73	0.70	0.67	0.63
-90	0.67	0.66	0.65	0.64	0.64	0.63	0.64	0.64	0.65	0.66	0.67	0.68	0.67	0.66	0.66	0.65	0.64	0.63
-80	0.58	0.58	0.58	0.57	0.57	0.57	0.57	0.58	0.58	0.59	0.60	0.61	0.63	0.64	0.64	0.64	0.64	0.63
-70	1.91	1.84	1.73	1.59	1.44	1.29	1.15	1.02	0.88	0.76	0.66	0.65	0.75	0.75	0.67	0.66	0.64	0.63
-60	6.12	5.81	5.35	4.79	4.14	3.60	3.08	2.59	2.13	1.72	1.36	1.16	1.03	1.01	0.91	0.69	0.64	0.63
-50	17.5	16.3	14.7	12.9	10.9	9.12	7.39	5.81	4.43	3.31	2.72	2.26	1.73	1.33	1.18	0.86	0.66	0.63
-40	45.8	41.7	36.2	29.9	24.3	19.2	14.9	11.3	8.39	6.14	5.84	4.65	2.90	1.90	1.37	1.07	0.69	0.63
-30	134	118	96.5	75.6	56.4	40.2	27.8	19.2	13.6	9.64	7.25	8.29	4.95	2.70	1.68	1.27	0.70	0.63
-20	385	324	255	185	126	81.1	50.3	31.2	19.8	13.3	9.11	9.25	8.41	3.62	1.98	1.42	0.71	0.63
-10	863	688	505	346	220	134	77.4	44.5	26.1	16.2	10.9	8.86	11.3	4.52	2.27	1.52	0.71	0.63
0	1213	932	652	432	271	163	92.3	51.6	29.3	17.5	11.7	9.08	13.2	5.12	2.46	1.60	0.72	0.63
10	900	698	504	348	229	144	84.4	50.1	29.8	18.6	12.5	9.91	12.0	4.92	2.51	1.65	0.76	0.63
20	437	372	289	210	147	96.9	63.0	40.3	26.0	17.5	12.0	11.1	9.63	4.39	2.43	1.66	0.80	0.63
30	175	157	131	103	77.4	57.1	40.5	29.2	20.8	14.8	10.9	10.7	6.56	3.74	2.31	1.61	0.84	0.63
40	68.5	63.6	56.6	48.3	39.2	31.3	24.8	19.4	15.0	11.3	9.57	7.26	4.72	3.11	2.13	1.49	0.86	0.63
50	29.4	27.9	25.8	23.1	20.4	17.3	14.4	11.8	9.48	7.60	6.20	4.84	3.58	2.62	2.01	1.34	0.86	0.63
60	12.7	12.3	11.6	10.8	9.82	8.74	7.69	6.71	5.83	5.04	4.31	3.51	2.81	2.28	1.76	1.19	0.87	0.63
70	5.75	5.63	5.44	5.20	4.91	4.58	4.24	3.89	3.57	3.26	3.00	2.73	2.35	1.93	1.49	1.17	0.87	0.63
80	2.84	2.81	2.78	2.74	2.70	2.65	2.61	2.56	2.51	2.45	2.40	2.32	2.01	1.70	1.41	1.13	0.87	0.63
90	2.09	2.08	2.07	2.06	2.05	2.04	2.04	2.04	2.05	2.05	2.06	2.06	1.82	1.58	1.35	1.11	0.87	0.63
100	1.74	1.73	1.73	1.72	1.72	1.72	1.75	1.77	1.79	1.82	1.85	1.87	1.69	1.50	1.30	1.09	0.86	0.63
110	1.67	1.68	1.68	1.68	1.68	1.68	1.69	1.69	1.70	1.71	1.73	1.71	1.57	1.43	1.26	1.08	0.86	0.63
120	2.00	2.00	1.98	1.95	1.91	1.87	1.81	1.76	1.72	1.70	1.71	1.61	1.48	1.35	1.22	1.05	0.85	0.63
130	2.88	2.85	2.78	2.68	2.54	2.40	2.25	2.10	1.96	1.84	1.69	1.52	1.39	1.27	1.16	1.02	0.84	0.63
140	3.94	3.89	3.78	3.64	3.44	3.21	2.94	2.65	2.38	2.05	1.70	1.46	1.30	1.19	1.10	0.98	0.83	0.63
150	4.66	4.63	4.55	4.41	4.21	3.94	3.62	3.27	2.65	2.07	1.65	1.38	1.21	1.10	1.03	0.94	0.80	0.63
160	4.87	4.88	4.92	4.88	4.70	4.45	3.80	3.09	2.45	1.90	1.49	1.24	1.09	1.01	0.95	0.89	0.77	0.63
170	4.58	4.63	4.82	4.64	4.22	3.63	3.05	2.48	1.96	1.52	1.19	1.03	0.95	0.90	0.87	0.84	0.74	0.63
180	3.79	3.55	3.33	3.07	2.74	2.36	1.96	1.57	1.23	0.97	0.80	0.77	0.78	0.79	0.79	0.78	0.71	0.63

H_(b) Range: -90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-09-05

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: