

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		2533.9 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	62.9V x 61.7H
	At 50% of Imax	29.9V x 29.4H
	At 90% of Imax	11.4V x 10.7H
Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	795.8 lumens per klm.
	To 50% of Imax	375.0 lumens per klm.
	To 90% of Imax	68.6 lumens per klm.
	Upward LOR	1.7 %
	Downward LOR	98.3 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-05

V(β) Range:-180 - 180DEG
V(β) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:BlazeLine Slim-600mm-RGBW DS-RED-30D-Rev1	TYPE:RGBW DS-RED	WEIGHT:
SPEC.:30 DEG	DIM.:600MM	SERIAL No.:IES001643
MFR.:	SUR.:	Shielding Angle:

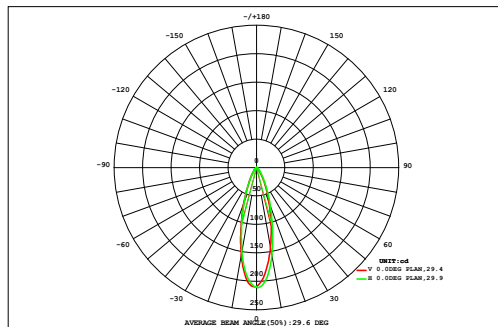

DATA OF LAMP		Eff:13.51lm/W	
MODEL		Imax(cd)	212.0
NOMINAL POWER(W)	6.192	AVAILABILITY(%)	79.7
RATED VOLTAGE(V)	24	Avai. FLUX(lm)	66.64
NOMINAL FLUX(lm)	83.66	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	83.66
TEST VOLTAGE(V)	24	q @50%(H,V)	29,30DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM															UNIT:lm			F t	F a	
	0.01	0.02	0.03	0.03	0.04	0.05	0.06	0.07	0.07	0.07	0.06	0.06	0.05	0.04	0.03	0.02	0.02	0.01	0.74	0.00	
45	0.02	0.02	0.03	0.05	0.06	0.08	0.09	0.10	0.10	0.10	0.10	0.08	0.07	0.06	0.04	0.03	0.02	0.02	1.08	0.00	
40	0.02	0.03	0.05	0.06	0.09	0.12	0.14	0.16	0.17	0.16	0.15	0.13	0.10	0.08	0.06	0.04	0.03	0.02	1.59	0.37	
35	0.03	0.04	0.06	0.08	0.12	0.17	0.21	0.25	0.27	0.26	0.24	0.20	0.15	0.11	0.08	0.05	0.03	0.02	2.37	1.63	
30	0.03	0.05	0.07	0.11	0.17	0.24	0.33	0.39	0.43	0.42	0.37	0.30	0.22	0.16	0.10	0.07	0.04	0.03	3.51	2.93	
25	0.03	0.05	0.09	0.14	0.22	0.34	0.48	0.61	0.67	0.65	0.56	0.43	0.31	0.21	0.13	0.08	0.05	0.03	5.10	4.61	
20	0.04	0.06	0.10	0.17	0.29	0.46	0.67	0.89	1.00	0.96	0.80	0.59	0.41	0.26	0.16	0.10	0.06	0.03	7.04	6.61	
15	0.04	0.07	0.11	0.19	0.34	0.56	0.86	1.17	1.35	1.28	1.03	0.74	0.50	0.32	0.19	0.11	0.06	0.03	8.95	8.54	
-15	0.04	0.07	0.11	0.20	0.36	0.61	0.96	1.34	1.56	1.47	1.19	0.86	0.57	0.35	0.21	0.12	0.06	0.03	10.1	9.73	
	0.04	0.07	0.11	0.20	0.36	0.62	0.97	1.34	1.54	1.47	1.20	0.87	0.57	0.35	0.20	0.11	0.06	0.03	10.1	9.76	
	0.04	0.06	0.11	0.19	0.34	0.56	0.86	1.15	1.30	1.25	1.03	0.76	0.51	0.31	0.19	0.10	0.06	0.03	8.84	8.43	
	0.03	0.06	0.10	0.17	0.28	0.45	0.64	0.83	0.94	0.91	0.77	0.58	0.40	0.26	0.16	0.09	0.05	0.03	6.74	6.31	
	0.03	0.05	0.08	0.13	0.21	0.32	0.44	0.55	0.61	0.60	0.52	0.40	0.29	0.19	0.12	0.07	0.04	0.02	4.67	4.19	
-20	0.02	0.04	0.06	0.10	0.15	0.21	0.28	0.34	0.37	0.37	0.33	0.26	0.19	0.13	0.09	0.05	0.03	0.02	3.04	2.45	
-25	0.02	0.03	0.04	0.07	0.10	0.14	0.17	0.20	0.22	0.22	0.20	0.16	0.12	0.09	0.06	0.04	0.02	0.02	1.91	1.06	
-30	0.01	0.02	0.03	0.05	0.07	0.09	0.11	0.12	0.13	0.12	0.11	0.10	0.08	0.06	0.04	0.03	0.02	0.01	1.19	0.00	
-35	0.01	0.02	0.02	0.03	0.04	0.06	0.06	0.07	0.07	0.07	0.07	0.06	0.05	0.04	0.03	0.02	0.01	0.01	0.75	0.00	
-40	0.01	0.01	0.02	0.02	0.03	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.03	0.02	0.02	0.01	0.01	0.01	0.48	0.00	
-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)				10	15	20	25	30	35	40	45		
F t	0.47	0.75	1.22	2.01	3.27	5.10	7.38	9.62	10.9	10.4	8.74	6.61	4.62	3.03	1.91	1.15	0.68	0.40	78	---	
F a	0.00	0.00	0.07	1.20	2.61	4.53	6.86	9.12	10.4	9.94	8.25	6.09	4.05	2.39	1.10	0.06	0.00	0.00	---	67	

one-half-peak spread: U:15.2,D:15.0 , L:14.2,R:15.4


NEMA Beam Type: Type 4

H(B) Range:-90 - 90DEG
H(B) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-05

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:BlazeLine Slim-600mm-RGBW DS-RED-30D-Rev1	TYPE:RGBW DS-RED	WEIGHT:
SPEC.:30 DEG	DIM.:600MM	SERIAL No.:IES001643
MFR.:	SUR.:	Shielding Angle:

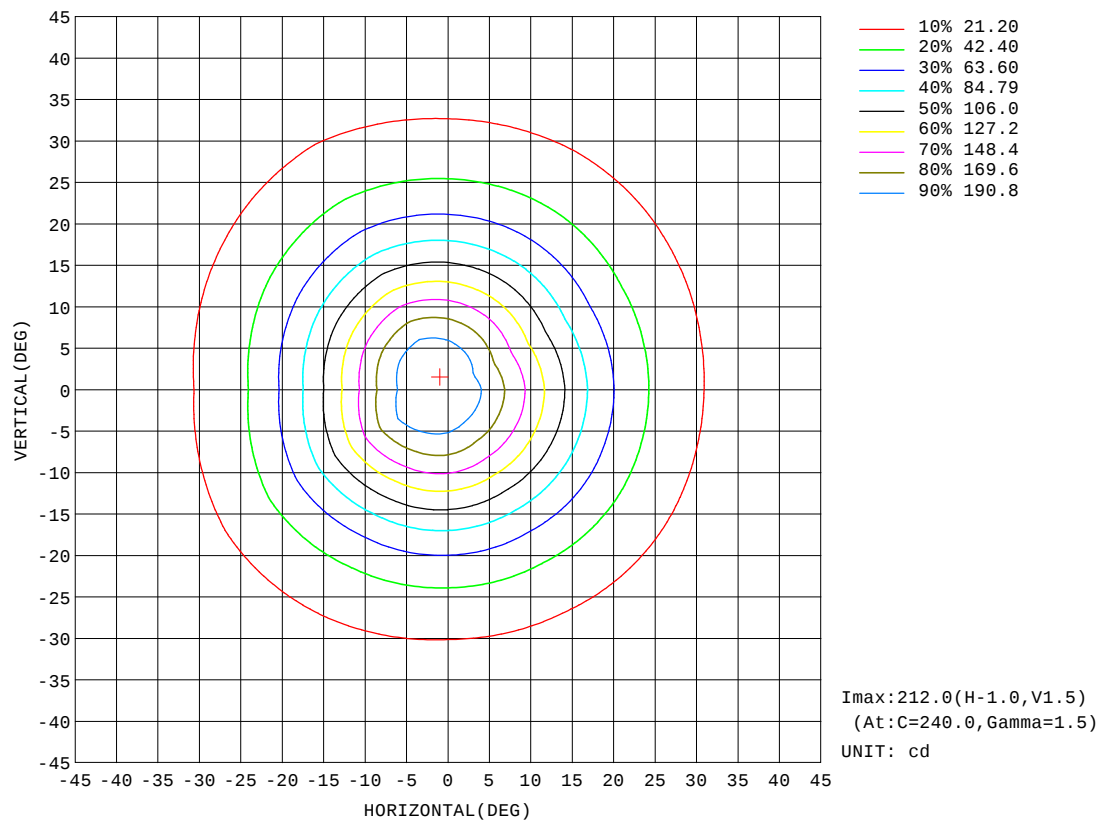


H(B) Range:-90 - 90DEG
H(B) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-05

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:BlazeLine Slim-600mm-RGBW DS-RED-30D-Rev1	TYPE:RGBW DS-RED	WEIGHT:
SPEC.:30 DEG	DIM.:600MM	SERIAL No.:IES001643
MFR.:	SUR.:	Shielding Angle:

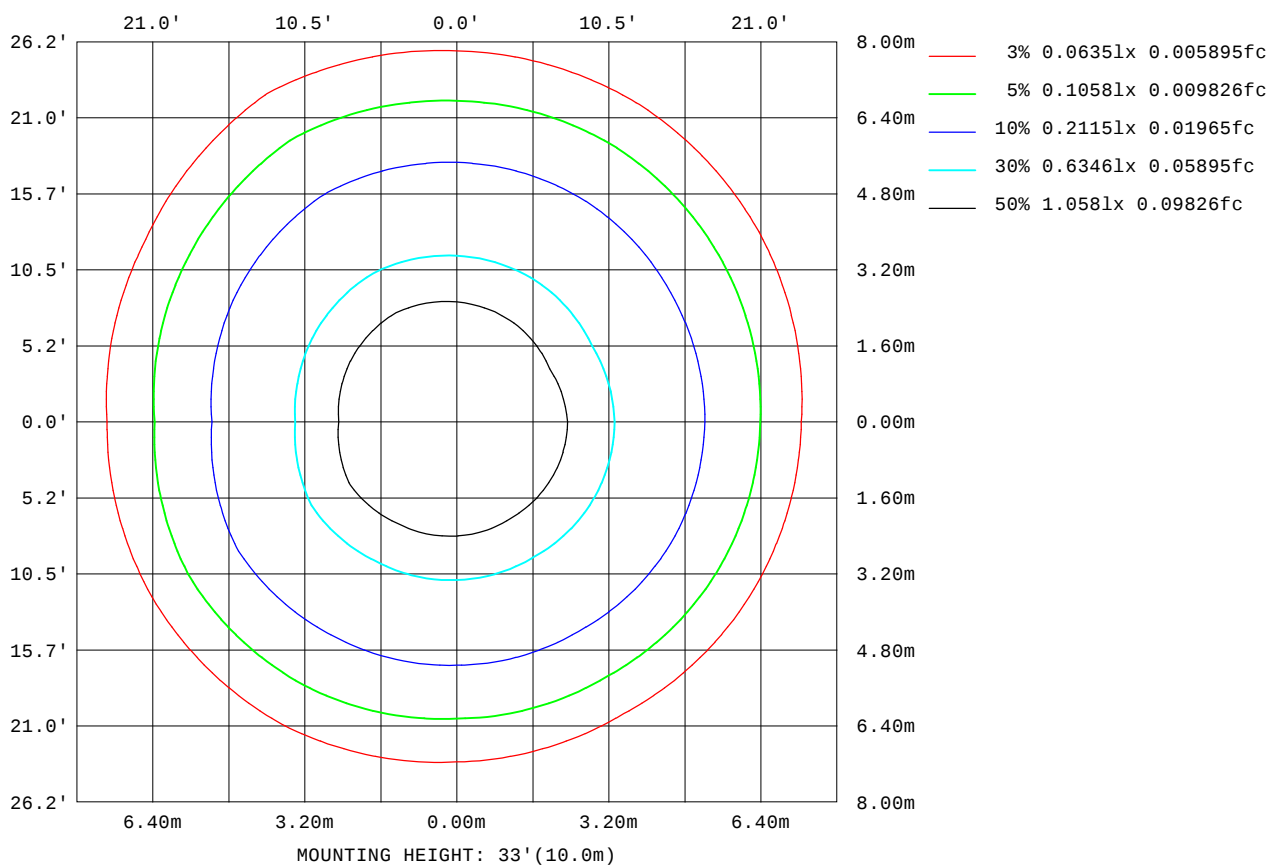

H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-05

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

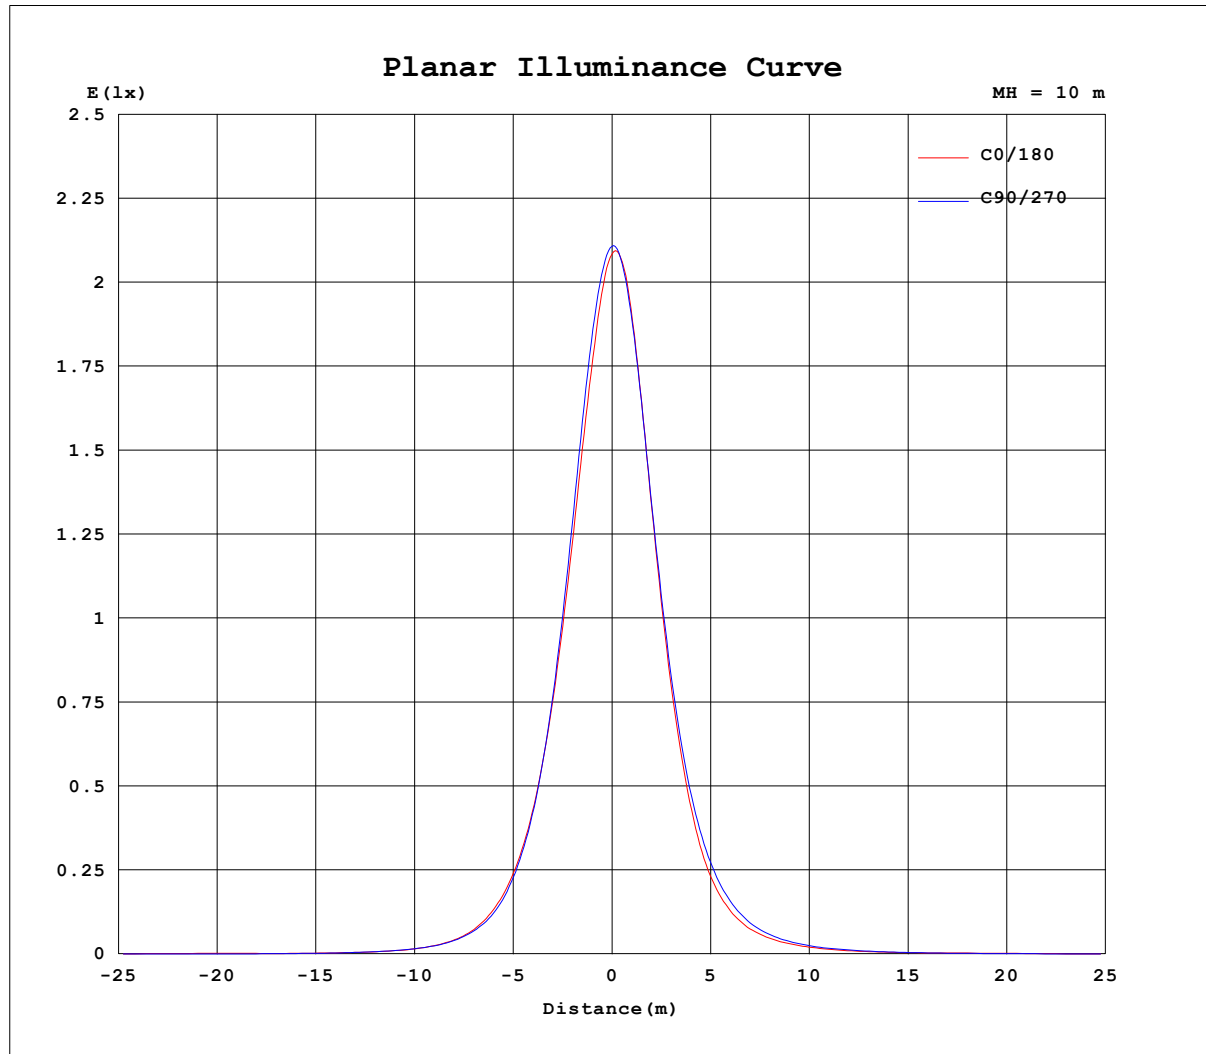


H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-05

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:BlazeLine Slim-600mm-RGBW DS-RED-30D-Rev1	TYPE:RGBW DS-RED	WEIGHT:
SPEC.:30 DEG	DIM.:600MM	SERIAL No.:IES001643
MFR.:	SUR.:	Shielding Angle:

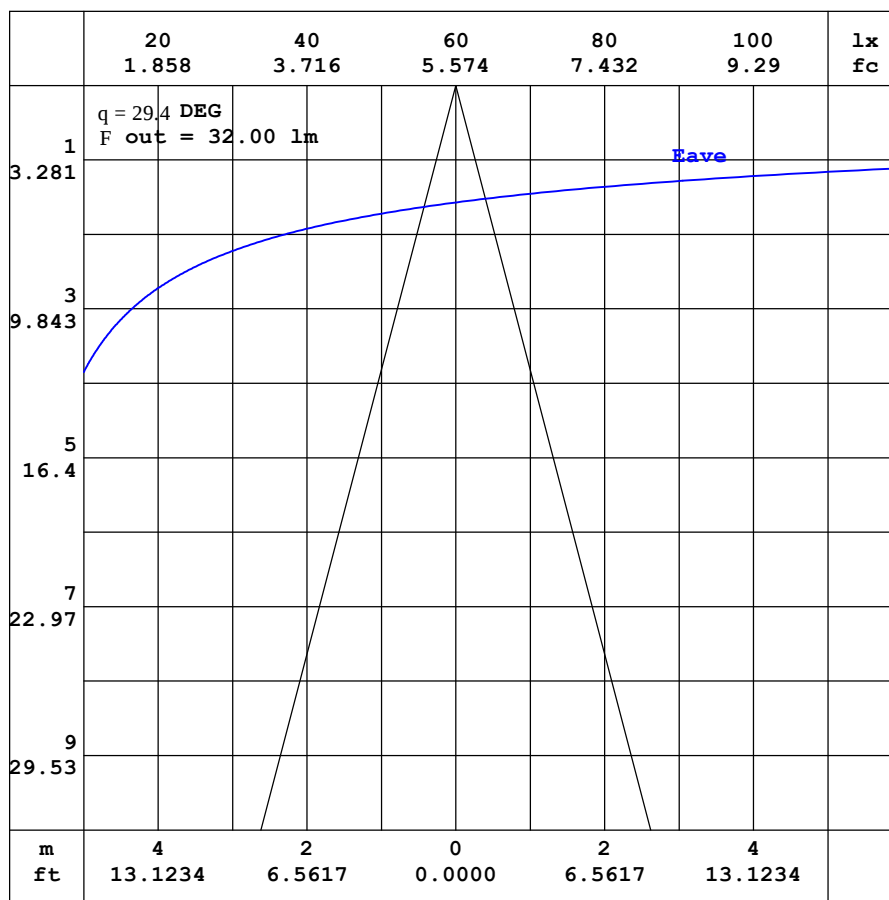

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-05

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeLine Slim-600mm-RGBW DS-RED-30D-Rev1	TYPE:RGBW DS-RED	WEIGHT:
SPEC.:30 DEG	DIM.:600MM	SERIAL No.:IES001643
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.23	0.20	0.20	0.20	0.20	0.22	0.26	0.31	0.38	0.46	0.53	0.59	0.60	0.60	0.60	0.59	0.57	0.57	0.57
-170	0.23	0.19	0.19	0.19	0.19	0.19	0.21	0.25	0.29	0.33	0.37	0.40	0.42	0.42	0.42	0.44	0.46	0.49	0.54
-160	0.23	0.19	0.18	0.17	0.17	0.16	0.17	0.18	0.19	0.20	0.21	0.21	0.21	0.26	0.31	0.35	0.38	0.43	0.47
-150	0.23	0.19	0.17	0.16	0.15	0.14	0.13	0.12	0.11	0.10	0.08	0.10	0.13	0.16	0.20	0.23	0.27	0.31	0.33
-140	0.23	0.18	0.17	0.15	0.13	0.12	0.10	0.08	0.06	0.05	0.05	0.05	0.06	0.07	0.08	0.11	0.15	0.17	0.18
-130	0.23	0.18	0.16	0.14	0.12	0.10	0.08	0.06	0.05	0.04	0.04	0.04	0.03	0.03	0.03	0.05	0.06	0.07	0.09
-120	0.23	0.18	0.16	0.13	0.11	0.09	0.07	0.05	0.05	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.04	0.04	0.05
-110	0.23	0.18	0.15	0.13	0.10	0.08	0.06	0.05	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.04	0.04	0.04	0.05
-100	0.23	0.18	0.15	0.12	0.10	0.07	0.06	0.04	0.04	0.03	0.03	0.02	0.02	0.02	0.03	0.03	0.04	0.04	0.05
-90	0.23	0.19	0.16	0.13	0.10	0.06	0.03	0.03	0.02	0.02	0.02	0.01	0.01	0.02	0.02	0.03	0.03	0.04	0.05
-80	0.23	0.20	0.17	0.13	0.10	0.06	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.02
-70	0.23	0.20	0.18	0.15	0.12	0.09	0.03	0.01	0.01	0.03	0.05	0.08	0.11	0.13	0.15	0.17	0.19	0.20	0.20
-60	0.23	0.20	0.20	0.19	0.19	0.15	0.10	0.08	0.14	0.21	0.29	0.37	0.46	0.56	0.67	0.76	0.84	0.90	0.93
-50	0.23	0.22	0.22	0.26	0.27	0.28	0.29	0.29	0.37	0.55	0.78	1.08	1.45	1.88	2.25	2.53	2.72	2.80	2.78
-40	0.23	0.23	0.26	0.34	0.40	0.47	0.60	0.83	0.87	1.22	1.86	2.64	3.55	4.59	5.68	6.48	7.07	7.40	7.37
-30	0.23	0.24	0.30	0.42	0.55	0.73	1.27	1.46	1.66	2.38	3.41	4.95	7.00	9.87	13.2	16.5	19.3	21.2	21.6
-20	0.23	0.25	0.36	0.52	0.70	1.11	1.87	1.88	2.59	3.83	5.60	8.47	13.6	20.6	30.1	41.1	52.2	60.9	63.6
-10	0.23	0.26	0.41	0.60	0.85	1.61	2.28	2.30	3.43	5.15	7.73	12.4	20.4	34.2	56.2	86.1	118	142	150
0	0.23	0.27	0.44	0.67	0.96	1.99	2.64	2.65	3.93	5.92	8.84	13.6	22.6	38.3	66.2	106	156	198	209
10	0.23	0.27	0.43	0.64	0.92	1.72	2.45	2.55	3.79	5.64	8.39	13.0	21.0	34.4	56.4	86.5	121	151	155
20	0.23	0.27	0.40	0.60	0.83	1.32	2.18	2.34	3.23	4.69	6.83	9.82	14.8	22.6	33.0	46.3	59.9	68.5	70.6
30	0.23	0.27	0.36	0.54	0.73	1.01	1.67	2.03	2.47	3.46	4.80	6.71	9.21	12.6	16.8	21.3	24.6	26.9	27.4
40	0.23	0.26	0.33	0.47	0.62	0.79	1.04	1.44	1.71	2.26	3.06	4.05	5.31	6.74	8.26	9.40	10.3	10.8	10.8
50	0.23	0.26	0.30	0.40	0.50	0.62	0.74	0.89	1.08	1.35	1.71	2.16	2.67	3.21	3.72	4.15	4.49	4.68	4.72
60	0.23	0.24	0.28	0.33	0.40	0.47	0.53	0.60	0.70	0.81	0.93	1.07	1.22	1.39	1.58	1.75	1.89	1.99	2.04
70	0.23	0.24	0.27	0.29	0.32	0.36	0.39	0.41	0.44	0.47	0.51	0.55	0.60	0.65	0.70	0.76	0.80	0.83	0.85
80	0.23	0.24	0.25	0.27	0.28	0.30	0.31	0.31	0.32	0.31	0.31	0.32	0.31	0.32	0.34	0.35	0.36	0.37	0.38
90	0.23	0.23	0.24	0.25	0.25	0.26	0.27	0.26	0.25	0.24	0.23	0.22	0.22	0.22	0.23	0.24	0.25	0.25	0.26
100	0.23	0.22	0.22	0.23	0.23	0.24	0.24	0.23	0.22	0.21	0.20	0.19	0.19	0.19	0.20	0.20	0.20	0.20	0.20
110	0.23	0.22	0.21	0.22	0.22	0.21	0.21	0.21	0.20	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.19
120	0.23	0.21	0.21	0.21	0.21	0.21	0.20	0.20	0.20	0.20	0.20	0.20	0.22	0.22	0.22	0.22	0.21	0.21	0.20
130	0.23	0.20	0.21	0.20	0.20	0.20	0.20	0.20	0.20	0.21	0.22	0.24	0.28	0.30	0.32	0.34	0.34	0.34	0.34
140	0.23	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.21	0.23	0.28	0.33	0.38	0.43	0.47	0.49	0.51	0.51	0.50
150	0.23	0.20	0.20	0.20	0.20	0.20	0.21	0.22	0.26	0.30	0.35	0.42	0.49	0.54	0.59	0.62	0.62	0.61	0.61
160	0.23	0.20	0.20	0.20	0.20	0.21	0.23	0.26	0.31	0.37	0.43	0.50	0.54	0.58	0.61	0.63	0.63	0.64	0.65
170	0.23	0.20	0.20	0.20	0.20	0.21	0.24	0.29	0.36	0.42	0.50	0.55	0.58	0.60	0.61	0.61	0.61	0.60	0.64
180	0.23	0.20	0.20	0.20	0.20	0.22	0.26	0.31	0.38	0.46	0.53	0.59	0.60	0.60	0.60	0.59	0.57	0.57	0.60

H(°) Range:-90 - 90DEG

H(°) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-09-05

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeLine Slim-600mm-RGBW DS-RED-30D-Rev1	TYPE:RGBW DS-RED	WEIGHT:
SPEC.:30 DEG	DIM.:600MM	SERIAL No.:IES001643
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	0.49	0.46	0.41	0.37	0.34	0.27	0.20	0.14	0.09	0.05	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.05	
-170	0.50	0.48	0.46	0.41	0.35	0.29	0.22	0.15	0.09	0.06	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.05	
-160	0.44	0.41	0.38	0.34	0.31	0.26	0.20	0.13	0.09	0.06	0.05	0.04	0.04	0.04	0.04	0.04	0.04	0.05	
-150	0.32	0.29	0.26	0.22	0.19	0.16	0.14	0.10	0.07	0.05	0.05	0.04	0.04	0.04	0.04	0.04	0.04	0.05	
-140	0.17	0.16	0.13	0.10	0.08	0.08	0.07	0.06	0.05	0.05	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.05	
-130	0.08	0.07	0.05	0.03	0.03	0.03	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.05	
-120	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.05	
-110	0.04	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.05	
-100	0.04	0.04	0.03	0.03	0.03	0.02	0.03	0.03	0.03	0.04	0.04	0.05	0.04	0.04	0.04	0.04	0.04	0.05	
-90	0.04	0.04	0.03	0.03	0.02	0.02	0.02	0.03	0.03	0.04	0.04	0.05	0.05	0.05	0.05	0.05	0.05	0.05	
-80	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.04	0.05	0.05	0.05	0.05	0.05	0.05	
-70	0.21	0.21	0.20	0.18	0.17	0.15	0.12	0.09	0.06	0.04	0.04	0.05	0.06	0.07	0.06	0.06	0.05	0.05	
-60	0.91	0.86	0.80	0.72	0.62	0.53	0.44	0.35	0.26	0.19	0.13	0.10	0.10	0.11	0.09	0.06	0.05	0.05	
-50	2.69	2.50	2.25	1.97	1.68	1.39	1.11	0.86	0.64	0.45	0.35	0.28	0.21	0.16	0.14	0.09	0.06	0.05	
-40	7.07	6.44	5.59	4.58	3.74	2.96	2.28	1.72	1.25	0.91	0.93	0.68	0.39	0.25	0.19	0.12	0.06	0.05	
-30	20.6	18.1	14.8	11.4	8.52	6.10	4.27	2.96	2.07	1.45	1.11	1.45	0.72	0.37	0.24	0.16	0.06	0.05	
-20	59.1	49.3	38.2	27.6	18.7	12.0	7.54	4.76	3.03	2.02	1.37	1.59	1.38	0.51	0.29	0.19	0.06	0.05	
-10	133	105	76.1	50.9	32.3	19.5	11.3	6.66	3.96	2.47	1.64	1.43	2.06	0.66	0.34	0.21	0.07	0.05	
0	184	142	98.8	63.9	39.2	23.4	13.3	7.66	4.40	2.68	1.78	1.43	2.47	0.77	0.37	0.22	0.07	0.05	
10	137	106	75.2	50.9	33.0	20.6	12.3	7.44	4.47	2.83	1.89	1.59	2.17	0.73	0.38	0.23	0.07	0.05	
20	65.3	54.8	42.2	30.6	21.2	14.1	9.31	6.04	3.93	2.65	1.81	1.89	1.58	0.64	0.37	0.23	0.08	0.05	
30	26.1	23.2	19.3	15.2	11.5	8.48	6.08	4.40	3.15	2.23	1.67	1.83	0.98	0.55	0.34	0.21	0.08	0.05	
40	10.5	9.66	8.55	7.26	5.93	4.75	3.76	2.94	2.26	1.71	1.53	1.11	0.69	0.46	0.31	0.19	0.09	0.05	
50	4.59	4.34	3.97	3.57	3.11	2.63	2.18	1.78	1.42	1.14	0.92	0.70	0.52	0.38	0.28	0.16	0.09	0.05	
60	2.00	1.91	1.79	1.65	1.47	1.30	1.14	0.98	0.85	0.72	0.62	0.50	0.39	0.31	0.22	0.14	0.08	0.05	
70	0.83	0.81	0.77	0.73	0.67	0.61	0.57	0.53	0.48	0.44	0.40	0.37	0.31	0.25	0.18	0.14	0.08	0.05	
80	0.37	0.36	0.35	0.33	0.32	0.31	0.31	0.31	0.31	0.31	0.31	0.30	0.25	0.22	0.17	0.12	0.08	0.05	
90	0.25	0.24	0.24	0.23	0.22	0.21	0.22	0.23	0.23	0.24	0.25	0.26	0.22	0.19	0.15	0.12	0.08	0.05	
100	0.20	0.20	0.20	0.20	0.19	0.19	0.19	0.20	0.20	0.21	0.22	0.22	0.20	0.17	0.14	0.11	0.08	0.05	
110	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.20	0.20	0.20	0.18	0.15	0.13	0.10	0.07	0.05	
120	0.21	0.22	0.22	0.23	0.23	0.22	0.21	0.20	0.20	0.19	0.19	0.18	0.16	0.14	0.12	0.09	0.07	0.05	
130	0.35	0.36	0.36	0.35	0.33	0.30	0.27	0.24	0.21	0.20	0.18	0.16	0.14	0.12	0.10	0.09	0.07	0.05	
140	0.51	0.52	0.52	0.50	0.46	0.43	0.37	0.32	0.27	0.21	0.17	0.14	0.13	0.11	0.09	0.08	0.06	0.05	
150	0.62	0.62	0.63	0.60	0.57	0.52	0.47	0.41	0.31	0.22	0.16	0.13	0.11	0.09	0.08	0.07	0.06	0.05	
160	0.64	0.64	0.63	0.63	0.60	0.57	0.48	0.38	0.28	0.20	0.14	0.10	0.09	0.08	0.07	0.06	0.05	0.05	
170	0.60	0.62	0.62	0.58	0.52	0.45	0.37	0.28	0.19	0.14	0.10	0.07	0.06	0.06	0.05	0.05	0.05	0.05	
180	0.49	0.46	0.41	0.37	0.34	0.27	0.20	0.14	0.09	0.05	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.05	

H(°) Range:-90 - 90DEG

H(°) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-09-05

V(°) Range:-180 - 180DEG

V(°) Interval: 0.5DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: