

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	1321.5 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	86.6V x 85.5H
	At 50% of Imax	47.4V x 47.3H
	At 90% of Imax	17.8V x 18.0H

Beam Flux	Total	1000.0 lumens per klm.
	To 10% of Imax	880.1 lumens per klm.
	To 50% of Imax	498.4 lumens per klm.
	To 90% of Imax	88.7 lumens per klm.

Upward LOR	2.2 %
Downward LOR	97.8 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-06

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:BlazeLine Slim-600mm-RGBW DS-3000K-50D-Rev1	TYPE:RGBW DS-3000K	WEIGHT:
SPEC.:50 DEG	DIM.:600MM	SERIAL No.:IES001651
MFR.:	SUR.:	Shielding Angle:

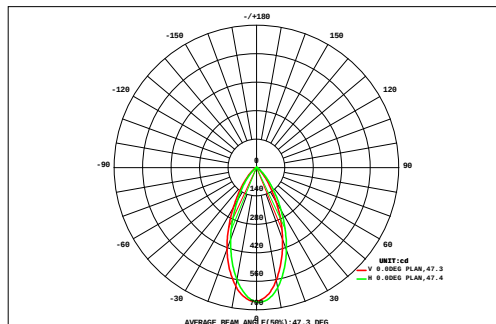

DATA OF LAMP		Eff:83.76lm/W	
MODEL		Imax(cd)	664.2
NOMINAL POWER(W)	6	AVAILABILITY(%)	88.1
RATED VOLTAGE(V)	24	Avai. FLUX(lm)	442.6
NOMINAL FLUX(lm)	502.6	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	502.6
TEST VOLTAGE(V)	24	q @50%(H,V)	47,47DEG

		AREA FLUX DIAGRAM																UNIT:lm			F t	F a
		0.02	0.03	0.04	0.06	0.07	0.09	0.10	0.11	0.12	0.12	0.11	0.10	0.08	0.06	0.05	0.04	0.03	0.01	1.23	0.00	
VERTICAL (DEG)	72	0.02	0.04	0.06	0.08	0.11	0.15	0.18	0.22	0.23	0.23	0.21	0.17	0.13	0.10	0.07	0.05	0.03	0.02	2.09	0.00	
	64	0.03	0.05	0.07	0.12	0.19	0.29	0.42	0.53	0.59	0.58	0.49	0.38	0.25	0.16	0.10	0.06	0.04	0.02	4.36	0.00	
	56	0.03	0.06	0.10	0.19	0.36	0.64	0.97	1.26	1.43	1.40	1.18	0.87	0.54	0.29	0.15	0.08	0.04	0.02	9.62	3.57	
	48	0.04	0.07	0.14	0.32	0.68	1.25	1.96	2.61	2.97	2.89	2.41	1.73	1.05	0.54	0.24	0.10	0.05	0.02	19.1	15.8	
	40	0.04	0.08	0.20	0.50	1.13	2.13	3.44	4.70	5.37	5.20	4.27	2.97	1.74	0.87	0.37	0.14	0.05	0.02	33.2	30.8	
	32	0.05	0.10	0.26	0.71	1.64	3.18	5.24	7.26	8.30	8.02	6.55	4.47	2.55	1.24	0.52	0.17	0.06	0.02	50.3	48.3	
	24	0.05	0.11	0.32	0.88	2.07	4.11	6.86	9.46	10.9	10.6	8.55	5.84	3.35	1.58	0.64	0.20	0.06	0.02	65.6	63.8	
	-24	0.05	0.12	0.35	0.98	2.30	4.62	7.71	10.6	12.4	12.0	9.75	6.74	3.85	1.76	0.70	0.22	0.06	0.02	74.3	72.5	
		0.05	0.11	0.34	0.95	2.24	4.50	7.52	10.3	12.0	11.8	9.67	6.66	3.79	1.73	0.69	0.21	0.06	0.02	72.7	71.0	
		0.04	0.10	0.29	0.82	1.93	3.80	6.34	8.66	10.0	9.79	8.05	5.59	3.18	1.49	0.59	0.18	0.05	0.02	60.9	59.1	
		0.04	0.08	0.22	0.62	1.45	2.79	4.53	6.20	7.19	7.01	5.74	4.00	2.30	1.11	0.44	0.14	0.04	0.02	43.9	41.9	
		-32	0.03	0.06	0.15	0.40	0.93	1.76	2.78	3.77	4.34	4.23	3.50	2.46	1.45	0.71	0.28	0.09	0.03	0.01	27.0	24.5
		-40	0.03	0.05	0.09	0.22	0.51	0.95	1.47	1.97	2.27	2.22	1.85	1.32	0.80	0.40	0.16	0.06	0.02	0.01	14.4	10.6
		-48	0.02	0.03	0.05	0.11	0.23	0.43	0.66	0.88	1.01	0.99	0.83	0.60	0.36	0.18	0.08	0.04	0.02	0.01	6.52	0.66
		-56	0.02	0.02	0.03	0.05	0.09	0.16	0.24	0.31	0.36	0.35	0.30	0.21	0.13	0.08	0.04	0.02	0.01	0.01	2.43	0.00
	-64	0.01	0.01	0.02	0.03	0.04	0.06	0.08	0.10	0.11	0.11	0.09	0.07	0.05	0.03	0.02	0.01	0.01	0.01	0.86	0.00	
-72	0.01	0.01	0.01	0.01	0.02	0.03	0.03	0.04	0.04	0.04	0.03	0.03	0.02	0.02	0.01	0.01	0.01	0.00	0.36	0.00		
		-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)				16	24	32	40	48	56	64	72	
F t	0.57	1.13	2.72	7.05	16.0	30.9	50.5	69.0	79.7	77.6	63.6	44.2	25.6	12.4	5.16	1.82	0.66	0.28	489	---		
F a	0.00	0.00	0.00	2.13	12.7	28.0	47.8	66.3	77.2	75.0	60.9	41.4	22.5	8.48	0.27	0.00	0.00	0.00	---	443		

one-half-peak spread: U:23.4,D:24.3 , L:24.6,R:23.1


NEMA Beam Type: Type 5

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-09-06

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:BlazeLine Slim-600mm-RGBW DS-3000K-50D-Rev1	TYPE:RGBW DS-3000K	WEIGHT:
SPEC.:50 DEG	DIM.:600MM	SERIAL No.:IES001651
MFR.:	SUR.:	Shielding Angle:

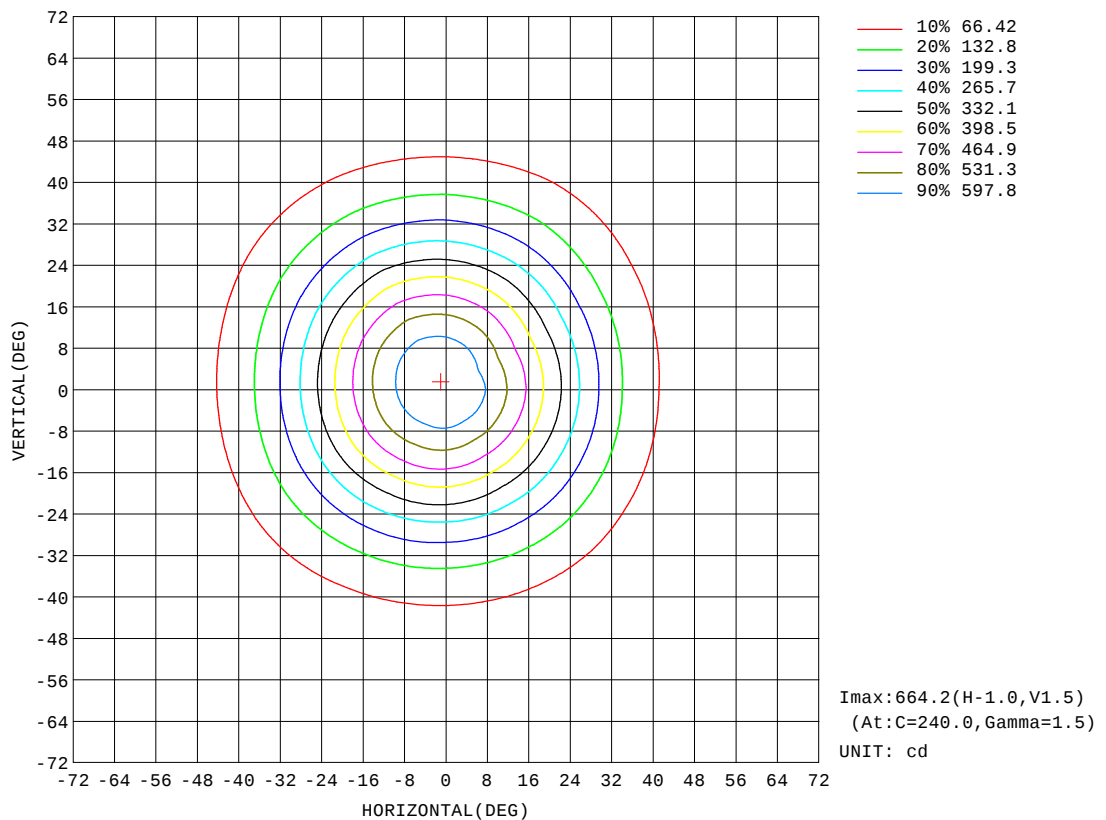


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-06

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:BlazeLine Slim-600mm-RGBW DS-3000K-50D-Rev1	TYPE:RGBW DS-3000K	WEIGHT:
SPEC.:50 DEG	DIM.:600MM	SERIAL No.:IES001651
MFR.:	SUR.:	Shielding Angle:

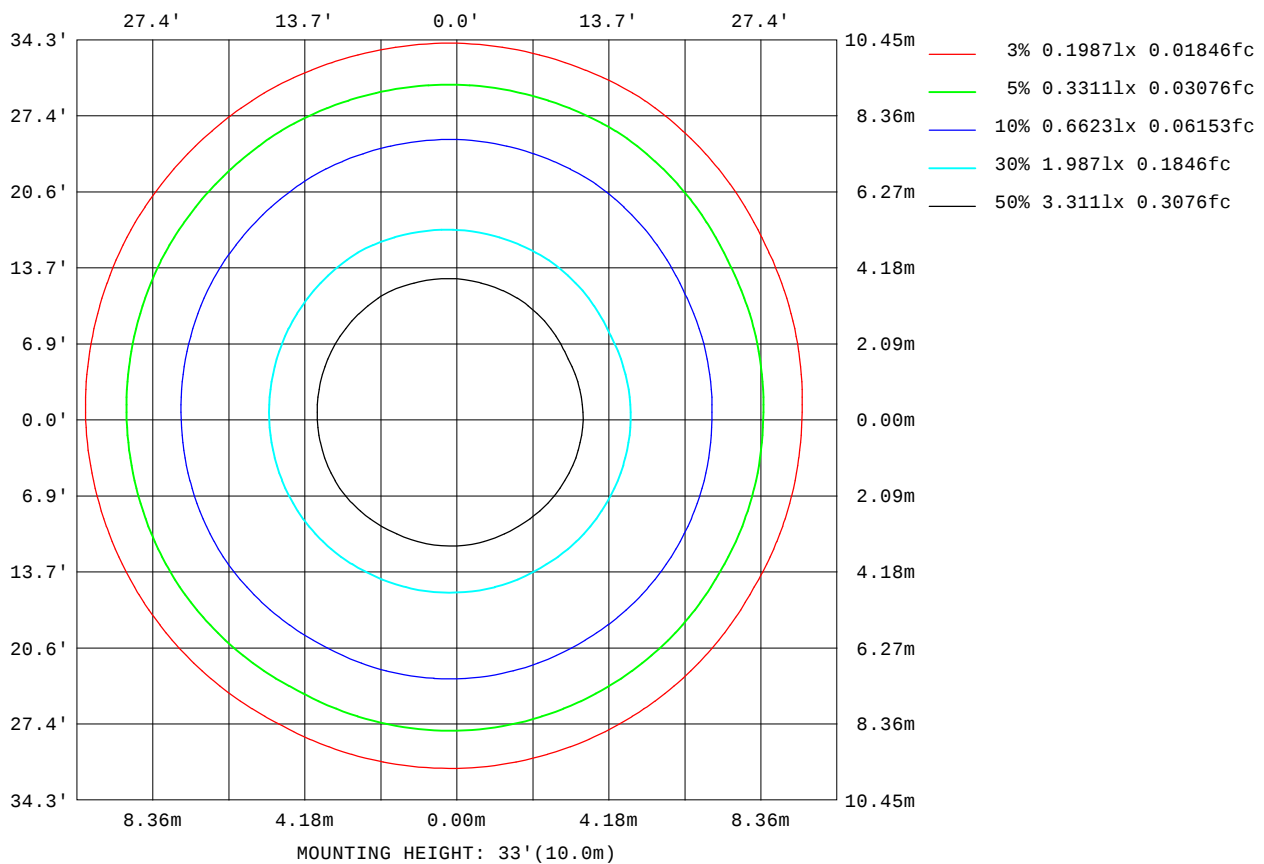

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-09-06

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

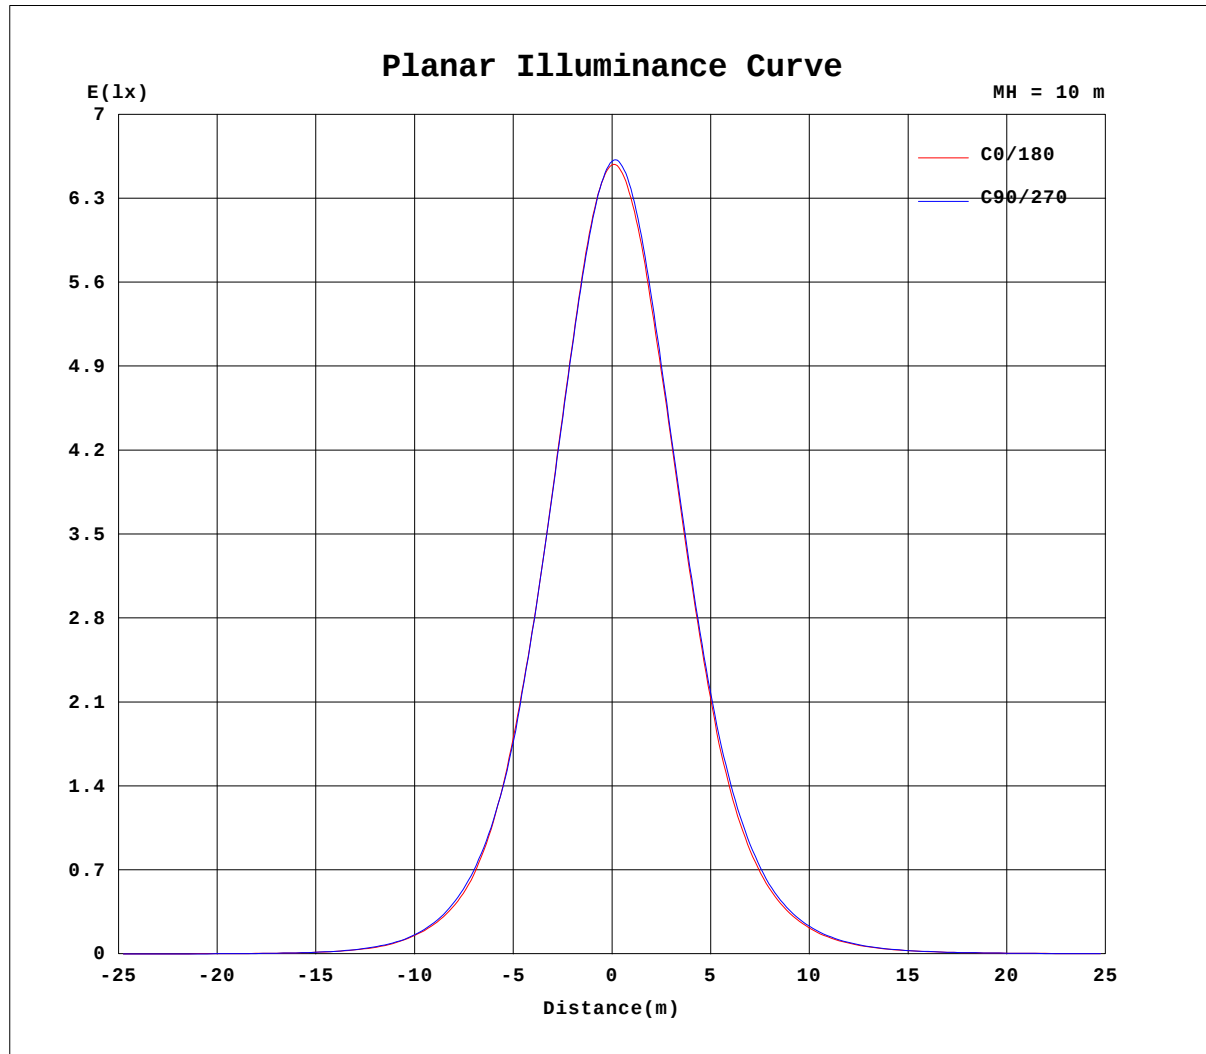


H(b) Range: -90 - 90DEG
H(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-09-06

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:BlazeLine Slim-600mm-RGBW DS-3000K-50D-Rev1	TYPE:RGBW DS-3000K	WEIGHT:
SPEC.:50 DEG	DIM.:600MM	SERIAL No.:IES001651
MFR.:	SUR.:	Shielding Angle:

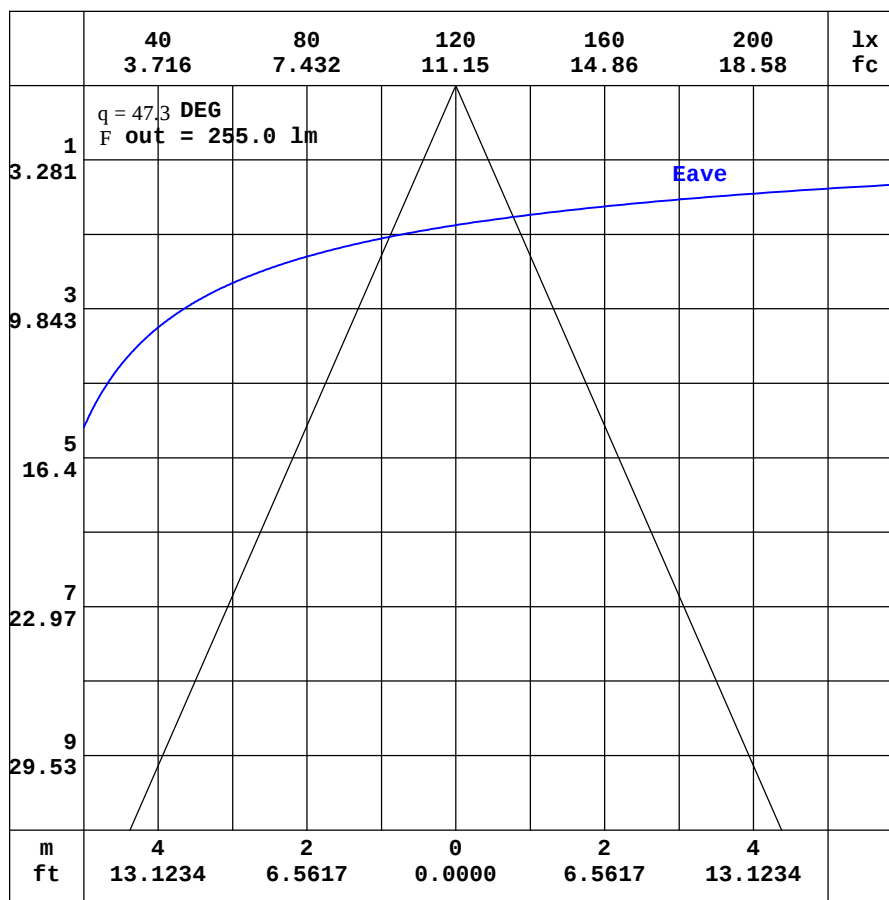

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-06

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeLine Slim-600mm-RGBW DS-3000K-50D-Rev1	TYPE:RGBW DS-3000K	WEIGHT:
SPEC.:50 DEG	DIM.:600MM	SERIAL No.:IES001651
MFR.:	SUR.:	Shielding Angle:

Table--1
UNIT: cd

H(°)\V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	1.93	1.76	1.69	1.69	1.75	1.89	2.10	2.37	2.68	3.00	3.30	3.56	3.75	3.87	3.89	3.85	3.81	3.74	3.80
-170	1.93	1.73	1.62	1.59	1.61	1.69	1.82	1.98	2.17	2.35	2.52	2.65	2.73	2.73	2.69	2.73	2.96	3.14	3.28
-160	1.93	1.70	1.56	1.50	1.47	1.48	1.52	1.58	1.64	1.69	1.71	1.71	1.69	1.95	2.18	2.39	2.56	2.68	2.75
-150	1.93	1.68	1.51	1.42	1.34	1.28	1.25	1.21	1.17	1.10	1.04	1.20	1.37	1.55	1.72	1.89	2.02	2.12	2.17
-140	1.93	1.66	1.46	1.33	1.22	1.12	1.03	0.92	0.80	0.78	0.85	0.94	1.03	1.14	1.24	1.35	1.45	1.51	1.54
-130	1.93	1.65	1.43	1.26	1.13	0.99	0.86	0.72	0.66	0.69	0.71	0.74	0.78	0.82	0.87	0.93	0.97	1.01	1.03
-120	1.93	1.66	1.41	1.21	1.04	0.89	0.74	0.62	0.63	0.63	0.64	0.64	0.64	0.65	0.67	0.70	0.72	0.73	0.74
-110	1.93	1.66	1.41	1.19	0.99	0.81	0.64	0.60	0.60	0.60	0.59	0.59	0.59	0.59	0.61	0.62	0.62	0.63	0.64
-100	1.93	1.67	1.43	1.19	0.97	0.76	0.56	0.55	0.55	0.55	0.55	0.56	0.56	0.57	0.57	0.58	0.59	0.60	0.61
-90	1.93	1.69	1.45	1.21	0.97	0.74	0.50	0.49	0.49	0.49	0.49	0.48	0.48	0.49	0.49	0.50	0.50	0.50	0.51
-80	1.93	1.73	1.51	1.28	1.05	0.79	0.50	0.48	0.48	0.49	0.49	0.50	0.50	0.51	0.50	0.50	0.50	0.49	0.49
-70	1.93	1.77	1.61	1.44	1.22	0.99	0.68	0.61	0.70	0.80	0.91	1.02	1.12	1.23	1.34	1.43	1.49	1.54	1.55
-60	1.93	1.83	1.77	1.70	1.73	1.61	1.33	1.17	1.46	1.81	2.20	2.64	3.08	3.57	4.13	4.61	4.96	5.19	5.24
-50	1.93	1.90	1.94	2.23	2.46	2.37	2.35	2.37	2.88	3.95	5.45	7.55	10.2	13.2	16.4	19.4	21.9	23.4	23.6
-40	1.93	1.98	2.21	2.80	3.11	3.39	3.83	4.55	6.02	9.46	15.2	23.4	33.1	43.7	54.2	64.5	72.8	78.0	79.3
-30	1.93	2.07	2.54	3.47	3.86	4.62	5.73	7.90	12.7	21.7	35.9	55.0	78.0	103	130	156	177	190	192
-20	1.93	2.15	2.92	3.96	4.69	5.93	7.91	12.3	22.0	38.7	63.7	97.9	141	192	246	300	342	369	376
-10	1.93	2.23	3.23	4.38	5.47	7.16	10.1	16.8	30.8	54.0	89.0	138	202	283	369	446	508	547	560
0	1.93	2.29	3.44	4.75	6.09	8.12	11.6	19.4	35.4	61.5	101	157	233	327	425	517	592	643	658
10	1.93	2.28	3.36	4.63	5.89	7.82	11.1	18.3	33.2	57.5	94.3	147	215	301	393	479	548	593	600
20	1.93	2.26	3.18	4.44	5.49	7.16	9.75	15.0	26.0	44.6	72.4	111	161	220	287	350	402	428	432
30	1.93	2.22	2.91	4.14	4.94	6.28	8.16	11.3	17.5	28.5	45.4	68.1	95.9	128	164	198	224	239	242
40	1.93	2.17	2.66	3.60	4.38	5.28	6.50	8.25	10.9	15.7	23.0	33.5	46.3	60.7	75.8	89.1	99.2	106	107
50	1.93	2.12	2.44	3.11	3.81	4.31	5.04	5.95	7.18	8.84	11.1	14.2	18.2	22.9	27.5	31.7	35.1	37.1	37.6
60	1.93	2.07	2.30	2.59	3.07	3.47	3.82	4.26	4.88	5.57	6.32	7.16	8.03	8.94	9.79	10.6	11.2	11.5	11.6
70	1.93	2.03	2.16	2.32	2.48	2.68	2.87	3.06	3.31	3.59	3.86	4.15	4.42	4.67	4.87	5.04	5.15	5.22	5.22
80	1.93	1.99	2.04	2.11	2.19	2.26	2.33	2.39	2.44	2.49	2.55	2.60	2.65	2.68	2.72	2.74	2.76	2.76	2.76
90	1.93	1.95	1.96	1.97	1.99	2.00	2.01	2.01	2.00	1.99	1.98	1.97	1.96	1.96	1.96	1.96	1.96	1.96	1.96
100	1.93	1.91	1.89	1.88	1.85	1.84	1.83	1.80	1.77	1.74	1.72	1.70	1.68	1.67	1.67	1.67	1.67	1.67	1.68
110	1.93	1.88	1.83	1.79	1.76	1.73	1.72	1.70	1.68	1.67	1.67	1.67	1.66	1.67	1.67	1.67	1.66	1.65	1.64
120	1.93	1.86	1.78	1.73	1.70	1.69	1.68	1.68	1.68	1.70	1.74	1.79	1.84	1.89	1.92	1.95	1.97	1.99	1.99
130	1.93	1.82	1.74	1.70	1.69	1.68	1.69	1.72	1.79	1.89	1.99	2.11	2.22	2.32	2.42	2.49	2.55	2.59	2.60
140	1.93	1.80	1.72	1.69	1.68	1.70	1.76	1.86	2.00	2.16	2.34	2.52	2.71	2.87	3.02	3.14	3.22	3.27	3.29
150	1.93	1.79	1.70	1.69	1.70	1.75	1.87	2.03	2.24	2.46	2.70	2.94	3.17	3.37	3.54	3.67	3.75	3.79	3.81
160	1.93	1.77	1.69	1.68	1.72	1.81	1.97	2.20	2.45	2.73	3.01	3.26	3.48	3.66	3.79	3.91	3.96	3.99	4.02
170	1.93	1.77	1.69	1.69	1.74	1.86	2.06	2.31	2.61	2.92	3.22	3.48	3.67	3.79	3.84	3.87	3.90	3.90	3.99
180	1.93	1.76	1.69	1.69	1.75	1.89	2.10	2.37	2.68	3.00	3.30	3.56	3.75	3.87	3.89	3.85	3.81	3.74	3.83

H_b Range:-90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-06

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeLine Slim-600mm-RGBW DS-3000K-50D-Rev1	TYPE:RGBW DS-3000K	WEIGHT:
SPEC.:50 DEG	DIM.:600MM	SERIAL No.:IES001651
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	3.37	3.10	2.87	2.60	2.32	2.02	1.71	1.43	1.18	0.99	0.82	0.71	0.65	0.63	0.59	0.57	0.50	0.48
-170	3.08	2.95	2.76	2.52	2.26	1.97	1.68	1.40	1.16	0.96	0.82	0.73	0.65	0.63	0.59	0.57	0.51	0.48
-160	2.69	2.57	2.42	2.23	2.01	1.77	1.52	1.28	1.08	0.91	0.79	0.71	0.65	0.63	0.59	0.57	0.51	0.48
-150	2.13	2.05	1.94	1.78	1.61	1.43	1.26	1.10	0.95	0.84	0.75	0.68	0.65	0.61	0.59	0.57	0.50	0.48
-140	1.52	1.47	1.39	1.30	1.19	1.09	0.98	0.89	0.82	0.76	0.70	0.66	0.64	0.61	0.59	0.56	0.50	0.48
-130	1.02	0.99	0.95	0.90	0.85	0.81	0.77	0.74	0.71	0.69	0.67	0.65	0.62	0.60	0.58	0.54	0.50	0.48
-120	0.73	0.72	0.71	0.69	0.66	0.65	0.65	0.65	0.65	0.65	0.64	0.63	0.61	0.59	0.56	0.52	0.50	0.48
-110	0.63	0.63	0.62	0.62	0.60	0.59	0.59	0.60	0.61	0.61	0.61	0.60	0.59	0.59	0.56	0.53	0.51	0.50
-100	0.60	0.59	0.58	0.57	0.57	0.56	0.56	0.57	0.56	0.56	0.56	0.56	0.55	0.53	0.52	0.50	0.49	0.48
-90	0.50	0.50	0.49	0.49	0.48	0.48	0.48	0.49	0.49	0.50	0.50	0.51	0.50	0.50	0.50	0.49	0.49	0.48
-80	0.48	0.48	0.48	0.47	0.47	0.47	0.47	0.47	0.47	0.47	0.47	0.47	0.48	0.49	0.49	0.49	0.49	0.48
-70	1.49	1.39	1.28	1.16	1.03	0.92	0.83	0.75	0.66	0.58	0.52	0.52	0.59	0.55	0.50	0.50	0.49	0.48
-60	5.06	4.71	4.26	3.70	3.10	2.60	2.17	1.78	1.45	1.17	0.94	0.83	0.82	0.81	0.68	0.51	0.49	0.48
-50	22.8	20.9	18.1	14.8	11.5	8.44	6.03	4.33	3.10	2.26	1.71	1.37	1.14	1.04	0.94	0.60	0.50	0.48
-40	76.1	69.1	59.8	49.1	37.9	27.4	18.3	11.3	6.86	4.32	2.92	2.11	1.60	1.28	1.14	0.80	0.51	0.48
-30	184	167	143	114	87.6	62.9	42.5	26.5	14.9	8.25	4.74	3.03	2.13	1.57	1.31	0.99	0.51	0.48
-20	358	320	272	218	163	114	75.0	47.3	26.9	14.1	7.17	4.04	2.64	1.87	1.43	1.13	0.52	0.48
-10	532	479	406	325	241	166	107	66.1	38.5	19.7	9.66	4.97	3.07	2.11	1.55	1.22	0.52	0.48
0	629	562	474	376	281	192	120	74.5	43.8	22.0	10.9	5.42	3.31	2.27	1.64	1.29	0.53	0.48
10	567	502	421	335	251	174	112	70.1	41.4	21.4	10.9	5.84	3.66	2.49	1.78	1.35	0.57	0.48
20	410	367	309	244	181	125	84.0	54.2	31.6	17.4	9.49	5.68	3.75	2.59	1.87	1.36	0.61	0.48
30	230	208	178	142	108	77.5	53.2	34.1	20.5	12.3	7.74	5.18	3.62	2.56	1.91	1.32	0.65	0.48
40	103	93.7	81.8	68.1	52.7	38.5	26.6	17.9	12.2	8.66	6.21	4.52	3.31	2.43	1.87	1.21	0.68	0.48
50	36.2	33.3	29.2	24.8	20.1	15.5	12.0	9.40	7.52	6.12	4.94	3.80	2.90	2.27	1.74	1.06	0.70	0.48
60	11.3	10.7	9.93	9.01	8.06	7.17	6.32	5.56	4.88	4.28	3.74	3.08	2.50	2.02	1.50	1.00	0.71	0.48
70	5.12	4.97	4.77	4.53	4.27	4.00	3.74	3.48	3.22	2.97	2.75	2.50	2.12	1.69	1.30	0.99	0.72	0.48
80	2.73	2.70	2.65	2.60	2.54	2.48	2.43	2.38	2.32	2.26	2.20	2.13	1.82	1.52	1.24	0.97	0.72	0.48
90	1.95	1.94	1.92	1.91	1.90	1.89	1.89	1.89	1.89	1.89	1.90	1.90	1.66	1.43	1.19	0.95	0.72	0.48
100	1.67	1.67	1.66	1.66	1.65	1.65	1.65	1.67	1.69	1.71	1.73	1.73	1.54	1.34	1.14	0.93	0.71	0.48
110	1.65	1.66	1.67	1.67	1.67	1.67	1.66	1.65	1.65	1.65	1.66	1.61	1.45	1.27	1.09	0.89	0.70	0.48
120	1.99	1.99	1.97	1.95	1.92	1.87	1.82	1.77	1.72	1.67	1.66	1.54	1.37	1.21	1.05	0.86	0.68	0.48
130	2.60	2.58	2.54	2.48	2.39	2.29	2.17	2.05	1.94	1.84	1.68	1.46	1.29	1.14	0.99	0.83	0.65	0.48
140	3.30	3.26	3.20	3.10	2.97	2.80	2.62	2.44	2.25	1.99	1.67	1.41	1.21	1.06	0.93	0.80	0.63	0.48
150	3.82	3.79	3.74	3.63	3.47	3.29	3.06	2.82	2.37	1.94	1.59	1.32	1.12	0.96	0.86	0.75	0.60	0.48
160	4.01	4.00	3.98	3.90	3.78	3.61	3.13	2.63	2.16	1.76	1.43	1.18	0.99	0.87	0.77	0.69	0.57	0.48
170	3.91	3.96	3.97	3.74	3.36	2.95	2.54	2.13	1.75	1.42	1.16	0.97	0.83	0.76	0.68	0.63	0.54	0.48
180	3.37	3.10	2.87	2.60	2.32	2.02	1.71	1.43	1.18	0.99	0.82	0.71	0.65	0.63	0.59	0.57	0.50	0.48

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-09-06

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: