

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	1303.3 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	86.9V x 86.4H
	At 50% of Imax	47.7V x 47.1H
	At 90% of Imax	18.3V x 18.2H

Beam Flux	Total	1000.0 lumens per klm.
	To 10% of Imax	879.4 lumens per klm.
	To 50% of Imax	497.7 lumens per klm.
	To 90% of Imax	98.1 lumens per klm.

Upward LOR	2.3 %
Downward LOR	97.7 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-06

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:BlazeLine Slim-600mm-RGBW DS-GREEN-50D-Rev1	TYPE:RGBW DS-GREEN	WEIGHT:
SPEC.:50 DEG	DIM.:600MM	SERIAL No.:IES001649
MFR.:	SUR.:	Shielding Angle:

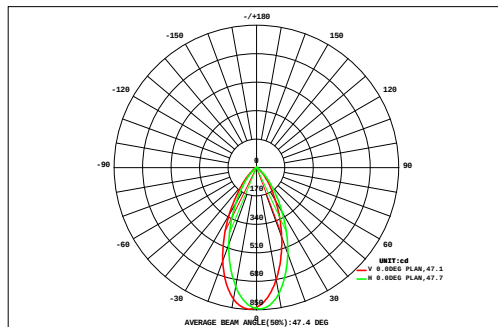

DATA OF LAMP		Eff:104.74lm/W	
MODEL		Imax(cd)	851.8
NOMINAL POWER(W)	6.24	AVAILABILITY(%)	88.0
RATED VOLTAGE(V)	24	Avai. FLUX(lm)	575.3
NOMINAL FLUX(lm)	653.6	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	653.6
TEST VOLTAGE(V)	24	q @50%(H,V)	47,48DEG

		AREA FLUX DIAGRAM															UNIT:lm			F t	F a	
		0.03	0.04	0.05	0.07	0.09	0.12	0.13	0.15	0.15	0.15	0.14	0.13	0.11	0.09	0.07	0.05	0.03	0.02	1.62	0.00	
VERTICAL (DEG)	72	0.03	0.04	0.05	0.07	0.09	0.12	0.13	0.15	0.15	0.15	0.14	0.13	0.11	0.09	0.07	0.05	0.03	0.02	2.72	0.00	
	64	0.03	0.05	0.07	0.11	0.15	0.19	0.24	0.28	0.30	0.29	0.26	0.22	0.18	0.13	0.10	0.07	0.04	0.02	5.60	0.00	
	56	0.04	0.06	0.10	0.16	0.25	0.38	0.54	0.67	0.74	0.72	0.62	0.48	0.33	0.22	0.14	0.09	0.05	0.02	12.4	4.46	
	48	0.04	0.08	0.14	0.25	0.48	0.85	1.28	1.64	1.82	1.75	1.47	1.08	0.69	0.39	0.21	0.11	0.06	0.03	24.6	20.3	
	40	0.05	0.09	0.19	0.43	0.92	1.70	2.64	3.44	3.82	3.63	2.97	2.11	1.30	0.70	0.33	0.15	0.07	0.03	42.8	39.7	
	32	0.05	0.11	0.27	0.69	1.57	2.95	4.67	6.24	6.90	6.51	5.23	3.59	2.15	1.12	0.49	0.19	0.08	0.03	64.9	62.3	
	24	0.06	0.13	0.36	0.98	2.30	4.43	7.13	9.65	10.7	10.1	8.02	5.39	3.11	1.58	0.68	0.24	0.08	0.03	84.7	82.3	
	-24	0.06	0.15	0.44	1.23	2.92	5.74	9.41	12.7	14.2	13.2	10.4	6.96	4.00	1.99	0.84	0.29	0.09	0.03	95.9	93.7	
		0.06	0.16	0.48	1.37	3.25	6.50	10.7	14.3	16.2	15.1	11.8	7.95	4.55	2.21	0.91	0.31	0.09	0.03	94.2	92.0	
		0.06	0.15	0.47	1.34	3.19	6.41	10.5	14.1	15.8	14.8	11.6	7.84	4.47	2.17	0.89	0.30	0.08	0.03	79.7	77.3	
		0.06	0.13	0.40	1.16	2.75	5.47	8.97	11.9	13.2	12.3	9.77	6.62	3.79	1.88	0.78	0.26	0.08	0.03	57.8	55.2	
		0.05	0.11	0.31	0.88	2.08	4.00	6.41	8.52	9.53	8.93	7.06	4.81	2.81	1.42	0.60	0.20	0.06	0.03	35.8	32.5	
		0.04	0.08	0.21	0.57	1.34	2.50	3.90	5.16	5.78	5.46	4.37	3.03	1.82	0.93	0.39	0.14	0.05	0.02	19.1	14.4	
		0.03	0.06	0.12	0.32	0.72	1.34	2.05	2.70	3.01	2.87	2.33	1.63	1.00	0.52	0.23	0.09	0.04	0.02	8.66	1.04	
		0.03	0.04	0.07	0.15	0.33	0.60	0.91	1.20	1.34	1.29	1.05	0.74	0.46	0.25	0.12	0.06	0.03	0.01	3.26	0.00	
	-56	0.02	0.03	0.04	0.07	0.13	0.22	0.33	0.42	0.47	0.46	0.38	0.27	0.18	0.11	0.06	0.04	0.02	0.01	1.17	0.00	
-64	0.02	0.02	0.02	0.04	0.06	0.08	0.11	0.13	0.14	0.14	0.12	0.10	0.07	0.05	0.03	0.02	0.01	0.01	0.50	0.00		
-72	0.01	0.01	0.01	0.02	0.03	0.03	0.04	0.05	0.05	0.05	0.05	0.04	0.03	0.03	0.02	0.01	0.01	0.01	0.50	0.00		
		-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)					16	24	32	40	48	56	64	72
F t	0.74	1.50	3.74	9.84	22.6	43.5	69.9	93.3	104	97.7	77.7	53.0	31.1	15.8	6.89	2.60	0.97	0.42	635	---		
F a	0.00	0.00	0.00	3.77	18.4	39.9	66.5	89.9	101	94.4	74.2	49.3	27.0	10.6	0.37	0.00	0.00	0.00	---	575		

one-half-peak spread: U:24.3,D:23.7 , L:23.5,R:23.9


NEMA Beam Type: Type 5

$H(b)$ Range: -90 - 90DEG
 $H(b)$ Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-09-06

$V(B)$ Range: -180 - 180DEG
 $V(B)$ Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:BlazeLine Slim-600mm-RGBW DS-GREEN-50D-Rev1	TYPE:RGBW DS-GREEN	WEIGHT:
SPEC.:50 DEG	DIM.:600MM	SERIAL No.:IES001649
MFR.:	SUR.:	Shielding Angle:

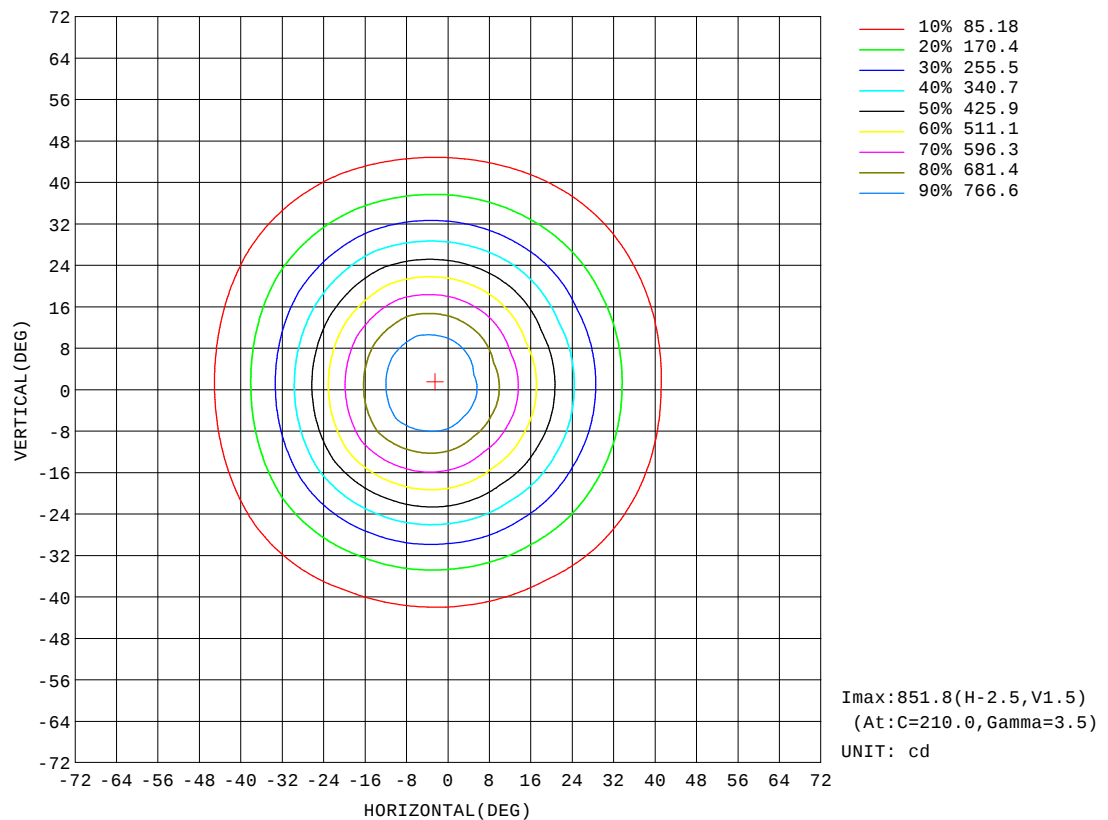


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-06

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:BlazeLine Slim-600mm-RGBW DS-GREEN-50D-Rev1	TYPE:RGBW DS-GREEN	WEIGHT:
SPEC.:50 DEG	DIM.:600MM	SERIAL No.:IES001649
MFR.:	SUR.:	Shielding Angle:

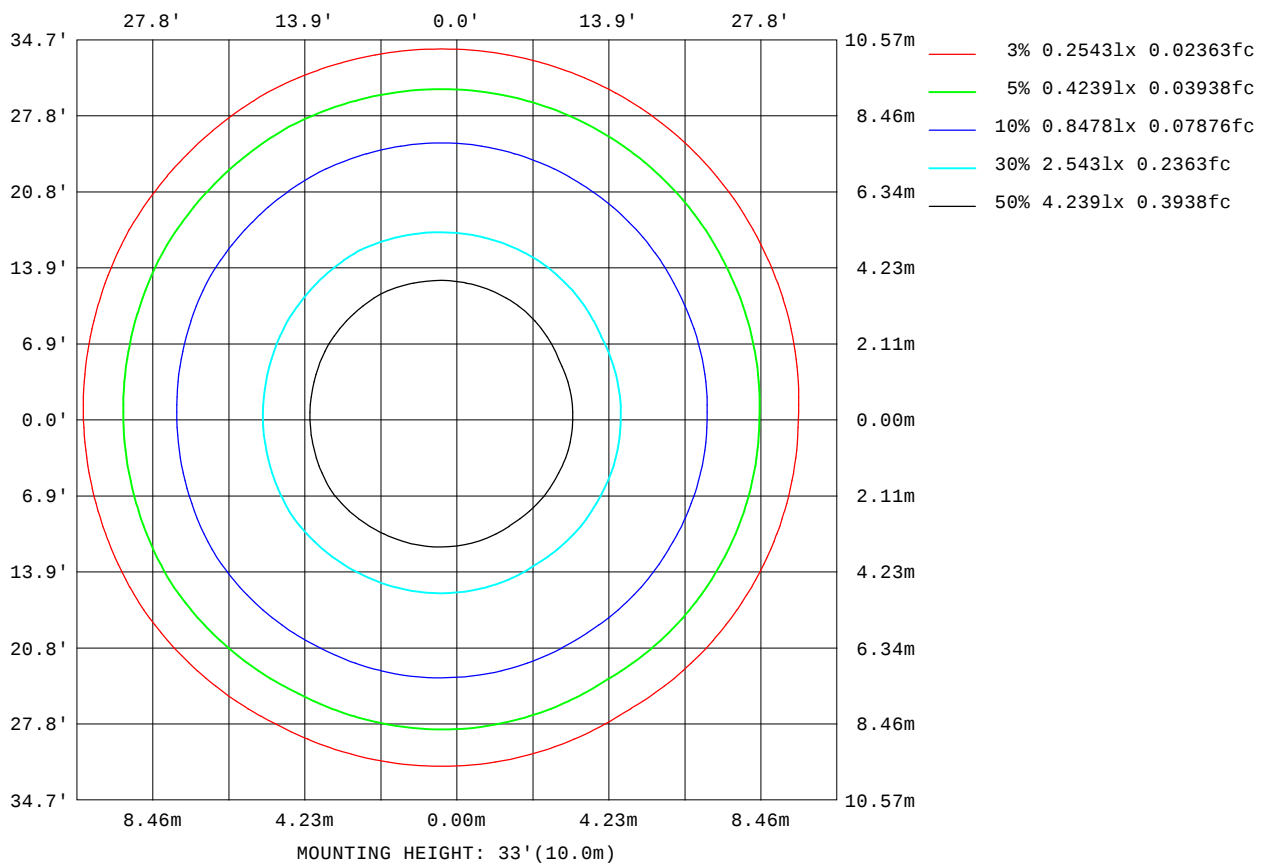

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-09-06

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

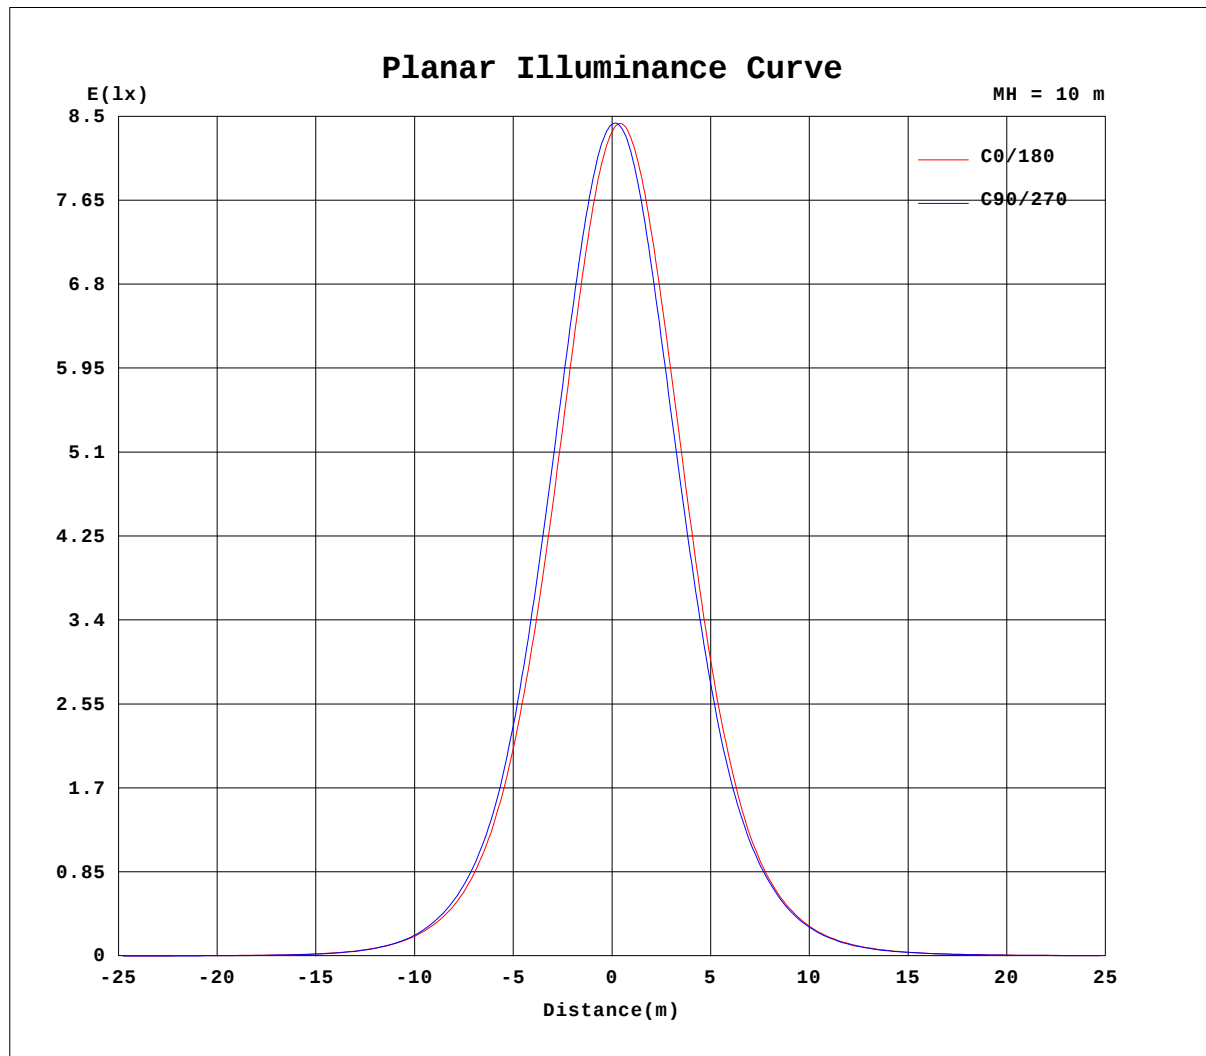


H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-09-06

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:BlazeLine Slim-600mm-RGBW DS-GREEN-50D-Rev1	TYPE:RGBW DS-GREEN	WEIGHT:
SPEC.:50 DEG	DIM.:600MM	SERIAL No.:IES001649
MFR.:	SUR.:	Shielding Angle:

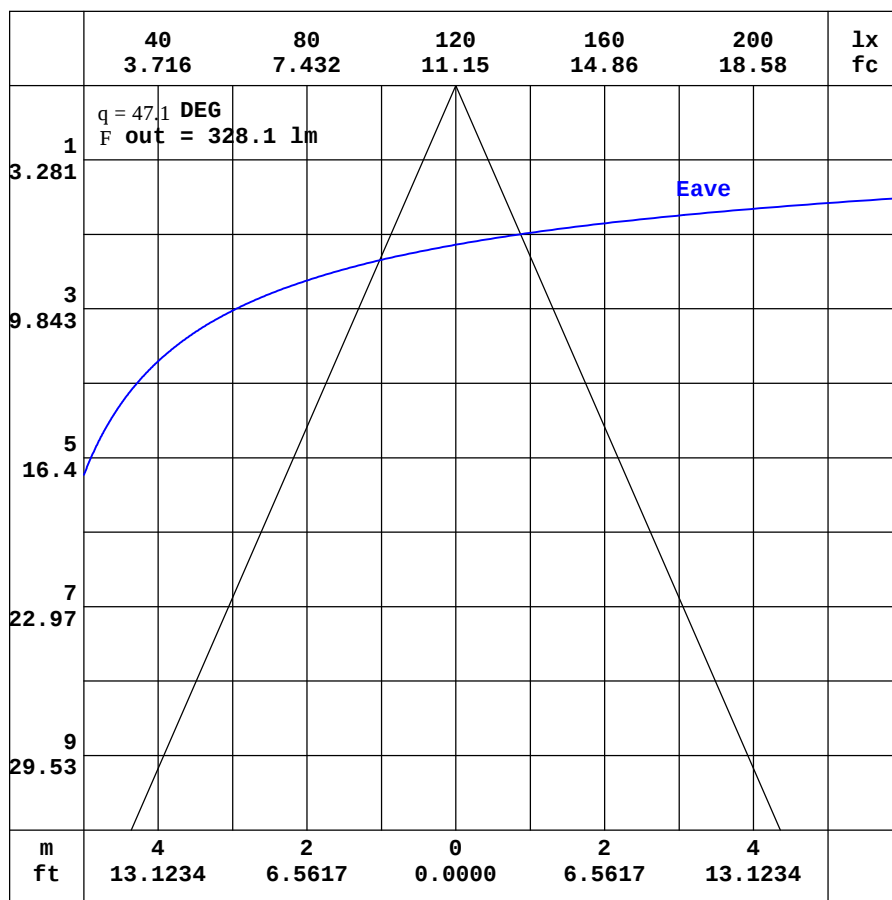

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-09-06

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeLine Slim-600mm-RGBW DS-GREEN-50D-Rev1	TYPE:RGBW DS-GREEN	WEIGHT:
SPEC.:50 DEG	DIM.:600MM	SERIAL No.:IES001649
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	2.63	2.40	2.25	2.23	2.27	2.41	2.64	2.95	3.33	3.75	4.15	4.52	4.81	5.02	5.11	5.11	5.05	4.95	4.97
-170	2.63	2.35	2.17	2.11	2.10	2.16	2.31	2.51	2.73	2.96	3.17	3.33	3.44	3.45	3.40	3.45	3.79	4.07	4.29
-160	2.63	2.31	2.10	1.99	1.93	1.92	1.96	2.05	2.11	2.17	2.18	2.15	2.12	2.44	2.74	3.05	3.32	3.51	3.66
-150	2.63	2.28	2.04	1.88	1.77	1.70	1.64	1.59	1.58	1.48	1.40	1.56	1.76	1.99	2.22	2.44	2.64	2.79	2.89
-140	2.63	2.26	1.97	1.77	1.63	1.49	1.37	1.25	1.09	1.13	1.19	1.27	1.38	1.50	1.64	1.78	1.91	2.01	2.07
-130	2.63	2.24	1.94	1.69	1.50	1.34	1.17	1.00	0.93	0.96	0.98	1.04	1.07	1.10	1.16	1.24	1.30	1.34	1.37
-120	2.63	2.23	1.92	1.64	1.40	1.20	1.01	0.86	0.88	0.89	0.88	0.89	0.89	0.89	0.92	0.94	0.96	0.97	0.98
-110	2.63	2.24	1.90	1.61	1.34	1.10	0.87	0.81	0.82	0.82	0.82	0.82	0.82	0.83	0.84	0.84	0.84	0.85	0.85
-100	2.63	2.26	1.92	1.60	1.30	1.02	0.76	0.74	0.74	0.75	0.75	0.76	0.76	0.77	0.77	0.78	0.79	0.79	0.80
-90	2.63	2.30	1.97	1.64	1.31	0.98	0.65	0.65	0.65	0.65	0.65	0.65	0.65	0.65	0.66	0.66	0.67	0.68	0.68
-80	2.63	2.34	2.05	1.73	1.40	1.05	0.67	0.64	0.64	0.65	0.65	0.66	0.67	0.68	0.68	0.68	0.67	0.66	0.65
-70	2.63	2.40	2.16	1.92	1.63	1.32	0.90	0.78	0.89	1.02	1.17	1.34	1.50	1.65	1.78	1.90	1.99	2.05	2.07
-60	2.63	2.47	2.36	2.25	2.30	2.05	1.63	1.47	1.95	2.42	2.94	3.53	4.17	4.86	5.55	6.19	6.67	6.94	6.95
-50	2.63	2.55	2.57	2.97	3.09	2.96	3.03	3.14	3.89	5.40	7.60	10.6	14.3	18.3	22.7	26.5	29.5	31.1	31.2
-40	2.63	2.65	2.94	3.70	3.91	4.29	4.99	6.10	8.45	13.5	21.9	33.1	46.4	60.8	75.0	88.4	98.9	104	105
-30	2.63	2.76	3.39	4.35	4.85	5.91	7.56	10.9	18.0	31.1	51.4	78.7	111	147	182	215	240	253	250
-20	2.63	2.87	3.89	4.98	5.87	7.65	10.6	17.2	31.0	54.8	91.2	141	203	276	349	417	467	493	488
-10	2.63	2.98	4.31	5.53	6.83	9.28	13.5	23.3	43.1	75.9	126	196	292	403	522	626	695	728	721
0	2.63	3.06	4.60	6.01	7.60	10.5	15.5	26.7	49.0	85.8	142	222	332	459	592	709	797	842	834
10	2.63	3.05	4.49	5.87	7.38	10.1	14.8	25.0	45.6	80.0	133	206	304	419	542	651	730	775	765
20	2.63	3.01	4.24	5.63	6.91	9.29	13.0	20.4	35.5	61.3	101	156	226	305	389	470	530	554	548
30	2.63	2.96	3.89	5.26	6.27	8.10	10.7	15.2	23.7	38.7	62.0	93.5	133	177	222	266	296	309	306
40	2.63	2.91	3.55	4.78	5.61	6.74	8.54	10.9	14.7	21.0	31.0	44.8	62.2	81.7	101	118	130	137	137
50	2.63	2.85	3.26	4.16	4.91	5.55	6.51	7.88	9.52	11.7	14.7	18.8	23.9	30.1	35.9	40.9	44.9	46.8	46.7
60	2.63	2.80	3.08	3.48	4.11	4.56	4.98	5.53	6.38	7.34	8.34	9.36	10.5	11.6	12.7	13.6	14.3	14.6	14.6
70	2.63	2.75	2.89	3.11	3.34	3.63	3.85	4.08	4.38	4.72	5.07	5.45	5.81	6.11	6.36	6.55	6.68	6.74	6.73
80	2.63	2.69	2.77	2.85	2.94	3.04	3.14	3.21	3.28	3.35	3.40	3.45	3.50	3.54	3.57	3.59	3.60	3.60	3.58
90	2.63	2.64	2.66	2.67	2.69	2.71	2.72	2.71	2.69	2.67	2.65	2.64	2.62	2.61	2.59	2.58	2.57	2.56	2.55
100	2.63	2.59	2.56	2.53	2.51	2.49	2.47	2.43	2.38	2.34	2.30	2.27	2.24	2.22	2.21	2.20	2.20	2.19	2.19
110	2.63	2.54	2.48	2.43	2.38	2.35	2.32	2.28	2.24	2.22	2.21	2.20	2.19	2.19	2.19	2.19	2.19	2.18	2.18
120	2.63	2.50	2.42	2.34	2.29	2.26	2.25	2.24	2.24	2.24	2.28	2.33	2.38	2.44	2.49	2.54	2.58	2.61	2.62
130	2.63	2.47	2.37	2.28	2.25	2.24	2.25	2.27	2.34	2.44	2.57	2.70	2.84	2.97	3.11	3.23	3.32	3.39	3.42
140	2.63	2.45	2.32	2.25	2.24	2.25	2.30	2.41	2.58	2.79	3.00	3.23	3.47	3.69	3.89	4.06	4.19	4.29	4.33
150	2.63	2.43	2.30	2.24	2.24	2.28	2.40	2.61	2.86	3.14	3.45	3.75	4.06	4.33	4.56	4.75	4.88	4.98	5.03
160	2.63	2.41	2.27	2.24	2.25	2.34	2.52	2.79	3.10	3.46	3.82	4.17	4.47	4.70	4.93	5.10	5.20	5.25	5.30
170	2.63	2.40	2.26	2.23	2.26	2.38	2.61	2.91	3.27	3.67	4.06	4.42	4.70	4.92	5.04	5.11	5.14	5.17	5.23
180	2.63	2.40	2.25	2.23	2.27	2.41	2.64	2.95	3.33	3.75	4.15	4.52	4.81	5.02	5.11	5.11	5.05	4.95	5.01

H_(b) Range:-90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature:25.3DEG
 Operators:Fan
 Test Date:2023-09-06

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:8.630m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:BlazeLine Slim-600mm-RGBW DS-GREEN-50D-Rev1	TYPE:RGBW DS-GREEN	WEIGHT:
SPEC.:50 DEG	DIM.:600MM	SERIAL No.:IES001649
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	4.48	4.15	3.82	3.53	3.19	2.83	2.44	2.05	1.70	1.40	1.16	0.99	0.87	0.82	0.78	0.76	0.72	0.67
-170	4.12	3.96	3.88	3.61	3.26	2.90	2.55	2.16	1.76	1.42	1.16	0.99	0.88	0.82	0.79	0.76	0.72	0.67
-160	3.63	3.54	3.41	3.22	3.01	2.81	2.47	2.07	1.66	1.33	1.10	0.95	0.87	0.82	0.79	0.75	0.72	0.67
-150	2.90	2.84	2.74	2.60	2.45	2.27	2.03	1.75	1.42	1.18	1.03	0.92	0.86	0.81	0.79	0.75	0.71	0.67
-140	2.07	2.02	1.95	1.83	1.74	1.61	1.45	1.29	1.15	1.03	0.94	0.88	0.84	0.80	0.78	0.75	0.71	0.67
-130	1.37	1.35	1.31	1.26	1.19	1.12	1.06	1.00	0.95	0.91	0.88	0.85	0.82	0.80	0.77	0.74	0.71	0.67
-120	0.98	0.96	0.94	0.92	0.90	0.87	0.87	0.86	0.85	0.84	0.84	0.82	0.80	0.78	0.75	0.73	0.70	0.67
-110	0.84	0.83	0.81	0.80	0.79	0.78	0.79	0.79	0.79	0.80	0.80	0.80	0.77	0.76	0.74	0.72	0.69	0.67
-100	0.79	0.77	0.76	0.75	0.74	0.73	0.73	0.74	0.75	0.75	0.75	0.76	0.74	0.73	0.71	0.69	0.68	0.67
-90	0.68	0.67	0.67	0.67	0.66	0.66	0.67	0.67	0.68	0.69	0.70	0.70	0.70	0.69	0.69	0.68	0.67	0.67
-80	0.66	0.67	0.67	0.67	0.67	0.67	0.67	0.67	0.67	0.68	0.68	0.68	0.69	0.70	0.69	0.68	0.67	0.67
-70	2.04	1.97	1.87	1.74	1.60	1.46	1.33	1.20	1.07	0.94	0.83	0.80	0.84	0.81	0.74	0.71	0.68	0.67
-60	6.75	6.34	5.78	5.13	4.45	3.84	3.31	2.80	2.33	1.91	1.54	1.34	1.25	1.18	0.97	0.75	0.69	0.67
-50	29.7	26.8	23.0	18.7	14.7	11.4	8.54	6.37	4.79	3.61	2.75	2.21	1.81	1.57	1.34	0.90	0.71	0.67
-40	98.7	88.3	74.8	60.0	46.8	34.9	24.4	16.1	10.2	6.63	4.61	3.36	2.55	1.98	1.67	1.13	0.74	0.67
-30	236	210	177	142	110	80.2	55.3	35.6	21.4	12.3	7.23	4.74	3.35	2.47	1.92	1.39	0.75	0.67
-20	454	396	331	261	196	141	96.4	61.9	36.9	20.4	10.7	6.23	4.12	2.92	2.11	1.58	0.76	0.67
-10	665	585	486	384	285	200	134	85.3	50.8	27.9	14.1	7.52	4.76	3.28	2.32	1.71	0.78	0.67
0	777	680	562	441	327	228	151	95.3	56.8	31.3	15.9	8.15	5.11	3.52	2.46	1.80	0.79	0.67
10	707	616	506	398	296	209	141	89.8	54.0	30.2	15.7	8.62	5.50	3.76	2.60	1.87	0.84	0.67
20	511	452	375	294	218	156	107	69.8	42.6	24.4	13.6	8.28	5.51	3.82	2.66	1.87	0.88	0.67
30	287	254	214	172	132	96.9	67.8	44.9	28.3	17.3	11.0	7.45	5.21	3.70	2.67	1.81	0.92	0.67
40	130	116	100	82.7	65.0	48.7	34.9	24.2	16.9	12.1	8.74	6.36	4.68	3.41	2.58	1.64	0.96	0.67
50	45.0	41.4	36.5	31.2	25.6	20.2	16.0	12.7	10.3	8.47	6.78	5.25	4.01	3.09	2.33	1.47	0.96	0.67
60	14.3	13.7	12.9	11.9	10.8	9.68	8.60	7.59	6.65	5.82	5.04	4.14	3.35	2.68	1.99	1.36	0.97	0.67
70	6.66	6.52	6.31	6.05	5.75	5.40	5.04	4.66	4.29	3.94	3.62	3.25	2.77	2.23	1.73	1.33	0.97	0.67
80	3.55	3.51	3.46	3.40	3.33	3.25	3.18	3.10	3.02	2.94	2.86	2.76	2.36	1.99	1.63	1.29	0.97	0.67
90	2.53	2.52	2.50	2.49	2.47	2.46	2.45	2.45	2.45	2.45	2.45	2.45	2.15	1.86	1.56	1.26	0.96	0.67
100	2.19	2.18	2.18	2.17	2.17	2.16	2.17	2.19	2.21	2.23	2.25	2.26	2.01	1.77	1.51	1.24	0.96	0.67
110	2.19	2.20	2.21	2.21	2.21	2.20	2.19	2.18	2.18	2.18	2.19	2.12	1.90	1.68	1.45	1.21	0.94	0.67
120	2.64	2.65	2.64	2.61	2.58	2.52	2.46	2.39	2.32	2.27	2.21	2.03	1.81	1.60	1.38	1.17	0.93	0.67
130	3.45	3.44	3.40	3.33	3.23	3.10	2.96	2.81	2.66	2.52	2.29	1.98	1.71	1.51	1.31	1.12	0.91	0.67
140	4.35	4.32	4.26	4.15	3.99	3.80	3.59	3.35	3.11	2.76	2.30	1.92	1.63	1.40	1.23	1.06	0.88	0.67
150	5.04	5.02	4.96	4.85	4.67	4.45	4.18	3.88	3.29	2.70	2.21	1.81	1.52	1.28	1.14	0.99	0.84	0.67
160	5.27	5.25	5.25	5.22	5.09	4.89	4.28	3.62	3.00	2.45	1.98	1.61	1.34	1.16	1.03	0.92	0.80	0.67
170	5.10	5.13	5.18	5.01	4.55	4.05	3.51	2.97	2.45	2.00	1.63	1.34	1.13	1.00	0.91	0.84	0.76	0.67
180	4.48	4.15	3.82	3.53	3.19	2.83	2.44	2.05	1.70	1.40	1.16	0.99	0.87	0.82	0.78	0.76	0.72	0.67

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-09-06

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks: