

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	3993.2 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	29.8V x 73.3H
	At 50% of Imax	9.9V x 50.1H
	At 90% of Imax	3.6V x 24.2H

Beam Flux	Total	1000.4 lumens per klm.
	To 10% of Imax	735.6 lumens per klm.
	To 50% of Imax	426.6 lumens per klm.
	To 90% of Imax	112.2 lumens per klm.

Upward LOR	2.1 %
Downward LOR	97.9 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Blazeline Max-598mm-RGBW DS-3000K-1050D-Rev1	TYPE:RGBW DS-3000K	WEIGHT:
SPEC.:10x50 DEG	DIM.:598MM	SERIAL No.:IES001839
MFR.:	SUR.:	Shielding Angle:

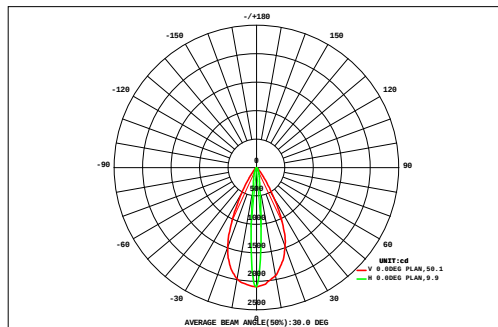

DATA OF LAMP		Eff:73.59lm/W	
MODEL		Imax(cd)	2095
NOMINAL POWER(W)	7.13	AVAILABILITY(%)	73.9
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	387.9
NOMINAL FLUX(lm)	524.7	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	524.7
TEST VOLTAGE(V)	220	q @50%(H,V)	50,10DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		F t	F a
	0.02	0.03	0.05	0.06	0.07	0.08	0.09	0.10	0.10	0.10	0.10	0.09	0.08	0.07	0.06	0.04	0.03	0.02	1.19	0.00
72	0.02	0.03	0.05	0.06	0.07	0.08	0.09	0.10	0.10	0.10	0.10	0.09	0.08	0.07	0.06	0.04	0.03	0.02	1.19	0.00
64	0.03	0.05	0.07	0.09	0.11	0.13	0.15	0.17	0.18	0.17	0.16	0.14	0.12	0.10	0.08	0.06	0.04	0.02	1.87	0.00
56	0.04	0.06	0.09	0.12	0.16	0.20	0.24	0.27	0.28	0.28	0.26	0.22	0.18	0.14	0.11	0.08	0.05	0.03	2.81	0.00
48	0.04	0.07	0.11	0.16	0.23	0.31	0.38	0.44	0.45	0.44	0.41	0.35	0.28	0.21	0.15	0.10	0.06	0.03	4.22	0.00
40	0.05	0.09	0.14	0.22	0.35	0.50	0.65	0.77	0.82	0.79	0.71	0.58	0.45	0.31	0.19	0.12	0.07	0.04	6.84	0.00
32	0.06	0.11	0.18	0.31	0.53	0.83	1.16	1.42	1.58	1.54	1.30	1.02	0.73	0.47	0.26	0.14	0.07	0.04	11.8	0.00
24	0.07	0.12	0.22	0.45	0.91	1.41	2.15	2.67	2.84	2.75	2.46	1.93	1.26	0.85	0.39	0.16	0.08	0.04	20.8	0.00
	0.07	0.14	0.26	0.66	1.82	4.04	5.43	6.46	6.12	6.00	6.24	5.20	4.19	1.87	0.61	0.18	0.08	0.04	49.4	37.3
	0.08	0.15	0.30	0.90	3.14	9.75	18.8	22.9	25.0	25.7	22.6	18.6	10.6	3.42	0.86	0.20	0.08	0.04	163	158
	0.07	0.15	0.29	0.88	3.11	9.67	18.4	21.9	24.9	26.6	22.8	18.6	10.5	3.40	0.84	0.19	0.08	0.04	163	157
	0.07	0.13	0.24	0.62	1.73	3.85	4.89	5.74	6.06	6.24	6.30	5.07	4.10	1.81	0.57	0.16	0.07	0.04	47.7	35.4
	0.06	0.11	0.19	0.38	0.78	1.19	1.82	2.40	2.73	2.69	2.32	1.76	1.12	0.75	0.33	0.13	0.07	0.03	18.8	0.00
-24	0.05	0.09	0.14	0.23	0.40	0.64	0.89	1.11	1.28	1.26	1.05	0.82	0.58	0.36	0.19	0.10	0.06	0.03	9.27	0.00
-32	0.04	0.07	0.10	0.14	0.24	0.35	0.44	0.53	0.57	0.56	0.49	0.39	0.31	0.21	0.12	0.07	0.05	0.03	4.71	0.00
-40	0.03	0.05	0.07	0.10	0.14	0.19	0.24	0.27	0.28	0.28	0.25	0.21	0.17	0.12	0.08	0.06	0.04	0.02	2.61	0.00
-48	0.03	0.04	0.05	0.07	0.09	0.12	0.14	0.16	0.17	0.17	0.15	0.12	0.10	0.08	0.06	0.04	0.03	0.02	1.63	0.00
-56	0.02	0.02	0.03	0.05	0.06	0.07	0.08	0.10	0.10	0.10	0.09	0.07	0.06	0.05	0.04	0.03	0.02	0.01	1.00	0.00
-64	0.01	0.01	0.02	0.03	0.03	0.04	0.05	0.05	0.05	0.05	0.05	0.04	0.03	0.03	0.02	0.02	0.01	0.01	0.55	0.00
-72	0.01	0.01	0.02	0.03	0.03	0.04	0.05	0.05	0.05	0.05	0.05	0.04	0.03	0.03	0.02	0.02	0.01	0.01	0.55	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)	16	24	32	40	48	56	64	72			
F t	0.83	1.50	2.53	5.45	13.9	33.4	56.0	67.5	73.6	75.7	67.7	55.2	34.8	14.2	4.97	1.87	0.98	0.52	511	---
F a	0.00	0.00	0.00	0.00	3.55	24.7	45.2	56.3	61.2	63.4	56.8	45.0	27.1	4.61	0.00	0.00	0.00	0.00	---	388


one-half-peak spread: U:5.4,D:4.6 , L:24.3,R:26.0 Beam Type: Type 5 x 3 (H x V)

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-09

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:Blazeline Max-598mm-RGBW DS-3000K-1050D-Rev1	TYPE:RGBW DS-3000K	WEIGHT:
SPEC.:10x50 DEG	DIM.:598MM	SERIAL No.:IES001839
MFR.:	SUR.:	Shielding Angle:

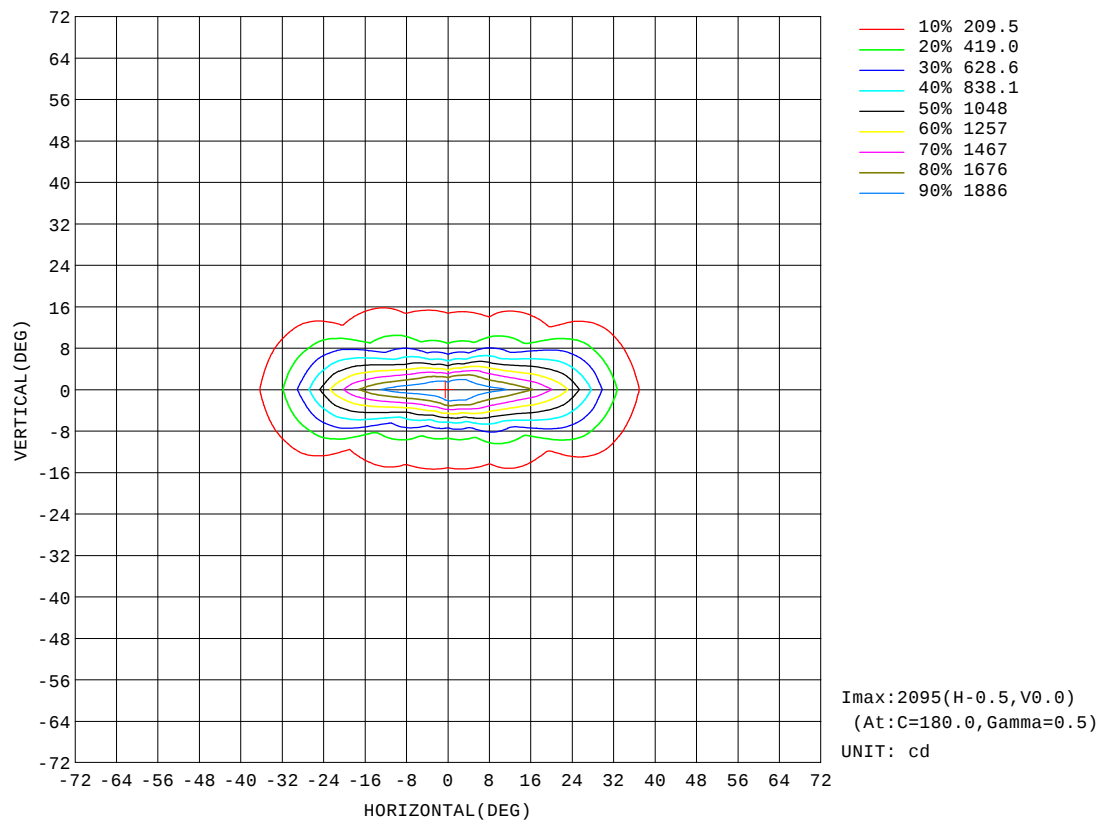


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Blazeline Max-598mm-RGBW DS-3000K-1050D-Rev1	TYPE:RGBW DS-3000K	WEIGHT:
SPEC.:10x50 DEG	DIM.:598MM	SERIAL No.:IES001839
MFR.:	SUR.:	Shielding Angle:

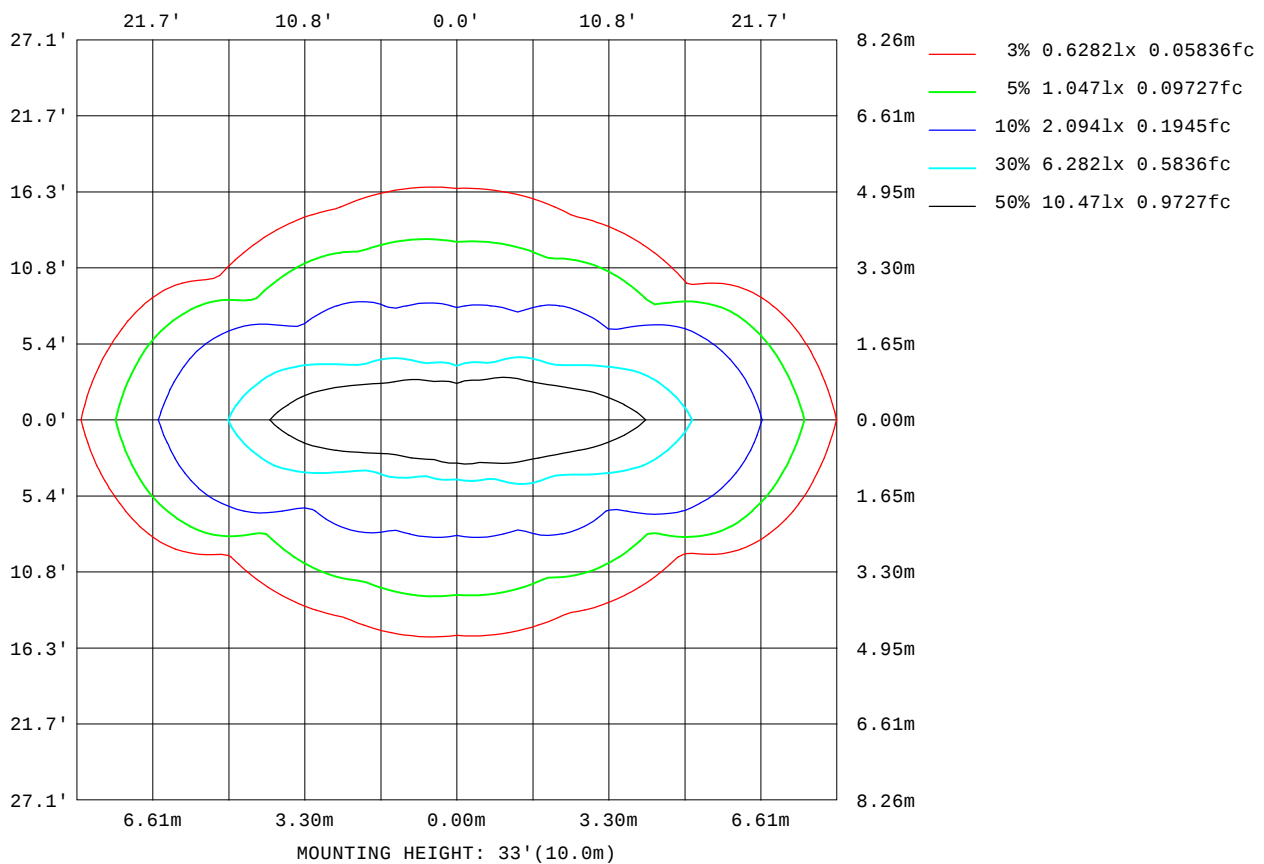

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-09

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

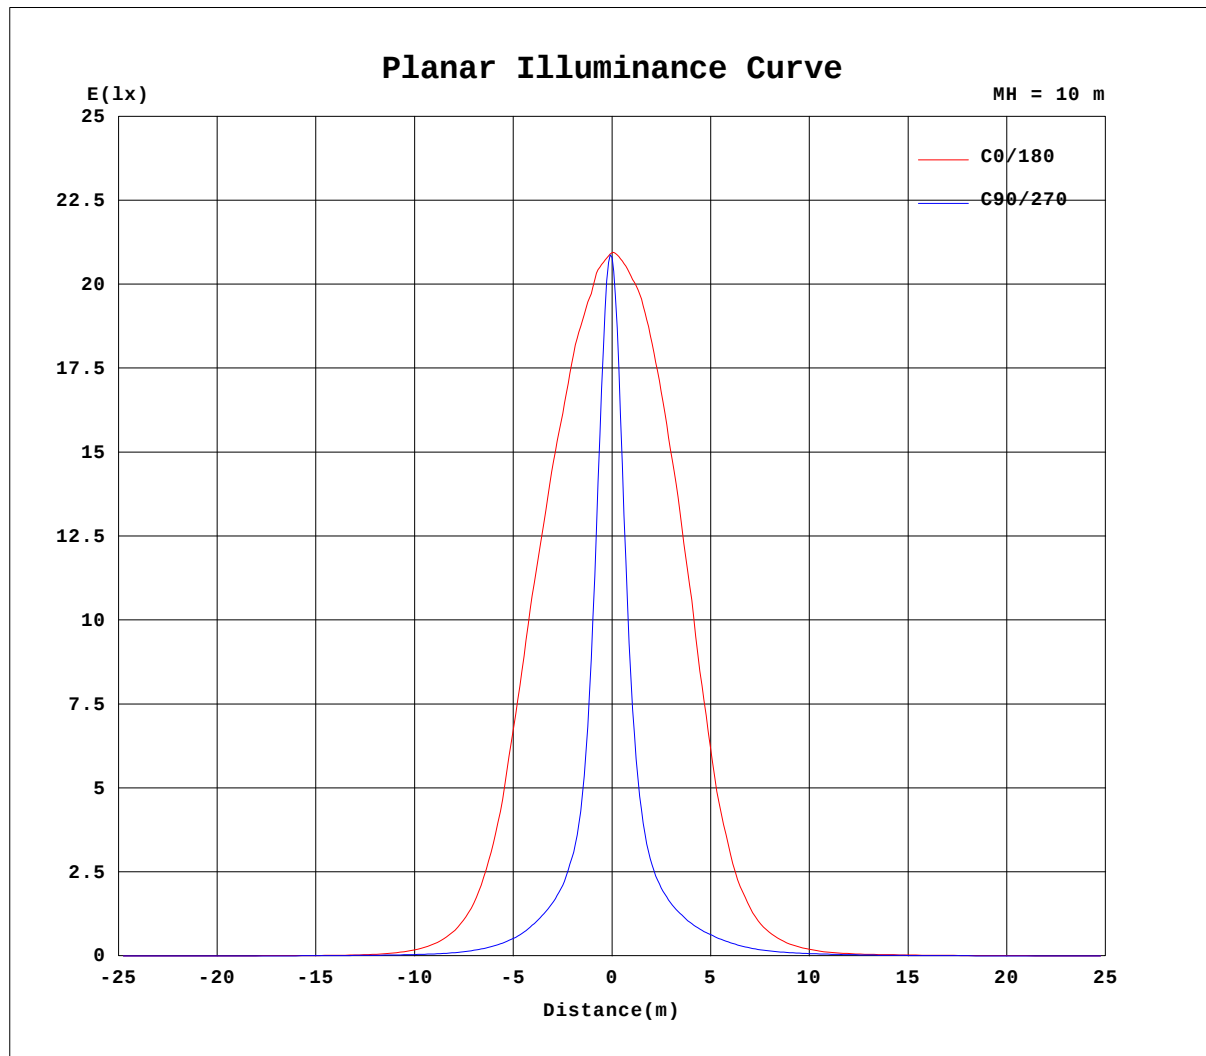


H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-09

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Blazeline Max-598mm-RGBW DS-3000K-1050D-Rev1	TYPE:RGBW DS-3000K	WEIGHT:
SPEC.:10x50 DEG	DIM.:598MM	SERIAL No.:IES001839
MFR.:	SUR.:	Shielding Angle:

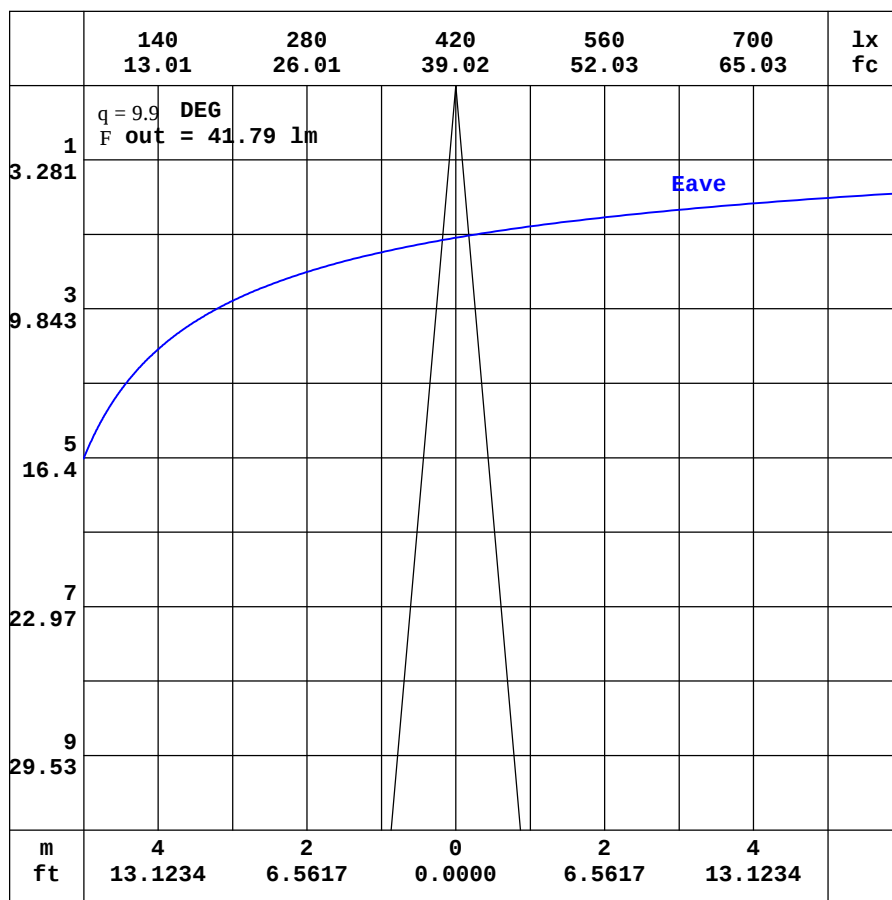

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

$H(b)$ Range:-90 - 90DEG
 $H(b)$ Interval: 0.5DEG
 Test Speed: LOW
 Temperature:25.3DEG
 Operators:Fan
 Test Date:2023-10-09

$V(B)$ Range:-180 - 180DEG
 $V(B)$ Interval: 0.5DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:8.630m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Max-598mm-RGBW DS-3000K-1050D-Rev1	TYPE:RGBW DS-3000K	WEIGHT:
SPEC.:10x50 DEG	DIM.:598MM	SERIAL No.:IES001839
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	1.86	1.67	1.59	1.60	1.69	1.86	2.12	2.42	2.73	3.01	3.24	3.42	3.52	3.52	3.47	3.37	3.28	3.25	3.21
-170	1.86	1.64	1.54	1.52	1.56	1.67	1.83	2.01	2.19	2.35	2.48	2.61	2.75	2.86	2.96	3.08	3.34	3.68	3.95
-160	1.86	1.61	1.49	1.43	1.43	1.47	1.53	1.59	1.63	1.66	1.67	1.71	1.79	2.11	2.44	2.76	3.06	3.27	3.39
-150	1.86	1.60	1.44	1.36	1.31	1.28	1.26	1.22	1.14	1.04	0.95	1.08	1.25	1.44	1.65	1.86	2.06	2.20	2.26
-140	1.86	1.59	1.40	1.30	1.21	1.13	1.05	0.94	0.80	0.72	0.71	0.71	0.74	0.80	0.87	1.00	1.10	1.16	1.18
-130	1.86	1.58	1.39	1.25	1.13	1.02	0.90	0.77	0.70	0.67	0.63	0.58	0.52	0.46	0.44	0.45	0.47	0.48	0.47
-120	1.86	1.58	1.38	1.21	1.08	0.95	0.81	0.71	0.72	0.71	0.69	0.65	0.60	0.56	0.50	0.46	0.42	0.38	0.36
-110	1.86	1.59	1.38	1.20	1.03	0.89	0.76	0.72	0.73	0.74	0.74	0.75	0.76	0.75	0.75	0.75	0.74	0.74	0.74
-100	1.86	1.61	1.39	1.20	1.02	0.84	0.68	0.68	0.70	0.71	0.73	0.74	0.75	0.75	0.76	0.77	0.77	0.78	0.78
-90	1.86	1.65	1.44	1.24	1.03	0.82	0.62	0.62	0.61	0.61	0.61	0.61	0.61	0.62	0.63	0.64	0.65	0.66	0.67
-80	1.86	1.67	1.49	1.30	1.15	0.96	0.66	0.66	0.67	0.69	0.70	0.70	0.69	0.68	0.66	0.65	0.62	0.59	0.56
-70	1.86	1.72	1.68	1.75	1.57	1.44	1.28	1.35	1.52	1.64	1.74	1.80	1.84	1.92	2.02	2.10	2.14	2.16	2.13
-60	1.86	1.76	2.13	2.12	2.37	2.56	2.56	2.48	2.83	3.17	3.48	3.76	3.99	4.24	4.58	4.86	5.07	5.19	5.22
-50	1.86	1.90	2.35	2.86	3.53	4.03	4.20	4.18	4.51	5.17	5.85	6.58	7.30	7.91	8.66	9.32	9.78	9.98	9.94
-40	1.86	2.17	2.68	3.73	4.86	5.64	6.18	6.63	6.85	7.79	9.70	11.9	14.1	15.8	16.8	18.4	19.4	19.6	18.8
-30	1.86	2.40	3.10	4.67	6.20	7.31	8.52	9.68	11.1	13.5	17.2	22.9	29.1	35.0	39.9	43.8	49.7	53.1	52.7
-20	1.86	2.56	3.56	5.54	7.44	9.08	11.1	13.3	16.8	24.1	37.1	51.1	57.2	76.3	97.6	117	127	140	138
-10	1.86	2.66	3.93	6.30	8.54	10.8	13.5	17.1	23.3	40.7	75.9	139	244	356	371	320	399	360	378
0	1.86	2.74	4.18	6.84	9.40	12.2	15.6	20.2	29.0	57.0	120	262	557	1022	1482	1794	1985	2059	2094
10	1.86	2.71	4.04	6.51	8.89	11.4	14.4	18.3	25.1	43.3	79.7	145	252	370	402	376	450	373	350
20	1.86	2.65	3.77	5.94	8.12	10.1	12.7	15.6	19.9	28.5	43.4	60.0	69.0	91.0	116	135	138	145	141
30	1.86	2.54	3.41	5.21	7.12	8.68	10.5	12.6	15.0	18.7	24.3	31.4	39.2	47.0	54.0	59.7	65.9	69.2	68.5
40	1.86	2.34	3.06	4.37	5.92	7.23	8.39	9.72	11.0	12.7	15.3	18.3	21.4	24.2	26.4	28.7	30.0	30.1	29.0
50	1.86	2.09	2.79	3.58	4.62	5.66	6.46	7.14	8.05	9.08	10.2	11.3	12.4	13.5	14.6	15.5	16.1	16.3	16.2
60	1.86	1.97	2.60	2.88	3.47	4.07	4.62	5.08	5.63	6.13	6.61	7.08	7.50	7.90	8.33	8.70	8.94	9.03	8.99
70	1.86	1.94	2.15	2.52	2.64	2.84	3.07	3.32	3.60	3.86	4.05	4.19	4.29	4.42	4.52	4.57	4.57	4.52	4.42
80	1.86	1.89	1.96	2.02	2.14	2.25	2.27	2.31	2.35	2.38	2.41	2.43	2.44	2.48	2.50	2.52	2.52	2.52	2.50
90	1.86	1.86	1.87	1.87	1.88	1.89	1.89	1.88	1.87	1.85	1.84	1.82	1.81	1.80	1.80	1.79	1.78	1.77	1.77
100	1.86	1.81	1.78	1.76	1.73	1.70	1.67	1.63	1.57	1.53	1.49	1.44	1.41	1.40	1.39	1.39	1.40	1.40	1.41
110	1.86	1.78	1.72	1.67	1.62	1.57	1.53	1.49	1.46	1.43	1.40	1.37	1.35	1.35	1.35	1.35	1.34	1.34	1.33
120	1.86	1.75	1.67	1.60	1.55	1.52	1.50	1.48	1.47	1.47	1.48	1.48	1.48	1.48	1.48	1.48	1.46	1.42	1.37
130	1.86	1.72	1.63	1.56	1.54	1.52	1.53	1.58	1.65	1.72	1.80	1.90	2.00	2.12	2.21	2.29	2.36	2.42	2.43
140	1.86	1.71	1.60	1.56	1.55	1.57	1.65	1.79	1.94	2.12	2.31	2.52	2.76	3.01	3.25	3.52	3.72	3.88	3.98
150	1.86	1.69	1.58	1.56	1.58	1.66	1.81	2.01	2.25	2.51	2.80	3.10	3.42	3.72	3.98	4.18	4.29	4.35	4.37
160	1.86	1.67	1.58	1.57	1.62	1.75	1.95	2.21	2.50	2.82	3.14	3.47	3.81	4.09	4.30	4.47	4.61	4.65	4.71
170	1.86	1.67	1.58	1.58	1.66	1.82	2.06	2.35	2.67	2.98	3.27	3.55	3.81	4.01	4.19	4.26	4.27	4.37	4.72
180	1.86	1.67	1.59	1.60	1.69	1.86	2.12	2.42	2.73	3.01	3.24	3.42	3.52	3.52	3.47	3.37	3.28	3.25	3.21

H_(b) Range: -90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature: 25.3DEG

Operators: Fan

Test Date: 2023-10-09

V(B) Range: -180 - 180DEG

V(B) Interval: 0.5DEG

Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity: 65.0%

Test Distance: 8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Max-598mm-RGBW DS-3000K-1050D-Rev1	TYPE:RGBW DS-3000K	WEIGHT:
SPEC.:10x50 DEG	DIM.:598MM	SERIAL No.:IES001839
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	3.04	2.85	2.67	2.48	2.22	1.95	1.67	1.39	1.17	1.00	0.86	0.78	0.72	0.71	0.69	0.65	0.60	0.55
-170	3.90	3.64	3.36	2.94	2.49	2.08	1.72	1.40	1.16	0.99	0.85	0.79	0.73	0.71	0.70	0.66	0.60	0.55
-160	3.31	3.12	2.87	2.56	2.23	1.91	1.57	1.29	1.09	0.93	0.83	0.78	0.72	0.71	0.70	0.66	0.60	0.55
-150	2.25	2.15	2.00	1.81	1.59	1.38	1.21	1.09	0.96	0.87	0.80	0.75	0.73	0.72	0.69	0.65	0.59	0.55
-140	1.19	1.17	1.10	1.00	0.94	0.88	0.85	0.83	0.83	0.81	0.77	0.74	0.73	0.71	0.69	0.65	0.59	0.55
-130	0.51	0.53	0.54	0.55	0.58	0.64	0.68	0.72	0.75	0.75	0.75	0.74	0.73	0.71	0.68	0.64	0.58	0.55
-120	0.40	0.45	0.50	0.56	0.61	0.66	0.70	0.73	0.74	0.75	0.75	0.74	0.72	0.69	0.66	0.62	0.57	0.55
-110	0.75	0.76	0.77	0.78	0.78	0.78	0.77	0.77	0.76	0.75	0.74	0.72	0.70	0.67	0.63	0.60	0.56	0.55
-100	0.78	0.78	0.78	0.77	0.77	0.75	0.73	0.72	0.71	0.70	0.68	0.67	0.65	0.62	0.60	0.58	0.56	0.55
-90	0.65	0.63	0.62	0.60	0.58	0.56	0.56	0.57	0.57	0.58	0.59	0.59	0.58	0.58	0.57	0.56	0.56	0.55
-80	0.58	0.59	0.60	0.60	0.61	0.61	0.63	0.63	0.62	0.61	0.58	0.57	0.59	0.59	0.58	0.56	0.56	0.55
-70	2.09	2.02	1.92	1.79	1.66	1.56	1.55	1.52	1.46	1.38	1.24	1.10	0.97	0.80	0.68	0.60	0.56	0.55
-60	5.02	4.74	4.39	3.99	3.58	3.36	3.18	2.97	2.74	2.48	2.21	2.07	1.83	1.46	1.00	0.71	0.58	0.55
-50	9.66	9.16	8.45	7.56	6.71	6.21	5.60	4.98	4.42	3.89	3.44	3.09	2.76	2.26	1.58	0.87	0.60	0.55
-40	19.0	18.2	16.7	14.8	13.8	12.3	10.4	8.44	6.74	5.61	4.91	4.24	3.63	3.05	2.17	1.17	0.64	0.55
-30	51.8	47.4	39.9	36.3	31.8	26.2	20.4	15.3	11.2	8.14	6.52	5.45	4.53	3.71	2.75	1.48	0.68	0.55
-20	136	120	113	93.5	72.2	53.2	49.0	34.0	20.3	11.8	8.33	6.63	5.35	4.28	3.25	1.77	0.72	0.55
-10	373	452	358	381	381	266	149	76.0	36.5	16.8	10.0	7.62	6.05	4.76	3.60	1.99	0.75	0.55
0	2038	1926	1732	1471	1081	612	287	126	52.3	20.9	11.2	8.33	6.55	5.10	3.82	2.10	0.76	0.55
10	365	443	361	390	387	269	153	78.8	38.7	18.4	11.2	8.42	6.58	5.10	3.80	2.09	0.79	0.55
20	139	127	123	103	80.1	60.6	55.5	39.1	24.2	14.7	10.4	8.10	6.34	4.92	3.63	1.97	0.81	0.55
30	66.6	60.8	52.7	47.8	41.4	34.4	27.7	21.6	16.0	11.8	9.24	7.39	5.85	4.58	3.27	1.77	0.81	0.55
40	29.2	28.2	26.2	23.7	21.6	19.2	16.4	13.7	11.4	9.56	7.87	6.38	5.15	4.06	2.78	1.53	0.80	0.55
50	16.0	15.3	14.4	13.4	12.1	11.2	10.2	9.14	8.20	7.29	6.30	5.25	4.31	3.31	2.27	1.29	0.78	0.55
60	8.86	8.60	8.23	7.77	7.25	6.86	6.50	6.06	5.63	5.17	4.69	4.05	3.27	2.51	1.73	1.16	0.78	0.55
70	4.45	4.45	4.39	4.28	4.11	3.95	3.88	3.77	3.60	3.38	3.13	2.81	2.32	1.83	1.42	1.06	0.77	0.55
80	2.49	2.46	2.43	2.38	2.33	2.27	2.28	2.26	2.24	2.22	2.18	2.13	1.84	1.55	1.27	1.00	0.77	0.55
90	1.76	1.75	1.74	1.73	1.72	1.72	1.74	1.76	1.78	1.80	1.81	1.83	1.62	1.41	1.19	0.98	0.76	0.55
100	1.40	1.40	1.39	1.39	1.39	1.40	1.43	1.46	1.49	1.52	1.57	1.60	1.45	1.30	1.13	0.95	0.75	0.55
110	1.34	1.35	1.36	1.36	1.37	1.37	1.38	1.40	1.41	1.42	1.45	1.44	1.32	1.21	1.08	0.92	0.74	0.55
120	1.43	1.47	1.49	1.50	1.50	1.50	1.51	1.49	1.48	1.46	1.44	1.36	1.24	1.14	1.02	0.89	0.73	0.55
130	2.44	2.39	2.32	2.24	2.15	2.03	1.92	1.83	1.73	1.66	1.51	1.32	1.19	1.07	0.97	0.86	0.71	0.55
140	3.91	3.79	3.61	3.37	3.11	2.83	2.57	2.35	2.15	1.89	1.56	1.31	1.14	1.02	0.92	0.82	0.69	0.55
150	4.38	4.35	4.27	4.09	3.82	3.51	3.17	2.86	2.37	1.91	1.55	1.27	1.08	0.96	0.87	0.78	0.67	0.55
160	4.73	4.71	4.60	4.42	4.19	3.88	3.28	2.70	2.19	1.77	1.42	1.18	0.99	0.88	0.82	0.74	0.65	0.55
170	4.73	4.66	4.62	4.25	3.69	3.15	2.64	2.16	1.77	1.44	1.18	1.01	0.87	0.80	0.76	0.70	0.63	0.55
180	3.04	2.85	2.67	2.48	2.22	1.95	1.67	1.39	1.17	1.00	0.86	0.78	0.72	0.71	0.69	0.65	0.60	0.55

H_(b) Range: -90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-10-09

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: