

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		3142.9 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	44.7V x 76.3H
	At 50% of Imax	11.9V x 50.1H
	At 90% of Imax	4.1V x 23.6H
Beam Flux	Total	1000.4 lumens per klm.
	To 10% of Imax	763.7 lumens per klm.
	To 50% of Imax	369.1 lumens per klm.
	To 90% of Imax	85.0 lumens per klm.
Upward LOR		1.7 %
Downward LOR		98.3 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-09

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Blazeline Max-598mm-RGBW DS-BLUE-1050D-Rev1	TYPE:RGBW DS-BLUE	WEIGHT:
SPEC.:10x50 DEG	DIM.:598MM	SERIAL No.:IES001838
MFR.:	SUR.:	Shielding Angle:

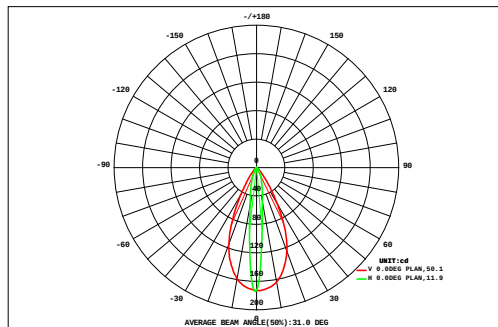

DATA OF LAMP		Eff:7.69lm/W	
MODEL		Imax(cd)	174.1
NOMINAL POWER(W)	7.2	AVAILABILITY(%)	76.5
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	42.39
NOMINAL FLUX(lm)	55.4	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	55.40
TEST VOLTAGE(V)	220	q @50%(H,V)	50,12DEG

		AREA FLUX DIAGRAM														UNIT:lm				F t	F a
VERTICAL (DEG)	72	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.13	0.00		
	64	0.00	0.00	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.00	0.00	0.21	0.00	
	56	0.00	0.01	0.01	0.01	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.01	0.01	0.01	0.00	0.34	0.00	
	48	0.00	0.01	0.01	0.02	0.03	0.04	0.05	0.06	0.06	0.06	0.06	0.05	0.04	0.03	0.02	0.01	0.01	0.00	0.54	0.00
	40	0.01	0.01	0.02	0.03	0.04	0.07	0.09	0.11	0.11	0.11	0.11	0.09	0.07	0.04	0.03	0.01	0.01	0.00	0.94	0.00
	32	0.01	0.01	0.02	0.04	0.07	0.11	0.16	0.20	0.23	0.23	0.21	0.16	0.12	0.07	0.04	0.02	0.01	0.00	1.70	0.00
	24	0.01	0.01	0.02	0.05	0.11	0.19	0.30	0.38	0.43	0.43	0.38	0.30	0.20	0.12	0.06	0.02	0.01	0.00	3.03	1.60
		0.01	0.01	0.03	0.07	0.19	0.41	0.60	0.78	0.83	0.83	0.80	0.63	0.47	0.23	0.08	0.03	0.01	0.00	6.03	5.38
		0.01	0.02	0.03	0.10	0.30	0.82	1.53	1.97	2.21	2.30	2.06	1.67	0.99	0.37	0.11	0.03	0.01	0.01	14.5	14.1
		0.01	0.02	0.03	0.09	0.30	0.81	1.52	1.98	2.34	2.49	2.16	1.69	0.99	0.37	0.11	0.03	0.01	0.00	15.0	14.5
		0.01	0.01	0.03	0.07	0.19	0.39	0.58	0.77	0.86	0.89	0.86	0.66	0.47	0.22	0.08	0.02	0.01	0.00	6.14	5.50
	-24	0.01	0.01	0.02	0.05	0.10	0.17	0.27	0.36	0.41	0.42	0.37	0.29	0.19	0.11	0.05	0.02	0.01	0.00	2.85	1.37
	-32	0.00	0.01	0.02	0.03	0.06	0.09	0.13	0.17	0.20	0.20	0.17	0.14	0.10	0.06	0.03	0.01	0.01	0.00	1.43	0.00
	-40	0.00	0.01	0.01	0.02	0.03	0.05	0.06	0.08	0.09	0.09	0.08	0.07	0.05	0.03	0.02	0.01	0.01	0.00	0.70	0.00
	-48	0.00	0.00	0.01	0.01	0.02	0.03	0.03	0.04	0.04	0.04	0.04	0.03	0.03	0.02	0.01	0.01	0.00	0.00	0.36	0.00
	-56	0.00	0.00	0.00	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.00	0.00	0.00	0.21	0.00
-64	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.11	0.00	
-72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.00	
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)				16	24	32	40	48	56	64	72	
F t	0.08	0.15	0.27	0.61	1.49	3.25	5.41	7.00	7.92	8.18	7.40	5.87	3.77	1.74	0.67	0.25	0.12	0.06	54	---	
F a	0.00	0.00	0.00	0.00	0.44	2.31	4.42	6.02	6.97	7.23	6.44	4.91	2.87	0.77	0.00	0.00	0.00	0.00	---	42	


one-half-peak spread: U:6.2,D:5.9 , L:25.7,R:24.4 Beam Type: Type 5 x 3 (H x V)

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-09

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:Blazeline Max-598mm-RGBW DS-BLUE-1050D-Rev1	TYPE:RGBW DS-BLUE	WEIGHT:
SPEC.:10x50 DEG	DIM.:598MM	SERIAL No.:IES001838
MFR.:	SUR.:	Shielding Angle:

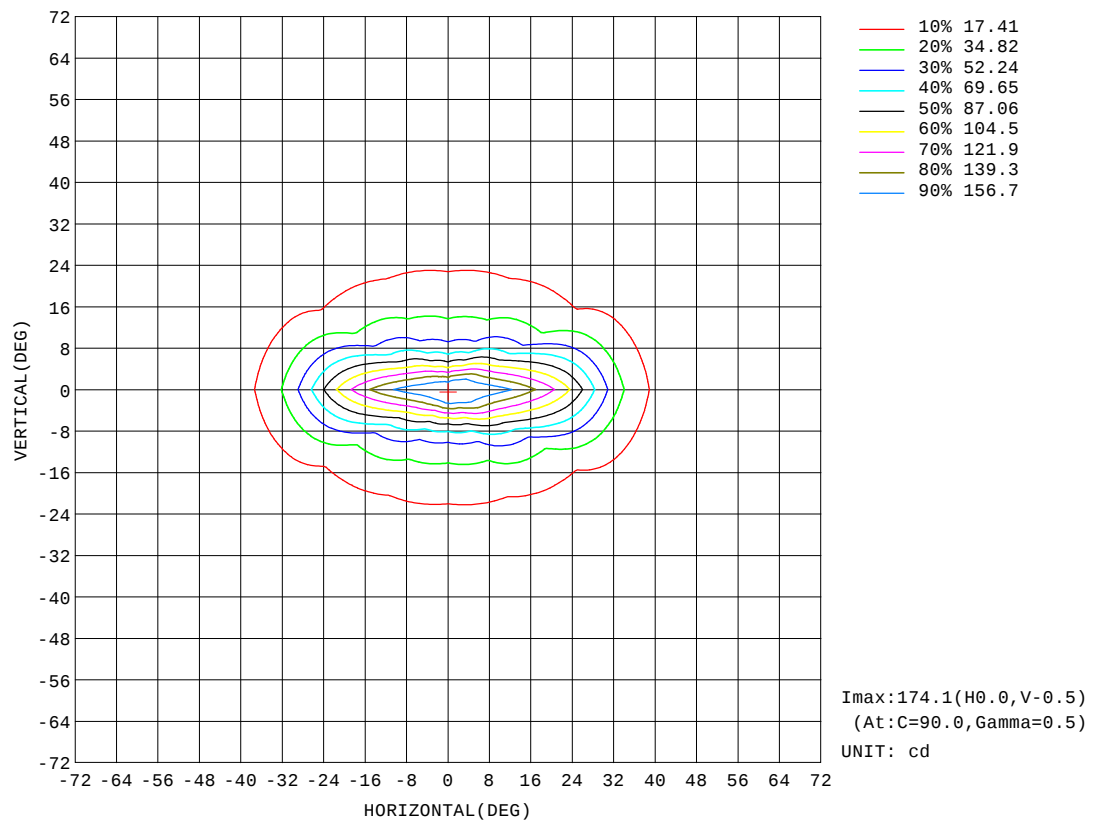


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Blazeline Max-598mm-RGBW DS-BLUE-1050D-Rev1	TYPE:RGBW DS-BLUE	WEIGHT:
SPEC.:10x50 DEG	DIM.:598MM	SERIAL No.:IES001838
MFR.:	SUR.:	Shielding Angle:

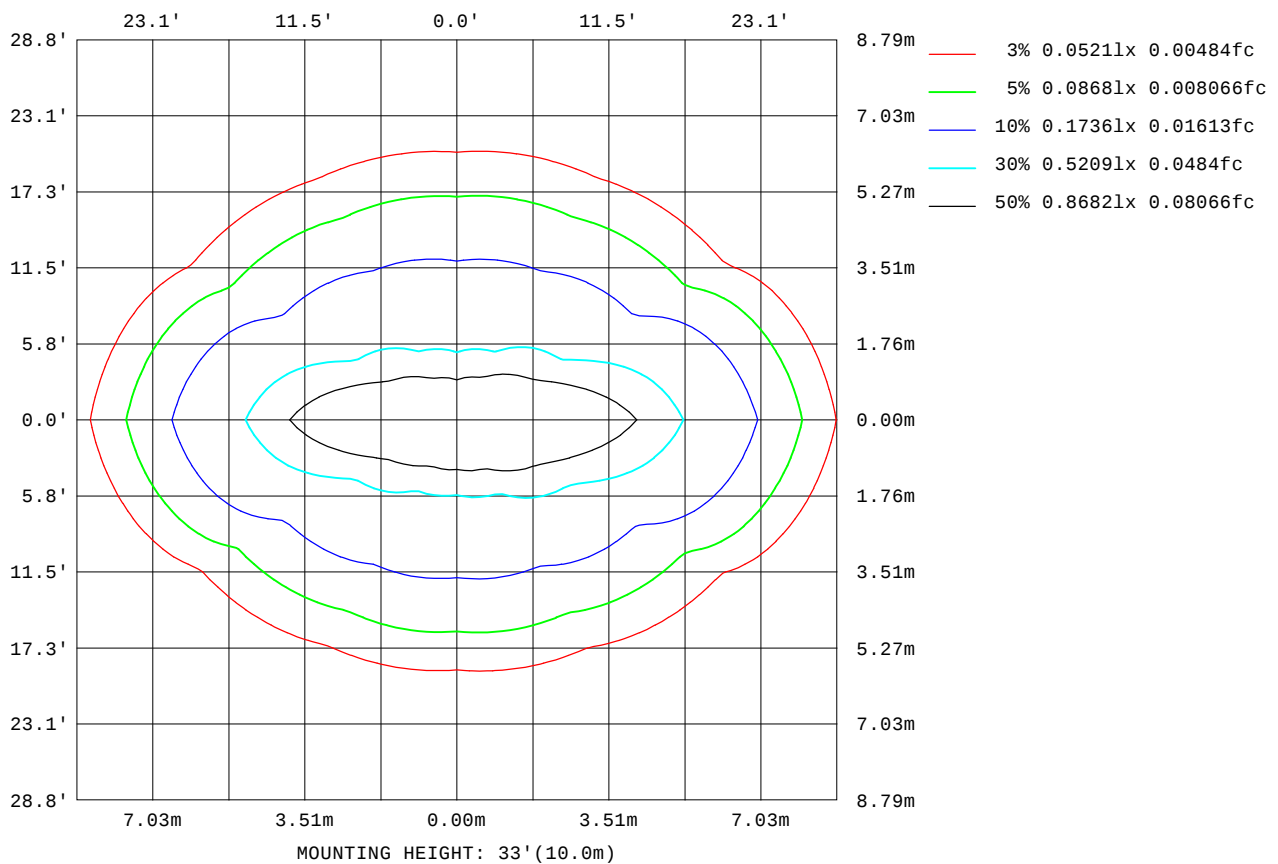

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-09

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

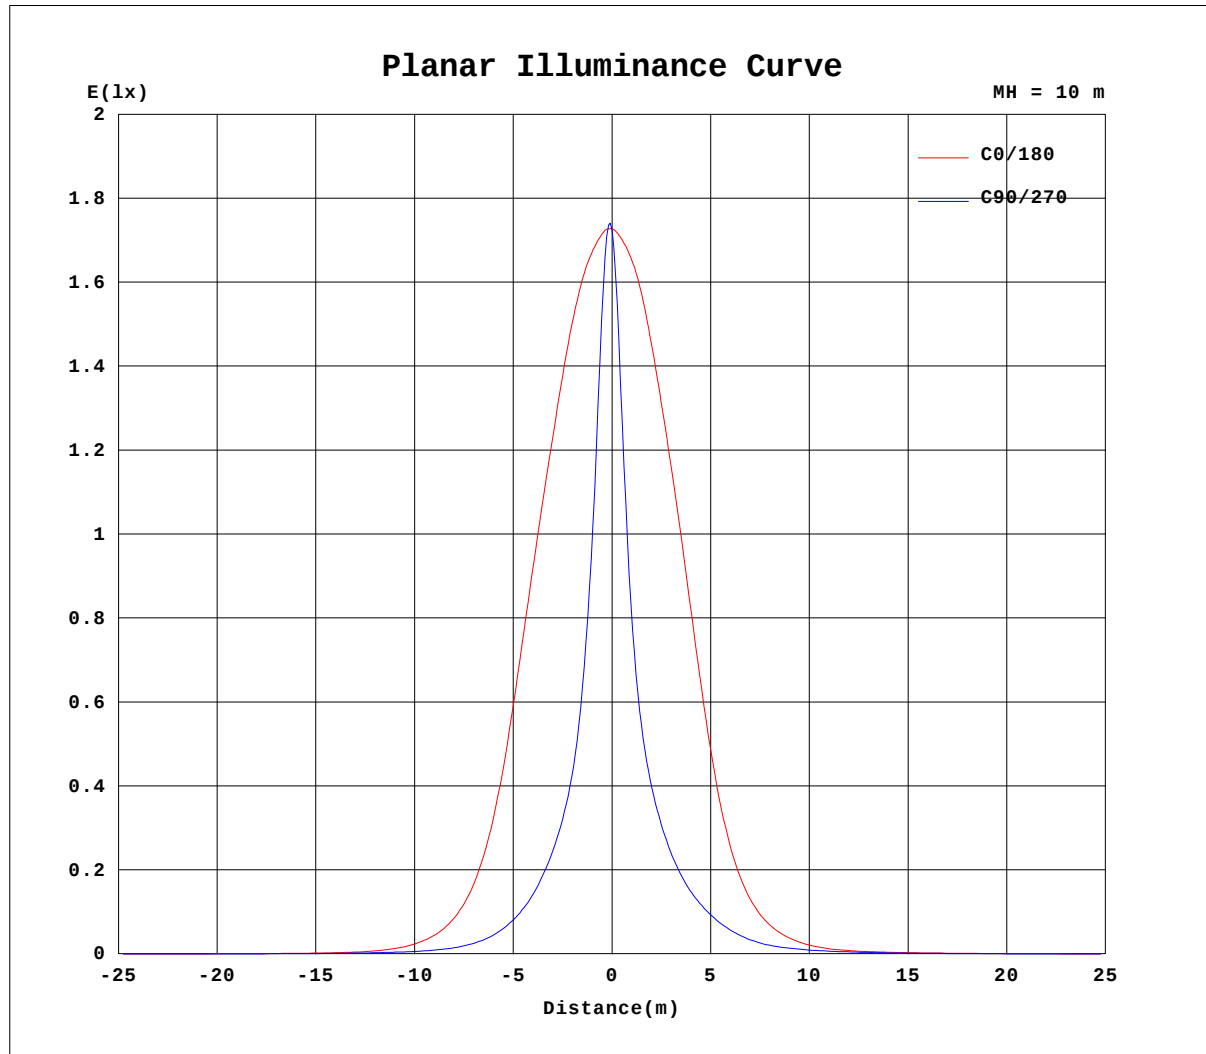


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-09

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Blazeline Max-598mm-RGBW DS-BLUE-1050D-Rev1	TYPE:RGBW DS-BLUE	WEIGHT:
SPEC.:10x50 DEG	DIM.:598MM	SERIAL No.:IES001838
MFR.:	SUR.:	Shielding Angle:

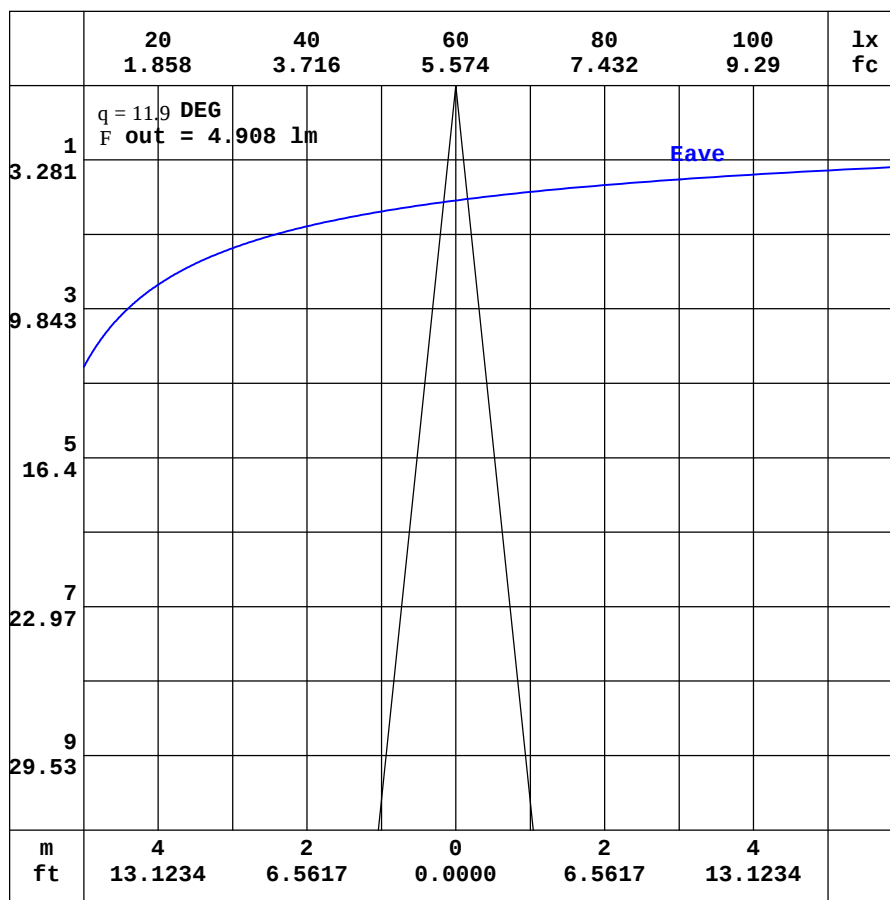

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Max-598mm-RGBW DS-BLUE-1050D-Rev1	TYPE:RGBW DS-BLUE	WEIGHT:
SPEC.:10x50 DEG	DIM.:598MM	SERIAL No.:IES001838
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.15	0.15	0.15	0.16	0.17	0.20	0.22	0.24	0.27	0.29	0.32	0.34	0.36	0.38	0.41	0.44	0.48	0.50	0.54
-170	0.15	0.15	0.14	0.15	0.15	0.17	0.18	0.19	0.20	0.22	0.23	0.25	0.26	0.28	0.31	0.35	0.40	0.45	0.54
-160	0.15	0.14	0.14	0.13	0.14	0.14	0.14	0.14	0.14	0.13	0.14	0.14	0.14	0.18	0.23	0.27	0.32	0.39	0.46
-150	0.15	0.14	0.13	0.12	0.11	0.10	0.10	0.09	0.07	0.06	0.05	0.06	0.08	0.10	0.13	0.15	0.19	0.23	0.25
-140	0.15	0.14	0.12	0.11	0.09	0.08	0.06	0.05	0.03	0.02	0.02	0.02	0.02	0.01	0.02	0.06	0.08	0.10	0.11
-130	0.15	0.13	0.11	0.09	0.08	0.06	0.04	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.01	0.02	0.03
-120	0.15	0.13	0.11	0.09	0.06	0.04	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.15	0.13	0.11	0.08	0.06	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.15	0.13	0.10	0.08	0.05	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.15	0.13	0.10	0.08	0.05	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.15	0.13	0.10	0.08	0.05	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.00	0.00	0.00
-70	0.15	0.13	0.11	0.09	0.07	0.05	0.03	0.05	0.07	0.10	0.12	0.14	0.16	0.17	0.18	0.19	0.19	0.19	0.18
-60	0.15	0.13	0.12	0.13	0.15	0.17	0.18	0.19	0.24	0.30	0.35	0.41	0.46	0.51	0.55	0.58	0.60	0.62	0.62
-50	0.15	0.14	0.14	0.20	0.28	0.34	0.38	0.39	0.45	0.55	0.67	0.79	0.92	1.03	1.13	1.22	1.29	1.31	1.31
-40	0.15	0.14	0.18	0.30	0.43	0.53	0.60	0.68	0.74	0.91	1.21	1.56	1.90	2.19	2.39	2.65	2.81	2.85	2.74
-30	0.15	0.15	0.23	0.41	0.58	0.72	0.86	1.03	1.25	1.66	2.30	3.19	4.17	5.10	5.94	6.61	7.53	8.08	8.04
-20	0.15	0.15	0.28	0.50	0.72	0.91	1.15	1.44	1.93	2.91	4.59	6.63	8.35	11.3	14.4	17.2	18.9	21.0	21.0
-10	0.15	0.16	0.33	0.58	0.83	1.09	1.41	1.85	2.67	4.63	8.38	14.5	23.7	34.2	39.8	42.8	51.9	51.1	53.4
0	0.15	0.17	0.36	0.64	0.93	1.23	1.62	2.15	3.22	6.07	12.2	23.9	45.9	79.4	114	140	159	169	173
10	0.15	0.17	0.34	0.61	0.87	1.15	1.51	1.97	2.84	4.87	8.72	15.0	24.4	35.1	40.8	43.5	51.8	49.5	48.0
20	0.15	0.17	0.31	0.56	0.80	1.03	1.32	1.68	2.24	3.34	5.16	7.47	9.45	12.7	16.0	18.7	20.2	21.8	21.2
30	0.15	0.16	0.27	0.49	0.70	0.89	1.10	1.35	1.67	2.19	2.98	4.00	5.18	6.40	7.49	8.36	9.36	9.92	9.89
40	0.15	0.16	0.23	0.39	0.57	0.73	0.87	1.04	1.21	1.44	1.78	2.20	2.66	3.10	3.47	3.82	4.04	4.08	3.94
50	0.15	0.16	0.20	0.31	0.44	0.56	0.66	0.75	0.86	0.99	1.13	1.28	1.43	1.59	1.74	1.87	1.97	2.02	2.01
60	0.15	0.16	0.18	0.23	0.31	0.38	0.45	0.52	0.58	0.63	0.70	0.75	0.81	0.87	0.94	1.00	1.03	1.06	1.07
70	0.15	0.16	0.17	0.19	0.21	0.25	0.28	0.31	0.34	0.36	0.38	0.39	0.41	0.43	0.45	0.47	0.49	0.50	0.50
80	0.15	0.16	0.17	0.17	0.18	0.19	0.21	0.20	0.20	0.19	0.19	0.19	0.18	0.19	0.20	0.21	0.22	0.23	0.23
90	0.15	0.16	0.16	0.17	0.17	0.18	0.18	0.18	0.17	0.16	0.15	0.14	0.13	0.14	0.14	0.15	0.15	0.16	0.17
100	0.15	0.16	0.16	0.16	0.16	0.16	0.16	0.14	0.13	0.12	0.11	0.10	0.10	0.09	0.09	0.09	0.10	0.10	0.10
110	0.15	0.16	0.16	0.16	0.15	0.14	0.13	0.12	0.11	0.11	0.10	0.10	0.10	0.09	0.09	0.09	0.09	0.09	0.09
120	0.15	0.16	0.16	0.15	0.14	0.13	0.13	0.12	0.12	0.11	0.11	0.11	0.11	0.12	0.12	0.11	0.10	0.09	0.09
130	0.15	0.16	0.15	0.15	0.14	0.14	0.13	0.13	0.12	0.13	0.13	0.14	0.16	0.18	0.19	0.20	0.21	0.20	0.19
140	0.15	0.15	0.15	0.15	0.15	0.15	0.14	0.14	0.14	0.15	0.18	0.21	0.23	0.27	0.30	0.33	0.34	0.35	0.35
150	0.15	0.15	0.15	0.15	0.15	0.16	0.16	0.16	0.17	0.20	0.21	0.26	0.30	0.34	0.38	0.43	0.43	0.44	0.43
160	0.15	0.15	0.15	0.15	0.16	0.17	0.18	0.19	0.22	0.23	0.27	0.29	0.33	0.37	0.42	0.48	0.53	0.55	0.56
170	0.15	0.15	0.15	0.16	0.17	0.18	0.20	0.22	0.24	0.27	0.29	0.33	0.35	0.38	0.42	0.45	0.51	0.56	0.64
180	0.15	0.15	0.15	0.16	0.17	0.20	0.22	0.24	0.27	0.29	0.32	0.34	0.36	0.38	0.41	0.44	0.48	0.50	0.54

H_b Range: -90 - 90DEGH_b Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-10-09

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Max-598mm-RGBW DS-BLUE-1050D-Rev1	TYPE:RGBW DS-BLUE	WEIGHT:
SPEC.:10x50 DEG	DIM.:598MM	SERIAL No.:IES001838
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	0.51	0.48	0.44	0.36	0.28	0.21	0.14	0.06	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-170	0.55	0.53	0.49	0.41	0.32	0.23	0.17	0.09	0.04	0.02	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00
-160	0.43	0.39	0.35	0.31	0.26	0.21	0.15	0.10	0.06	0.04	0.03	0.01	0.01	0.00	0.00	0.00	0.00	0.00
-150	0.25	0.23	0.20	0.17	0.15	0.12	0.11	0.09	0.07	0.05	0.03	0.02	0.01	0.00	0.00	0.00	0.00	0.00
-140	0.11	0.10	0.07	0.06	0.05	0.04	0.05	0.05	0.05	0.04	0.03	0.02	0.01	0.00	0.00	0.00	0.00	0.00
-130	0.02	0.01	0.01	0.00	0.00	0.01	0.02	0.03	0.03	0.03	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.00
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.19	0.19	0.19	0.18	0.18	0.16	0.14	0.12	0.11	0.09	0.05	0.03	0.02	0.02	0.01	0.00	0.00	0.00
-60	0.61	0.59	0.56	0.53	0.49	0.44	0.40	0.35	0.29	0.24	0.19	0.16	0.14	0.09	0.04	0.01	0.00	0.00
-50	1.31	1.27	1.21	1.10	1.00	0.91	0.79	0.67	0.56	0.46	0.37	0.32	0.27	0.20	0.11	0.03	0.00	0.00
-40	2.87	2.85	2.69	2.40	2.23	1.95	1.62	1.26	0.95	0.74	0.60	0.48	0.39	0.31	0.19	0.07	0.00	0.00
-30	8.18	7.70	6.83	6.28	5.45	4.46	3.42	2.47	1.71	1.16	0.86	0.67	0.52	0.40	0.27	0.11	0.00	0.00
-20	21.2	19.3	18.3	15.7	12.4	9.25	7.45	5.08	3.05	1.75	1.15	0.85	0.64	0.48	0.34	0.15	0.00	0.00
-10	53.4	58.3	49.5	45.2	40.4	29.1	17.7	9.85	5.06	2.47	1.43	1.00	0.74	0.54	0.38	0.18	0.01	0.00
0	170	163	147	125	94.2	58.0	30.5	14.8	6.85	3.00	1.61	1.10	0.81	0.60	0.42	0.20	0.01	0.00
10	49.0	53.0	44.6	43.3	40.1	29.2	18.0	10.1	5.26	2.64	1.56	1.09	0.81	0.59	0.41	0.20	0.01	0.00
20	21.7	20.2	19.0	16.3	13.0	9.75	7.99	5.53	3.43	2.06	1.39	1.02	0.76	0.57	0.39	0.18	0.02	0.00
30	9.98	9.46	8.47	7.60	6.52	5.28	4.10	3.09	2.22	1.57	1.18	0.90	0.68	0.52	0.35	0.15	0.02	0.00
40	4.08	4.03	3.81	3.44	3.10	2.68	2.24	1.82	1.47	1.20	0.96	0.75	0.59	0.45	0.29	0.12	0.02	0.00
50	2.01	1.96	1.86	1.72	1.57	1.43	1.28	1.13	1.00	0.86	0.73	0.60	0.48	0.36	0.22	0.09	0.03	0.00
60	1.06	1.03	0.99	0.92	0.85	0.80	0.75	0.69	0.63	0.58	0.53	0.45	0.35	0.25	0.15	0.07	0.03	0.00
70	0.50	0.48	0.47	0.45	0.42	0.40	0.39	0.38	0.37	0.35	0.33	0.29	0.24	0.17	0.11	0.06	0.03	0.00
80	0.23	0.22	0.21	0.20	0.20	0.19	0.20	0.21	0.21	0.22	0.22	0.22	0.18	0.14	0.10	0.06	0.03	0.00
90	0.16	0.15	0.15	0.14	0.13	0.13	0.14	0.15	0.16	0.17	0.17	0.18	0.15	0.12	0.09	0.06	0.03	0.00
100	0.10	0.10	0.10	0.09	0.09	0.09	0.10	0.10	0.11	0.12	0.13	0.15	0.12	0.10	0.08	0.06	0.03	0.00
110	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.10	0.10	0.11	0.12	0.12	0.10	0.09	0.07	0.05	0.03	0.00
120	0.09	0.10	0.11	0.11	0.11	0.11	0.11	0.10	0.10	0.11	0.11	0.10	0.08	0.07	0.06	0.04	0.02	0.00
130	0.20	0.21	0.20	0.19	0.18	0.16	0.14	0.12	0.11	0.11	0.10	0.09	0.07	0.06	0.05	0.04	0.02	0.00
140	0.36	0.35	0.35	0.32	0.28	0.24	0.21	0.18	0.15	0.11	0.09	0.07	0.06	0.05	0.04	0.03	0.02	0.00
150	0.45	0.46	0.45	0.42	0.37	0.31	0.27	0.22	0.18	0.12	0.08	0.06	0.05	0.04	0.03	0.02	0.01	0.00
160	0.58	0.58	0.54	0.48	0.43	0.36	0.28	0.20	0.14	0.10	0.06	0.05	0.03	0.03	0.02	0.01	0.01	0.00
170	0.61	0.60	0.57	0.49	0.40	0.32	0.23	0.14	0.09	0.06	0.04	0.02	0.02	0.01	0.01	0.01	0.00	0.00
180	0.51	0.48	0.44	0.36	0.28	0.21	0.14	0.06	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H_(b) Range: -90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-10-09

V(B) Range: -180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: