

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		3350.9 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	44.3V x 73.7H
	At 50% of Imax	11.2V x 48.8H
	At 90% of Imax	4.1V x 23.0H
Beam Flux	Total	1000.2 lumens per klm.
	To 10% of Imax	744.1 lumens per klm.
	To 50% of Imax	355.9 lumens per klm.
	To 90% of Imax	74.8 lumens per klm.
	Upward LOR	2.2 %
	Downward LOR	97.8 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(B) Range:-90 - 90DEG
H(B) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-08

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Blazeline Max-598mm-RGBW DS-RED-1050D-Rev1	TYPE:RGBW DS-RED	WEIGHT:
SPEC.:10x50 DEG	DIM.:598MM	SERIAL No.:IES001836
MFR.:	SUR.:	Shielding Angle:

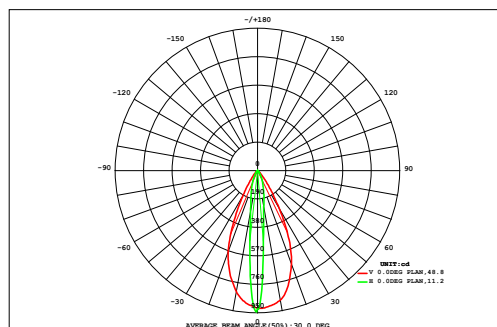

DATA OF LAMP		Eff:50.03lm/W	
MODEL		Imax(cd)	944.0
NOMINAL POWER(W)	5.6	AVAILABILITY(%)	74.8
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	210.6
NOMINAL FLUX(lm)	281.7	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	281.7
TEST VOLTAGE(V)	220	q @50%(H,V)	49,11DEG

		AREA FLUX DIAGRAM																UNIT:lm			F t	F a
		0.01	0.02	0.02	0.03	0.04	0.05	0.05	0.06	0.06	0.06	0.06	0.06	0.05	0.04	0.04	0.03	0.02	0.01	0.71	0.00	
VERTICAL (DEG)	72	0.01	0.02	0.03	0.05	0.06	0.07	0.09	0.10	0.11	0.11	0.10	0.09	0.08	0.07	0.05	0.04	0.03	0.01	1.13	0.00	
	64	0.02	0.03	0.04	0.06	0.09	0.11	0.14	0.16	0.17	0.18	0.17	0.15	0.12	0.10	0.08	0.05	0.03	0.02	1.72	0.00	
	56	0.02	0.04	0.06	0.08	0.13	0.17	0.22	0.27	0.29	0.29	0.28	0.24	0.20	0.15	0.10	0.07	0.04	0.02	2.67	0.00	
	48	0.03	0.05	0.07	0.12	0.19	0.29	0.39	0.49	0.56	0.58	0.54	0.44	0.33	0.23	0.14	0.08	0.05	0.03	4.60	0.00	
	40	0.03	0.05	0.09	0.17	0.30	0.50	0.73	0.97	1.17	1.20	1.06	0.83	0.58	0.35	0.19	0.10	0.05	0.03	8.39	0.00	
	32	0.03	0.06	0.11	0.24	0.49	0.83	1.34	1.84	2.18	2.22	1.97	1.52	0.98	0.59	0.27	0.11	0.06	0.03	14.9	6.60	
	24	0.03	0.07	0.13	0.33	0.84	1.81	2.74	3.74	4.20	4.31	4.09	3.18	2.35	1.09	0.39	0.13	0.06	0.03	29.5	25.7	
		0.04	0.07	0.14	0.42	1.29	3.74	7.53	9.83	11.4	12.4	11.0	8.76	5.00	1.77	0.51	0.14	0.06	0.03	74.1	71.5	
		0.04	0.07	0.14	0.41	1.27	3.71	7.50	9.97	12.2	13.2	11.5	8.88	5.01	1.76	0.50	0.14	0.06	0.03	76.4	73.8	
		0.03	0.06	0.12	0.31	0.80	1.75	2.65	3.77	4.44	4.64	4.47	3.34	2.36	1.07	0.37	0.12	0.06	0.03	30.4	26.5	
	-24	0.03	0.05	0.09	0.20	0.44	0.75	1.24	1.80	2.23	2.28	1.98	1.51	0.96	0.56	0.24	0.10	0.05	0.03	14.5	6.61	
	-32	0.02	0.04	0.07	0.13	0.24	0.42	0.63	0.87	1.07	1.10	0.95	0.75	0.52	0.31	0.16	0.07	0.04	0.02	7.42	0.00	
	-40	0.02	0.03	0.05	0.08	0.14	0.22	0.29	0.39	0.45	0.47	0.44	0.35	0.27	0.17	0.10	0.06	0.04	0.02	3.59	0.00	
	-48	0.02	0.03	0.03	0.05	0.08	0.11	0.15	0.18	0.20	0.21	0.20	0.17	0.14	0.10	0.06	0.04	0.03	0.02	1.81	0.00	
	-56	0.01	0.02	0.02	0.04	0.05	0.07	0.08	0.10	0.11	0.11	0.11	0.09	0.08	0.06	0.04	0.03	0.02	0.01	1.05	0.00	
	-64	0.01	0.01	0.02	0.02	0.03	0.04	0.05	0.06	0.06	0.06	0.06	0.05	0.04	0.04	0.03	0.02	0.02	0.01	0.63	0.00	
-72	0.01	0.01	0.01	0.01	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.01	0.01	0.01	0.34	0.00		
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)				16	24	32	40	48	56	64	72		
F t	0.41	0.73	1.26	2.74	6.50	14.7	25.8	34.6	41.0	43.4	39.0	30.5	19.1	8.46	3.29	1.35	0.72	0.38	274	---		
F a	0.00	0.00	0.00	0.00	1.04	9.77	20.4	29.4	35.8	38.2	33.8	25.1	14.2	3.03	0.00	0.00	0.00	0.00	---	211		


one-half-peak spread: U:5.9,D:5.5 , L:25.1,R:25.1 Beam Type: Type 5 x 3 (H x V)

H(B) Range:-90 - 90DEG
H(B) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-08

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:Blazeline Max-598mm-RGBW DS-RED-1050D-Rev1	TYPE:RGBW DS-RED	WEIGHT:
SPEC.:10x50 DEG	DIM.:598MM	SERIAL No.:IES001836
MFR.:	SUR.:	Shielding Angle:

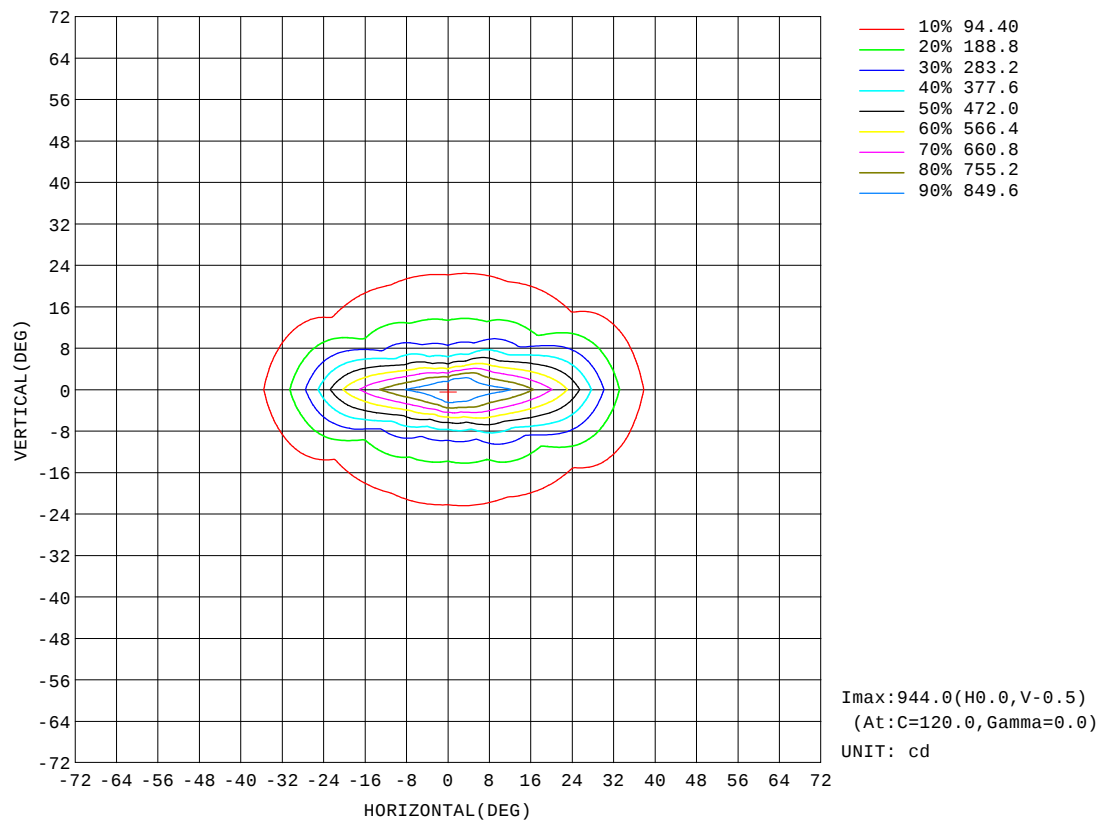


H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-08

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Blazeline Max-598mm-RGBW DS-RED-1050D-Rev1	TYPE:RGBW DS-RED	WEIGHT:
SPEC.:10x50 DEG	DIM.:598MM	SERIAL No.:IES001836
MFR.:	SUR.:	Shielding Angle:

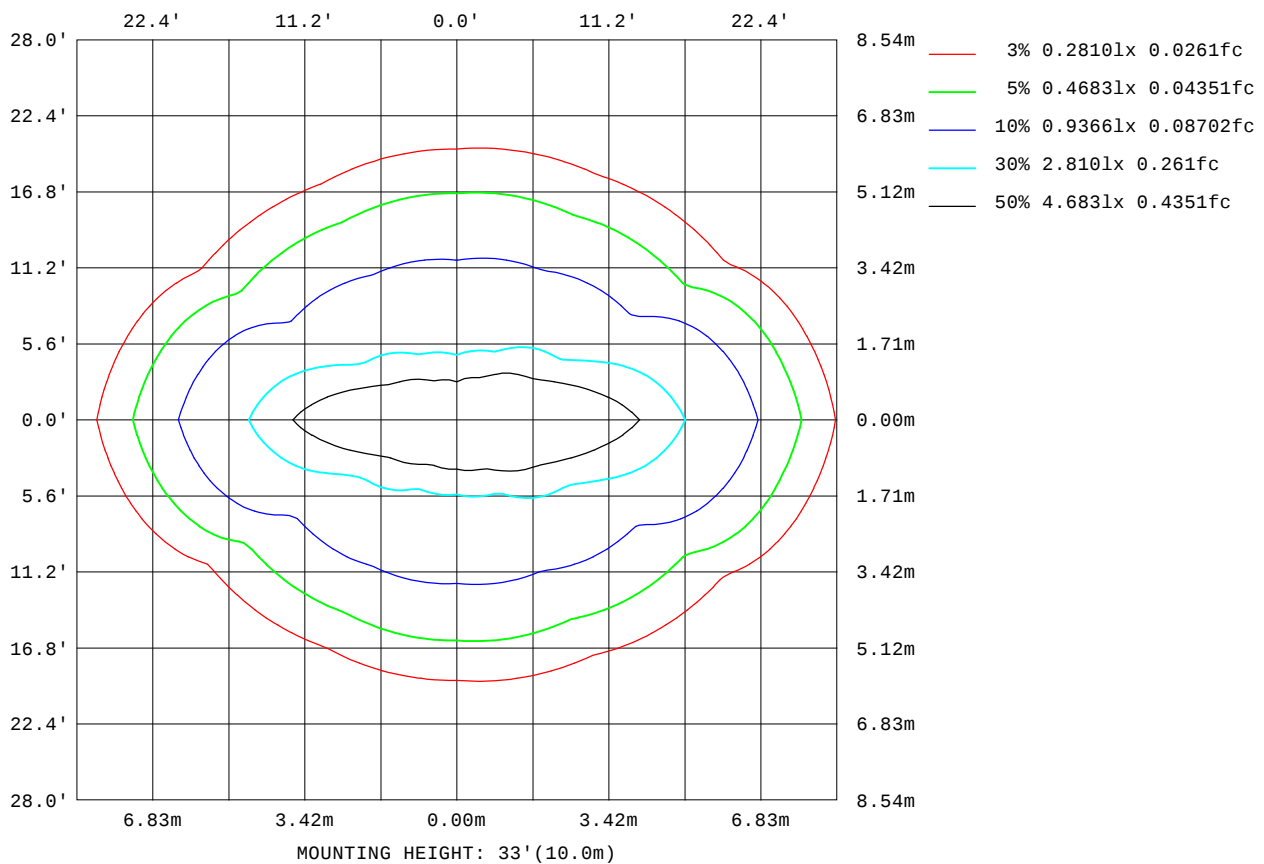

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-08

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

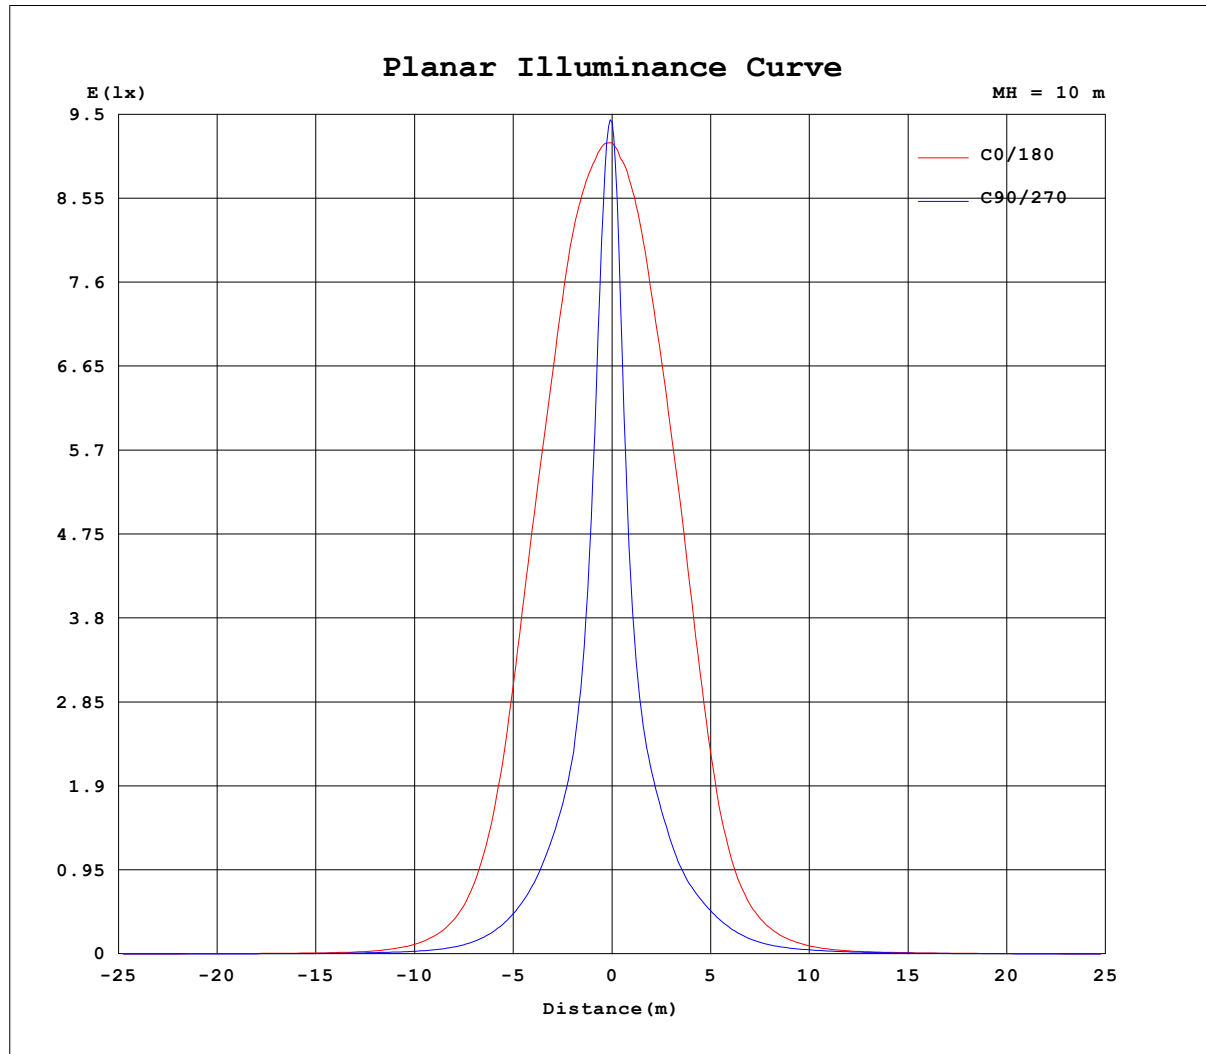


H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-08

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Blazeline Max-598mm-RGBW DS-RED-1050D-Rev1	TYPE:RGBW DS-RED	WEIGHT:
SPEC.:10x50 DEG	DIM.:598MM	SERIAL No.:IES001836
MFR.:	SUR.:	Shielding Angle:

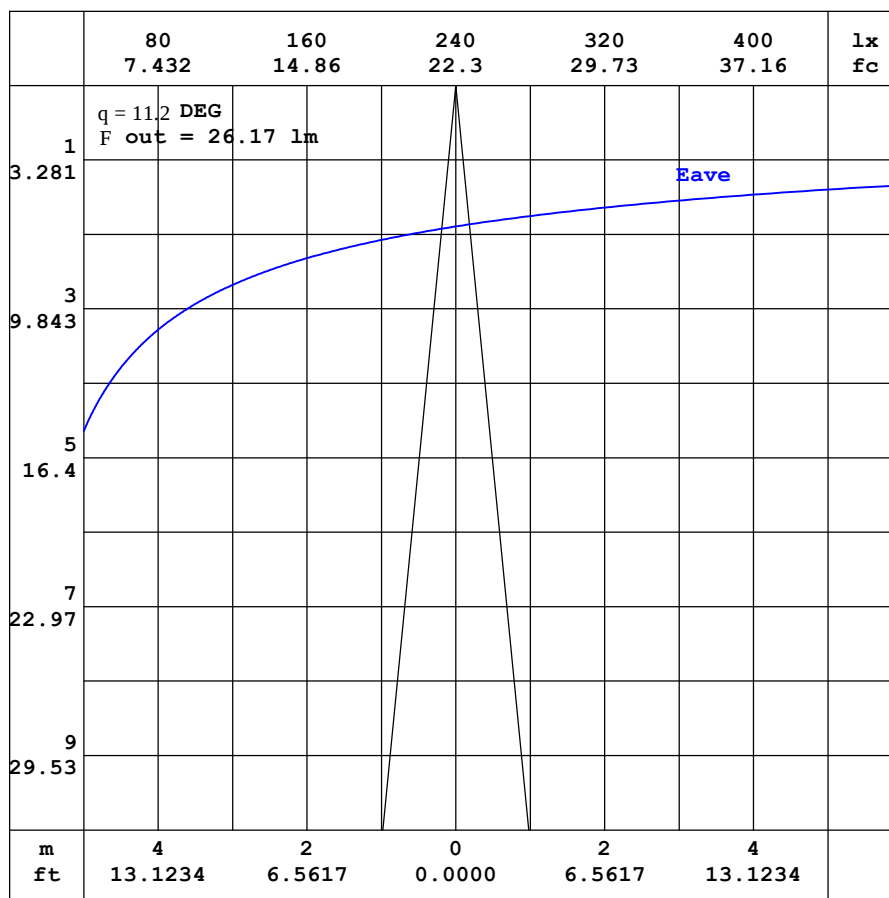

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-08

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Max-598mm-RGBW DS-RED-1050D-Rev1	TYPE:RGBW DS-RED	WEIGHT:
SPEC.:10x50 DEG	DIM.:598MM	SERIAL No.:IES001836
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.96	0.87	0.87	0.88	0.93	1.03	1.17	1.33	1.50	1.66	1.81	1.93	2.01	2.00	2.00	1.97	1.96	1.96	2.01
-170	0.96	0.86	0.84	0.83	0.86	0.93	1.01	1.11	1.20	1.30	1.38	1.46	1.53	1.58	1.63	1.72	1.89	2.04	2.21
-160	0.96	0.85	0.81	0.79	0.79	0.81	0.83	0.87	0.90	0.91	0.92	0.93	0.97	1.15	1.33	1.49	1.66	1.80	1.88
-150	0.96	0.84	0.78	0.75	0.72	0.71	0.69	0.67	0.62	0.57	0.52	0.59	0.68	0.79	0.90	1.02	1.14	1.22	1.26
-140	0.96	0.83	0.76	0.71	0.66	0.62	0.57	0.51	0.43	0.39	0.38	0.39	0.41	0.45	0.48	0.57	0.64	0.68	0.71
-130	0.96	0.83	0.74	0.67	0.62	0.55	0.49	0.41	0.37	0.36	0.35	0.32	0.30	0.27	0.27	0.29	0.31	0.34	0.35
-120	0.96	0.83	0.72	0.64	0.57	0.51	0.44	0.38	0.37	0.37	0.37	0.35	0.33	0.31	0.30	0.28	0.27	0.27	0.27
-110	0.96	0.83	0.72	0.62	0.54	0.47	0.39	0.37	0.37	0.37	0.36	0.36	0.36	0.36	0.36	0.37	0.37	0.37	0.38
-100	0.96	0.83	0.72	0.62	0.52	0.43	0.34	0.35	0.35	0.35	0.35	0.35	0.35	0.36	0.36	0.37	0.37	0.38	0.38
-90	0.96	0.84	0.73	0.62	0.51	0.40	0.29	0.29	0.29	0.28	0.28	0.27	0.27	0.28	0.29	0.31	0.32	0.33	0.34
-80	0.96	0.87	0.76	0.65	0.54	0.41	0.28	0.27	0.28	0.30	0.31	0.32	0.32	0.33	0.34	0.34	0.34	0.34	0.33
-70	0.96	0.88	0.80	0.72	0.66	0.63	0.56	0.62	0.73	0.81	0.87	0.92	0.96	1.03	1.12	1.20	1.26	1.31	1.33
-60	0.96	0.90	0.88	0.91	1.07	1.22	1.24	1.22	1.41	1.60	1.78	1.97	2.15	2.33	2.59	2.81	2.99	3.13	3.20
-50	0.96	0.94	1.01	1.30	1.71	1.97	2.06	2.05	2.26	2.65	3.09	3.56	4.08	4.52	5.07	5.61	6.04	6.33	6.44
-40	0.96	0.97	1.18	1.78	2.37	2.75	3.02	3.27	3.48	4.15	5.42	6.88	8.43	9.76	10.8	12.5	13.7	14.5	14.5
-30	0.96	1.01	1.41	2.26	3.03	3.56	4.13	4.77	5.69	7.41	10.2	14.1	18.6	23.1	27.6	33.0	39.5	43.9	45.2
-20	0.96	1.06	1.63	2.68	3.62	4.40	5.33	6.55	8.59	12.9	20.1	28.9	36.6	50.6	66.5	83.7	98.3	113	115
-10	0.96	1.10	1.80	3.06	4.14	5.19	6.51	8.33	11.8	20.4	36.3	62.5	103	156	183	197	256	258	276
0	0.96	1.13	1.91	3.34	4.55	5.82	7.46	9.70	14.2	26.6	51.9	102	203	380	575	715	821	887	918
10	0.96	1.12	1.86	3.17	4.33	5.48	6.94	8.93	12.6	21.5	37.9	64.7	106	160	189	201	249	243	244
20	0.96	1.11	1.75	2.89	3.98	4.94	6.13	7.66	10.1	14.9	22.8	32.7	41.5	55.6	72.5	87.4	99.2	110	110
30	0.96	1.09	1.58	2.55	3.52	4.29	5.19	6.25	7.61	9.93	13.5	17.9	23.0	28.5	33.7	38.4	44.8	49.6	51.0
40	0.96	1.06	1.38	2.13	2.94	3.60	4.20	4.88	5.63	6.64	8.18	10.1	12.1	13.9	15.6	17.5	18.9	19.6	19.5
50	0.96	1.04	1.25	1.69	2.29	2.84	3.26	3.64	4.12	4.73	5.36	6.03	6.81	7.49	8.30	9.01	9.55	9.90	10.0
60	0.96	1.02	1.13	1.33	1.67	2.04	2.33	2.61	2.91	3.19	3.50	3.77	4.06	4.36	4.67	4.98	5.22	5.38	5.46
70	0.96	1.00	1.06	1.14	1.25	1.40	1.55	1.69	1.85	2.00	2.12	2.22	2.29	2.41	2.54	2.62	2.68	2.72	2.72
80	0.96	0.99	1.01	1.04	1.07	1.11	1.15	1.17	1.20	1.22	1.24	1.26	1.28	1.31	1.35	1.37	1.40	1.41	1.42
90	0.96	0.96	0.97	0.97	0.98	0.99	0.99	0.98	0.97	0.97	0.96	0.95	0.94	0.95	0.96	0.96	0.97	0.98	0.99
100	0.96	0.95	0.93	0.92	0.91	0.90	0.90	0.87	0.84	0.82	0.80	0.78	0.76	0.76	0.77	0.77	0.78	0.79	0.79
110	0.96	0.93	0.91	0.88	0.87	0.85	0.83	0.82	0.80	0.79	0.78	0.77	0.76	0.76	0.76	0.76	0.76	0.76	0.76
120	0.96	0.91	0.88	0.86	0.85	0.83	0.82	0.81	0.81	0.82	0.82	0.84	0.85	0.86	0.86	0.86	0.85	0.84	0.82
130	0.96	0.91	0.87	0.86	0.85	0.84	0.84	0.86	0.90	0.95	1.01	1.07	1.13	1.20	1.26	1.30	1.35	1.37	1.37
140	0.96	0.89	0.87	0.85	0.85	0.86	0.90	0.97	1.06	1.16	1.27	1.39	1.52	1.65	1.79	1.91	2.01	2.07	2.11
150	0.96	0.88	0.86	0.86	0.87	0.91	0.99	1.10	1.22	1.37	1.52	1.69	1.86	2.02	2.17	2.27	2.33	2.36	2.37
160	0.96	0.88	0.87	0.86	0.89	0.97	1.07	1.21	1.37	1.54	1.71	1.89	2.06	2.21	2.32	2.42	2.51	2.54	2.59
170	0.96	0.88	0.87	0.87	0.92	1.01	1.14	1.29	1.46	1.64	1.81	1.96	2.10	2.19	2.26	2.32	2.35	2.40	2.60
180	0.96	0.87	0.87	0.88	0.93	1.03	1.17	1.33	1.50	1.66	1.81	1.93	2.01	2.00	2.00	1.97	1.96	1.96	2.02

H_b Range:-90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-08

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Max-598mm-RGBW DS-RED-1050D-Rev1	TYPE:RGBW DS-RED	WEIGHT:
SPEC.:10x50 DEG	DIM.:598MM	SERIAL No.:IES001836
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	1.85	1.72	1.60	1.45	1.28	1.09	0.91	0.72	0.57	0.48	0.41	0.35	0.34	0.34	0.34	0.31	0.27	0.28
-170	2.15	2.02	1.86	1.62	1.38	1.14	0.97	0.81	0.65	0.52	0.42	0.37	0.36	0.35	0.34	0.31	0.28	0.28
-160	1.82	1.73	1.67	1.48	1.25	1.09	1.03	0.83	0.66	0.52	0.42	0.38	0.37	0.36	0.36	0.32	0.28	0.28
-150	1.30	1.30	1.24	1.11	1.01	0.93	0.83	0.74	0.61	0.47	0.42	0.40	0.38	0.37	0.35	0.32	0.28	0.28
-140	0.74	0.74	0.71	0.66	0.62	0.59	0.57	0.50	0.48	0.46	0.42	0.40	0.39	0.37	0.35	0.32	0.28	0.28
-130	0.37	0.37	0.38	0.37	0.38	0.40	0.41	0.43	0.43	0.43	0.42	0.41	0.39	0.38	0.34	0.32	0.29	0.28
-120	0.29	0.31	0.33	0.35	0.38	0.40	0.41	0.42	0.42	0.42	0.42	0.41	0.39	0.36	0.34	0.30	0.29	0.28
-110	0.39	0.39	0.40	0.41	0.41	0.42	0.42	0.42	0.42	0.41	0.41	0.39	0.37	0.35	0.32	0.30	0.29	0.28
-100	0.39	0.39	0.39	0.39	0.39	0.39	0.38	0.38	0.38	0.38	0.37	0.37	0.35	0.33	0.32	0.30	0.29	0.28
-90	0.34	0.34	0.33	0.33	0.32	0.32	0.33	0.33	0.34	0.34	0.35	0.35	0.34	0.33	0.32	0.30	0.29	0.28
-80	0.36	0.37	0.39	0.40	0.41	0.41	0.42	0.42	0.41	0.40	0.37	0.36	0.39	0.40	0.42	0.38	0.29	0.28
-70	1.35	1.35	1.32	1.28	1.22	1.17	1.16	1.14	1.09	1.02	0.92	0.79	0.70	0.58	0.49	0.45	0.38	0.28
-60	3.20	3.13	3.01	2.85	2.64	2.52	2.41	2.25	2.08	1.88	1.67	1.55	1.37	1.08	0.76	0.53	0.46	0.28
-50	6.55	6.46	6.17	5.68	5.17	4.76	4.28	3.81	3.40	3.00	2.63	2.35	2.08	1.71	1.17	0.68	0.47	0.28
-40	15.3	15.1	14.3	12.8	11.7	10.2	8.50	6.72	5.28	4.34	3.79	3.26	2.75	2.30	1.63	0.91	0.50	0.28
-30	45.7	42.6	37.4	33.5	28.7	23.1	17.6	12.9	9.00	6.31	4.97	4.21	3.45	2.80	2.08	1.13	0.54	0.28
-20	116	105	96.6	81.4	63.6	47.0	37.1	24.9	15.1	9.07	6.29	5.03	4.10	3.23	2.44	1.33	0.57	0.28
-10	274	303	250	230	206	143	84.4	46.1	24.0	12.2	7.50	5.73	4.65	3.61	2.71	1.48	0.60	0.28
0	908	878	792	664	489	288	144	67.6	31.4	14.5	8.23	6.22	5.03	3.87	2.88	1.57	0.61	0.28
10	253	274	224	221	203	143	85.1	47.0	25.0	13.0	8.14	6.21	4.97	3.81	2.83	1.55	0.62	0.28
20	113	104	96.1	82.2	64.9	48.6	38.9	26.8	17.0	10.6	7.49	5.92	4.70	3.62	2.66	1.44	0.62	0.28
30	51.4	48.5	43.2	38.3	32.6	26.4	20.7	15.9	11.5	8.40	6.60	5.37	4.25	3.32	2.39	1.30	0.61	0.28
40	20.3	20.1	19.1	17.4	15.8	13.8	11.7	9.67	7.98	6.70	5.57	4.54	3.67	2.90	1.99	1.12	0.60	0.28
50	10.2	10.0	9.62	9.08	8.41	7.73	6.98	6.31	5.67	5.04	4.36	3.65	3.01	2.32	1.57	0.93	0.59	0.28
60	5.50	5.44	5.32	5.12	4.85	4.63	4.38	4.11	3.81	3.49	3.16	2.72	2.21	1.68	1.20	0.81	0.59	0.28
70	2.78	2.80	2.79	2.74	2.66	2.58	2.53	2.45	2.34	2.18	2.00	1.78	1.50	1.20	0.94	0.73	0.51	0.28
80	1.43	1.42	1.42	1.40	1.38	1.35	1.36	1.36	1.35	1.34	1.33	1.30	1.14	0.98	0.84	0.64	0.42	0.28
90	0.99	0.99	0.98	0.98	0.98	0.98	1.00	1.02	1.04	1.06	1.08	1.10	0.97	0.83	0.69	0.55	0.42	0.28
100	0.79	0.79	0.79	0.79	0.79	0.79	0.80	0.81	0.84	0.87	0.90	0.93	0.96	0.86	0.75	0.64	0.53	0.40
110	0.77	0.77	0.78	0.78	0.79	0.80	0.80	0.82	0.83	0.84	0.86	0.85	0.85	0.78	0.70	0.60	0.50	0.40
120	0.85	0.87	0.89	0.90	0.90	0.89	0.88	0.86	0.85	0.84	0.85	0.80	0.72	0.64	0.57	0.47	0.38	0.28
130	1.39	1.38	1.35	1.31	1.26	1.18	1.11	1.04	0.98	0.93	0.85	0.75	0.68	0.61	0.53	0.46	0.37	0.28
140	2.11	2.09	2.03	1.93	1.80	1.66	1.52	1.38	1.20	1.04	0.86	0.72	0.63	0.57	0.50	0.43	0.35	0.28
150	2.39	2.39	2.35	2.29	2.20	2.06	1.90	1.71	1.40	1.05	0.83	0.69	0.57	0.52	0.47	0.41	0.33	0.28
160	2.60	2.60	2.62	2.59	2.50	2.34	1.96	1.60	1.27	0.99	0.75	0.60	0.51	0.46	0.43	0.37	0.31	0.28
170	2.58	2.57	2.62	2.67	2.23	1.86	1.54	1.22	0.98	0.78	0.60	0.49	0.43	0.40	0.38	0.34	0.29	0.28
180	1.85	1.72	1.60	1.45	1.28	1.09	0.91	0.72	0.57	0.48	0.41	0.35	0.34	0.34	0.34	0.31	0.27	0.28

H_b Range:-90 - 90DEGH_b Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-10-08

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: