

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		10869.2 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	27.2V x 27.4H
	At 50% of Imax	14.7V x 14.8H
	At 90% of Imax	6.1V x 6.0H
Beam Flux	Total	1000.4 lumens per klm.
	To 10% of Imax	745.4 lumens per klm.
	To 50% of Imax	411.4 lumens per klm.
	To 90% of Imax	92.7 lumens per klm.
	Upward LOR	2.2 %
	Downward LOR	97.8 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-07

V(β) Range:-180 - 180DEG
V(β) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Blazeline Max-598mm-RGBW DS-3000K-15D-Rev1	TYPE:RGBW DS-3000K	WEIGHT:
SPEC.:15 DEG	DIM.:598MM	SERIAL No.:IES001823
MFR.:	SUR.:	Shielding Angle:

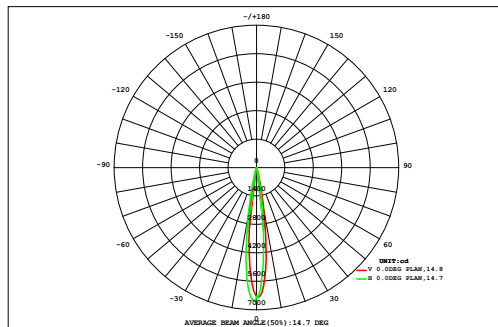

DATA OF LAMP		Eff:85.60lm/W	
MODEL		Imax(cd)	6560
NOMINAL POWER(W)	7.08	AVAILABILITY(%)	74.2
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	447.9
NOMINAL FLUX(lm)	603.5	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	603.5
TEST VOLTAGE(V)	220	q @50%(H,V)	15,15DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm				F t	F a
	18	16	14	12	10	8	6	4	2	0	2	4	6	8	10	12	14	16	18			
	0.10	0.11	0.13	0.14	0.16	0.18	0.20	0.21	0.22	0.22	0.22	0.20	0.18	0.16	0.14	0.13	0.12	0.11	2.95	0.00		
	0.11	0.13	0.15	0.18	0.21	0.26	0.31	0.35	0.36	0.36	0.35	0.32	0.27	0.22	0.18	0.15	0.13	0.12	4.14	0.00		
	0.12	0.15	0.18	0.23	0.32	0.42	0.51	0.60	0.64	0.65	0.61	0.53	0.43	0.33	0.24	0.19	0.15	0.13	6.45	0.00		
	0.14	0.17	0.23	0.34	0.48	0.68	0.90	1.08	1.19	1.21	1.12	0.94	0.72	0.51	0.36	0.25	0.18	0.15	10.7	6.50		
	0.16	0.21	0.31	0.48	0.74	1.10	1.50	1.85	2.03	2.06	1.92	1.59	1.18	0.80	0.52	0.34	0.23	0.17	17.2	13.9		
	0.18	0.26	0.41	0.68	1.10	1.66	2.33	2.94	3.29	3.35	3.10	2.50	1.79	1.20	0.74	0.46	0.30	0.20	26.5	23.7		
	0.21	0.33	0.54	0.92	1.49	2.29	3.30	4.29	4.85	4.95	4.53	3.57	2.51	1.67	1.08	0.66	0.40	0.25	37.8	35.4		
	0.23	0.39	0.66	1.16	1.91	2.95	4.20	5.51	6.38	6.54	5.84	4.60	3.40	2.32	1.48	0.89	0.51	0.29	49.3	47.2		
	0.25	0.43	0.75	1.33	2.24	3.49	4.95	6.30	7.30	7.54	6.83	5.74	4.33	2.93	1.82	1.08	0.60	0.33	58.2	56.3		
	0.27	0.47	0.83	1.49	2.53	3.94	5.56	7.05	7.85	7.82	7.32	6.21	4.71	3.19	1.97	1.16	0.64	0.35	63.4	61.3		
	0.28	0.50	0.89	1.59	2.69	4.19	5.79	6.92	7.49	7.48	6.92	5.89	4.49	3.04	1.89	1.11	0.62	0.35	62.1	60.0		
	0.28	0.49	0.86	1.51	2.50	3.73	4.90	5.87	6.51	6.53	5.93	4.98	3.82	2.62	1.65	0.97	0.55	0.32	54.0	52.0		
	0.25	0.44	0.75	1.26	1.93	2.78	3.67	4.49	5.07	5.10	4.58	3.78	2.87	2.01	1.31	0.79	0.47	0.28	41.8	39.7		
	0.21	0.36	0.58	0.91	1.37	1.91	2.51	3.11	3.53	3.56	3.18	2.59	1.99	1.43	0.94	0.60	0.38	0.23	29.4	26.6		
	0.17	0.27	0.42	0.63	0.91	1.26	1.63	1.98	2.22	2.24	2.02	1.68	1.32	0.95	0.65	0.43	0.28	0.18	19.2	15.8		
	0.14	0.20	0.29	0.42	0.58	0.78	1.01	1.21	1.34	1.34	1.23	1.04	0.81	0.60	0.43	0.30	0.20	0.14	12.1	8.06		
	0.11	0.15	0.20	0.28	0.37	0.49	0.60	0.71	0.78	0.78	0.72	0.62	0.50	0.38	0.29	0.21	0.15	0.11	7.47	1.31		
	0.09	0.12	0.15	0.19	0.25	0.31	0.37	0.43	0.46	0.46	0.43	0.38	0.31	0.25	0.19	0.15	0.12	0.09	4.74	0.00		
-18	-16	-14	-12	-10	-8	-6	-4	HORIZONTAL (DEG)				4	6	8	10	12	14	16	18			
F t	3.31	5.16	8.35	13.7	21.8	32.4	44.2	54.9	61.5	62.2	56.8	47.2	35.6	24.6	15.9	9.87	6.03	3.81	507	---		
F a	0.00	0.00	2.54	9.99	18.7	29.9	42.1	52.8	59.5	60.2	54.7	44.9	33.1	21.6	12.2	5.67	0.00	0.00	---	448		

one-half-peak spread: U:7.6,D:7.2 , L:7.3,R:7.6


NEMA Beam Type: Type 2

H_b) Range:-90 - 90DEG
H_b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:Blazeline Max-598mm-RGBW DS-3000K-15D-Rev1	TYPE:RGBW DS-3000K	WEIGHT:
SPEC.:15 DEG	DIM.:598MM	SERIAL No.:IES001823
MFR.:	SUR.:	Shielding Angle:

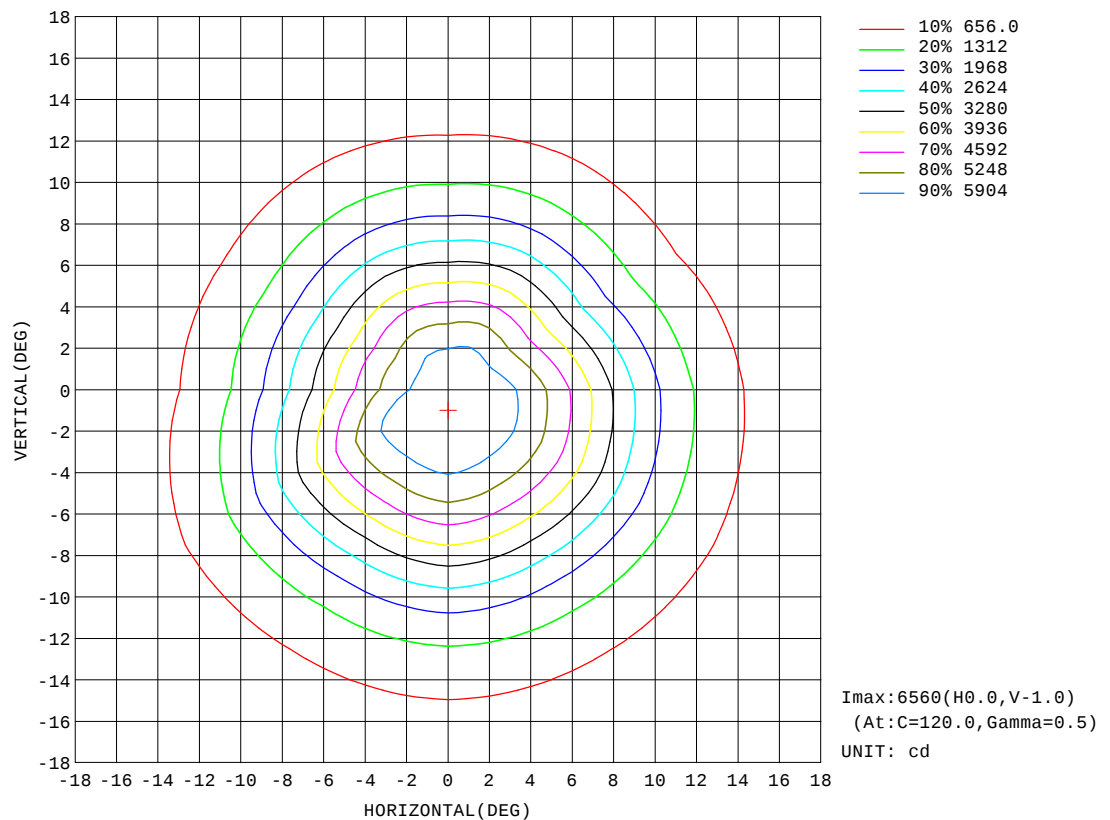


H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Blazeline Max-598mm-RGBW DS-3000K-15D-Rev1	TYPE:RGBW DS-3000K	WEIGHT:
SPEC.:15 DEG	DIM.:598MM	SERIAL No.:IES001823
MFR.:	SUR.:	Shielding Angle:

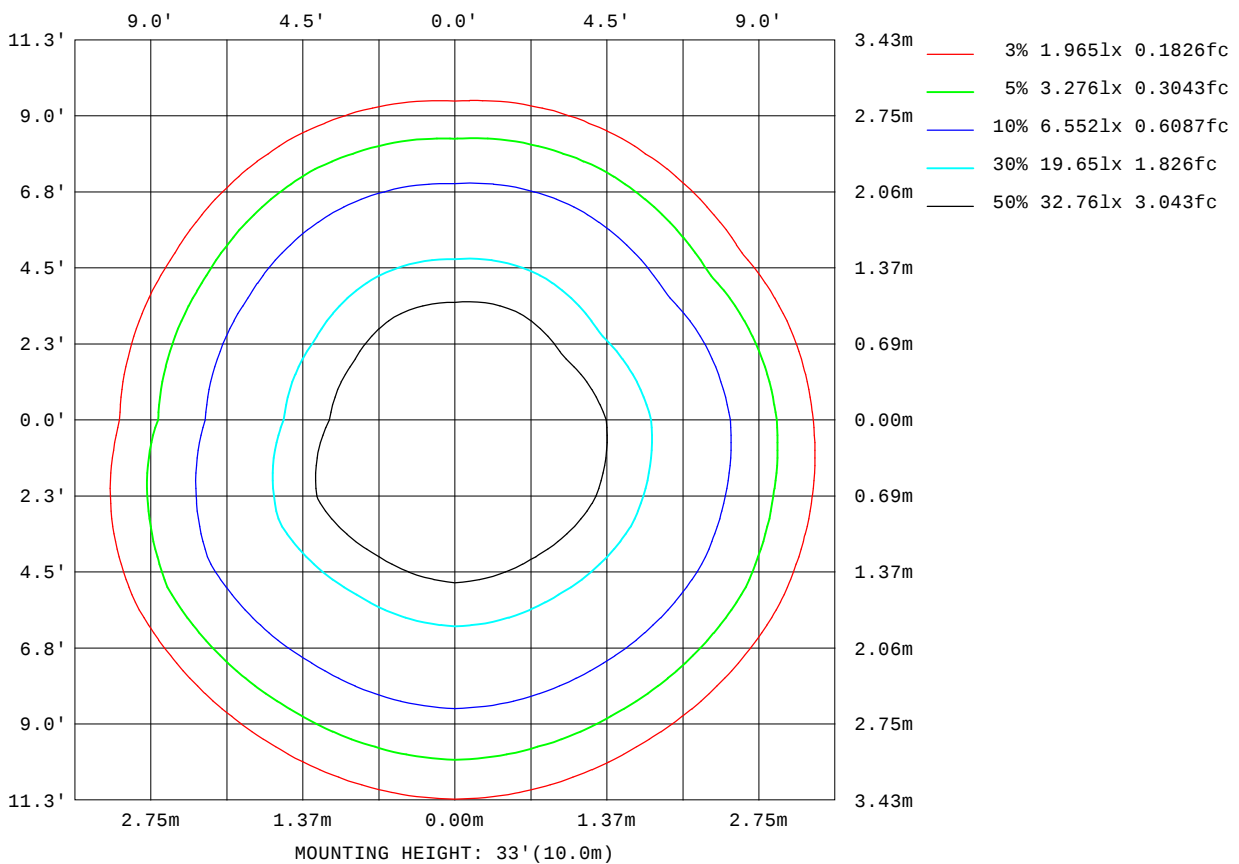

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

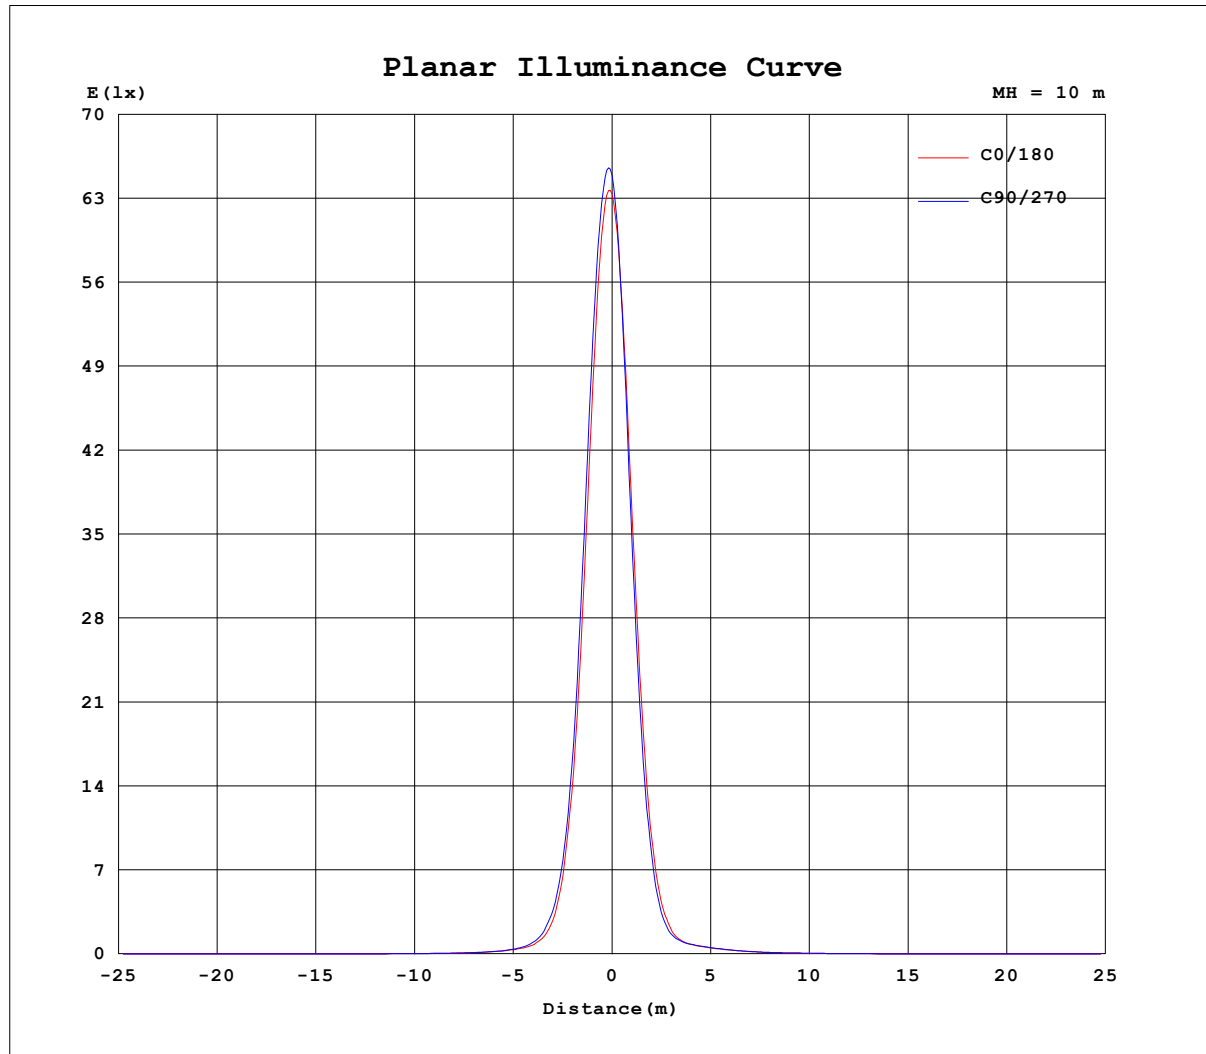


H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Blazeline Max-598mm-RGBW DS-3000K-15D-Rev1	TYPE:RGBW DS-3000K	WEIGHT:
SPEC.:15 DEG	DIM.:598MM	SERIAL No.:IES001823
MFR.:	SUR.:	Shielding Angle:

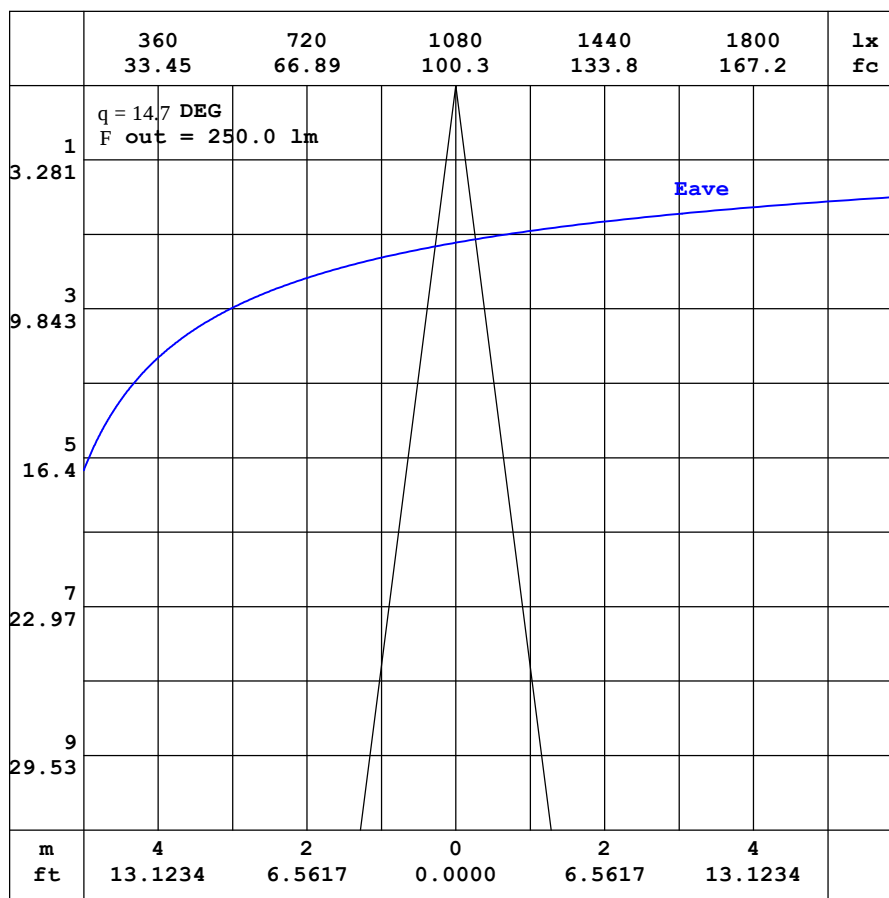

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Max-598mm-RGBW DS-3000K-15D-Rev1	TYPE:RGBW DS-3000K	WEIGHT:
SPEC.:15 DEG	DIM.:598MM	SERIAL No.:IES001823
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	2.10	1.82	1.56	1.37	1.37	1.42	1.58	2.07	2.94	3.98	4.79	5.14	5.07	4.82	4.59	4.50	4.38	4.17	4.06
-170	2.10	1.81	1.54	1.36	1.35	1.34	1.39	1.63	2.15	2.78	3.28	3.54	3.60	3.67	3.82	4.09	4.41	4.74	4.88
-160	2.10	1.80	1.54	1.36	1.33	1.28	1.22	1.21	1.36	1.56	1.71	1.76	1.82	2.38	2.93	3.43	3.84	4.11	4.23
-150	2.10	1.79	1.55	1.37	1.31	1.25	1.14	0.98	0.82	0.68	0.54	0.76	1.08	1.46	1.82	2.17	2.46	2.65	2.74
-140	2.10	1.80	1.56	1.40	1.30	1.26	1.16	0.98	0.72	0.50	0.43	0.43	0.49	0.63	0.80	0.98	1.14	1.24	1.29
-130	2.10	1.80	1.58	1.43	1.32	1.26	1.21	1.10	0.96	0.81	0.67	0.53	0.44	0.40	0.38	0.39	0.40	0.42	0.43
-120	2.10	1.82	1.60	1.45	1.35	1.27	1.22	1.20	1.18	1.14	1.07	0.99	0.91	0.82	0.73	0.65	0.60	0.56	0.54
-110	2.10	1.84	1.62	1.46	1.34	1.26	1.22	1.21	1.21	1.21	1.21	1.22	1.22	1.22	1.21	1.20	1.18	1.16	1.15
-100	2.10	1.87	1.64	1.46	1.30	1.17	1.06	1.08	1.11	1.13	1.14	1.16	1.16	1.18	1.20	1.21	1.22	1.22	1.23
-90	2.10	1.89	1.67	1.45	1.23	1.01	0.79	0.80	0.80	0.80	0.81	0.81	0.81	0.83	0.85	0.86	0.88	0.89	0.91
-80	2.10	1.91	1.70	1.47	1.21	0.92	0.61	0.57	0.54	0.53	0.52	0.51	0.50	0.51	0.52	0.52	0.53	0.53	0.54
-70	2.10	1.96	1.76	1.55	1.28	0.99	0.66	0.57	0.62	0.67	0.73	0.80	0.87	0.94	1.02	1.10	1.16	1.20	1.23
-60	2.10	2.00	1.87	1.69	1.48	1.28	1.03	0.85	0.99	1.16	1.38	1.64	1.93	2.24	2.54	2.83	3.07	3.26	3.38
-50	2.10	2.06	2.00	1.90	1.85	1.79	1.66	1.43	1.57	2.06	2.66	3.39	4.16	4.94	5.79	6.64	7.40	8.00	8.39
-40	2.10	2.12	2.15	2.20	2.34	2.47	2.54	2.64	2.80	3.58	4.88	6.35	7.88	9.46	11.3	13.2	14.6	15.6	16.0
-30	2.10	2.20	2.32	2.54	2.91	3.27	3.70	4.36	5.31	6.48	7.69	10.0	12.9	16.6	21.1	26.4	31.8	36.0	37.9
-20	2.10	2.28	2.49	2.91	3.51	4.15	5.06	6.50	8.47	10.8	13.1	15.7	19.6	29.1	44.3	68.6	108	153	178
-10	2.10	2.34	2.66	3.26	4.08	5.02	6.45	8.65	11.7	15.4	20.1	27.3	38.8	56.4	96.8	266	765	1660	2370
0	2.10	2.40	2.80	3.54	4.57	5.77	7.60	10.4	14.4	19.3	26.4	38.4	57.2	79.9	122	364	1493	4257	6335
10	2.10	2.39	2.79	3.48	4.43	5.55	7.27	9.88	13.5	18.0	24.1	34.1	50.1	70.7	96.1	161	406	958	1274
20	2.10	2.38	2.74	3.34	4.17	5.14	6.55	8.71	11.6	15.3	19.6	25.7	35.3	49.3	66.9	84.0	101	113	118
30	2.10	2.35	2.68	3.16	3.83	4.62	5.65	7.15	9.24	11.9	15.0	18.5	22.8	28.6	36.3	44.9	52.5	58.2	60.3
40	2.10	2.30	2.59	2.95	3.46	4.03	4.70	5.61	6.85	8.54	10.6	12.8	15.2	17.6	19.9	22.2	24.1	25.5	26.2
50	2.10	2.27	2.50	2.75	3.09	3.48	3.88	4.34	4.99	5.90	6.98	8.18	9.41	10.7	11.9	13.0	13.9	14.6	14.9
60	2.10	2.23	2.41	2.58	2.77	3.00	3.25	3.48	3.76	4.10	4.50	4.99	5.53	6.06	6.56	7.01	7.36	7.61	7.74
70	2.10	2.19	2.29	2.43	2.53	2.65	2.76	2.88	3.00	3.12	3.23	3.35	3.46	3.59	3.71	3.82	3.92	3.98	4.02
80	2.10	2.15	2.20	2.25	2.32	2.39	2.45	2.48	2.51	2.54	2.57	2.60	2.62	2.66	2.70	2.73	2.76	2.79	2.81
90	2.10	2.11	2.11	2.11	2.12	2.12	2.12	2.10	2.08	2.06	2.04	2.02	2.00	2.01	2.01	2.01	2.01	2.02	2.02
100	2.10	2.07	2.01	1.96	1.90	1.85	1.79	1.72	1.65	1.59	1.54	1.50	1.46	1.45	1.45	1.46	1.46	1.47	1.47
110	2.10	2.01	1.91	1.80	1.70	1.61	1.54	1.48	1.44	1.42	1.41	1.40	1.39	1.40	1.40	1.41	1.41	1.41	1.41
120	2.10	1.96	1.82	1.67	1.55	1.46	1.43	1.41	1.40	1.40	1.39	1.40	1.41	1.43	1.45	1.48	1.50	1.51	1.51
130	2.10	1.92	1.73	1.56	1.45	1.40	1.40	1.40	1.40	1.43	1.52	1.68	1.89	2.15	2.44	2.72	2.95	3.11	3.19
140	2.10	1.89	1.67	1.49	1.40	1.39	1.40	1.41	1.53	1.79	2.22	2.79	3.42	3.98	4.44	4.74	4.93	5.02	5.05
150	2.10	1.86	1.62	1.43	1.39	1.39	1.41	1.55	1.91	2.55	3.38	4.15	4.75	5.11	5.30	5.42	5.46	5.48	5.48
160	2.10	1.84	1.58	1.40	1.38	1.40	1.48	1.78	2.43	3.35	4.26	4.90	5.24	5.41	5.52	5.63	5.76	5.83	5.93
170	2.10	1.83	1.56	1.38	1.38	1.41	1.55	1.99	2.82	3.84	4.69	5.15	5.27	5.29	5.33	5.32	5.28	5.31	5.48
180	2.10	1.82	1.56	1.37	1.37	1.42	1.58	2.07	2.94	3.98	4.79	5.14	5.07	4.82	4.59	4.50	4.38	4.17	4.07

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-10-07

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Max-598mm-RGBW DS-3000K-15D-Rev1	TYPE:RGBW DS-3000K	WEIGHT:
SPEC.:15 DEG	DIM.:598MM	SERIAL No.:IES001823
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	3.66	3.54	3.44	3.20	2.93	2.60	2.13	1.52	0.96	0.56	0.47	0.57	0.81	1.06	1.21	1.19	1.09	0.89	
-170	4.77	4.46	4.17	3.73	3.17	2.60	1.99	1.38	0.86	0.52	0.46	0.57	0.83	1.08	1.21	1.20	1.08	0.89	
-160	4.15	3.94	3.60	3.17	2.66	2.10	1.53	1.03	0.66	0.46	0.47	0.64	0.89	1.11	1.21	1.20	1.08	0.89	
-150	2.71	2.57	2.33	2.02	1.65	1.27	0.92	0.64	0.47	0.45	0.54	0.76	0.99	1.15	1.21	1.19	1.07	0.89	
-140	1.28	1.20	1.07	0.90	0.73	0.57	0.47	0.43	0.44	0.54	0.73	0.93	1.09	1.19	1.21	1.17	1.05	0.89	
-130	0.43	0.41	0.39	0.38	0.39	0.42	0.46	0.55	0.69	0.83	0.97	1.09	1.18	1.21	1.20	1.14	1.02	0.89	
-120	0.54	0.57	0.61	0.66	0.73	0.81	0.89	0.98	1.05	1.11	1.15	1.19	1.20	1.20	1.18	1.10	1.00	0.89	
-110	1.15	1.16	1.17	1.19	1.21	1.21	1.20	1.20	1.21	1.21	1.21	1.21	1.20	1.16	1.11	1.04	0.97	0.89	
-100	1.22	1.22	1.21	1.21	1.20	1.20	1.19	1.18	1.18	1.16	1.15	1.13	1.10	1.07	1.03	0.98	0.93	0.89	
-90	0.91	0.91	0.91	0.91	0.91	0.91	0.92	0.92	0.93	0.94	0.94	0.95	0.94	0.93	0.92	0.91	0.90	0.89	
-80	0.56	0.58	0.60	0.61	0.63	0.65	0.67	0.69	0.71	0.74	0.77	0.79	0.83	0.85	0.87	0.89	0.89	0.89	
-70	1.25	1.24	1.22	1.18	1.13	1.07	1.02	0.96	0.91	0.87	0.84	0.80	0.80	0.82	0.84	0.87	0.89	0.89	
-60	3.33	3.20	3.01	2.77	2.51	2.22	1.92	1.65	1.42	1.26	1.13	1.04	0.97	0.87	0.84	0.86	0.88	0.89	
-50	8.21	7.81	7.21	6.43	5.56	4.69	3.84	3.06	2.40	1.88	1.55	1.41	1.25	1.07	0.90	0.86	0.88	0.89	
-40	15.7	14.9	13.7	12.3	10.7	9.02	7.31	5.64	4.15	3.01	2.28	1.85	1.58	1.30	1.02	0.87	0.88	0.89	
-30	36.1	31.8	26.5	21.6	17.4	14.0	11.3	8.84	6.65	4.67	3.26	2.37	1.92	1.55	1.17	0.91	0.88	0.89	
-20	153	107	69.3	45.7	31.2	21.4	15.5	11.8	8.95	6.38	4.30	2.95	2.22	1.78	1.32	0.95	0.88	0.89	
-10	1721	794	284	99.1	51.9	31.3	19.9	14.0	10.6	7.63	5.11	3.43	2.47	1.97	1.42	0.98	0.88	0.89	
0	5108	2081	531	141	61.9	35.8	22.0	14.9	11.1	8.10	5.46	3.67	2.62	2.09	1.49	1.00	0.89	0.89	
10	1013	435	171	100	68.3	44.0	27.4	18.4	13.4	9.56	6.41	4.27	3.02	2.32	1.65	1.10	0.93	0.89	
20	113	101	86.7	71.1	53.7	38.4	26.1	18.8	13.8	9.74	6.62	4.50	3.25	2.46	1.75	1.19	0.98	0.89	
30	58.8	54.0	46.8	38.3	30.5	24.6	20.3	16.6	12.4	8.82	6.16	4.38	3.30	2.49	1.78	1.25	1.01	0.89	
40	25.9	24.8	23.2	21.2	18.9	16.5	14.1	11.6	9.36	7.20	5.36	4.08	3.18	2.43	1.76	1.29	1.05	0.89	
50	14.8	14.3	13.6	12.6	11.5	10.1	8.81	7.52	6.37	5.41	4.55	3.68	2.96	2.30	1.72	1.33	1.07	0.89	
60	7.70	7.54	7.26	6.89	6.45	5.92	5.37	4.88	4.45	4.10	3.80	3.28	2.68	2.12	1.67	1.34	1.08	0.89	
70	4.04	4.03	3.98	3.91	3.82	3.71	3.60	3.49	3.36	3.24	3.09	2.83	2.37	1.98	1.63	1.34	1.09	0.89	
80	2.81	2.80	2.79	2.77	2.74	2.71	2.69	2.65	2.61	2.57	2.52	2.44	2.12	1.83	1.56	1.31	1.09	0.89	
90	2.01	2.01	2.00	1.99	1.99	1.98	1.99	2.00	2.01	2.02	2.03	2.04	1.85	1.65	1.46	1.27	1.08	0.89	
100	1.46	1.46	1.45	1.44	1.44	1.44	1.47	1.50	1.54	1.58	1.63	1.68	1.62	1.53	1.41	1.27	1.10	0.89	
110	1.41	1.40	1.40	1.39	1.39	1.38	1.38	1.39	1.39	1.41	1.43	1.46	1.45	1.43	1.37	1.26	1.11	0.89	
120	1.52	1.51	1.50	1.47	1.45	1.42	1.39	1.39	1.38	1.38	1.39	1.38	1.37	1.36	1.34	1.26	1.12	0.89	
130	3.15	3.03	2.83	2.57	2.29	2.02	1.78	1.59	1.46	1.38	1.36	1.32	1.33	1.32	1.30	1.26	1.12	0.89	
140	5.03	4.96	4.82	4.56	4.17	3.65	3.04	2.44	1.95	1.55	1.29	1.24	1.26	1.29	1.28	1.25	1.12	0.89	
150	5.47	5.45	5.40	5.30	5.16	4.87	4.38	3.67	2.57	1.72	1.25	1.12	1.17	1.24	1.26	1.24	1.12	0.89	
160	5.90	5.83	5.65	5.50	5.39	5.25	4.55	3.61	2.57	1.67	1.14	0.97	1.05	1.17	1.24	1.23	1.11	0.89	
170	5.46	5.39	5.39	5.11	4.62	4.09	3.48	2.76	1.96	1.25	0.87	0.78	0.92	1.11	1.22	1.21	1.10	0.89	
180	3.66	3.54	3.44	3.20	2.93	2.60	2.13	1.52	0.96	0.56	0.47	0.57	0.81	1.06	1.21	1.19	1.09	0.89	

H(°) Range:-90 - 90DEG

H(°) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-10-07

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: