

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	10152.2 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	27.6V x 28.2H
	At 50% of Imax	14.4V x 14.7H
	At 90% of Imax	5.9V x 5.9H

Beam Flux	Total	1000.7 lumens per klm.
	To 10% of Imax	698.4 lumens per klm.
	To 50% of Imax	374.8 lumens per klm.
	To 90% of Imax	75.1 lumens per klm.

Upward LOR	2.3 %
Downward LOR	97.8 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Blazeline Max-598mm-RGBW DS-All-15D-Rev1	TYPE:RGBW-DS W=3000K	WEIGHT:
SPEC.:15 DEG	DIM.:598MM	SERIAL No.:IES001819
MFR.:	SUR.:	Shielding Angle:

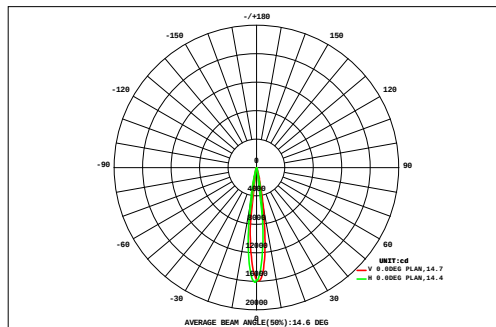

DATA OF LAMP		Eff:68.09lm/W	
MODEL		Imax(cd)	16132
NOMINAL POWER(W)	23.6	AVAILABILITY(%)	69.8
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	1109
NOMINAL FLUX(lm)	1589	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1589
TEST VOLTAGE(V)	220	q @50%(H,V)	15,14DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm				F t	F a
	18	16	14	12	10	8	6	4	2	0	2	4	6	8	10	12	14	16	18			
	0.36	0.41	0.47	0.54	0.61	0.68	0.74	0.79	0.82	0.83	0.82	0.78	0.72	0.65	0.57	0.50	0.44	0.39	11.1	0.00		
	0.41	0.48	0.56	0.66	0.78	0.91	1.04	1.16	1.22	1.24	1.22	1.12	1.00	0.86	0.72	0.60	0.51	0.44	15.0	0.00		
	0.46	0.56	0.69	0.85	1.05	1.29	1.55	1.77	1.89	1.93	1.89	1.72	1.47	1.19	0.94	0.75	0.61	0.50	21.1	4.19		
	0.53	0.66	0.85	1.11	1.45	1.90	2.40	2.86	3.15	3.26	3.15	2.76	2.21	1.68	1.27	0.95	0.73	0.58	31.5	20.4		
	0.60	0.79	1.06	1.45	2.03	2.83	3.83	4.73	5.30	5.48	5.21	4.48	3.41	2.40	1.69	1.22	0.88	0.67	48.1	39.8		
	0.68	0.93	1.30	1.87	2.80	4.16	5.81	7.44	8.49	8.81	8.30	6.80	4.95	3.39	2.24	1.54	1.09	0.79	71.4	63.3		
	0.76	1.08	1.56	2.39	3.70	5.65	8.16	10.7	12.4	12.8	11.9	9.48	6.78	4.58	3.04	2.00	1.34	0.92	99.3	92.7		
	0.83	1.20	1.82	2.92	4.68	7.18	10.3	13.6	16.0	16.6	15.0	11.9	8.96	6.22	4.01	2.50	1.59	1.04	126	121		
	0.87	1.29	2.00	3.31	5.37	8.38	12.0	15.4	18.1	18.7	17.2	14.6	11.2	7.69	4.85	2.93	1.79	1.14	147	142		
	0.90	1.35	2.13	3.58	5.85	9.17	13.1	16.8	18.9	19.4	18.4	15.7	12.0	8.22	5.16	3.10	1.86	1.17	157	152		
	0.91	1.37	2.18	3.64	5.98	9.35	13.1	16.0	17.8	18.2	17.1	14.6	11.2	7.66	4.86	2.95	1.78	1.14	150	145		
	0.88	1.32	2.05	3.38	5.39	8.05	10.8	13.2	15.1	15.5	14.3	12.1	9.33	6.51	4.24	2.59	1.61	1.05	127	122		
	0.81	1.20	1.81	2.78	4.15	5.89	7.87	9.87	11.4	11.7	10.8	9.02	6.93	4.95	3.37	2.14	1.39	0.92	97.0	91.0		
	0.72	1.03	1.46	2.07	2.95	4.02	5.24	6.66	7.70	7.93	7.28	6.08	4.75	3.51	2.43	1.67	1.14	0.79	67.4	60.7		
	0.61	0.83	1.14	1.54	2.04	2.66	3.42	4.22	4.82	4.95	4.57	3.88	3.10	2.37	1.74	1.26	0.90	0.65	44.7	36.1		
	0.50	0.66	0.87	1.13	1.46	1.80	2.22	2.63	2.94	3.00	2.80	2.44	2.02	1.62	1.26	0.94	0.70	0.53	29.5	17.2		
	0.41	0.52	0.66	0.83	1.03	1.26	1.49	1.69	1.82	1.85	1.76	1.59	1.37	1.12	0.89	0.70	0.55	0.43	20.0	2.55		
	0.33	0.41	0.51	0.62	0.74	0.87	1.00	1.11	1.18	1.19	1.15	1.05	0.92	0.78	0.65	0.53	0.43	0.35	13.8	0.00		
-18	-16	-14	-12	-10	-8	-6	-4	HORIZONTAL (DEG)				4	6	8	10	12	14	16	18			
F t	11.6	16.1	23.1	34.7	52.1	76.0	104	131	149	154	143	120	92.3	65.4	43.9	28.9	19.3	13.5	1277	---		
F a	0.00	0.00	6.69	24.2	44.1	68.4	97.8	125	144	149	137	114	85.4	58.0	34.7	17.4	3.04	0.00	---	1109		

one-half-peak spread: U:7.6,D:7.0 , L:7.5,R:7.3


NEMA Beam Type: Type 2

$H(b)$ Range: -90 - 90DEG
 $H(b)$ Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-10-07

$V(B)$ Range: -180 - 180DEG
 $V(B)$ Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:Blazeline Max-598mm-RGBW DS-A11-15D-Rev1	TYPE:RGBW-DS W=3000K	WEIGHT:
SPEC.:15 DEG	DIM.:598MM	SERIAL No.:IES001819
MFR.:	SUR.:	Shielding Angle:

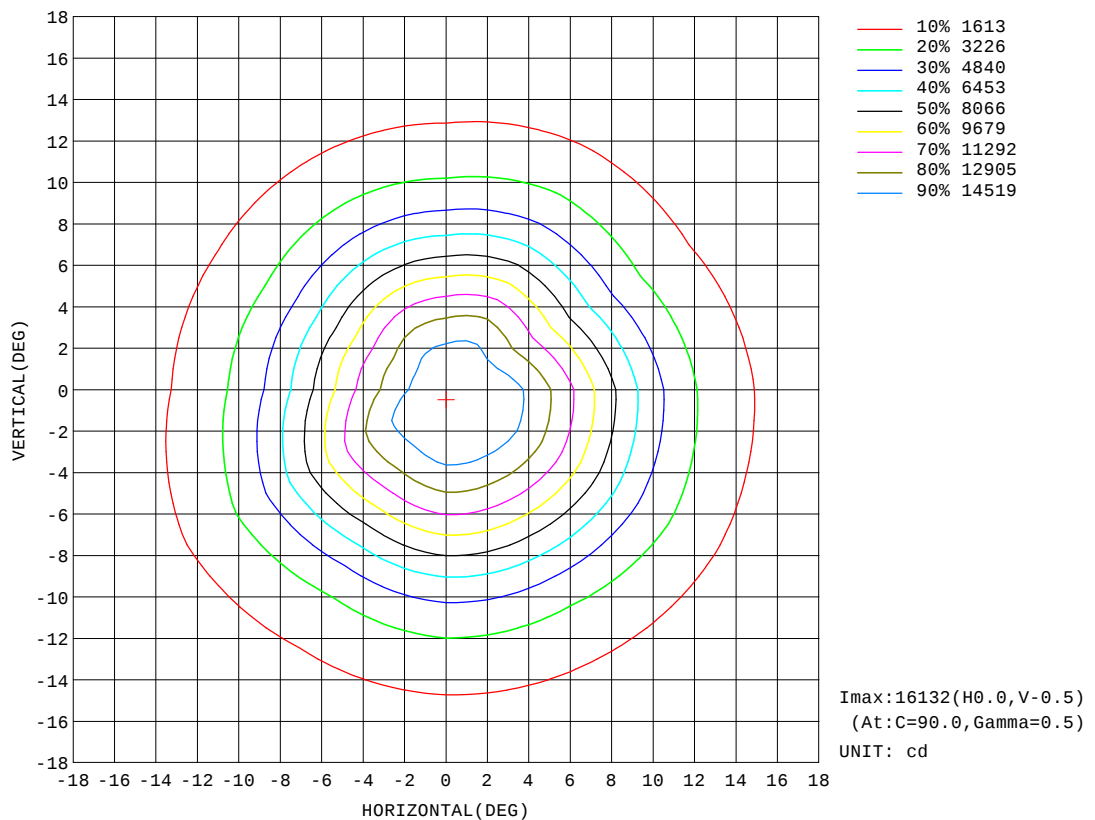


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Blazeline Max-598mm-RGBW DS-A11-15D-Rev1	TYPE:RGBW-DS W=3000K	WEIGHT:
SPEC.:15 DEG	DIM.:598MM	SERIAL No.:IES001819
MFR.:	SUR.:	Shielding Angle:

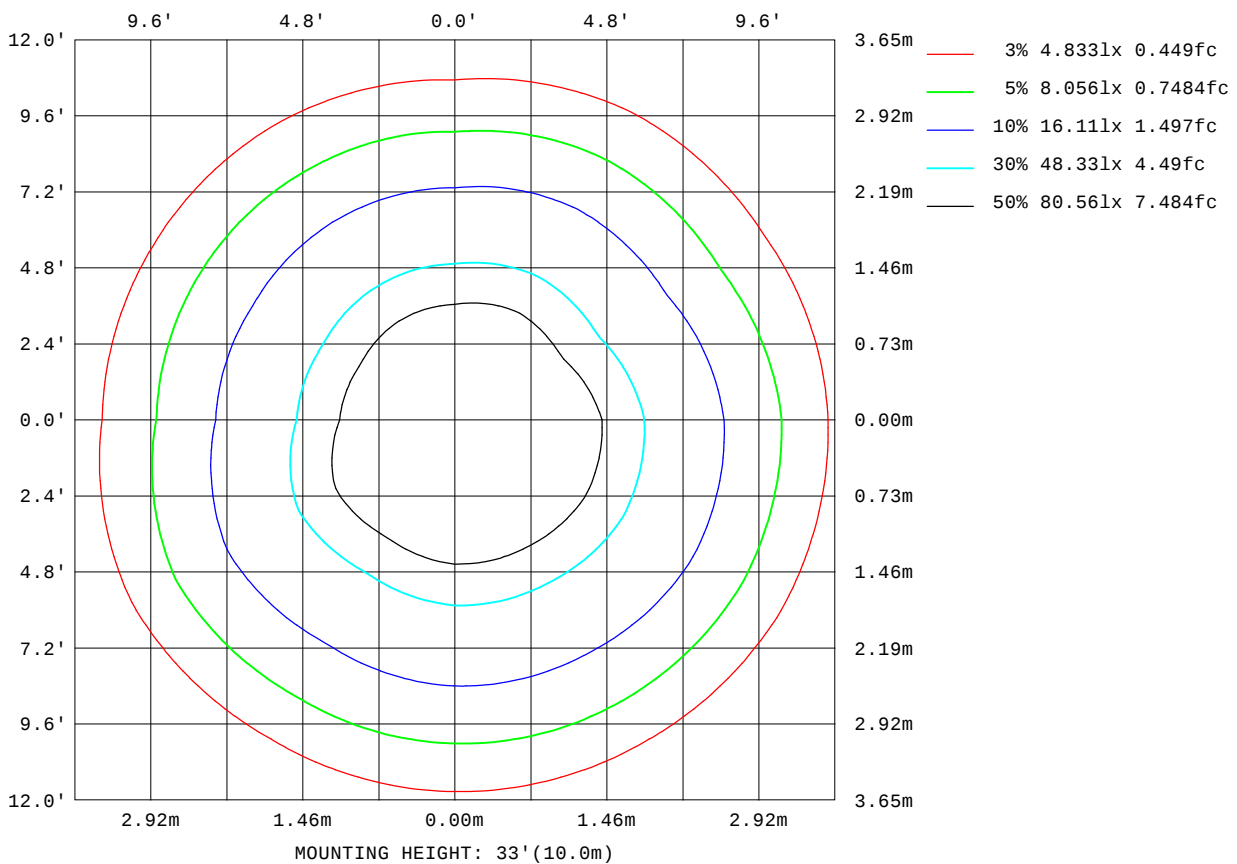

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-07

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

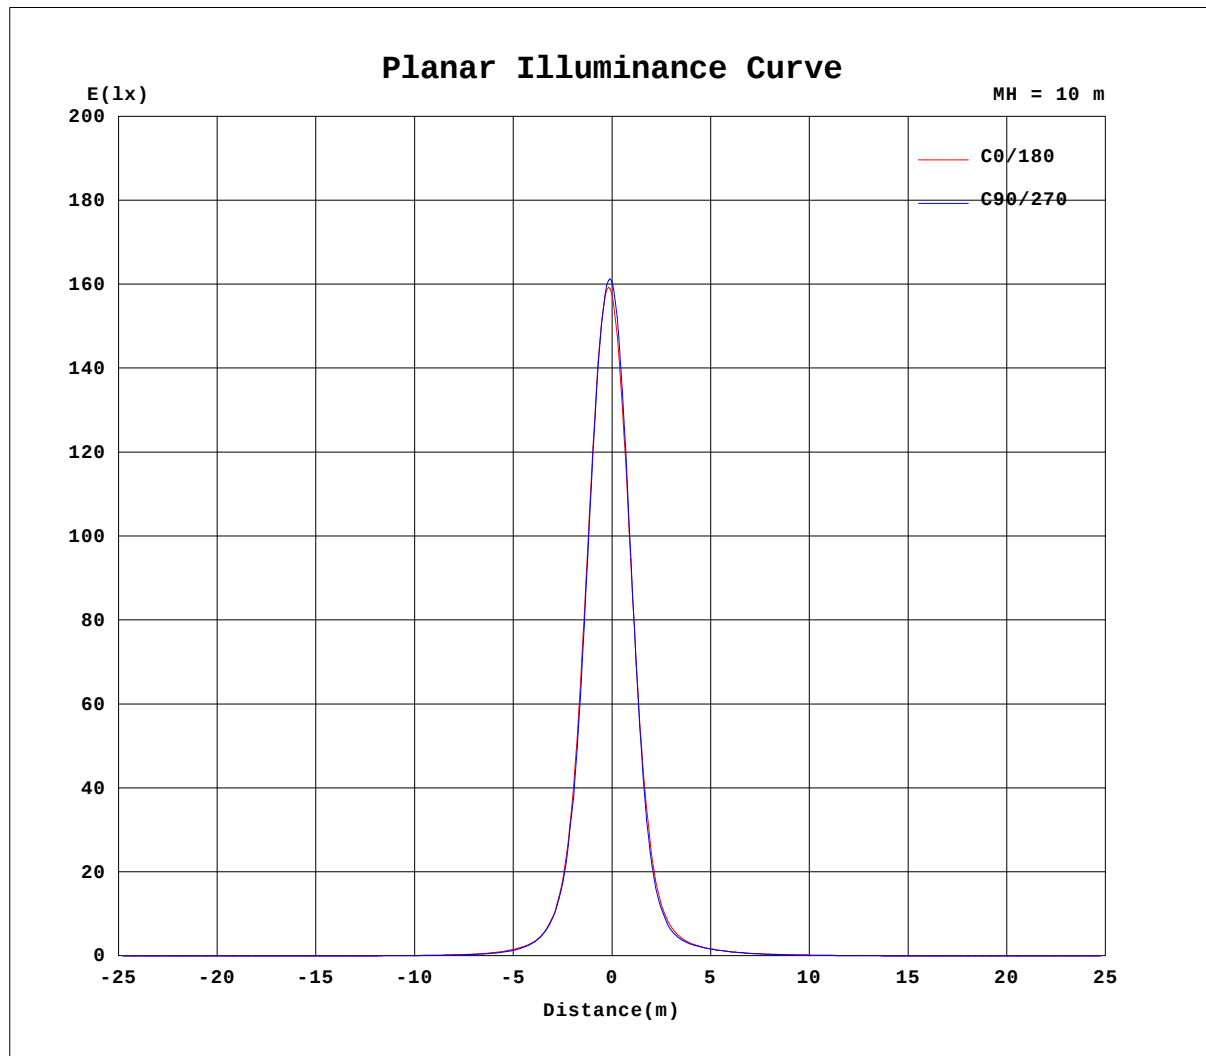


H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-07

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Blazeline Max-598mm-RGBW DS-A11-15D-Rev1	TYPE:RGBW-DS W=3000K	WEIGHT:
SPEC.:15 DEG	DIM.:598MM	SERIAL No.:IES001819
MFR.:	SUR.:	Shielding Angle:

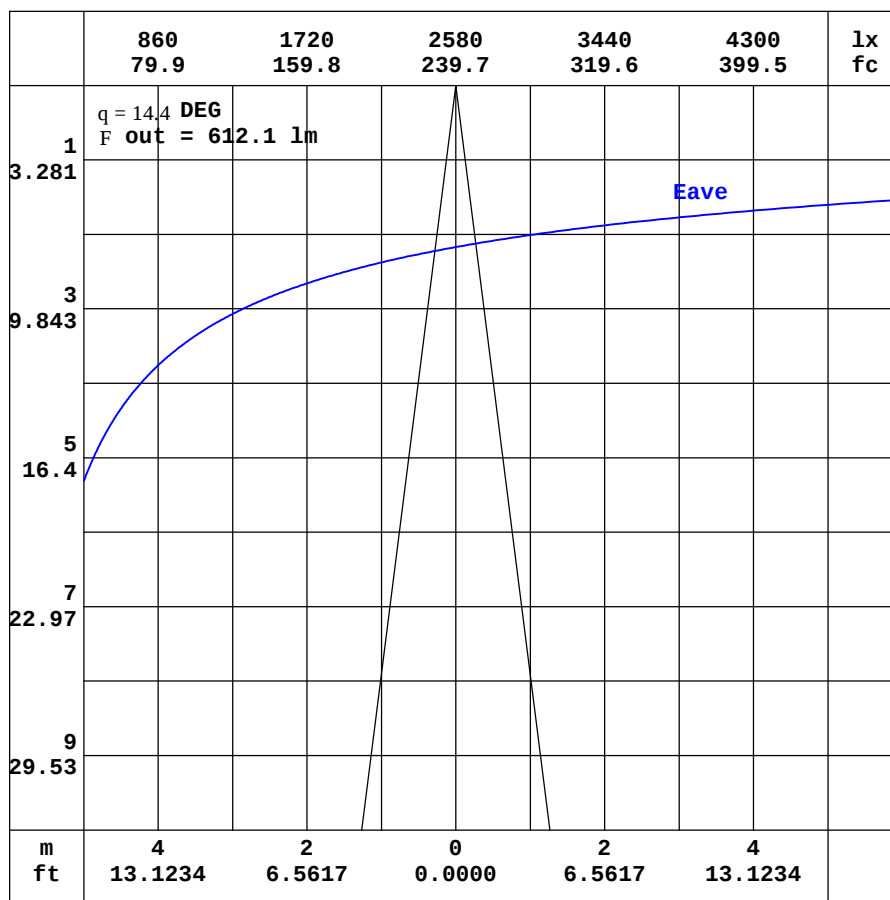

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

$H(b)$ Range:-90 - 90DEG
 $H(b)$ Interval: 0.5DEG
 Test Speed: LOW
 Temperature:25.3DEG
 Operators:Fan
 Test Date:2023-10-07

$V(B)$ Range:-180 - 180DEG
 $V(B)$ Interval: 0.5DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:8.630m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Max-598mm-RGBW DS-All-15D-Rev1	TYPE:RGBW-DS W=3000K	WEIGHT:
SPEC.:15 DEG	DIM.:598MM	SERIAL No.:IES001819
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: ×10cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.59	0.52	0.44	0.40	0.40	0.42	0.47	0.60	0.83	1.08	1.27	1.35	1.34	1.28	1.22	1.19	1.16	1.11	1.10
-170	0.59	0.51	0.44	0.39	0.39	0.39	0.41	0.48	0.62	0.78	0.90	0.96	0.97	0.98	1.01	1.07	1.15	1.23	1.27
-160	0.59	0.51	0.44	0.39	0.38	0.37	0.36	0.36	0.41	0.46	0.50	0.52	0.54	0.67	0.81	0.94	1.03	1.09	1.11
-150	0.59	0.51	0.44	0.39	0.37	0.35	0.32	0.29	0.25	0.22	0.19	0.26	0.35	0.44	0.54	0.63	0.69	0.73	0.74
-140	0.59	0.51	0.44	0.39	0.36	0.35	0.32	0.27	0.21	0.16	0.15	0.16	0.18	0.22	0.27	0.31	0.35	0.37	0.37
-130	0.59	0.51	0.44	0.40	0.37	0.35	0.33	0.30	0.26	0.22	0.19	0.16	0.14	0.14	0.13	0.14	0.14	0.15	0.15
-120	0.59	0.51	0.45	0.40	0.37	0.35	0.33	0.32	0.31	0.30	0.28	0.26	0.24	0.22	0.20	0.18	0.17	0.17	0.16
-110	0.59	0.52	0.46	0.41	0.37	0.35	0.33	0.32	0.32	0.33	0.33	0.33	0.33	0.32	0.32	0.32	0.31	0.31	0.31
-100	0.59	0.52	0.46	0.41	0.36	0.33	0.29	0.30	0.30	0.31	0.31	0.32	0.32	0.32	0.32	0.32	0.33	0.33	0.33
-90	0.59	0.53	0.47	0.41	0.35	0.29	0.23	0.23	0.23	0.24	0.24	0.24	0.24	0.24	0.24	0.24	0.25	0.25	0.25
-80	0.59	0.54	0.48	0.42	0.35	0.27	0.19	0.18	0.18	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.16
-70	0.59	0.55	0.50	0.44	0.38	0.30	0.21	0.20	0.21	0.23	0.25	0.27	0.29	0.31	0.33	0.35	0.37	0.38	0.38
-60	0.59	0.57	0.53	0.49	0.44	0.39	0.33	0.28	0.33	0.39	0.47	0.56	0.66	0.76	0.85	0.94	1.01	1.05	1.07
-50	0.59	0.58	0.57	0.55	0.55	0.54	0.52	0.48	0.55	0.73	0.96	1.22	1.51	1.79	2.07	2.32	2.51	2.64	2.68
-40	0.59	0.60	0.61	0.64	0.70	0.75	0.79	0.88	1.01	1.35	1.86	2.45	3.04	3.65	4.22	4.67	4.97	5.13	5.11
-30	0.59	0.62	0.66	0.74	0.86	0.99	1.16	1.44	1.87	2.45	3.10	4.02	5.04	6.14	7.33	8.75	10.4	11.8	12.4
-20	0.59	0.64	0.71	0.85	1.04	1.24	1.58	2.12	2.93	3.93	4.98	6.09	7.45	10.4	15.9	24.6	36.1	48.0	54.0
-10	0.59	0.66	0.76	0.95	1.21	1.50	2.00	2.80	3.97	5.41	7.12	9.36	13.0	20.2	36.7	78.4	173	346	518
0	0.59	0.68	0.80	1.03	1.34	1.71	2.32	3.29	4.74	6.56	8.90	12.3	17.9	27.6	47.2	110	367	1026	1575
10	0.59	0.67	0.80	1.01	1.30	1.64	2.21	3.12	4.45	6.11	8.16	11.1	15.7	23.2	35.9	61.0	122	246	338
20	0.59	0.67	0.78	0.97	1.22	1.51	1.97	2.70	3.77	5.13	6.70	8.61	11.3	15.4	20.9	28.0	35.5	41.3	43.3
30	0.59	0.66	0.76	0.91	1.11	1.35	1.67	2.18	2.90	3.87	5.02	6.28	7.62	9.25	11.2	13.4	15.6	17.3	17.9
40	0.59	0.65	0.73	0.84	1.00	1.17	1.37	1.66	2.08	2.65	3.39	4.20	5.04	5.84	6.54	7.18	7.69	8.02	8.10
50	0.59	0.64	0.70	0.78	0.88	1.00	1.12	1.26	1.46	1.76	2.11	2.52	2.94	3.38	3.77	4.12	4.38	4.55	4.61
60	0.59	0.63	0.68	0.72	0.78	0.85	0.92	0.99	1.08	1.19	1.31	1.47	1.63	1.80	1.96	2.09	2.20	2.27	2.30
70	0.59	0.62	0.64	0.68	0.71	0.74	0.77	0.81	0.85	0.89	0.92	0.96	1.00	1.04	1.07	1.10	1.13	1.14	1.15
80	0.59	0.60	0.62	0.63	0.64	0.66	0.68	0.69	0.70	0.71	0.72	0.73	0.74	0.75	0.75	0.76	0.76	0.77	0.77
90	0.59	0.59	0.59	0.59	0.59	0.59	0.59	0.59	0.58	0.58	0.58	0.58	0.58	0.58	0.58	0.57	0.57	0.57	0.57
100	0.59	0.58	0.56	0.55	0.53	0.52	0.50	0.48	0.47	0.45	0.44	0.43	0.42	0.42	0.42	0.42	0.42	0.41	0.41
110	0.59	0.57	0.54	0.51	0.48	0.45	0.43	0.42	0.41	0.40	0.40	0.40	0.40	0.40	0.40	0.40	0.40	0.40	0.40
120	0.59	0.55	0.51	0.47	0.44	0.41	0.40	0.40	0.40	0.40	0.40	0.40	0.41	0.41	0.42	0.43	0.43	0.44	0.43
130	0.59	0.54	0.49	0.44	0.41	0.40	0.40	0.40	0.41	0.43	0.45	0.49	0.54	0.60	0.67	0.74	0.79	0.82	0.83
140	0.59	0.53	0.47	0.42	0.40	0.40	0.40	0.42	0.46	0.53	0.64	0.78	0.93	1.07	1.18	1.25	1.29	1.31	1.32
150	0.59	0.53	0.46	0.41	0.40	0.40	0.42	0.47	0.57	0.74	0.94	1.13	1.27	1.36	1.40	1.43	1.44	1.44	1.44
160	0.59	0.52	0.45	0.40	0.40	0.41	0.44	0.53	0.70	0.93	1.16	1.31	1.39	1.42	1.45	1.49	1.52	1.53	1.55
170	0.59	0.52	0.44	0.40	0.40	0.41	0.46	0.58	0.80	1.05	1.25	1.36	1.39	1.39	1.40	1.40	1.40	1.42	1.47
180	0.59	0.52	0.44	0.40	0.40	0.42	0.47	0.60	0.83	1.08	1.27	1.35	1.34	1.28	1.22	1.19	1.16	1.11	1.10

H_(b) Range: -90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-10-07

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Max-598mm-RGBW DS-All-15D-Rev1	TYPE:RGBW-DS W=3000K	WEIGHT:
SPEC.:15 DEG	DIM.:598MM	SERIAL No.:IES001819
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: ×10cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	0.97	0.94	0.91	0.85	0.78	0.68	0.56	0.41	0.27	0.18	0.15	0.18	0.23	0.29	0.32	0.32	0.29	0.23
-170	1.24	1.16	1.08	0.96	0.82	0.67	0.52	0.37	0.24	0.17	0.15	0.18	0.24	0.29	0.32	0.32	0.29	0.23
-160	1.09	1.03	0.94	0.82	0.69	0.54	0.40	0.28	0.19	0.15	0.15	0.20	0.25	0.30	0.32	0.31	0.28	0.23
-150	0.73	0.69	0.62	0.54	0.44	0.34	0.26	0.19	0.15	0.15	0.18	0.22	0.28	0.31	0.32	0.31	0.28	0.23
-140	0.37	0.34	0.31	0.26	0.22	0.18	0.15	0.14	0.15	0.18	0.22	0.26	0.30	0.32	0.32	0.31	0.27	0.23
-130	0.15	0.14	0.13	0.13	0.13	0.13	0.15	0.17	0.20	0.24	0.27	0.30	0.32	0.32	0.32	0.30	0.27	0.23
-120	0.16	0.17	0.18	0.19	0.21	0.22	0.25	0.27	0.29	0.30	0.31	0.32	0.32	0.32	0.31	0.29	0.26	0.23
-110	0.31	0.31	0.31	0.31	0.32	0.32	0.32	0.32	0.32	0.32	0.32	0.32	0.31	0.30	0.29	0.27	0.25	0.23
-100	0.33	0.32	0.32	0.32	0.32	0.31	0.31	0.31	0.31	0.30	0.30	0.29	0.28	0.27	0.26	0.25	0.24	0.23
-90	0.25	0.24	0.24	0.24	0.24	0.24	0.24	0.24	0.24	0.24	0.24	0.24	0.24	0.24	0.24	0.23	0.23	0.23
-80	0.17	0.17	0.17	0.17	0.17	0.17	0.18	0.18	0.18	0.19	0.19	0.20	0.20	0.21	0.22	0.22	0.23	0.23
-70	0.38	0.37	0.35	0.34	0.32	0.30	0.28	0.26	0.24	0.23	0.22	0.21	0.21	0.21	0.21	0.21	0.22	0.23
-60	1.05	0.99	0.92	0.83	0.73	0.64	0.55	0.46	0.39	0.34	0.30	0.28	0.26	0.23	0.21	0.21	0.22	0.23
-50	2.60	2.46	2.24	1.99	1.72	1.45	1.18	0.93	0.71	0.54	0.43	0.38	0.34	0.29	0.24	0.21	0.21	0.23
-40	4.98	4.69	4.30	3.83	3.37	2.86	2.32	1.80	1.31	0.92	0.66	0.51	0.43	0.35	0.27	0.22	0.21	0.23
-30	11.9	10.4	8.60	6.98	5.65	4.56	3.70	2.92	2.17	1.50	1.00	0.68	0.52	0.42	0.32	0.23	0.21	0.23
-20	48.9	37.0	25.4	16.6	10.9	7.34	5.29	4.01	3.02	2.11	1.36	0.88	0.61	0.48	0.36	0.25	0.21	0.23
-10	399	202	85.6	38.5	20.5	11.9	7.38	5.06	3.69	2.58	1.67	1.04	0.69	0.53	0.39	0.26	0.21	0.23
0	1299	545	157	55.0	27.1	15.0	8.77	5.70	4.02	2.80	1.80	1.12	0.74	0.56	0.41	0.26	0.21	0.23
10	294	142	67.5	39.3	25.0	15.5	9.55	6.36	4.52	3.13	2.03	1.27	0.84	0.63	0.45	0.29	0.23	0.23
20	42.5	37.0	30.0	23.1	17.3	12.3	8.45	6.08	4.42	3.06	2.00	1.30	0.89	0.67	0.47	0.31	0.24	0.23
30	17.6	16.1	14.0	11.7	9.52	7.76	6.36	5.13	3.79	2.65	1.79	1.23	0.90	0.67	0.48	0.33	0.25	0.23
40	8.03	7.70	7.20	6.57	5.87	5.10	4.31	3.50	2.75	2.07	1.50	1.11	0.86	0.66	0.47	0.34	0.26	0.23
50	4.56	4.41	4.15	3.83	3.45	3.03	2.58	2.17	1.80	1.50	1.24	0.99	0.79	0.62	0.46	0.34	0.27	0.23
60	2.28	2.22	2.12	1.99	1.85	1.68	1.51	1.36	1.22	1.11	1.02	0.88	0.72	0.57	0.44	0.35	0.27	0.23
70	1.15	1.14	1.12	1.09	1.06	1.03	0.99	0.95	0.91	0.87	0.83	0.76	0.64	0.53	0.43	0.35	0.28	0.23
80	0.77	0.77	0.77	0.76	0.75	0.75	0.74	0.73	0.72	0.70	0.69	0.67	0.58	0.49	0.42	0.35	0.28	0.23
90	0.57	0.57	0.57	0.57	0.57	0.57	0.57	0.57	0.57	0.57	0.57	0.57	0.52	0.46	0.40	0.35	0.29	0.23
100	0.41	0.41	0.41	0.42	0.42	0.42	0.43	0.43	0.44	0.46	0.47	0.48	0.46	0.43	0.39	0.35	0.30	0.23
110	0.40	0.40	0.39	0.39	0.39	0.39	0.39	0.39	0.40	0.40	0.41	0.42	0.41	0.40	0.38	0.35	0.30	0.23
120	0.43	0.43	0.42	0.42	0.41	0.40	0.39	0.39	0.39	0.39	0.39	0.39	0.38	0.38	0.37	0.34	0.30	0.23
130	0.82	0.78	0.73	0.67	0.60	0.54	0.48	0.44	0.41	0.40	0.38	0.37	0.37	0.36	0.36	0.34	0.30	0.23
140	1.31	1.28	1.24	1.16	1.06	0.92	0.78	0.64	0.53	0.43	0.37	0.35	0.35	0.35	0.35	0.34	0.30	0.23
150	1.43	1.42	1.40	1.37	1.33	1.25	1.11	0.93	0.67	0.46	0.36	0.32	0.33	0.34	0.34	0.33	0.30	0.23
160	1.53	1.51	1.47	1.44	1.40	1.36	1.17	0.93	0.66	0.45	0.32	0.28	0.30	0.32	0.33	0.33	0.29	0.23
170	1.46	1.44	1.43	1.35	1.21	1.07	0.91	0.72	0.52	0.35	0.25	0.23	0.26	0.30	0.33	0.32	0.29	0.23
180	0.97	0.94	0.91	0.85	0.78	0.68	0.56	0.41	0.27	0.18	0.15	0.18	0.23	0.29	0.32	0.32	0.29	0.23

H_b Range: -90 - 90DEGH_b Interval: 0.5DEG

Test Speed: LOW

Temperature: 25.3DEG

Operators: Fan

Test Date: 2023-10-07

V(B) Range: -180 - 180DEG

V(B) Interval: 0.5DEG

Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity: 65.0%

Test Distance: 8.630m [K=1.0000]

Remarks: