

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	9168.9 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	--

Beam Spread	At 10% of Imax	28.6V x 30.4H
	At 50% of Imax	14.5V x 14.9H
	At 90% of Imax	5.8V x 5.9H

Beam Flux	Total	1000.4 lumens per klm.
	To 10% of Imax	664.9 lumens per klm.
	To 50% of Imax	344.3 lumens per klm.
	To 90% of Imax	69.8 lumens per klm.

Upward LOR	2.2 %
Downward LOR	97.8 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Blazeline Max-598mm-RGBW DS-GREEN-15D-Rev1	TYPE:RGBW DS-GREEN	WEIGHT:
SPEC.:15 DEG	DIM.:598MM	SERIAL No.:IES001821
MFR.:	SUR.:	Shielding Angle:

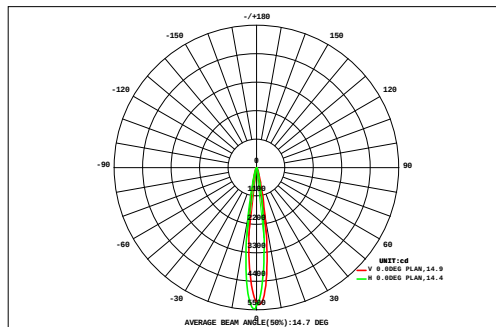

DATA OF LAMP		Eff:89.42lm/W	
MODEL		Imax(cd)	5460
NOMINAL POWER(W)	6.7	AVAILABILITY(%)	66.3
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	394.8
NOMINAL FLUX(lm)	595.5	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	595.5
TEST VOLTAGE(V)	220	q @50%(H,V)	15,14DEG

		AREA FLUX DIAGRAM															UNIT:lm			F t	F a
		0.12	0.14	0.16	0.19	0.22	0.24	0.27	0.29	0.29	0.30	0.30	0.28	0.26	0.24	0.21	0.18	0.16	0.13	3.98	0.00
VERTICAL (DEG)	27	0.14	0.16	0.20	0.24	0.28	0.32	0.36	0.39	0.40	0.41	0.41	0.39	0.35	0.31	0.27	0.23	0.19	0.16	5.22	0.00
	24	0.16	0.19	0.24	0.30	0.36	0.43	0.49	0.55	0.57	0.59	0.58	0.54	0.48	0.42	0.36	0.30	0.24	0.19	6.98	0.00
	21	0.18	0.23	0.29	0.38	0.47	0.59	0.71	0.81	0.87	0.90	0.88	0.80	0.68	0.56	0.46	0.37	0.30	0.23	9.72	0.00
	18	0.21	0.27	0.36	0.47	0.63	0.83	1.05	1.27	1.43	1.50	1.44	1.23	0.98	0.76	0.59	0.46	0.36	0.27	14.1	2.07
	15	0.23	0.31	0.43	0.59	0.83	1.15	1.60	2.18	2.69	2.88	2.62	2.03	1.45	1.03	0.74	0.55	0.42	0.31	22.0	14.1
	12	0.26	0.36	0.50	0.73	1.06	1.60	2.62	4.11	5.41	5.87	5.09	3.45	2.17	1.38	0.93	0.65	0.47	0.34	37.0	30.4
	9	0.28	0.39	0.57	0.86	1.33	2.24	4.04	6.84	9.43	10.3	8.41	5.41	3.21	1.85	1.13	0.74	0.51	0.37	57.9	51.9
	6	0.29	0.41	0.62	0.96	1.55	2.85	5.48	9.17	12.5	13.7	11.3	7.63	4.33	2.30	1.30	0.81	0.54	0.38	76.1	70.8
	3	0.29	0.41	0.63	1.00	1.66	3.19	6.35	10.7	13.9	14.5	12.5	8.48	4.73	2.45	1.34	0.82	0.54	0.38	83.9	78.5
	0	0.28	0.40	0.61	0.97	1.61	3.05	5.87	9.25	11.8	12.5	10.6	7.34	4.19	2.21	1.24	0.77	0.51	0.35	73.6	68.4
-9	0.25	0.36	0.55	0.87	1.38	2.29	3.86	5.90	7.95	8.44	7.08	4.94	3.04	1.77	1.05	0.67	0.45	0.31	51.2	45.5	
	0.22	0.31	0.47	0.72	1.05	1.52	2.23	3.23	4.25	4.51	3.86	2.86	1.93	1.25	0.83	0.55	0.38	0.27	30.4	23.8	
	0.18	0.26	0.37	0.53	0.76	1.02	1.34	1.75	2.11	2.21	2.01	1.60	1.19	0.86	0.61	0.43	0.31	0.22	17.8	9.30	
	0.15	0.21	0.29	0.39	0.53	0.69	0.86	1.04	1.17	1.20	1.11	0.95	0.75	0.58	0.44	0.33	0.24	0.18	11.1	0.00	
	0.13	0.16	0.22	0.28	0.37	0.46	0.56	0.64	0.70	0.71	0.67	0.59	0.49	0.40	0.32	0.25	0.19	0.14	7.26	0.00	
	0.11	0.13	0.16	0.21	0.25	0.31	0.37	0.41	0.43	0.44	0.42	0.38	0.33	0.27	0.22	0.18	0.14	0.11	4.87	0.00	
-24	0.09	0.11	0.13	0.15	0.18	0.21	0.24	0.27	0.28	0.28	0.27	0.25	0.22	0.19	0.16	0.13	0.11	0.09	3.37	0.00	
	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL (DEG)				6	9	12	15	18	21	24	27	
F t	3.56	4.83	6.80	9.84	14.5	23.0	38.3	58.8	76.3	81.2	69.5	49.1	30.8	18.8	12.2	8.42	6.06	4.43	516	---	
F a	0.00	0.00	0.00	0.00	4.22	15.7	32.0	53.0	70.7	75.5	64.0	43.3	24.2	11.0	1.37	0.00	0.00	0.00	---	395	


one-half-peak spread: U:7.3,D:7.3 , L:7.5,R:7.5,EMA Beam Type: Type 3 x 2 (H x V)

H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-07

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:Blazeline Max-598mm-RGBW DS-GREEN-15D-Rev1	TYPE:RGBW DS-GREEN	WEIGHT:
SPEC.:15 DEG	DIM.:598MM	SERIAL No.:IES001821
MFR.:	SUR.:	Shielding Angle:

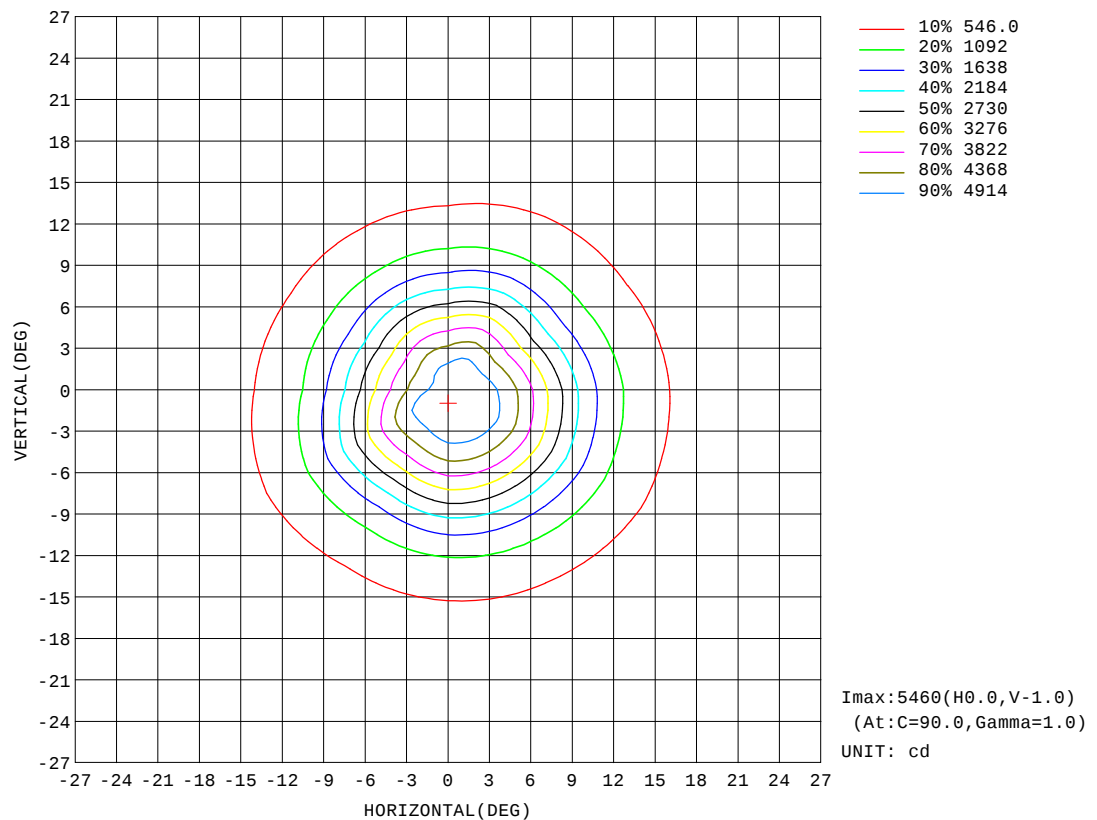


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Blazeline Max-598mm-RGBW DS-GREEN-15D-Rev1	TYPE:RGBW DS-GREEN	WEIGHT:
SPEC.:15 DEG	DIM.:598MM	SERIAL No.:IES001821
MFR.:	SUR.:	Shielding Angle:

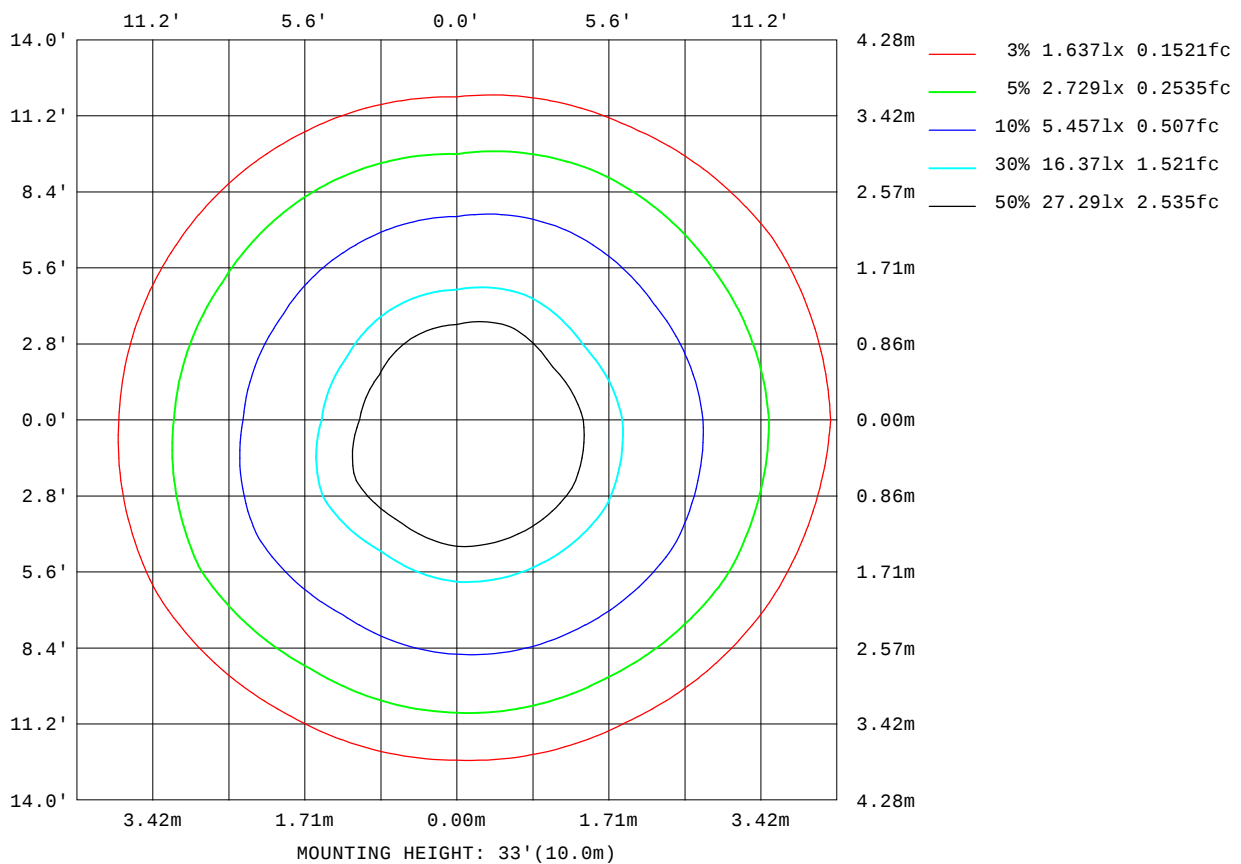

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-07

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

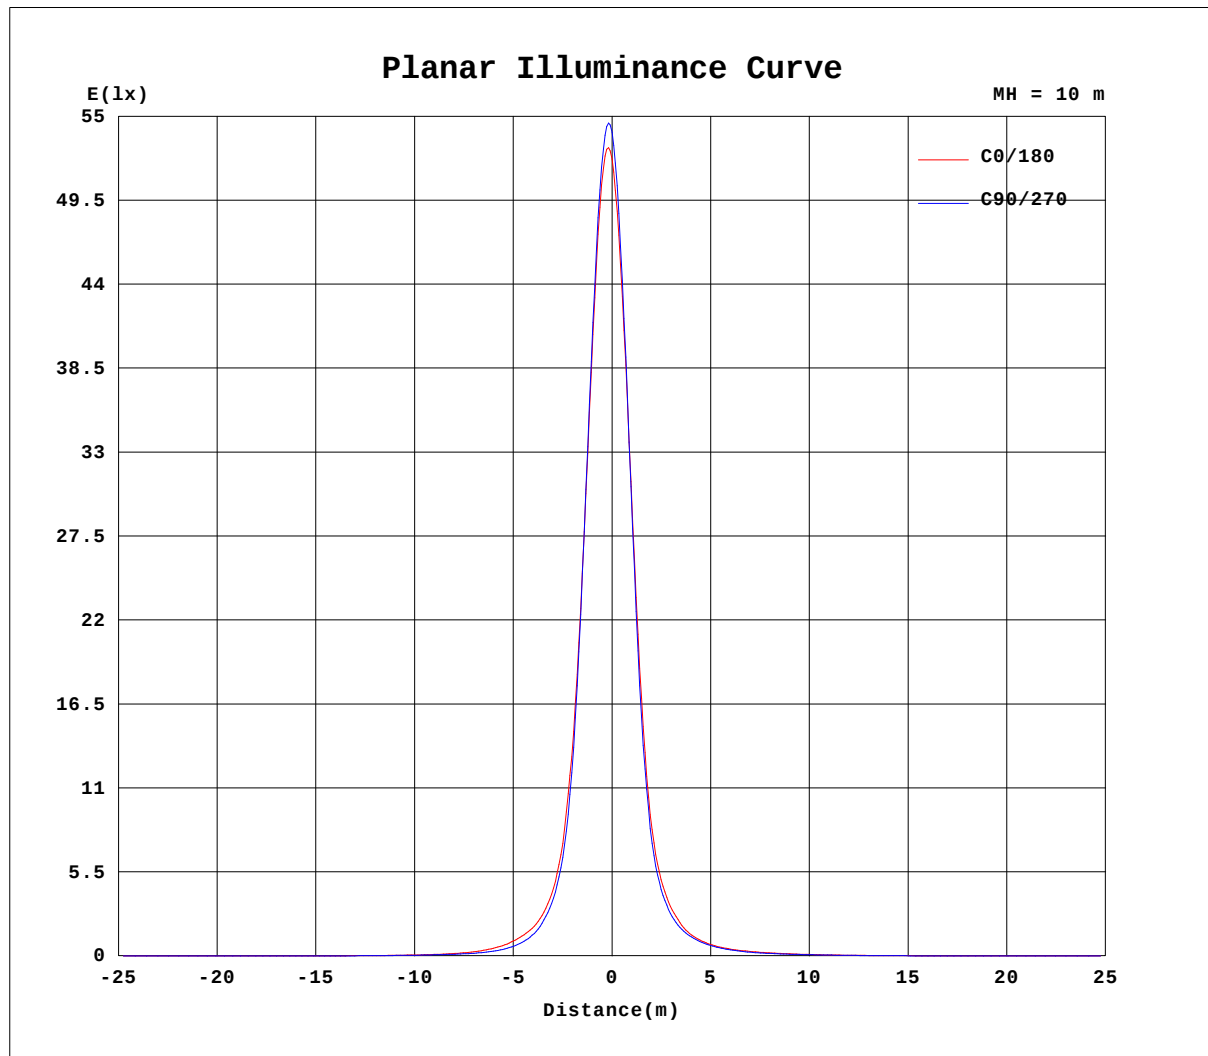


H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-07

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Blazeline Max-598mm-RGBW DS-GREEN-15D-Rev1	TYPE:RGBW DS-GREEN	WEIGHT:
SPEC.:15 DEG	DIM.:598MM	SERIAL No.:IES001821
MFR.:	SUR.:	Shielding Angle:

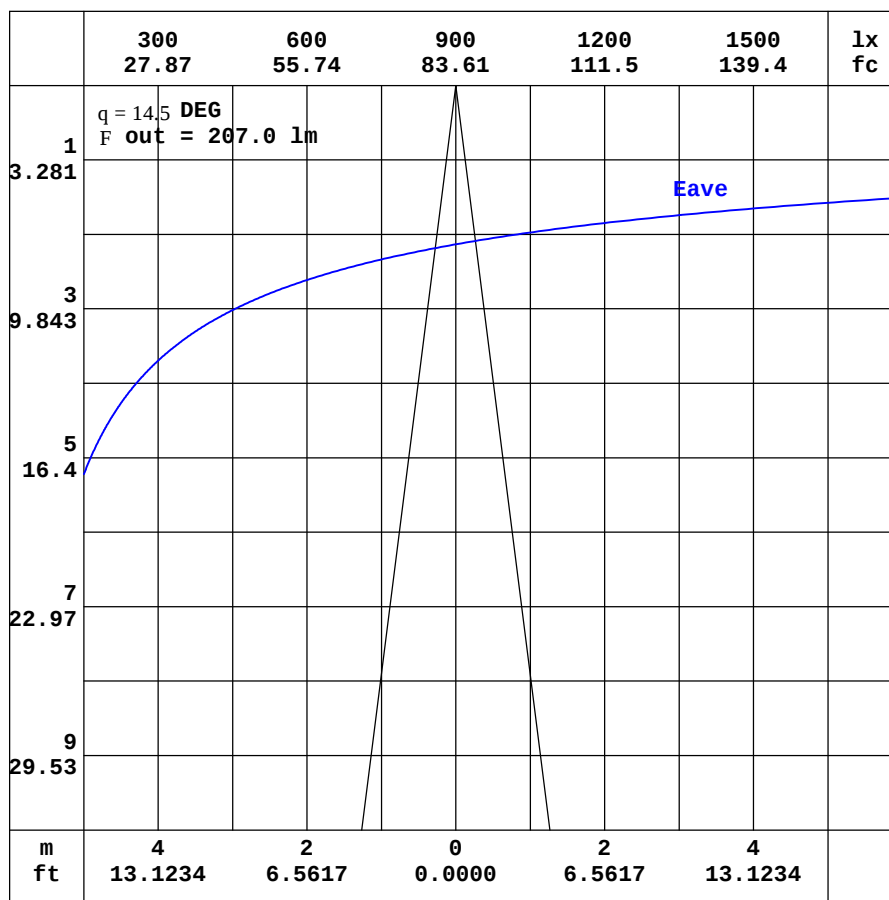

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_b) Range:-90 - 90DEG
H_b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Max-598mm-RGBW DS-GREEN-15D-Rev1	TYPE:RGBW DS-GREEN	WEIGHT:
SPEC.:15 DEG	DIM.:598MM	SERIAL No.:IES001821
MFR.:	SUR.:	Shielding Angle:

Table--1
UNIT: cd

H(°)\V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	2.11	1.85	1.60	1.51	1.54	1.63	1.85	2.33	3.09	3.96	4.62	4.90	4.86	4.67	4.47	4.37	4.27	4.11	4.06
-170	2.11	1.83	1.58	1.47	1.48	1.51	1.61	1.88	2.35	2.89	3.32	3.54	3.55	3.60	3.69	3.86	4.10	4.40	4.54
-160	2.11	1.82	1.57	1.44	1.42	1.39	1.38	1.43	1.59	1.79	1.93	1.99	2.07	2.49	2.97	3.42	3.70	3.89	3.97
-150	2.11	1.81	1.57	1.41	1.36	1.31	1.22	1.11	1.02	0.92	0.83	1.06	1.36	1.69	2.02	2.31	2.54	2.68	2.71
-140	2.11	1.81	1.58	1.40	1.33	1.27	1.16	0.99	0.76	0.64	0.63	0.65	0.75	0.88	1.03	1.19	1.31	1.38	1.40
-130	2.11	1.82	1.59	1.42	1.30	1.24	1.16	1.03	0.91	0.80	0.69	0.62	0.58	0.55	0.54	0.55	0.56	0.58	0.58
-120	2.11	1.83	1.61	1.44	1.31	1.22	1.15	1.09	1.08	1.04	0.99	0.93	0.86	0.79	0.73	0.67	0.63	0.60	0.58
-110	2.11	1.84	1.63	1.46	1.32	1.22	1.13	1.10	1.11	1.11	1.11	1.11	1.12	1.11	1.10	1.09	1.07	1.06	1.05
-100	2.11	1.87	1.65	1.46	1.30	1.15	1.03	1.04	1.05	1.07	1.07	1.08	1.08	1.08	1.09	1.09	1.09	1.09	1.09
-90	2.11	1.90	1.69	1.47	1.26	1.04	0.83	0.83	0.83	0.83	0.83	0.84	0.84	0.84	0.83	0.83	0.83	0.83	0.83
-80	2.11	1.94	1.73	1.51	1.26	0.99	0.70	0.66	0.66	0.65	0.65	0.65	0.65	0.65	0.64	0.63	0.62	0.61	0.60
-70	2.11	1.97	1.80	1.60	1.37	1.10	0.78	0.73	0.80	0.88	0.97	1.07	1.17	1.25	1.32	1.39	1.44	1.47	1.48
-60	2.11	2.02	1.91	1.77	1.62	1.46	1.24	1.07	1.29	1.56	1.90	2.30	2.72	3.14	3.56	3.91	4.19	4.37	4.43
-50	2.11	2.08	2.06	2.04	2.06	2.07	2.01	1.94	2.33	3.21	4.30	5.54	6.84	8.16	9.45	10.5	11.2	11.6	11.6
-40	2.11	2.15	2.23	2.39	2.64	2.89	3.18	3.71	4.67	6.46	8.92	11.7	14.5	17.5	20.2	22.0	23.3	23.9	23.6
-30	2.11	2.23	2.43	2.79	3.31	3.90	4.75	6.28	8.65	11.7	14.9	19.5	24.4	30.0	35.6	41.4	48.4	54.9	57.3
-20	2.11	2.30	2.62	3.22	4.01	4.98	6.58	9.28	13.4	18.2	23.6	29.5	37.3	51.1	75.9	115	164	212	233
-10	2.11	2.36	2.81	3.60	4.69	6.02	8.28	12.2	17.9	24.8	33.3	44.0	60.4	95.9	173	341	636	1224	1854
0	2.11	2.42	2.96	3.92	5.24	6.85	9.54	14.2	21.0	29.7	40.8	55.4	78.5	124	223	466	1233	3407	5220
10	2.11	2.41	2.94	3.83	5.04	6.53	9.01	13.2	19.7	27.5	37.2	49.8	67.6	99.9	161	274	473	826	1145
20	2.11	2.40	2.87	3.64	4.67	5.95	7.95	11.2	16.4	22.7	30.4	38.9	49.9	64.3	86.8	119	154	185	196
30	2.11	2.37	2.78	3.40	4.23	5.22	6.58	8.77	12.1	16.8	22.1	28.2	34.3	40.8	47.8	54.9	62.4	68.4	70.3
40	2.11	2.33	2.65	3.13	3.76	4.46	5.29	6.50	8.29	10.9	14.3	18.2	22.1	26.0	29.2	31.5	33.2	34.1	34.1
50	2.11	2.28	2.54	2.86	3.28	3.76	4.23	4.79	5.62	6.83	8.32	10.1	12.0	14.0	15.8	17.3	18.3	18.9	19.0
60	2.11	2.24	2.43	2.63	2.88	3.16	3.45	3.72	4.07	4.50	5.02	5.63	6.29	6.96	7.57	8.09	8.50	8.78	8.89
70	2.11	2.20	2.30	2.44	2.57	2.70	2.83	2.98	3.14	3.31	3.47	3.63	3.78	3.93	4.07	4.19	4.29	4.35	4.37
80	2.11	2.16	2.21	2.26	2.31	2.39	2.45	2.49	2.54	2.58	2.62	2.65	2.68	2.72	2.76	2.79	2.82	2.84	2.85
90	2.11	2.11	2.11	2.12	2.12	2.12	2.12	2.11	2.10	2.10	2.09	2.08	2.08	2.08	2.08	2.08	2.08	2.08	2.08
100	2.11	2.07	2.02	1.97	1.91	1.87	1.82	1.76	1.71	1.66	1.62	1.59	1.56	1.56	1.55	1.55	1.55	1.55	1.55
110	2.11	2.02	1.92	1.83	1.74	1.67	1.61	1.57	1.53	1.52	1.51	1.51	1.51	1.51	1.50	1.50	1.50	1.49	1.48
120	2.11	1.98	1.84	1.71	1.61	1.54	1.53	1.51	1.51	1.51	1.53	1.56	1.59	1.61	1.63	1.65	1.65	1.65	1.63
130	2.11	1.94	1.77	1.62	1.53	1.51	1.52	1.52	1.58	1.67	1.78	1.94	2.12	2.33	2.57	2.78	2.95	3.05	3.08
140	2.11	1.91	1.71	1.56	1.51	1.52	1.54	1.65	1.81	2.09	2.48	2.97	3.50	3.99	4.36	4.59	4.72	4.77	4.78
150	2.11	1.88	1.66	1.52	1.51	1.54	1.64	1.83	2.22	2.81	3.52	4.17	4.66	4.97	5.16	5.27	5.30	5.30	5.26
160	2.11	1.86	1.63	1.51	1.52	1.58	1.74	2.07	2.68	3.48	4.25	4.80	5.09	5.21	5.33	5.46	5.54	5.58	5.63
170	2.11	1.85	1.61	1.51	1.53	1.61	1.82	2.26	3.01	3.87	4.58	4.96	5.05	5.07	5.10	5.07	5.04	5.10	5.30
180	2.11	1.85	1.60	1.51	1.54	1.63	1.85	2.33	3.09	3.96	4.62	4.90	4.86	4.67	4.47	4.37	4.27	4.11	4.06

H_b Range:-90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Max-598mm-RGBW DS-GREEN-15D-Rev1	TYPE:RGBW DS-GREEN	WEIGHT:
SPEC.:15 DEG	DIM.:598MM	SERIAL No.:IES001821
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	3.60	3.44	3.28	3.05	2.79	2.44	1.99	1.46	0.98	0.66	0.59	0.65	0.82	1.01	1.06	1.03	0.92	0.75
-170	4.43	4.15	3.86	3.43	2.93	2.40	1.87	1.35	0.91	0.63	0.58	0.65	0.83	1.00	1.06	1.03	0.92	0.75
-160	3.87	3.65	3.32	2.91	2.45	1.96	1.47	1.05	0.74	0.58	0.58	0.69	0.88	1.02	1.06	1.03	0.91	0.75
-150	2.64	2.46	2.20	1.90	1.58	1.25	0.95	0.72	0.59	0.56	0.62	0.78	0.94	1.05	1.06	1.01	0.90	0.75
-140	1.36	1.25	1.11	0.94	0.79	0.65	0.56	0.54	0.55	0.62	0.75	0.90	1.01	1.06	1.05	1.00	0.89	0.75
-130	0.57	0.53	0.50	0.49	0.49	0.51	0.55	0.61	0.71	0.82	0.92	1.00	1.05	1.06	1.04	0.97	0.87	0.75
-120	0.59	0.61	0.64	0.68	0.74	0.80	0.86	0.92	0.97	1.01	1.03	1.06	1.06	1.05	1.00	0.93	0.85	0.75
-110	1.05	1.05	1.06	1.07	1.07	1.07	1.06	1.06	1.06	1.06	1.06	1.06	1.04	0.99	0.94	0.88	0.82	0.75
-100	1.08	1.07	1.06	1.05	1.04	1.02	1.02	1.01	1.01	1.00	0.98	0.96	0.93	0.90	0.87	0.83	0.79	0.75
-90	0.82	0.81	0.80	0.79	0.78	0.77	0.77	0.78	0.78	0.78	0.78	0.78	0.78	0.77	0.77	0.76	0.75	0.75
-80	0.60	0.61	0.61	0.61	0.61	0.61	0.61	0.62	0.62	0.63	0.64	0.65	0.67	0.69	0.70	0.72	0.72	0.75
-70	1.46	1.42	1.36	1.29	1.21	1.12	1.03	0.94	0.87	0.80	0.75	0.70	0.69	0.68	0.68	0.70	0.71	0.75
-60	4.30	4.07	3.75	3.35	2.93	2.52	2.12	1.76	1.45	1.21	1.03	0.97	0.89	0.79	0.72	0.69	0.70	0.75
-50	11.2	10.5	9.56	8.47	7.31	6.21	5.01	3.86	2.87	2.09	1.59	1.36	1.19	1.01	0.81	0.71	0.70	0.75
-40	22.6	20.8	18.5	16.3	14.6	12.6	10.4	8.02	5.74	3.89	2.64	1.93	1.57	1.27	0.96	0.76	0.70	0.75
-30	55.2	48.8	40.1	32.4	26.3	21.4	17.4	13.6	9.94	6.58	4.18	2.69	1.96	1.55	1.14	0.81	0.70	0.75
-20	219	174	125	86.3	57.3	37.7	26.7	19.8	14.3	9.58	5.87	3.51	2.37	1.81	1.30	0.86	0.70	0.75
-10	1496	822	400	206	118	67.9	40.7	26.6	18.2	12.0	7.27	4.27	2.72	2.01	1.43	0.91	0.71	0.75
0	4361	1934	667	297	164	91.4	51.9	31.5	20.5	13.2	7.91	4.58	2.89	2.15	1.51	0.93	0.71	0.75
10	1017	603	341	209	132	80.4	49.0	31.8	21.6	14.2	8.65	5.15	3.29	2.38	1.66	1.04	0.76	0.75
20	195	171	139	107	78.6	56.4	39.3	28.2	19.9	13.2	8.31	5.15	3.46	2.52	1.75	1.12	0.80	0.75
30	70.0	64.7	56.7	49.2	41.2	34.4	28.2	22.4	16.2	11.0	7.21	4.79	3.42	2.54	1.77	1.17	0.84	0.75
40	33.7	32.4	30.5	27.8	25.1	21.8	18.2	14.6	11.2	8.28	5.86	4.28	3.25	2.46	1.73	1.20	0.88	0.75
50	18.8	18.1	17.1	15.7	14.1	12.3	10.4	8.60	7.08	5.80	4.74	3.76	2.99	2.30	1.67	1.20	0.91	0.75
60	8.83	8.60	8.23	7.75	7.18	6.50	5.81	5.19	4.66	4.21	3.85	3.31	2.68	2.09	1.60	1.21	0.93	0.75
70	4.37	4.33	4.26	4.16	4.04	3.89	3.73	3.58	3.43	3.27	3.10	2.83	2.35	1.91	1.53	1.21	0.94	0.75
80	2.85	2.84	2.82	2.80	2.77	2.74	2.71	2.67	2.62	2.57	2.50	2.42	2.09	1.77	1.47	1.19	0.95	0.75
90	2.08	2.08	2.08	2.07	2.07	2.07	2.07	2.07	2.07	2.07	2.07	2.07	1.85	1.63	1.41	1.19	0.97	0.75
100	1.54	1.54	1.54	1.53	1.54	1.55	1.57	1.60	1.63	1.67	1.72	1.75	1.64	1.52	1.36	1.19	0.98	0.75
110	1.48	1.48	1.48	1.48	1.48	1.47	1.48	1.48	1.49	1.51	1.54	1.55	1.49	1.42	1.32	1.18	0.99	0.75
120	1.63	1.62	1.60	1.58	1.55	1.52	1.49	1.48	1.47	1.48	1.49	1.44	1.40	1.35	1.27	1.17	0.99	0.75
130	3.03	2.90	2.71	2.47	2.23	2.01	1.82	1.67	1.56	1.49	1.44	1.39	1.34	1.30	1.24	1.15	0.99	0.75
140	4.74	4.65	4.48	4.22	3.85	3.37	2.84	2.34	1.96	1.62	1.38	1.30	1.28	1.25	1.21	1.13	0.99	0.75
150	5.24	5.20	5.12	4.98	4.79	4.48	4.00	3.37	2.43	1.72	1.32	1.18	1.18	1.20	1.17	1.11	0.98	0.75
160	5.61	5.54	5.38	5.23	5.08	4.88	4.20	3.31	2.40	1.64	1.20	1.04	1.06	1.13	1.14	1.09	0.96	0.75
170	5.30	5.24	5.23	4.90	4.38	3.85	3.24	2.57	1.87	1.27	0.95	0.86	0.94	1.06	1.10	1.06	0.95	0.75
180	3.60	3.44	3.28	3.05	2.79	2.44	1.99	1.46	0.98	0.66	0.59	0.65	0.82	1.01	1.06	1.03	0.92	0.75

H_(b) Range: -90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-10-07

V(B) Range: -180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: