

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	2594.7 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	59.7V x 59.4H
	At 50% of Imax	29.8V x 29.7H
	At 90% of Imax	11.7V x 11.6H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	762.2 lumens per klm.
	To 50% of Imax	389.6 lumens per klm.
	To 90% of Imax	74.3 lumens per klm.

Upward LOR	2.2 %
Downward LOR	97.8 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Blazeline Max-598mm-RGBW DS-3000K-30D-Rev1	TYPE:RGBW DS-3000K	WEIGHT:
SPEC.:30 DEG	DIM.:598MM	SERIAL No.:IES001828
MFR.:	SUR.:	Shielding Angle:

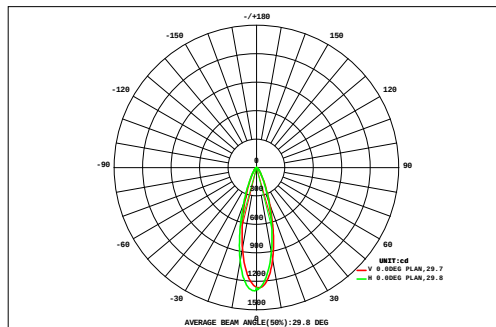

DATA OF LAMP			Eff:71.18lm/W	
MODEL			Imax(cd)	1298
NOMINAL POWER(W)	7.04		AVAILABILITY(%)	76.3
RATED VOLTAGE(V)	220		Avai. FLUX(lm)	381.6
NOMINAL FLUX(lm)	500.4		LOR(%)	100.0
LAMPS INSIDE	1		TOTAL FLUX(lm)	500.4
TEST VOLTAGE(V)	220		q @50%(H,V)	30,30DEG

		AREA FLUX DIAGRAM															UNIT:lm				F t	F a
VERTICAL (DEG)	45	0.09	0.12	0.14	0.18	0.21	0.25	0.29	0.32	0.34	0.35	0.34	0.31	0.28	0.24	0.21	0.17	0.14	0.11	4.09	0.00	
	40	0.11	0.14	0.18	0.23	0.28	0.35	0.41	0.46	0.50	0.51	0.48	0.44	0.39	0.32	0.26	0.21	0.16	0.13	5.56	0.00	
	35	0.12	0.16	0.22	0.29	0.38	0.50	0.61	0.71	0.77	0.78	0.74	0.65	0.55	0.44	0.34	0.26	0.20	0.15	7.87	0.00	
	30	0.14	0.19	0.27	0.38	0.53	0.73	0.95	1.15	1.28	1.30	1.19	1.01	0.80	0.60	0.44	0.32	0.23	0.17	11.7	5.84	
	25	0.16	0.23	0.33	0.49	0.74	1.09	1.51	1.92	2.18	2.21	2.00	1.61	1.18	0.83	0.57	0.39	0.27	0.19	17.9	13.7	
	20	0.18	0.26	0.40	0.63	1.02	1.59	2.38	3.16	3.64	3.69	3.29	2.53	1.74	1.14	0.73	0.47	0.31	0.20	27.4	24.0	
	15	0.20	0.30	0.48	0.79	1.33	2.21	3.44	4.78	5.63	5.73	5.02	3.70	2.44	1.51	0.91	0.55	0.34	0.22	39.6	36.6	
	-15	0.21	0.33	0.54	0.93	1.64	2.81	4.46	6.34	7.66	7.85	6.75	4.91	3.18	1.89	1.08	0.61	0.36	0.23	51.8	49.0	
		0.22	0.34	0.57	1.01	1.83	3.21	5.19	7.36	8.98	9.28	7.99	5.91	3.77	2.16	1.18	0.65	0.37	0.23	60.2	57.7	
		0.22	0.34	0.57	1.01	1.85	3.30	5.40	7.75	9.38	9.50	8.27	6.10	3.86	2.19	1.18	0.64	0.37	0.22	62.2	59.6	
		0.20	0.32	0.53	0.94	1.70	3.02	4.91	6.89	8.26	8.40	7.24	5.33	3.39	1.95	1.07	0.60	0.35	0.22	55.3	52.6	
		0.18	0.28	0.46	0.79	1.38	2.36	3.67	5.07	6.13	6.24	5.34	3.96	2.60	1.55	0.90	0.52	0.31	0.20	41.9	39.1	
		0.16	0.24	0.37	0.61	1.01	1.62	2.42	3.26	3.89	3.95	3.41	2.59	1.78	1.13	0.70	0.43	0.27	0.18	28.1	24.8	
		0.13	0.19	0.29	0.46	0.71	1.06	1.49	1.93	2.25	2.28	2.00	1.58	1.15	0.78	0.52	0.34	0.23	0.16	17.5	13.5	
		0.11	0.15	0.23	0.33	0.48	0.67	0.89	1.11	1.25	1.26	1.15	0.95	0.73	0.53	0.38	0.27	0.19	0.13	10.8	5.08	
		0.09	0.13	0.18	0.24	0.33	0.43	0.55	0.65	0.72	0.73	0.67	0.58	0.47	0.37	0.28	0.21	0.15	0.11	6.89	0.00	
0.08		0.10	0.14	0.18	0.23	0.29	0.35	0.40	0.44	0.44	0.42	0.37	0.32	0.26	0.21	0.16	0.13	0.10	4.60	0.00		
0.06	0.08	0.11	0.13	0.17	0.20	0.24	0.26	0.28	0.29	0.27	0.25	0.22	0.19	0.16	0.13	0.10	0.08	3.23	0.00			
-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)				10	15	20	25	30	35	40	45			
F t	2.67	3.90	6.00	9.64	15.8	25.7	39.1	53.5	63.6	64.8	56.6	42.8	28.8	18.1	11.1	6.93	4.49	3.01	457	---		
F a	0.00	0.00	0.00	3.35	11.4	21.9	35.7	50.2	60.5	61.7	53.3	39.3	25.1	13.7	5.50	0.00	0.00	0.00	---	382		

one-half-peak spread: U:14.5,D:15.5 , L:15.0,R:14.9


NEMA Beam Type: Type 4

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-10-07

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:Blazeline Max-598mm-RGBW DS-3000K-30D-Rev1	TYPE:RGBW DS-3000K	WEIGHT:
SPEC.:30 DEG	DIM.:598MM	SERIAL No.:IES001828
MFR.:	SUR.:	Shielding Angle:

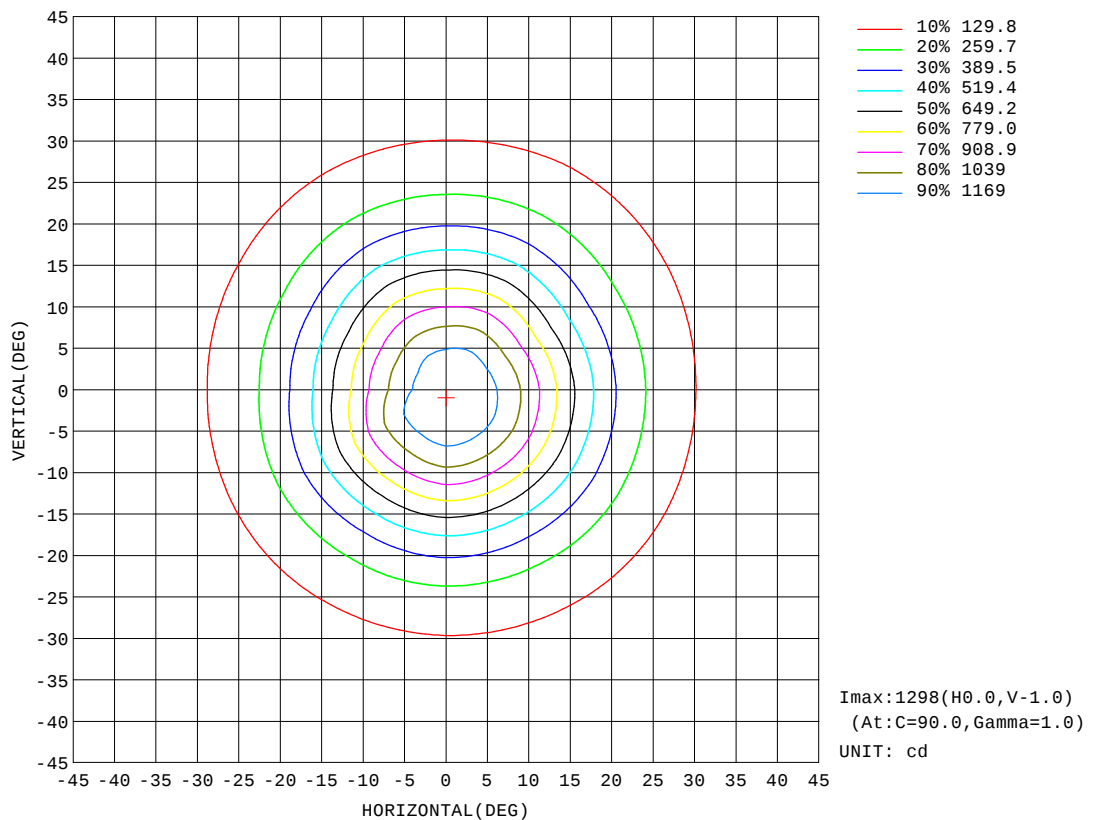


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Blazeline Max-598mm-RGBW DS-3000K-30D-Rev1	TYPE:RGBW DS-3000K	WEIGHT:
SPEC.:30 DEG	DIM.:598MM	SERIAL No.:IES001828
MFR.:	SUR.:	Shielding Angle:

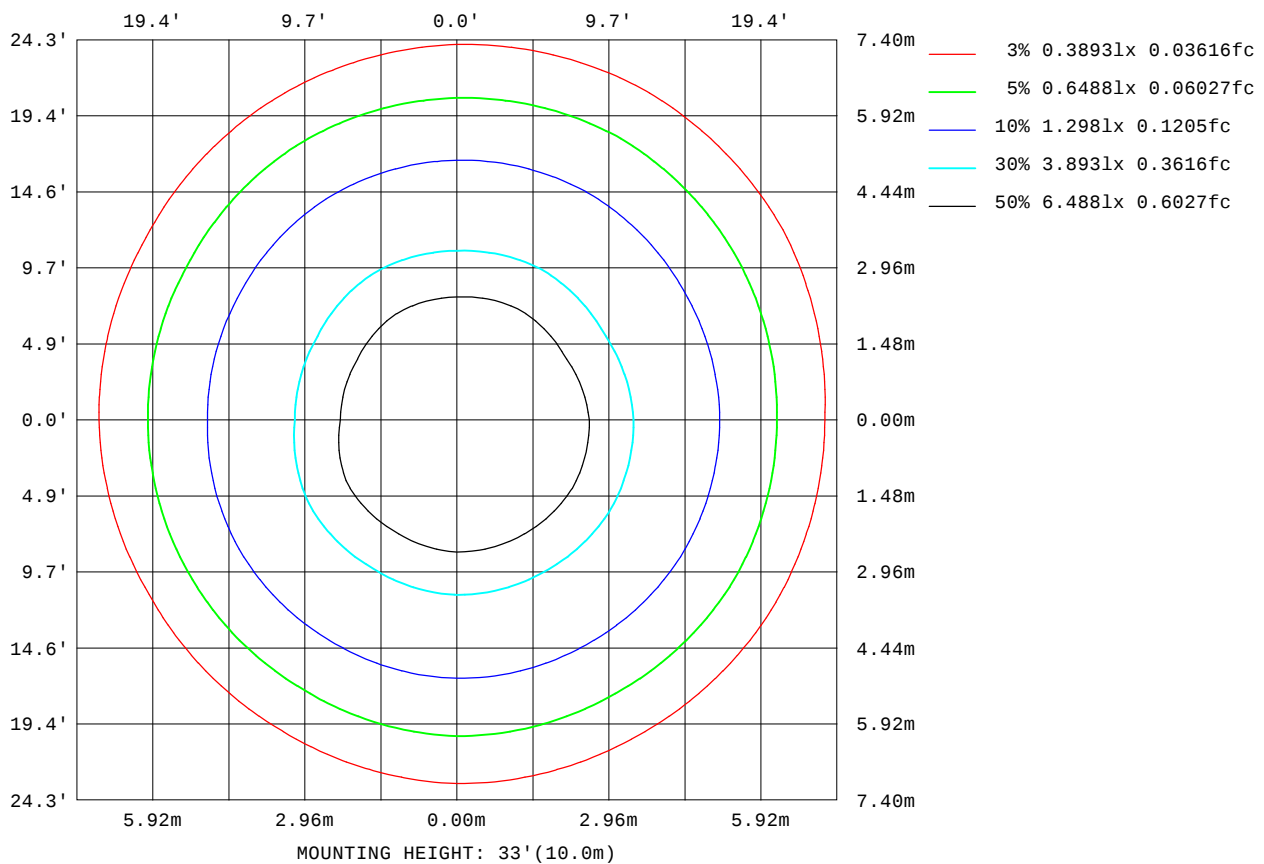

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-07

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

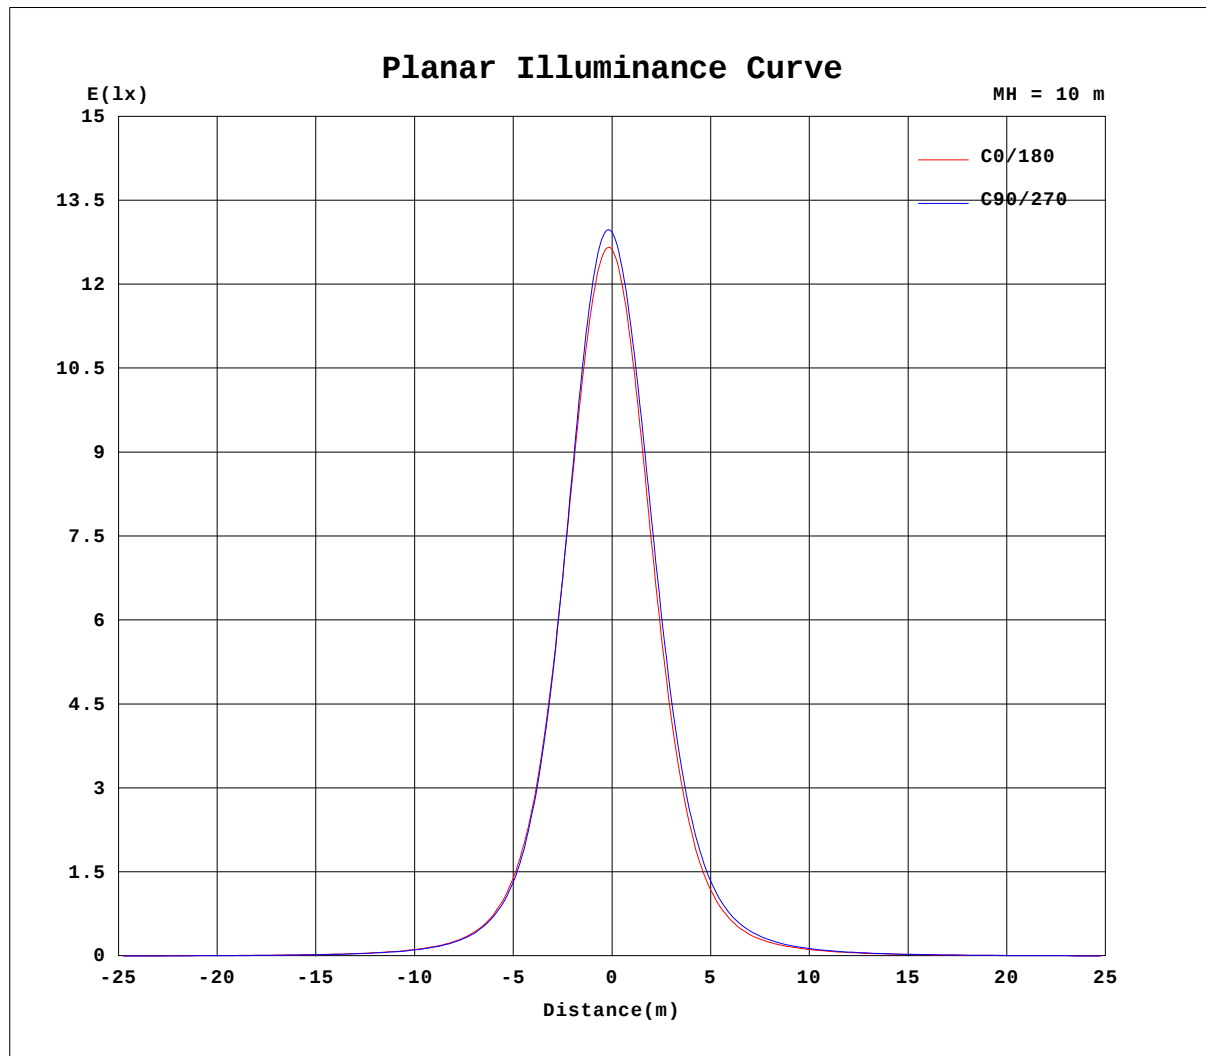


$H(b)$ Range: -90 - 90DEG
 $H(b)$ Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-07

$V(B)$ Range: -180 - 180DEG
 $V(B)$ Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Blazeline Max-598mm-RGBW DS-3000K-30D-Rev1	TYPE:RGBW DS-3000K	WEIGHT:
SPEC.:30 DEG	DIM.:598MM	SERIAL No.:IES001828
MFR.:	SUR.:	Shielding Angle:

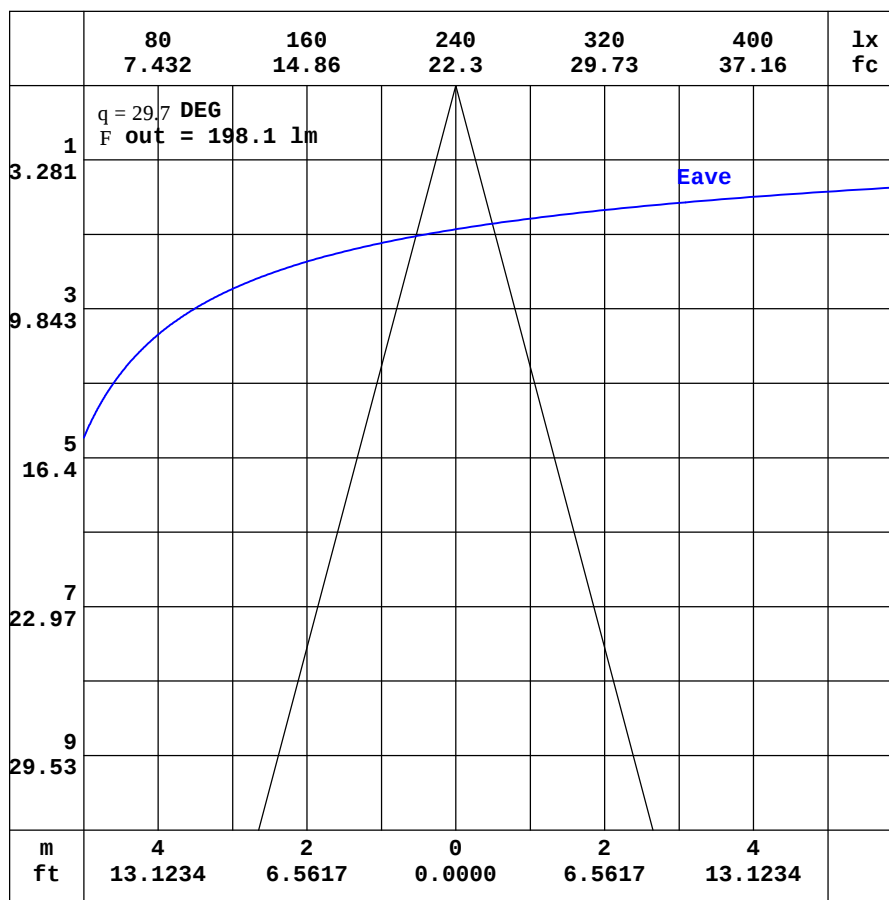

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Max-598mm-RGBW DS-3000K-30D-Rev1	TYPE:RGBW DS-3000K	WEIGHT:
SPEC.:30 DEG	DIM.:598MM	SERIAL No.:IES001828
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	1.84	1.68	1.56	1.53	1.55	1.65	1.87	2.21	2.65	3.12	3.52	3.82	3.99	4.03	4.01	3.94	3.82	3.69	3.73
-170	1.84	1.66	1.52	1.46	1.44	1.48	1.62	1.82	2.08	2.35	2.58	2.74	2.83	2.85	2.81	2.83	3.03	3.18	3.34
-160	1.84	1.64	1.48	1.39	1.34	1.32	1.36	1.42	1.50	1.57	1.61	1.61	1.62	1.94	2.24	2.51	2.72	2.86	2.95
-150	1.84	1.62	1.45	1.32	1.25	1.19	1.13	1.09	1.02	0.92	0.84	1.00	1.19	1.42	1.63	1.84	2.01	2.13	2.18
-140	1.84	1.60	1.42	1.27	1.18	1.08	0.98	0.86	0.73	0.67	0.68	0.73	0.81	0.91	1.02	1.14	1.23	1.30	1.33
-130	1.84	1.59	1.40	1.24	1.11	1.01	0.89	0.75	0.67	0.66	0.66	0.65	0.64	0.64	0.65	0.70	0.73	0.75	0.77
-120	1.84	1.60	1.39	1.23	1.08	0.94	0.82	0.73	0.72	0.72	0.71	0.69	0.68	0.66	0.65	0.64	0.64	0.64	0.64
-110	1.84	1.60	1.39	1.21	1.05	0.91	0.77	0.73	0.73	0.73	0.74	0.73	0.73	0.73	0.73	0.72	0.72	0.71	0.70
-100	1.84	1.61	1.40	1.20	1.01	0.85	0.68	0.68	0.69	0.70	0.71	0.71	0.71	0.72	0.72	0.73	0.73	0.74	0.74
-90	1.84	1.63	1.42	1.20	0.99	0.78	0.56	0.56	0.56	0.56	0.55	0.55	0.55	0.56	0.56	0.57	0.58	0.59	0.60
-80	1.84	1.65	1.45	1.24	1.02	0.79	0.54	0.54	0.58	0.62	0.66	0.69	0.73	0.78	0.85	0.91	0.97	1.01	1.04
-70	1.84	1.69	1.52	1.38	1.26	1.16	1.07	1.25	1.52	1.81	2.10	2.41	2.71	3.10	3.52	3.90	4.23	4.50	4.69
-60	1.84	1.73	1.66	1.71	1.88	2.14	2.36	2.74	3.50	4.29	5.09	5.89	6.68	7.49	8.44	9.31	10.1	10.7	11.1
-50	1.84	1.79	1.88	2.23	2.84	3.47	4.24	5.01	6.10	7.47	8.92	10.5	12.2	14.0	16.0	17.9	19.6	20.9	21.8
-40	1.84	1.85	2.16	2.96	3.89	5.12	6.46	7.84	9.14	11.1	13.8	16.9	20.7	25.2	30.2	35.6	40.4	44.2	46.3
-30	1.84	1.92	2.45	3.62	5.04	6.83	8.82	10.9	13.2	16.1	19.9	26.5	35.8	48.5	64.2	82.7	102	118	125
-20	1.84	2.00	2.75	4.24	6.13	8.46	11.1	14.1	17.7	22.6	30.0	42.0	62.7	96.7	147	215	294	366	402
-10	1.84	2.07	3.02	4.75	7.03	9.83	13.1	16.8	21.8	29.1	40.6	60.5	98.0	166	289	473	697	894	1002
0	1.84	2.13	3.21	5.10	7.63	10.8	14.5	18.8	24.6	33.4	46.7	69.6	115	196	345	574	865	1130	1262
10	1.84	2.12	3.14	4.95	7.37	10.3	13.9	18.0	23.4	31.2	43.0	63.0	99.4	164	271	433	642	833	906
20	1.84	2.09	2.97	4.62	6.75	9.43	12.6	16.2	20.6	26.5	34.7	47.2	67.9	101	149	215	295	354	379
30	1.84	2.05	2.76	4.15	5.89	8.14	10.7	13.6	17.0	21.0	26.1	33.0	42.7	55.8	72.5	91.6	110	124	131
40	1.84	2.01	2.54	3.61	4.90	6.59	8.57	10.7	13.1	15.8	19.1	22.8	27.2	32.2	37.7	43.4	48.5	52.3	54.3
50	1.84	1.98	2.32	2.96	3.92	4.99	6.33	7.85	9.47	11.3	13.1	15.1	17.2	19.3	21.5	23.8	25.6	27.1	27.9
60	1.84	1.94	2.13	2.48	2.99	3.64	4.33	5.16	6.19	7.27	8.33	9.38	10.4	11.4	12.5	13.4	14.3	14.9	15.3
70	1.84	1.91	2.00	2.15	2.35	2.59	2.89	3.24	3.64	4.08	4.52	4.99	5.45	5.91	6.35	6.74	7.06	7.30	7.45
80	1.84	1.88	1.92	1.97	2.03	2.09	2.16	2.21	2.28	2.36	2.44	2.52	2.60	2.69	2.77	2.84	2.90	2.94	2.96
90	1.84	1.85	1.86	1.87	1.88	1.88	1.89	1.88	1.87	1.86	1.85	1.84	1.83	1.84	1.85	1.86	1.87	1.88	1.88
100	1.84	1.82	1.80	1.78	1.76	1.74	1.72	1.69	1.66	1.63	1.61	1.58	1.56	1.56	1.56	1.56	1.56	1.56	1.57
110	1.84	1.79	1.74	1.70	1.66	1.63	1.60	1.57	1.54	1.52	1.51	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.49
120	1.84	1.77	1.69	1.64	1.59	1.55	1.53	1.52	1.52	1.52	1.54	1.58	1.63	1.68	1.72	1.75	1.78	1.79	1.79
130	1.84	1.74	1.65	1.58	1.54	1.53	1.52	1.52	1.58	1.67	1.80	1.94	2.09	2.23	2.37	2.47	2.56	2.61	2.62
140	1.84	1.72	1.63	1.55	1.53	1.53	1.54	1.65	1.80	2.01	2.27	2.53	2.79	3.02	3.22	3.37	3.48	3.54	3.57
150	1.84	1.71	1.60	1.53	1.53	1.55	1.64	1.83	2.10	2.44	2.79	3.13	3.42	3.67	3.86	4.00	4.08	4.12	4.13
160	1.84	1.70	1.58	1.53	1.53	1.59	1.75	2.02	2.39	2.80	3.20	3.55	3.80	3.98	4.10	4.18	4.22	4.23	4.27
170	1.84	1.69	1.57	1.53	1.54	1.62	1.83	2.16	2.58	3.04	3.45	3.76	3.96	4.04	4.04	4.04	3.98	3.94	3.98
180	1.84	1.68	1.56	1.53	1.55	1.65	1.87	2.21	2.65	3.12	3.52	3.82	3.99	4.03	4.01	3.94	3.82	3.69	3.74

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-10-07

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Max-598mm-RGBW DS-3000K-30D-Rev1	TYPE:RGBW DS-3000K	WEIGHT:
SPEC.:30 DEG	DIM.:598MM	SERIAL No.:IES001828
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	3.30	3.07	2.88	2.68	2.38	2.04	1.67	1.32	1.00	0.77	0.64	0.64	0.68	0.72	0.72	0.72	0.64	0.59
-170	3.19	3.05	2.87	2.63	2.33	1.98	1.61	1.27	0.97	0.76	0.65	0.65	0.68	0.72	0.72	0.71	0.65	0.59
-160	2.87	2.74	2.54	2.30	2.01	1.70	1.38	1.09	0.86	0.70	0.65	0.65	0.68	0.72	0.72	0.71	0.64	0.59
-150	2.14	2.04	1.88	1.68	1.47	1.25	1.04	0.87	0.74	0.66	0.65	0.66	0.70	0.72	0.73	0.71	0.64	0.59
-140	1.31	1.25	1.16	1.06	0.94	0.83	0.75	0.69	0.66	0.65	0.65	0.67	0.71	0.72	0.72	0.70	0.63	0.59
-130	0.76	0.74	0.71	0.67	0.64	0.64	0.64	0.65	0.65	0.65	0.67	0.70	0.72	0.73	0.72	0.69	0.63	0.59
-120	0.64	0.64	0.64	0.65	0.66	0.67	0.68	0.68	0.70	0.71	0.71	0.73	0.72	0.72	0.70	0.66	0.61	0.59
-110	0.71	0.71	0.72	0.72	0.73	0.73	0.73	0.73	0.73	0.73	0.73	0.72	0.72	0.71	0.67	0.64	0.60	0.59
-100	0.74	0.73	0.73	0.73	0.72	0.71	0.71	0.71	0.72	0.72	0.71	0.70	0.68	0.66	0.64	0.61	0.60	0.59
-90	0.60	0.59	0.59	0.59	0.59	0.59	0.60	0.61	0.61	0.62	0.63	0.63	0.62	0.62	0.61	0.60	0.60	0.59
-80	1.06	1.06	1.05	1.02	0.99	0.95	0.93	0.89	0.85	0.80	0.76	0.71	0.69	0.68	0.66	0.63	0.60	0.59
-70	4.68	4.59	4.42	4.18	3.88	3.58	3.26	2.91	2.56	2.20	1.85	1.52	1.25	1.02	0.85	0.72	0.63	0.59
-60	11.0	10.8	10.3	9.75	9.03	8.26	7.44	6.57	5.67	4.79	3.92	3.10	2.37	1.72	1.23	0.89	0.68	0.59
-50	21.5	20.7	19.5	18.0	16.3	14.6	12.9	11.1	9.47	7.91	6.48	5.14	3.85	2.71	1.75	1.11	0.74	0.59
-40	45.3	42.4	38.3	33.5	28.8	24.4	20.4	17.0	14.0	11.4	9.24	7.30	5.47	3.79	2.38	1.37	0.79	0.59
-30	120	106	88.5	70.5	54.8	41.9	32.1	24.8	19.3	15.3	12.0	9.36	7.00	4.84	3.01	1.64	0.85	0.59
-20	376	310	232	162	109	72.6	49.3	34.8	25.3	19.0	14.5	11.1	8.29	5.73	3.52	1.85	0.91	0.59
-10	928	744	518	324	189	111	68.1	44.4	30.7	22.0	16.4	12.4	9.21	6.37	3.90	2.02	0.95	0.59
0	1207	984	682	414	234	132	77.2	48.8	33.2	23.3	17.2	13.0	9.67	6.69	4.08	2.10	0.97	0.59
10	867	689	476	305	187	113	71.3	47.4	33.1	23.7	17.6	13.2	9.74	6.70	4.09	2.12	0.99	0.59
20	363	310	232	165	114	79.5	56.1	40.3	29.6	22.1	16.7	12.7	9.27	6.34	3.88	2.05	1.00	0.59
30	127	116	99.3	80.7	64.0	50.3	39.7	31.6	24.7	19.2	14.8	11.3	8.30	5.66	3.52	1.93	0.99	0.59
40	53.8	51.3	47.4	42.5	37.0	31.7	27.0	22.8	19.0	15.5	12.3	9.41	6.92	4.74	3.00	1.74	0.96	0.59
50	27.8	27.2	25.9	24.3	22.4	20.1	17.9	15.6	13.4	11.4	9.31	7.21	5.31	3.74	2.45	1.54	0.93	0.59
60	15.3	15.1	14.7	14.0	13.1	12.1	11.0	9.81	8.61	7.44	6.26	4.96	3.80	2.79	1.98	1.35	0.90	0.59
70	7.47	7.40	7.24	6.98	6.65	6.26	5.79	5.27	4.76	4.26	3.78	3.25	2.62	2.09	1.61	1.21	0.85	0.59
80	2.99	3.00	2.99	2.95	2.90	2.84	2.75	2.66	2.57	2.49	2.40	2.29	1.98	1.69	1.39	1.10	0.82	0.59
90	1.88	1.88	1.88	1.88	1.88	1.87	1.89	1.90	1.91	1.92	1.93	1.94	1.72	1.49	1.27	1.04	0.82	0.59
100	1.56	1.56	1.56	1.56	1.56	1.57	1.59	1.61	1.64	1.67	1.71	1.72	1.56	1.40	1.21	1.01	0.80	0.59
110	1.49	1.50	1.50	1.50	1.50	1.49	1.50	1.50	1.51	1.53	1.56	1.56	1.44	1.31	1.16	0.99	0.79	0.59
120	1.79	1.78	1.75	1.72	1.68	1.63	1.58	1.54	1.51	1.51	1.51	1.43	1.33	1.23	1.11	0.96	0.78	0.59
130	2.62	2.57	2.49	2.38	2.25	2.10	1.95	1.81	1.68	1.58	1.47	1.35	1.24	1.15	1.06	0.94	0.77	0.59
140	3.55	3.49	3.39	3.25	3.05	2.81	2.55	2.29	2.03	1.74	1.45	1.26	1.16	1.07	1.00	0.90	0.75	0.59
150	4.11	4.08	4.00	3.87	3.69	3.45	3.15	2.81	2.26	1.76	1.40	1.18	1.07	0.99	0.93	0.86	0.73	0.59
160	4.23	4.21	4.16	4.10	3.98	3.80	3.27	2.66	2.09	1.60	1.26	1.05	0.96	0.91	0.86	0.81	0.70	0.59
170	3.91	3.98	4.04	3.83	3.47	3.06	2.60	2.11	1.65	1.26	1.00	0.87	0.82	0.82	0.79	0.77	0.68	0.59
180	3.30	3.07	2.88	2.68	2.38	2.04	1.67	1.32	1.00	0.77	0.64	0.64	0.68	0.72	0.72	0.72	0.64	0.59

H_(b) Range: -90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-10-07

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: