

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	2358.6 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	62.9V x 62.8H
	At 50% of Imax	31.1V x 30.9H
	At 90% of Imax	12.1V x 12.0H

Beam Flux	Total	1000.4 lumens per klm.
	To 10% of Imax	762.7 lumens per klm.
	To 50% of Imax	385.3 lumens per klm.
	To 90% of Imax	74.4 lumens per klm.

Upward LOR	2.3 %
Downward LOR	97.7 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Blazeline Max-598mm-RGBW DS-A11-30D-Rev1	TYPE:RGBW-DS W=3000K	WEIGHT:
SPEC.:30 DEG	DIM.:598MM	SERIAL No.:IES001824
MFR.:	SUR.:	Shielding Angle:

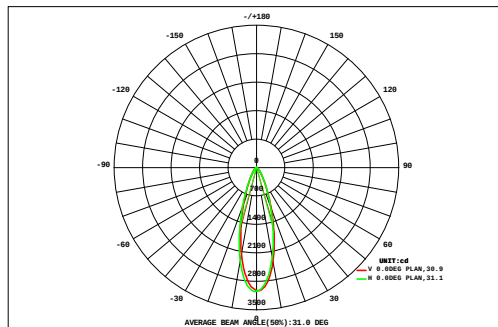

DATA OF LAMP		Eff:55.23lm/W	
MODEL		Imax(cd)	3047
NOMINAL POWER(W)	23.7	AVAILABILITY(%)	76.3
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	985.8
NOMINAL FLUX(lm)	1292	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1292
TEST VOLTAGE(V)	220	q @50%(H,V)	31,31DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		F t	F a
	0.27	0.35	0.44	0.53	0.64	0.74	0.84	0.92	0.97	0.97	0.94	0.87	0.78	0.67	0.57	0.46	0.37	0.29	11.6	0.00
45	0.32	0.42	0.54	0.68	0.84	1.01	1.18	1.32	1.41	1.42	1.35	1.22	1.06	0.88	0.72	0.57	0.45	0.35	15.7	0.00
40	0.38	0.50	0.66	0.86	1.12	1.42	1.73	2.00	2.17	2.19	2.05	1.80	1.49	1.19	0.92	0.71	0.54	0.40	22.1	2.86
35	0.43	0.59	0.81	1.12	1.53	2.07	2.67	3.19	3.52	3.55	3.27	2.78	2.19	1.63	1.20	0.87	0.63	0.46	32.5	20.3
30	0.49	0.69	0.99	1.44	2.12	3.04	4.16	5.21	5.87	5.91	5.34	4.34	3.21	2.26	1.55	1.07	0.74	0.51	48.9	39.5
25	0.55	0.80	1.19	1.83	2.86	4.38	6.36	8.30	9.48	9.55	8.49	6.60	4.61	3.05	1.98	1.29	0.84	0.56	72.7	64.9
20	0.60	0.90	1.40	2.26	3.70	5.97	9.03	12.2	14.2	14.2	12.5	9.32	6.27	3.97	2.46	1.51	0.94	0.60	102	95.2
15	0.64	0.98	1.57	2.64	4.51	7.50	11.5	15.9	18.8	18.9	16.2	11.9	8.03	4.96	2.91	1.70	1.02	0.63	130	124
10	0.67	1.02	1.67	2.86	4.99	8.47	13.2	18.2	21.7	21.9	18.9	14.3	9.46	5.68	3.22	1.82	1.06	0.64	150	144
5	0.66	1.01	1.66	2.86	5.03	8.60	13.5	18.6	22.0	22.3	19.5	14.7	9.67	5.76	3.24	1.82	1.05	0.64	153	147
0	0.62	0.94	1.53	2.64	4.60	7.80	12.1	16.4	19.2	19.5	17.0	12.9	8.55	5.15	2.96	1.69	0.99	0.61	135	129
-5	0.56	0.84	1.33	2.24	3.78	6.17	9.22	12.3	14.5	14.7	12.8	9.78	6.68	4.17	2.48	1.46	0.89	0.56	104	97.8
-10	0.49	0.72	1.09	1.75	2.82	4.35	6.25	8.20	9.61	9.73	8.52	6.64	4.70	3.09	1.95	1.21	0.77	0.50	72.4	64.9
-15	0.42	0.59	0.87	1.31	1.99	2.89	3.95	5.04	5.80	5.86	5.22	4.18	3.11	2.17	1.45	0.97	0.65	0.44	46.9	37.7
-20	0.35	0.48	0.68	0.97	1.37	1.87	2.44	3.00	3.37	3.40	3.09	2.58	2.01	1.49	1.07	0.76	0.53	0.38	29.9	17.3
-25	0.29	0.40	0.54	0.72	0.96	1.23	1.53	1.80	1.98	2.00	1.85	1.61	1.31	1.03	0.79	0.59	0.44	0.32	19.4	1.06
-30	0.24	0.32	0.42	0.54	0.68	0.84	1.00	1.13	1.21	1.22	1.16	1.04	0.88	0.73	0.59	0.46	0.36	0.27	13.1	0.00
-35	0.20	0.26	0.33	0.41	0.50	0.59	0.68	0.75	0.80	0.80	0.77	0.71	0.62	0.53	0.44	0.36	0.29	0.22	9.28	0.00
-40	0.18	0.24	0.31	0.39	0.48	0.57	0.66	0.73	0.78	0.78	0.75	0.69	0.62	0.54	0.46	0.38	0.30	0.23	7.14	0.00
-45	0.16	0.22	0.29	0.37	0.46	0.55	0.64	0.71	0.76	0.76	0.73	0.67	0.60	0.52	0.44	0.36	0.28	0.21	6.00	0.00
	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)	10	15	20	25	30	35	40	45			
F t	8.19	11.8	17.7	27.7	44.0	69.0	101	134	157	158	139	107	74.6	48.4	30.5	19.3	12.6	8.40	1169	---
F a	0.00	0.00	0.82	14.9	33.8	60.2	93.3	127	149	151	131	99.2	65.9	38.5	18.3	2.22	0.00	0.00	---	986

one-half-peak spread: U:15.4,D:16.0 , L:15.4,R:15.8


NEMA Beam Type: Type 4

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-10-07

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:Blazeline Max-598mm-RGBW DS-A11-30D-Rev1	TYPE:RGBW-DS W=3000K	WEIGHT:
SPEC.:30 DEG	DIM.:598MM	SERIAL No.:IES001824
MFR.:	SUR.:	Shielding Angle:

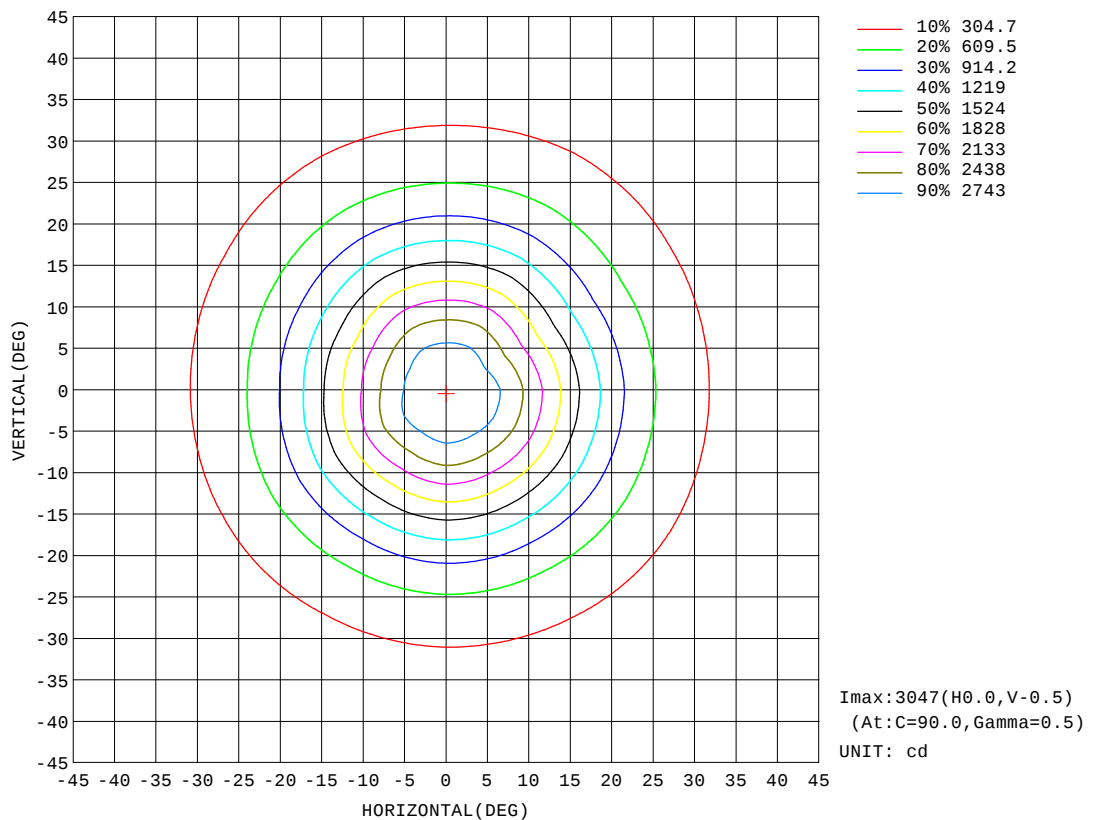


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Blazeline Max-598mm-RGBW DS-A11-30D-Rev1	TYPE:RGBW-DS W=3000K	WEIGHT:
SPEC.:30 DEG	DIM.:598MM	SERIAL No.:IES001824
MFR.:	SUR.:	Shielding Angle:

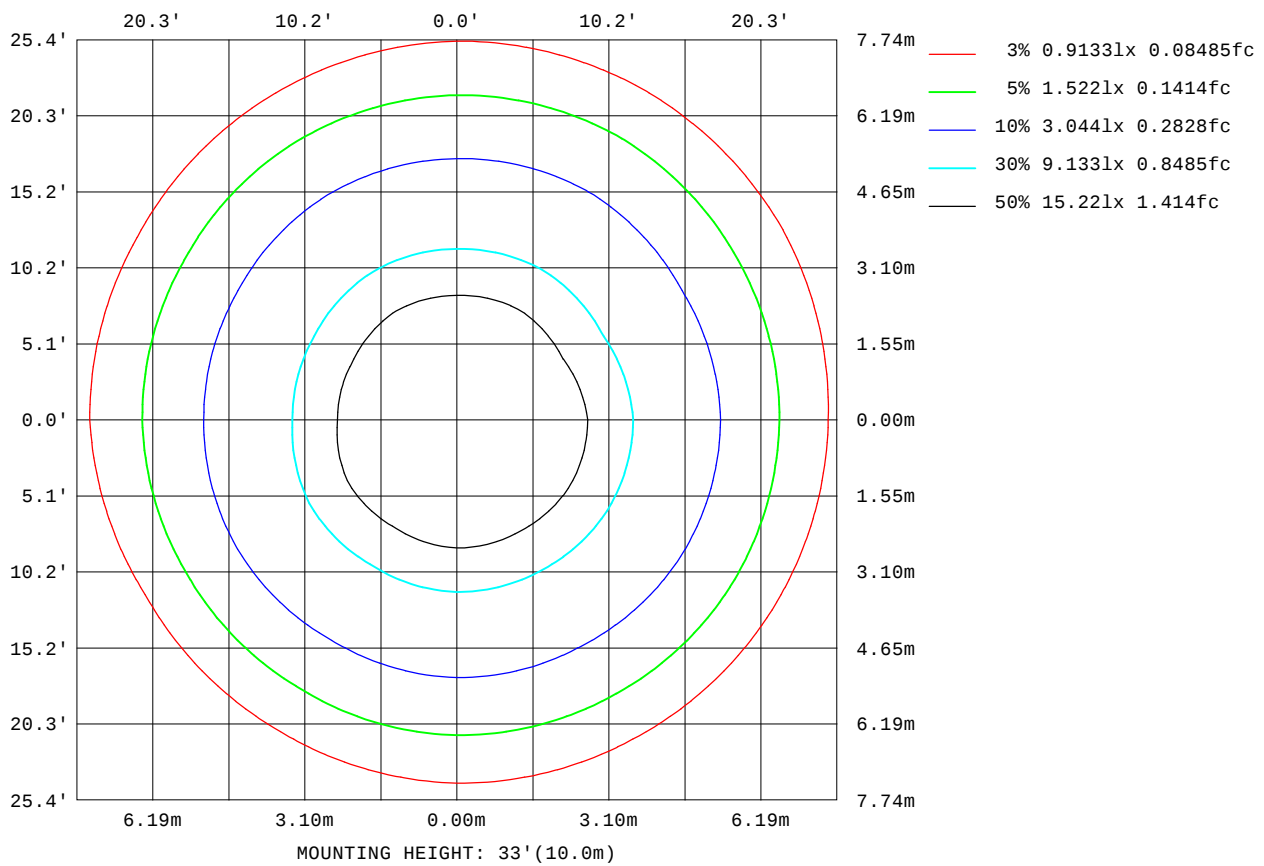

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-07

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

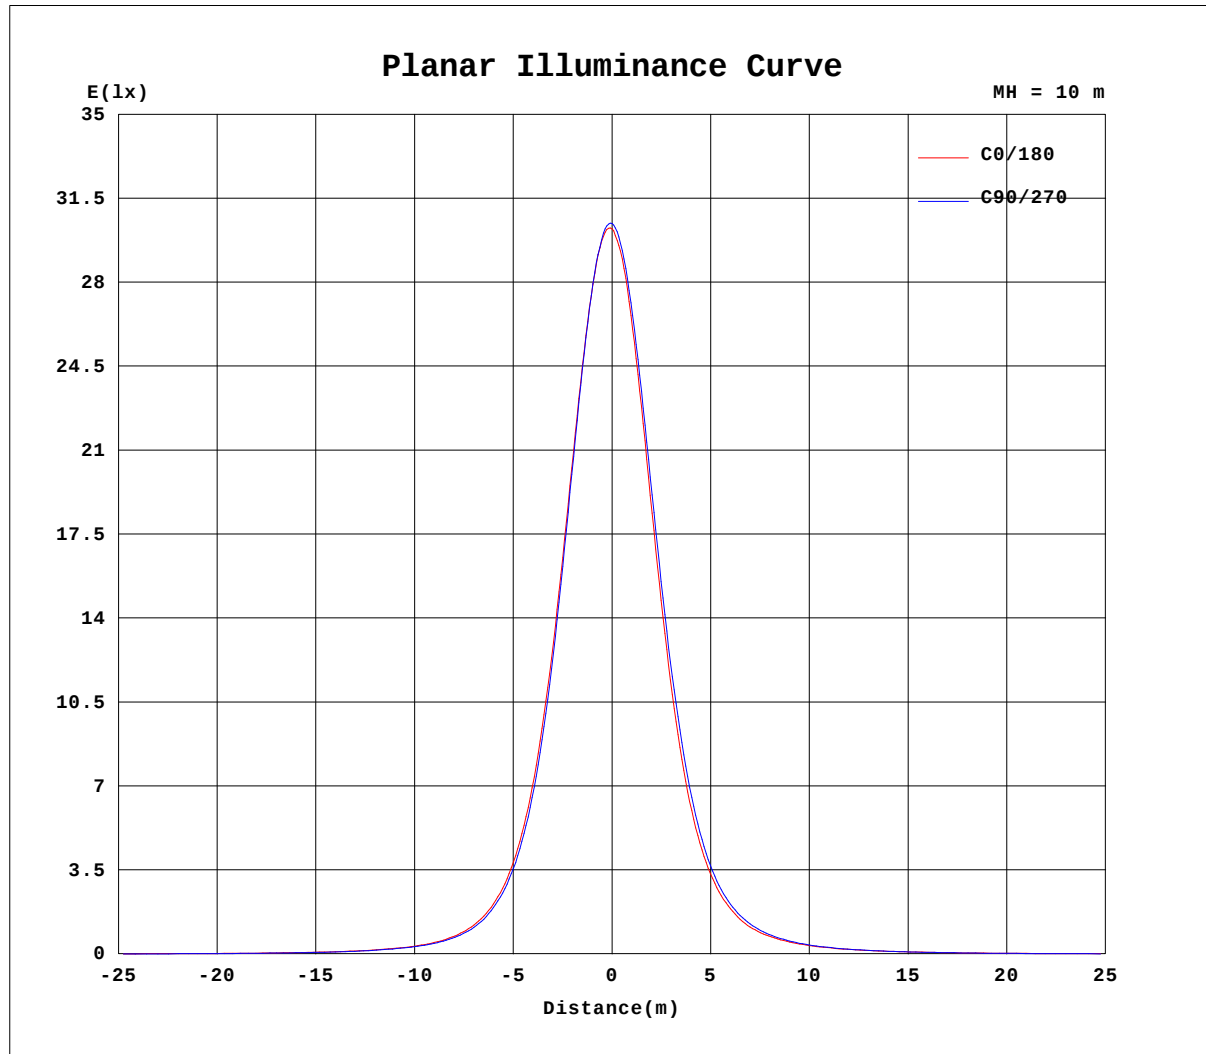


H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-07

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Blazeline Max-598mm-RGBW DS-A11-30D-Rev1	TYPE:RGBW-DS W=3000K	WEIGHT:
SPEC.:30 DEG	DIM.:598MM	SERIAL No.:IES001824
MFR.:	SUR.:	Shielding Angle:

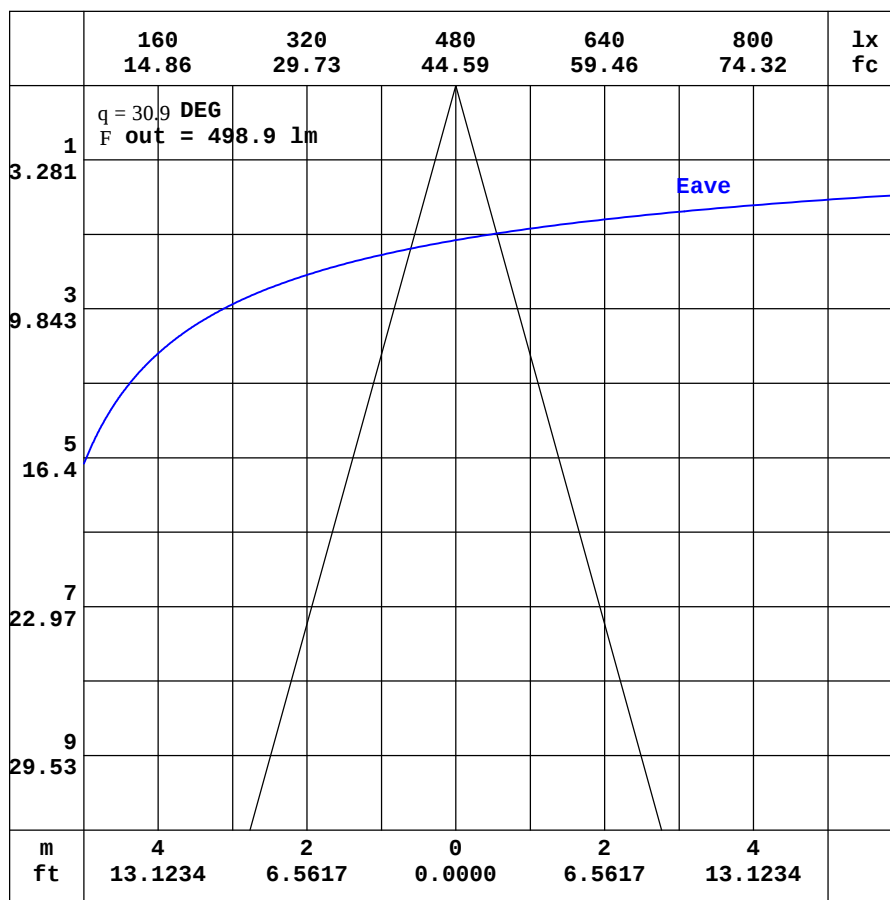

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Max-598mm-RGBW DS-All-30D-Rev1	TYPE:RGBW-DS W=3000K	WEIGHT:
SPEC.:30 DEG	DIM.:598MM	SERIAL No.:IES001824
MFR.:	SUR.:	Shielding Angle:

Table--1
UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	5.14	4.73	4.40	4.24	4.29	4.58	5.17	6.02	7.08	8.20	9.18	9.91	10.3	10.5	10.4	10.2	9.97	9.69	9.63
-170	5.14	4.66	4.27	4.05	4.02	4.16	4.50	5.03	5.68	6.37	6.98	7.40	7.40	7.45	7.35	7.43	7.96	8.34	8.57
-160	5.14	4.59	4.17	3.88	3.75	3.73	3.82	3.99	4.23	4.46	4.64	4.74	4.82	5.25	6.06	6.79	7.17	7.43	7.59
-150	5.14	4.54	4.07	3.73	3.52	3.35	3.23	3.12	2.97	2.81	2.68	3.15	3.68	4.21	4.74	5.22	5.58	5.77	5.81
-140	5.14	4.50	4.00	3.61	3.32	3.07	2.82	2.52	2.18	2.03	2.16	2.33	2.57	2.84	3.10	3.38	3.59	3.71	3.74
-130	5.14	4.47	3.95	3.53	3.17	2.87	2.55	2.22	2.03	2.00	1.99	1.98	1.99	2.05	2.11	2.19	2.26	2.30	2.31
-120	5.14	4.47	3.92	3.46	3.07	2.72	2.39	2.14	2.12	2.10	2.07	2.03	2.00	1.98	1.94	1.93	1.91	1.89	1.88
-110	5.14	4.48	3.91	3.41	2.97	2.57	2.23	2.13	2.14	2.14	2.14	2.13	2.13	2.12	2.10	2.07	2.04	2.02	1.99
-100	5.14	4.52	3.93	3.39	2.88	2.41	1.97	1.97	1.99	2.01	2.03	2.05	2.06	2.07	2.07	2.07	2.06	2.06	2.06
-90	5.14	4.56	3.99	3.41	2.84	2.26	1.69	1.69	1.69	1.69	1.69	1.69	1.68	1.67	1.66	1.65	1.64	1.63	1.62
-80	5.14	4.64	4.10	3.53	2.95	2.36	1.73	1.78	1.90	2.03	2.13	2.23	2.31	2.46	2.61	2.75	2.87	2.97	3.02
-70	5.14	4.73	4.30	3.98	3.76	3.63	3.47	3.91	4.72	5.56	6.44	7.34	8.25	9.30	10.4	11.3	12.1	12.7	13.1
-60	5.14	4.85	4.74	5.02	5.71	6.46	7.16	8.32	10.5	13.0	15.7	18.3	20.8	23.3	25.8	28.1	30.0	31.4	32.2
-50	5.14	5.00	5.40	6.68	8.46	10.4	12.7	15.3	18.9	23.4	28.1	33.1	38.2	43.3	48.5	53.4	57.6	60.7	62.4
-40	5.14	5.20	6.24	8.68	11.6	15.3	19.7	24.4	28.9	35.3	43.6	53.0	63.8	75.8	88.8	103	115	124	129
-30	5.14	5.44	7.21	10.7	15.0	20.7	27.3	34.3	42.0	51.0	62.9	81.8	107	141	183	231	282	323	342
-20	5.14	5.66	8.13	12.5	18.3	25.8	34.6	44.3	55.6	70.6	92.4	126	182	274	405	575	762	931	1012
-10	5.14	5.85	8.91	14.0	21.0	30.1	40.9	52.8	67.8	89.4	123	178	283	462	765	1203	1696	2107	2328
0	5.14	5.99	9.42	15.0	22.8	33.0	45.2	58.6	75.9	102	141	205	330	547	922	1482	2159	2751	3024
10	5.14	5.97	9.19	14.5	21.8	31.5	43.0	55.9	72.2	95.2	130	187	288	458	739	1150	1645	2084	2235
20	5.14	5.90	8.68	13.5	19.9	28.4	38.5	49.9	63.5	81.2	106	143	200	289	419	593	789	941	1001
30	5.14	5.79	7.98	12.1	17.2	24.1	32.3	41.6	52.0	64.4	79.9	100	127	164	208	259	311	348	363
40	5.14	5.65	7.22	10.4	14.3	19.2	25.2	32.1	39.4	48.0	58.0	69.3	81.9	95.9	111	126	139	149	154
50	5.14	5.52	6.53	8.56	11.3	14.4	18.2	22.7	27.8	33.5	39.5	45.6	51.9	58.2	64.3	69.8	74.4	77.6	79.2
60	5.14	5.41	5.98	6.99	8.58	10.4	12.4	14.7	17.6	20.8	24.2	27.6	30.8	33.8	36.7	39.3	41.3	42.8	43.6
70	5.14	5.33	5.58	6.01	6.56	7.25	8.15	9.14	10.2	11.5	12.8	14.0	15.3	16.5	17.7	18.7	19.5	20.1	20.4
80	5.14	5.24	5.35	5.47	5.63	5.81	5.97	6.14	6.34	6.55	6.78	7.01	7.23	7.44	7.63	7.79	7.91	8.00	8.04
90	5.14	5.15	5.17	5.19	5.21	5.23	5.25	5.23	5.22	5.20	5.19	5.17	5.16	5.15	5.14	5.13	5.12	5.11	5.10
100	5.14	5.08	5.01	4.95	4.89	4.82	4.75	4.68	4.62	4.56	4.50	4.46	4.41	4.37	4.34	4.32	4.30	4.29	4.29
110	5.14	5.00	4.87	4.73	4.61	4.51	4.44	4.37	4.31	4.26	4.22	4.19	4.16	4.15	4.14	4.13	4.12	4.10	4.08
120	5.14	4.93	4.74	4.56	4.43	4.35	4.33	4.31	4.29	4.30	4.38	4.47	4.58	4.68	4.76	4.84	4.88	4.90	4.88
130	5.14	4.87	4.63	4.44	4.32	4.30	4.30	4.38	4.53	4.80	5.09	5.42	5.76	6.08	6.37	6.57	6.78	6.88	6.88
140	5.14	4.82	4.55	4.35	4.28	4.29	4.41	4.73	5.15	5.69	6.32	6.92	7.57	8.13	8.58	8.92	9.14	9.24	9.24
150	5.14	4.78	4.48	4.29	4.27	4.36	4.67	5.18	5.89	6.77	7.70	8.54	9.27	9.83	10.2	10.5	10.6	10.7	10.7
160	5.14	4.75	4.44	4.26	4.27	4.46	4.91	5.62	6.57	7.63	8.69	9.62	10.3	10.3	10.6	10.8	10.9	10.9	11.0
170	5.14	4.74	4.41	4.25	4.29	4.55	5.10	5.94	6.99	8.11	9.16	9.97	10.2	10.5	10.5	10.3	10.2	10.1	10.2
180	5.14	4.73	4.40	4.24	4.29	4.58	5.17	6.02	7.08	8.20	9.18	9.91	10.3	10.5	10.4	10.2	9.97	9.69	9.64

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Max-598mm-RGBW DS-All-30D-Rev1	TYPE:RGBW-DS W=3000K	WEIGHT:
SPEC.:30 DEG	DIM.:598MM	SERIAL No.:IES001824
MFR.:	SUR.:	Shielding Angle:

Table--2
UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	8.64	8.09	7.60	7.01	6.24	5.37	4.45	3.58	2.82	2.25	1.92	1.85	1.89	1.98	2.00	1.95	1.78	1.55
-170	8.22	7.88	7.41	6.80	6.04	5.17	4.27	3.43	2.71	2.20	1.91	1.85	1.89	1.98	2.00	1.95	1.77	1.55
-160	7.41	7.10	6.60	5.96	5.23	4.44	3.67	2.98	2.42	2.05	1.86	1.85	1.91	1.99	2.00	1.94	1.77	1.55
-150	5.68	5.41	4.99	4.48	3.94	3.37	2.85	2.42	2.09	1.90	1.84	1.86	1.93	1.99	2.00	1.92	1.75	1.55
-140	3.66	3.49	3.25	2.94	2.65	2.37	2.14	1.96	1.87	1.84	1.85	1.90	1.97	2.00	1.99	1.89	1.73	1.55
-130	2.26	2.19	2.09	1.98	1.88	1.83	1.81	1.82	1.83	1.85	1.90	1.96	1.99	2.00	1.96	1.85	1.70	1.55
-120	1.86	1.84	1.83	1.82	1.82	1.83	1.86	1.89	1.92	1.95	1.97	1.99	2.00	1.97	1.90	1.79	1.67	1.55
-110	1.99	1.98	1.98	1.99	1.99	1.99	1.99	1.99	1.99	2.00	2.00	1.98	1.94	1.88	1.81	1.72	1.63	1.55
-100	2.04	2.02	2.00	1.97	1.95	1.93	1.92	1.91	1.90	1.88	1.86	1.84	1.79	1.75	1.70	1.65	1.59	1.55
-90	1.61	1.60	1.60	1.59	1.58	1.57	1.58	1.58	1.59	1.60	1.61	1.62	1.61	1.59	1.58	1.57	1.56	1.55
-80	3.01	2.96	2.88	2.76	2.63	2.49	2.43	2.35	2.23	2.12	1.97	1.83	1.75	1.68	1.64	1.59	1.55	1.55
-70	12.9	12.6	12.1	11.3	10.4	9.46	8.52	7.54	6.56	5.60	4.68	3.90	3.30	2.67	2.12	1.76	1.58	1.55
-60	31.8	30.9	29.4	27.5	25.2	22.9	20.4	17.8	15.1	12.4	9.96	7.87	6.08	4.56	3.27	2.17	1.66	1.55
-50	61.4	59.1	55.5	51.1	46.3	41.4	36.3	31.3	26.4	21.6	17.3	13.3	9.89	7.01	4.71	2.86	1.77	1.55
-40	126	118	107	94.1	81.3	69.0	58.0	48.2	39.5	32.1	25.6	19.6	14.3	9.81	6.28	3.66	1.90	1.55
-30	329	294	246	197	154	118	90.6	70.1	55.0	43.2	33.8	25.8	18.6	12.6	7.86	4.42	2.05	1.55
-20	955	800	615	440	303	203	139	98.2	71.9	54.1	41.2	30.9	22.4	15.1	9.24	5.03	2.18	1.55
-10	2165	1778	1289	841	516	312	193	125	86.9	62.8	46.7	34.9	25.1	16.8	10.2	5.49	2.28	1.55
0	2870	2350	1675	1070	632	368	220	139	94.0	66.8	49.2	36.8	26.4	17.7	10.7	5.73	2.32	1.55
10	2111	1686	1195	791	500	313	199	132	92.2	66.9	49.6	36.8	26.4	17.6	10.7	5.77	2.40	1.55
20	955	815	622	444	310	217	154	110	81.7	61.5	46.5	34.6	24.8	16.5	10.2	5.57	2.42	1.55
30	353	321	273	220	175	137	108	85.8	67.5	52.6	40.5	30.3	21.7	14.6	9.17	5.18	2.39	1.55
40	151	143	131	117	101	86.9	73.9	62.1	51.6	41.8	32.6	24.6	17.8	12.2	7.89	4.62	2.34	1.55
50	78.5	76.1	72.3	67.3	61.6	55.2	48.7	42.3	35.9	29.7	23.9	18.3	13.6	9.67	6.53	3.96	2.29	1.55
60	43.3	42.3	40.6	38.4	35.8	32.7	29.4	25.9	22.3	18.9	15.8	12.7	9.78	7.32	5.19	3.38	2.22	1.55
70	20.3	20.0	19.4	18.6	17.5	16.3	15.0	13.6	12.2	10.9	9.69	8.41	6.86	5.40	4.09	3.03	2.17	1.55
80	8.05	8.02	7.94	7.83	7.69	7.51	7.28	7.04	6.76	6.50	6.23	5.95	5.14	4.34	3.56	2.82	2.15	1.55
90	5.10	5.10	5.10	5.10	5.10	5.10	5.11	5.11	5.12	5.13	5.13	5.14	4.54	3.94	3.34	2.74	2.14	1.55
100	4.28	4.28	4.29	4.30	4.32	4.34	4.38	4.42	4.47	4.53	4.59	4.62	4.19	3.74	3.25	2.72	2.15	1.55
110	4.08	4.09	4.09	4.09	4.08	4.08	4.08	4.10	4.13	4.18	4.25	4.21	3.88	3.53	3.13	2.67	2.15	1.55
120	4.87	4.82	4.74	4.64	4.53	4.41	4.30	4.20	4.13	4.11	4.12	3.90	3.62	3.33	3.01	2.61	2.13	1.55
130	6.84	6.71	6.50	6.22	5.90	5.57	5.21	4.87	4.57	4.34	4.03	3.68	3.39	3.14	2.87	2.53	2.09	1.55
140	9.18	9.03	8.76	8.39	7.91	7.32	6.68	6.06	5.46	4.73	3.99	3.48	3.17	2.94	2.72	2.44	2.05	1.55
150	10.6	10.5	10.3	9.93	9.47	8.86	8.17	7.35	5.98	4.76	3.84	3.26	2.92	2.73	2.55	2.33	1.99	1.55
160	10.9	10.8	10.7	10.5	10.2	9.74	8.42	6.92	5.53	4.35	3.46	2.92	2.63	2.50	2.38	2.21	1.93	1.55
170	10.2	10.3	10.4	9.89	8.99	7.93	6.74	5.55	4.42	3.48	2.80	2.43	2.28	2.24	2.19	2.09	1.86	1.55
180	8.64	8.09	7.60	7.01	6.24	5.37	4.45	3.58	2.82	2.25	1.92	1.85	1.89	1.98	2.00	1.95	1.78	1.55

H_b Range:-90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks: