

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	2089.3 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	--

Beam Spread	At 10% of Imax	66.4V x 66.9H
	At 50% of Imax	33.5V x 33.9H
	At 90% of Imax	13.1V x 13.3H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	769.5 lumens per klm.
	To 50% of Imax	400.7 lumens per klm.
	To 90% of Imax	76.4 lumens per klm.

Upward LOR	2.3 %
Downward LOR	97.8 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Blazeline Max-598mm-RGBW DS-GREEN-30D-Rev1	TYPE:RGBW DS-GREEN	WEIGHT:
SPEC.:30 DEG	DIM.:598MM	SERIAL No.:IES001826
MFR.:	SUR.:	Shielding Angle:

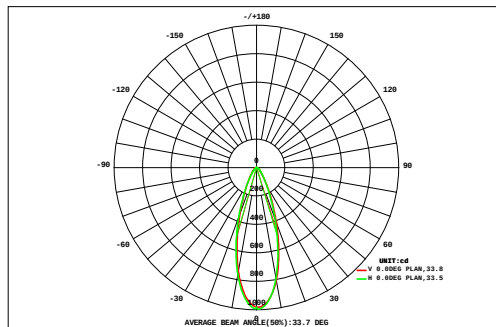

DATA OF LAMP		Eff:72.00lm/W	
MODEL		Imax(cd)	994.3
NOMINAL POWER(W)	6.64	AVAILABILITY(%)	77.0
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	366.7
NOMINAL FLUX(lm)	475.9	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	475.9
TEST VOLTAGE(V)	220	q @50%(H,V)	34,33DEG

		AREA FLUX DIAGRAM														UNIT:lm				F t	F a	
VERTICAL (DEG)	45	0.11	0.14	0.18	0.22	0.26	0.30	0.34	0.37	0.38	0.38	0.37	0.35	0.31	0.27	0.23	0.19	0.15	0.12	4.66	0.00	
	40	0.13	0.17	0.22	0.27	0.34	0.41	0.47	0.52	0.55	0.56	0.53	0.48	0.42	0.36	0.29	0.23	0.18	0.14	6.28	0.00	
	35	0.15	0.20	0.27	0.35	0.45	0.57	0.68	0.78	0.85	0.85	0.80	0.71	0.60	0.48	0.37	0.29	0.22	0.16	8.78	2.96	
	30	0.18	0.24	0.33	0.45	0.61	0.81	1.04	1.24	1.37	1.38	1.27	1.08	0.86	0.65	0.48	0.36	0.26	0.19	12.8	9.14	
	25	0.20	0.28	0.39	0.57	0.83	1.18	1.60	2.00	2.25	2.27	2.06	1.68	1.26	0.90	0.62	0.43	0.30	0.21	19.0	16.1	
	20	0.22	0.32	0.47	0.72	1.11	1.69	2.43	3.14	3.56	3.59	3.22	2.54	1.80	1.21	0.79	0.52	0.35	0.23	27.9	25.5	
	15	0.24	0.36	0.55	0.88	1.43	2.28	3.38	4.47	5.12	5.15	4.57	3.52	2.43	1.57	0.99	0.61	0.39	0.25	38.2	36.1	
	-15	0.26	0.39	0.62	1.02	1.72	2.81	4.21	5.61	6.51	6.54	5.71	4.40	3.06	1.95	1.17	0.69	0.42	0.27	47.3	45.4	
		0.27	0.41	0.65	1.09	1.88	3.12	4.68	6.20	7.22	7.25	6.41	5.07	3.54	2.21	1.29	0.74	0.44	0.27	52.7	51.0	
		0.27	0.40	0.65	1.09	1.89	3.13	4.69	6.20	7.14	7.22	6.47	5.13	3.59	2.23	1.30	0.74	0.43	0.27	52.8	51.1	
		0.25	0.38	0.61	1.01	1.73	2.84	4.21	5.47	6.27	6.34	5.67	4.52	3.18	2.00	1.18	0.69	0.41	0.26	47.0	45.2	
		0.23	0.34	0.53	0.87	1.43	2.28	3.28	4.22	4.88	4.95	4.41	3.53	2.53	1.62	0.99	0.60	0.37	0.24	37.3	35.2	
		-20	0.20	0.30	0.44	0.69	1.08	1.63	2.29	2.94	3.39	3.44	3.07	2.46	1.80	1.21	0.78	0.50	0.32	0.21	26.8	24.4
		-25	0.18	0.25	0.36	0.53	0.77	1.11	1.49	1.87	2.14	2.16	1.95	1.59	1.21	0.86	0.59	0.40	0.27	0.19	17.9	15.0
		-30	0.15	0.20	0.28	0.39	0.54	0.73	0.94	1.14	1.27	1.28	1.18	1.00	0.79	0.60	0.44	0.31	0.23	0.16	11.6	7.85
		-35	0.12	0.17	0.22	0.30	0.38	0.49	0.60	0.70	0.76	0.77	0.72	0.63	0.52	0.42	0.32	0.25	0.18	0.13	7.69	1.64
-40		0.10	0.14	0.18	0.22	0.28	0.34	0.40	0.45	0.48	0.48	0.46	0.41	0.36	0.30	0.24	0.19	0.15	0.11	5.27	0.00	
-45	0.09	0.11	0.14	0.17	0.21	0.24	0.27	0.30	0.32	0.32	0.31	0.28	0.25	0.22	0.18	0.15	0.12	0.09	3.77	0.00		
		-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)				10	15	20	25	30	35	40	45	
F t		3.35	4.80	7.08	10.8	16.9	25.9	37.0	47.6	54.4	54.9	49.2	39.4	28.5	19.1	12.3	7.89	5.20	3.50	428	---	
F a		0.00	0.00	1.42	6.91	13.7	23.2	34.5	45.2	52.2	52.8	46.8	36.9	25.8	15.9	8.58	2.69	0.00	0.00	---	367	

one-half-peak spread: U:17.1,D:16.6 , L:16.6,R:17.5


NEMA Beam Type: Type 4

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-10-07

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:Blazeline Max-598mm-RGBW DS-GREEN-30D-Rev1	TYPE:RGBW DS-GREEN	WEIGHT:
SPEC.:30 DEG	DIM.:598MM	SERIAL No.:IES001826
MFR.:	SUR.:	Shielding Angle:

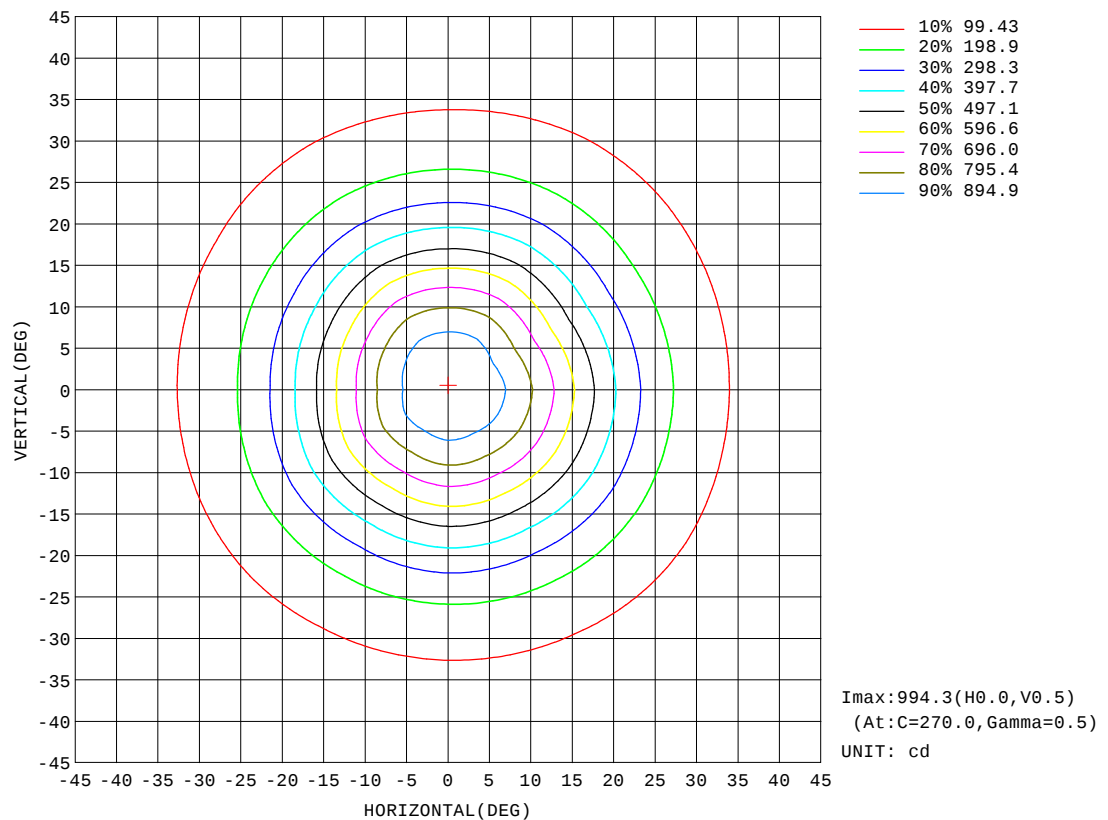


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Blazeline Max-598mm-RGBW DS-GREEN-30D-Rev1	TYPE:RGBW DS-GREEN	WEIGHT:
SPEC.:30 DEG	DIM.:598MM	SERIAL No.:IES001826
MFR.:	SUR.:	Shielding Angle:

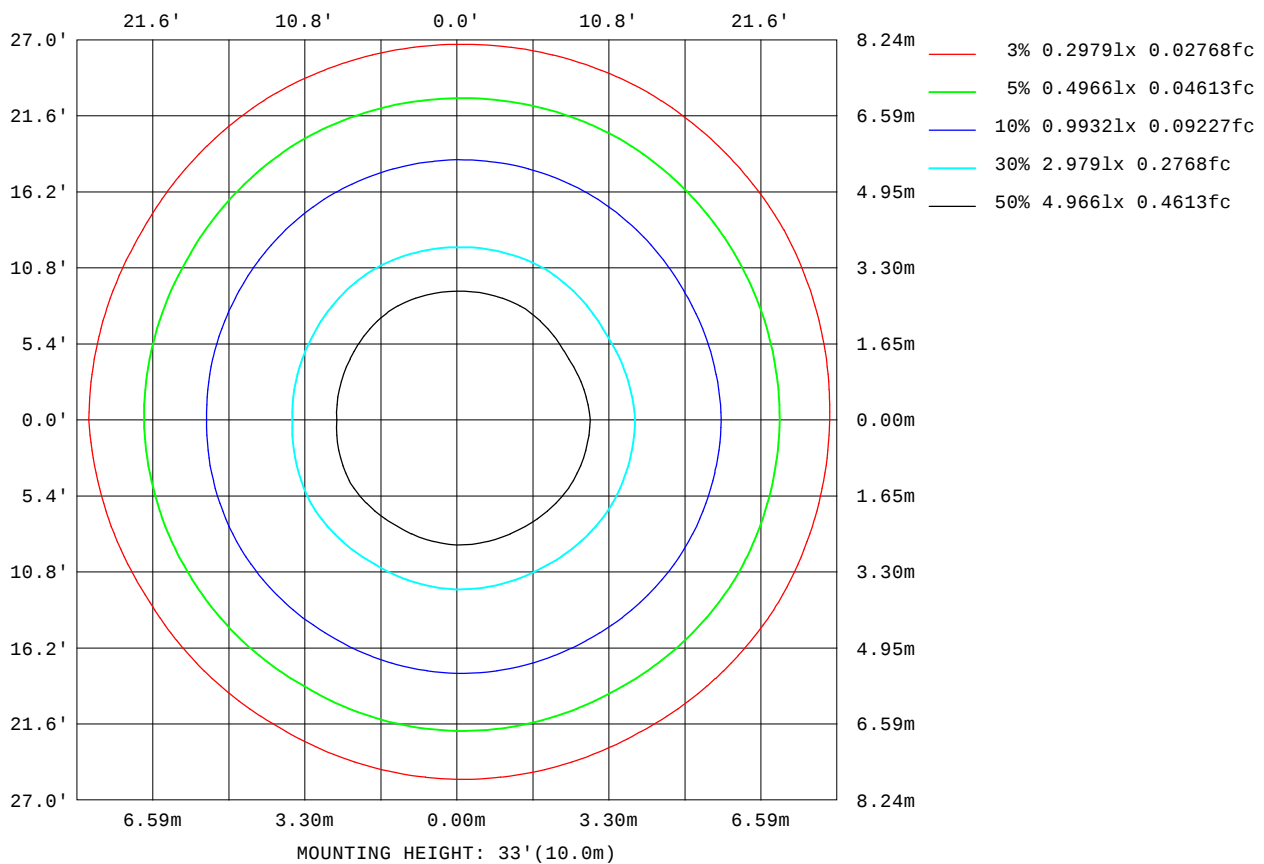

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-07

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

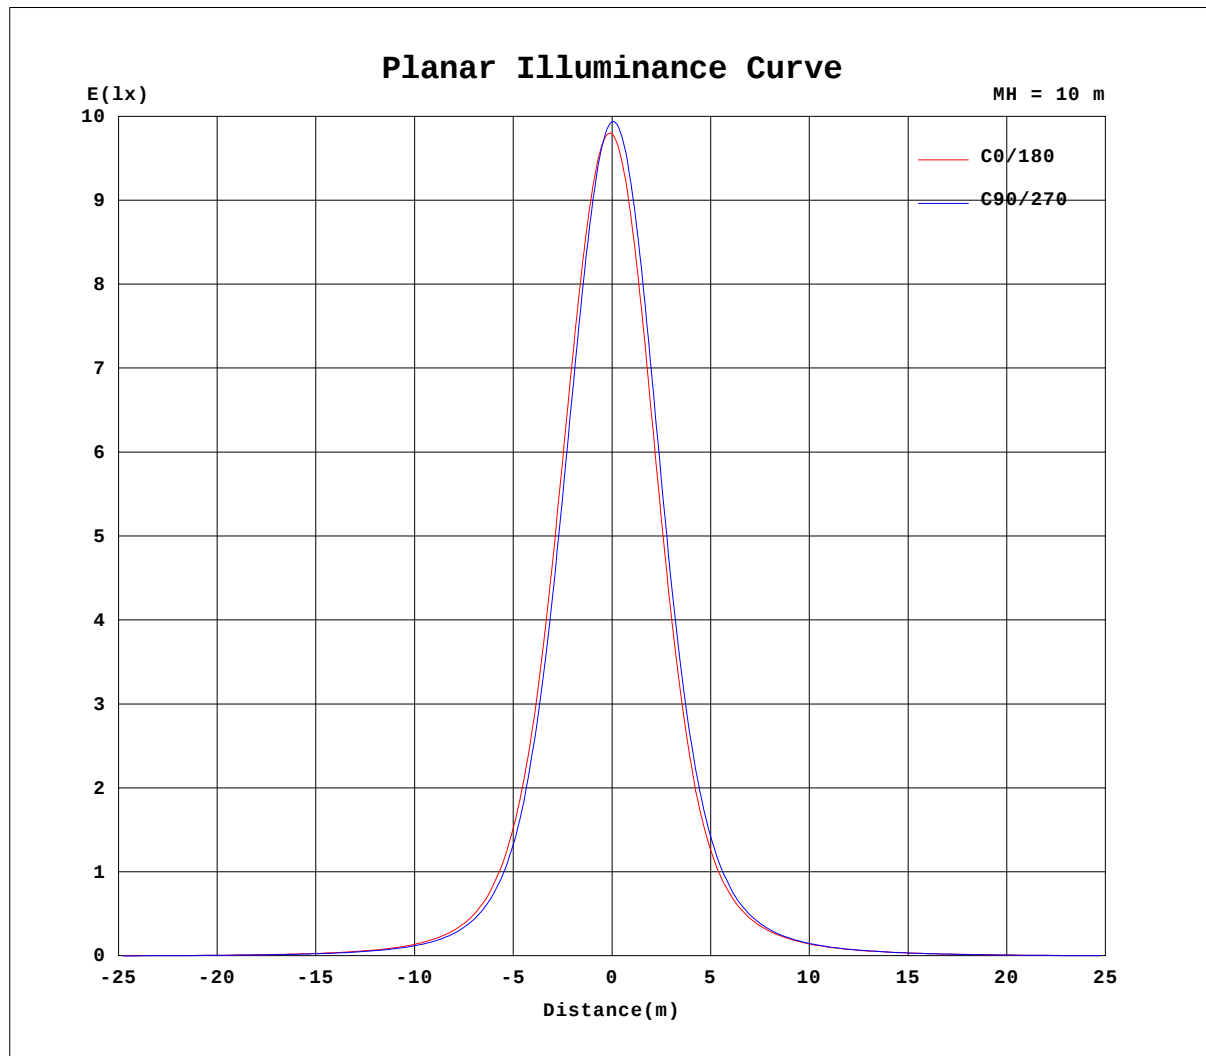


H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-07

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Blazeline Max-598mm-RGBW DS-GREEN-30D-Rev1	TYPE:RGBW DS-GREEN	WEIGHT:
SPEC.:30 DEG	DIM.:598MM	SERIAL No.:IES001826
MFR.:	SUR.:	Shielding Angle:

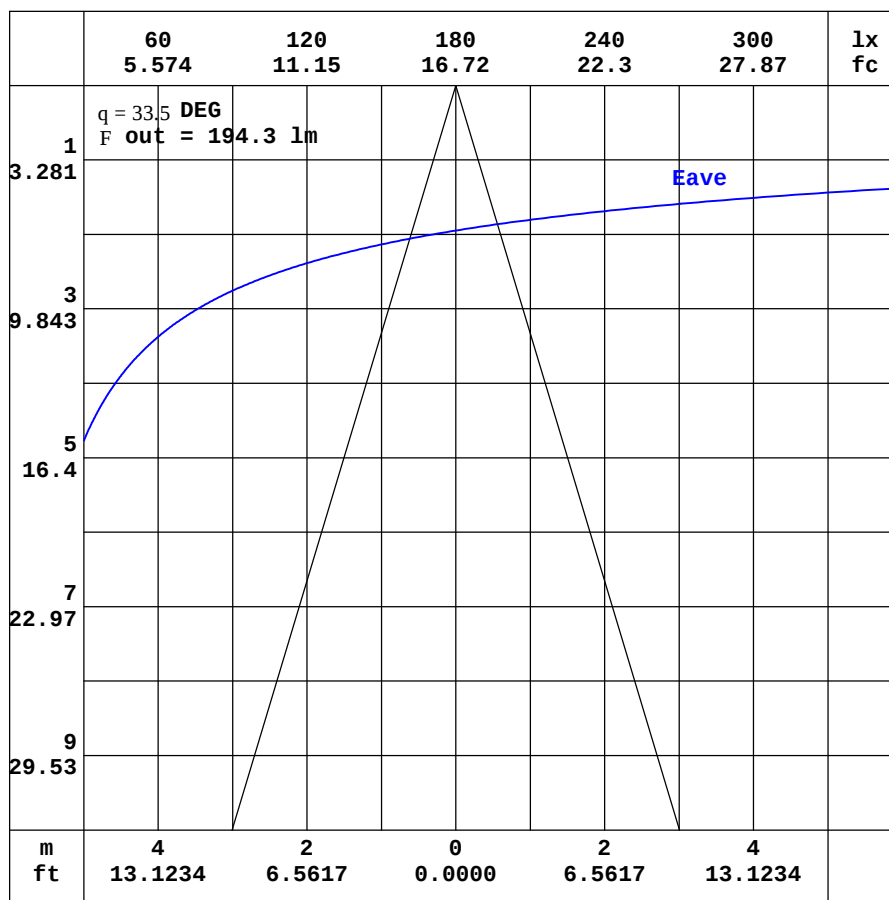

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Max-598mm-RGBW DS-GREEN-30D-Rev1	TYPE:RGBW DS-GREEN	WEIGHT:
SPEC.:30 DEG	DIM.:598MM	SERIAL No.:IES001826
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	1.82	1.68	1.57	1.55	1.58	1.70	1.92	2.21	2.57	2.94	3.27	3.52	3.68	3.70	3.68	3.61	3.52	3.42	3.47
-170	1.82	1.65	1.53	1.49	1.48	1.55	1.69	1.87	2.09	2.31	2.52	2.66	2.66	2.66	2.63	2.66	2.83	2.95	3.06
-160	1.82	1.63	1.48	1.42	1.38	1.39	1.44	1.49	1.59	1.66	1.71	1.75	1.77	1.92	2.20	2.47	2.57	2.63	2.69
-150	1.82	1.61	1.45	1.36	1.29	1.24	1.22	1.19	1.14	1.09	1.04	1.19	1.38	1.56	1.74	1.91	2.05	2.12	2.14
-140	1.82	1.60	1.43	1.30	1.21	1.13	1.05	0.96	0.85	0.79	0.85	0.90	0.98	1.07	1.16	1.26	1.35	1.40	1.42
-130	1.82	1.59	1.41	1.26	1.15	1.04	0.94	0.83	0.77	0.77	0.76	0.76	0.76	0.77	0.79	0.83	0.86	0.89	0.90
-120	1.82	1.59	1.40	1.24	1.10	0.98	0.86	0.77	0.77	0.76	0.75	0.75	0.74	0.73	0.72	0.72	0.71	0.70	0.70
-110	1.82	1.59	1.39	1.22	1.07	0.93	0.80	0.77	0.76	0.76	0.75	0.74	0.74	0.73	0.72	0.71	0.71	0.70	0.69
-100	1.82	1.60	1.40	1.21	1.04	0.87	0.72	0.71	0.72	0.72	0.72	0.72	0.71	0.71	0.70	0.70	0.70	0.70	0.69
-90	1.82	1.62	1.42	1.22	1.02	0.82	0.63	0.62	0.62	0.62	0.61	0.61	0.61	0.60	0.59	0.58	0.57	0.56	0.55
-80	1.82	1.65	1.46	1.26	1.07	0.85	0.64	0.66	0.72	0.77	0.83	0.88	0.92	0.97	1.02	1.06	1.09	1.11	1.11
-70	1.82	1.68	1.53	1.42	1.36	1.38	1.33	1.51	1.85	2.19	2.56	2.94	3.30	3.71	4.15	4.50	4.78	4.97	5.07
-60	1.82	1.72	1.68	1.85	2.17	2.47	2.77	3.29	4.23	5.30	6.43	7.58	8.66	9.70	10.7	11.5	12.2	12.7	12.9
-50	1.82	1.77	1.93	2.53	3.20	4.01	5.04	6.17	7.79	9.78	11.9	14.0	16.1	18.1	20.1	21.9	23.4	24.4	24.9
-40	1.82	1.84	2.31	3.27	4.41	6.02	7.94	10.0	12.2	15.0	18.5	22.4	26.7	31.3	36.2	41.4	45.9	49.4	50.9
-30	1.82	1.92	2.71	4.02	5.73	8.24	11.1	14.3	17.7	21.6	26.8	34.4	44.2	56.9	72.2	89.9	108	123	130
-20	1.82	2.00	3.07	4.69	7.12	10.3	14.2	18.3	23.1	29.4	38.5	52.1	73.6	107	155	216	281	339	367
-10	1.82	2.07	3.36	5.27	8.20	12.1	16.7	21.6	27.8	36.6	50.1	71.9	110	176	286	432	584	701	763
0	1.82	2.12	3.56	5.65	8.91	13.2	18.3	23.7	30.8	41.0	56.6	81.6	127	207	344	531	739	906	979
10	1.82	2.11	3.47	5.46	8.52	12.6	17.4	22.7	29.2	38.6	52.4	74.3	112	177	282	431	601	742	790
20	1.82	2.09	3.28	5.05	7.72	11.3	15.5	20.2	25.7	33.0	42.9	57.2	78.8	112	163	228	304	359	381
30	1.82	2.05	3.00	4.52	6.55	9.50	12.9	16.7	21.0	26.1	32.5	40.7	51.5	65.3	82.6	102	121	136	142
40	1.82	2.00	2.67	3.89	5.37	7.44	9.95	12.8	15.8	19.4	23.5	28.1	33.2	38.8	44.8	50.4	55.2	58.6	60.0
50	1.82	1.96	2.34	3.22	4.21	5.46	7.07	8.89	11.0	13.4	15.9	18.4	21.0	23.6	26.0	28.1	29.8	30.9	31.4
60	1.82	1.92	2.14	2.57	3.22	3.88	4.64	5.61	6.82	8.14	9.56	11.0	12.3	13.6	14.7	15.7	16.5	17.0	17.2
70	1.82	1.89	2.00	2.17	2.39	2.73	3.04	3.41	3.83	4.32	4.87	5.41	5.95	6.43	6.87	7.26	7.58	7.78	7.87
80	1.82	1.87	1.92	1.97	2.05	2.12	2.19	2.26	2.33	2.41	2.50	2.59	2.66	2.74	2.81	2.88	2.93	2.97	2.99
90	1.82	1.84	1.86	1.87	1.89	1.91	1.93	1.92	1.91	1.90	1.89	1.88	1.87	1.87	1.87	1.87	1.86	1.86	1.86
100	1.82	1.81	1.81	1.79	1.78	1.77	1.74	1.71	1.68	1.66	1.64	1.63	1.61	1.61	1.60	1.59	1.59	1.58	1.58
110	1.82	1.79	1.75	1.72	1.69	1.64	1.62	1.60	1.59	1.58	1.58	1.57	1.57	1.57	1.55	1.54	1.53	1.52	1.50
120	1.82	1.76	1.71	1.65	1.60	1.59	1.59	1.59	1.60	1.62	1.64	1.65	1.67	1.70	1.73	1.76	1.77	1.77	1.76
130	1.82	1.73	1.66	1.59	1.58	1.58	1.60	1.65	1.69	1.79	1.89	1.99	2.13	2.24	2.33	2.39	2.44	2.47	2.45
140	1.82	1.72	1.63	1.57	1.57	1.59	1.66	1.77	1.93	2.11	2.32	2.51	2.74	2.93	3.10	3.20	3.25	3.27	3.25
150	1.82	1.71	1.60	1.57	1.57	1.63	1.75	1.93	2.18	2.47	2.78	3.05	3.31	3.51	3.68	3.80	3.83	3.82	3.81
160	1.82	1.69	1.58	1.56	1.58	1.67	1.84	2.08	2.40	2.76	3.09	3.41	3.64	3.69	3.77	3.83	3.85	3.89	3.95
170	1.82	1.69	1.58	1.56	1.59	1.69	1.90	2.19	2.54	2.91	3.26	3.53	3.64	3.69	3.69	3.69	3.64	3.60	3.72
180	1.82	1.68	1.57	1.55	1.58	1.70	1.92	2.21	2.57	2.94	3.27	3.52	3.68	3.70	3.68	3.61	3.52	3.42	3.51

H_(b) Range:-90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature:25.3DEG
 Operators:Fan
 Test Date:2023-10-07

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:8.630m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Max-598mm-RGBW DS-GREEN-30D-Rev1	TYPE:RGBW DS-GREEN	WEIGHT:
SPEC.:30 DEG	DIM.:598MM	SERIAL No.:IES001826
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	3.05	2.85	2.65	2.43	2.15	1.85	1.53	1.23	0.98	0.78	0.66	0.64	0.64	0.64	0.64	0.61	0.53	0.48
-170	2.88	2.76	2.60	2.38	2.10	1.80	1.49	1.20	0.96	0.77	0.66	0.64	0.64	0.64	0.64	0.61	0.53	0.48
-160	2.61	2.48	2.30	2.09	1.84	1.57	1.31	1.07	0.87	0.73	0.65	0.64	0.64	0.64	0.64	0.60	0.53	0.48
-150	2.06	1.93	1.76	1.58	1.39	1.20	1.03	0.88	0.75	0.67	0.64	0.64	0.64	0.64	0.64	0.59	0.53	0.48
-140	1.37	1.28	1.17	1.04	0.94	0.85	0.77	0.70	0.66	0.64	0.64	0.64	0.64	0.64	0.63	0.58	0.52	0.48
-130	0.86	0.81	0.76	0.70	0.64	0.63	0.63	0.63	0.63	0.63	0.64	0.64	0.64	0.64	0.61	0.57	0.51	0.48
-120	0.68	0.66	0.65	0.64	0.63	0.62	0.63	0.64	0.64	0.63	0.64	0.64	0.63	0.62	0.59	0.55	0.51	0.48
-110	0.68	0.67	0.66	0.65	0.64	0.63	0.63	0.63	0.63	0.63	0.63	0.63	0.63	0.62	0.59	0.56	0.53	0.49
-100	0.68	0.66	0.65	0.63	0.61	0.59	0.59	0.60	0.60	0.60	0.59	0.59	0.57	0.55	0.53	0.50	0.49	0.48
-90	0.54	0.53	0.52	0.51	0.50	0.49	0.49	0.50	0.50	0.50	0.51	0.51	0.50	0.50	0.49	0.49	0.48	0.48
-80	1.09	1.06	1.02	0.97	0.91	0.86	0.83	0.79	0.75	0.69	0.63	0.56	0.53	0.52	0.51	0.49	0.48	0.48
-70	5.01	4.86	4.62	4.29	3.89	3.48	3.10	2.71	2.34	1.97	1.63	1.34	1.13	0.91	0.66	0.55	0.49	0.48
-60	12.7	12.4	11.8	10.9	10.0	9.00	7.90	6.76	5.62	4.52	3.55	2.80	2.16	1.61	1.16	0.68	0.51	0.48
-50	24.6	23.8	22.4	20.7	18.8	16.8	14.7	12.6	10.5	8.22	6.39	4.81	3.53	2.51	1.68	0.97	0.55	0.48
-40	50.2	47.4	43.3	38.3	33.3	28.5	24.0	19.8	16.1	12.9	9.96	7.29	5.16	3.51	2.26	1.32	0.60	0.48
-30	127	114	96.1	78.4	62.3	48.8	38.0	29.5	23.0	17.7	13.5	9.89	6.85	4.52	2.84	1.59	0.64	0.48
-20	349	298	235	172	121	83.4	58.0	41.4	30.4	22.5	16.8	12.1	8.38	5.44	3.33	1.83	0.69	0.48
-10	721	617	472	324	203	126	79.4	52.8	36.7	26.4	19.2	13.8	9.47	6.10	3.69	1.99	0.72	0.48
0	939	802	608	408	250	149	90.2	58.2	39.8	28.1	20.2	14.6	9.97	6.41	3.87	2.08	0.73	0.48
10	751	618	454	309	200	126	81.2	54.9	38.7	27.9	20.3	14.5	9.92	6.38	3.87	2.10	0.77	0.48
20	365	315	241	175	123	87.1	62.6	45.8	34.0	25.3	18.8	13.4	9.23	5.99	3.68	2.03	0.78	0.48
30	138	125	108	87.9	70.2	55.7	44.3	35.3	27.7	21.3	16.1	11.5	7.99	5.28	3.34	1.89	0.78	0.48
40	59.4	56.6	52.3	46.9	41.1	35.4	30.1	25.2	20.7	16.6	12.4	9.12	6.45	4.42	2.88	1.70	0.77	0.48
50	31.3	30.4	29.0	27.1	24.8	22.2	19.5	16.8	14.0	11.2	8.84	6.66	4.91	3.52	2.39	1.40	0.75	0.48
60	17.1	16.7	16.1	15.2	14.1	12.8	11.3	9.80	8.31	6.93	5.74	4.60	3.57	2.68	1.91	1.15	0.73	0.48
70	7.83	7.67	7.40	7.03	6.59	6.12	5.57	5.02	4.49	3.99	3.55	3.08	2.52	1.96	1.43	1.04	0.71	0.48
80	2.98	2.96	2.92	2.87	2.81	2.73	2.65	2.57	2.47	2.37	2.27	2.17	1.86	1.55	1.25	0.97	0.71	0.48
90	1.86	1.85	1.85	1.85	1.84	1.84	1.85	1.85	1.86	1.87	1.87	1.88	1.65	1.41	1.18	0.94	0.71	0.48
100	1.57	1.57	1.57	1.57	1.57	1.57	1.59	1.61	1.63	1.65	1.68	1.69	1.52	1.33	1.13	0.92	0.70	0.48
110	1.50	1.50	1.50	1.50	1.50	1.50	1.51	1.51	1.52	1.54	1.56	1.55	1.40	1.25	1.09	0.90	0.69	0.48
120	1.76	1.75	1.73	1.70	1.67	1.62	1.58	1.54	1.52	1.51	1.52	1.43	1.31	1.18	1.04	0.87	0.69	0.48
130	2.45	2.41	2.34	2.25	2.14	2.03	1.90	1.78	1.66	1.58	1.46	1.34	1.22	1.11	0.99	0.84	0.67	0.48
140	3.25	3.22	3.16	3.05	2.87	2.65	2.41	2.19	1.97	1.71	1.44	1.24	1.13	1.03	0.93	0.80	0.65	0.48
150	3.79	3.73	3.66	3.53	3.36	3.18	2.93	2.64	2.15	1.71	1.38	1.16	1.02	0.94	0.87	0.76	0.63	0.48
160	3.91	3.89	3.85	3.79	3.67	3.50	3.01	2.45	1.97	1.55	1.23	1.04	0.92	0.85	0.80	0.71	0.60	0.48
170	3.66	3.72	3.77	3.54	3.19	2.82	2.39	1.96	1.56	1.23	0.99	0.86	0.79	0.75	0.72	0.66	0.57	0.48
180	3.05	2.85	2.65	2.43	2.15	1.85	1.53	1.23	0.98	0.78	0.66	0.64	0.64	0.64	0.64	0.61	0.53	0.48

H_(b) Range: -90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-10-07

V(B) Range: -180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: