

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		2483.9 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	62.0V x 60.9H
	At 50% of Imax	30.2V x 29.5H
	At 90% of Imax	11.4V x 11.1H
Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	757.4 lumens per klm.
	To 50% of Imax	372.7 lumens per klm.
	To 90% of Imax	67.6 lumens per klm.
	Upward LOR	2.2 %
	Downward LOR	97.8 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-07

V(β) Range:-180 - 180DEG
V(β) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Blazeline Max-598mm-RGBW DS-RED-30D-Rev1	TYPE:RGBW DS-RED	WEIGHT:
SPEC.:30 DEG	DIM.:598MM	SERIAL No.:IES001825
MFR.:	SUR.:	Shielding Angle:

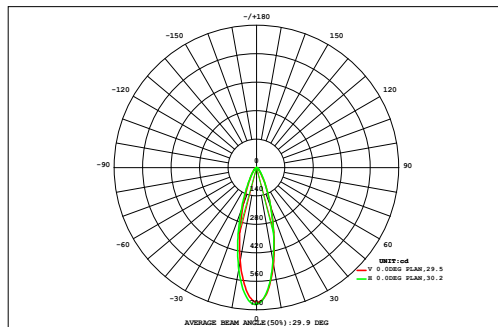

DATA OF LAMP		Eff:48.41lm/W	
MODEL		Imax(cd)	673.4
NOMINAL POWER(W)	5.6	AVAILABILITY(%)	75.6
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	205.0
NOMINAL FLUX(lm)	271.1	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	271.1
TEST VOLTAGE(V)	220	q @50% (H,V)	30,30DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		F t	F a
	0.06	0.08	0.10	0.12	0.14	0.16	0.18	0.19	0.20	0.20	0.19	0.18	0.15	0.13	0.11	0.09	0.07	0.06	2.42	0.00
45	0.06	0.08	0.10	0.12	0.14	0.16	0.18	0.19	0.20	0.20	0.19	0.18	0.15	0.13	0.11	0.09	0.07	0.06	2.42	0.00
40	0.07	0.09	0.12	0.15	0.18	0.22	0.25	0.28	0.29	0.29	0.27	0.25	0.21	0.17	0.14	0.11	0.09	0.07	3.25	0.00
35	0.08	0.11	0.15	0.19	0.24	0.30	0.36	0.41	0.45	0.45	0.42	0.36	0.30	0.23	0.18	0.14	0.10	0.08	4.54	0.25
30	0.10	0.13	0.18	0.24	0.32	0.43	0.55	0.65	0.72	0.72	0.66	0.56	0.43	0.32	0.23	0.17	0.12	0.09	6.62	3.77
25	0.11	0.15	0.21	0.31	0.44	0.63	0.85	1.06	1.20	1.21	1.08	0.87	0.64	0.44	0.30	0.20	0.14	0.10	9.93	7.74
20	0.12	0.17	0.26	0.39	0.60	0.91	1.30	1.69	1.95	1.95	1.70	1.31	0.91	0.60	0.38	0.25	0.16	0.10	14.7	13.0
15	0.13	0.20	0.30	0.48	0.77	1.25	1.88	2.55	2.95	2.94	2.52	1.86	1.24	0.77	0.47	0.29	0.18	0.11	20.9	19.3
10	0.14	0.21	0.33	0.55	0.94	1.58	2.45	3.39	4.04	4.01	3.33	2.39	1.58	0.97	0.56	0.32	0.19	0.11	27.1	25.7
5	0.15	0.22	0.35	0.60	1.04	1.79	2.84	3.95	4.77	4.75	3.95	2.86	1.85	1.10	0.62	0.35	0.19	0.12	31.5	30.1
0	0.14	0.22	0.35	0.60	1.06	1.84	2.95	4.11	4.87	4.86	4.11	2.97	1.91	1.12	0.62	0.34	0.19	0.11	32.4	31.0
-5	0.14	0.21	0.33	0.56	0.99	1.70	2.69	3.64	4.24	4.23	3.58	2.63	1.70	1.01	0.57	0.32	0.18	0.11	28.8	27.5
-10	0.12	0.18	0.29	0.48	0.82	1.35	2.05	2.73	3.19	3.19	2.72	2.03	1.35	0.83	0.48	0.28	0.17	0.10	22.4	20.9
-15	0.11	0.16	0.24	0.38	0.61	0.96	1.39	1.82	2.12	2.12	1.83	1.40	0.96	0.62	0.38	0.23	0.14	0.09	15.6	13.9
-20	0.09	0.13	0.19	0.29	0.43	0.63	0.87	1.11	1.27	1.28	1.13	0.89	0.64	0.44	0.29	0.19	0.12	0.08	10.1	8.03
-25	0.08	0.11	0.15	0.21	0.30	0.41	0.53	0.65	0.73	0.74	0.66	0.55	0.42	0.30	0.21	0.14	0.10	0.07	6.37	3.63
-30	0.07	0.09	0.12	0.16	0.21	0.27	0.33	0.39	0.43	0.43	0.40	0.34	0.27	0.21	0.15	0.11	0.08	0.06	4.12	0.19
-35	0.05	0.07	0.09	0.12	0.15	0.18	0.22	0.25	0.26	0.26	0.25	0.22	0.18	0.15	0.11	0.09	0.07	0.05	2.78	0.00
-40	0.05	0.06	0.07	0.09	0.11	0.13	0.15	0.16	0.17	0.17	0.16	0.15	0.13	0.11	0.09	0.07	0.06	0.04	1.97	0.00
-45	0.05	0.06	0.07	0.09	0.11	0.13	0.15	0.16	0.17	0.17	0.16	0.15	0.13	0.11	0.09	0.07	0.06	0.04	1.97	0.00
	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)	10	15	20	25	30	35	40	45			
F t	1.82	2.59	3.84	5.92	9.37	14.7	21.8	29.1	33.9	33.8	29.0	21.8	14.9	9.51	5.91	3.69	2.35	1.55	245	---
F a	0.00	0.00	0.00	2.94	7.06	12.7	20.0	27.4	32.2	32.2	27.3	20.0	12.9	7.23	3.00	0.00	0.00	0.00	---	205

one-half-peak spread: U:15.3,D:15.2 , L:15.2,R:14.6


NEMA Beam Type: Type 4

H(B) Range:-90 - 90DEG
H(B) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:Blazeline Max-598mm-RGBW DS-RED-30D-Rev1	TYPE:RGBW DS-RED	WEIGHT:
SPEC.:30 DEG	DIM.:598MM	SERIAL No.:IES001825
MFR.:	SUR.:	Shielding Angle:

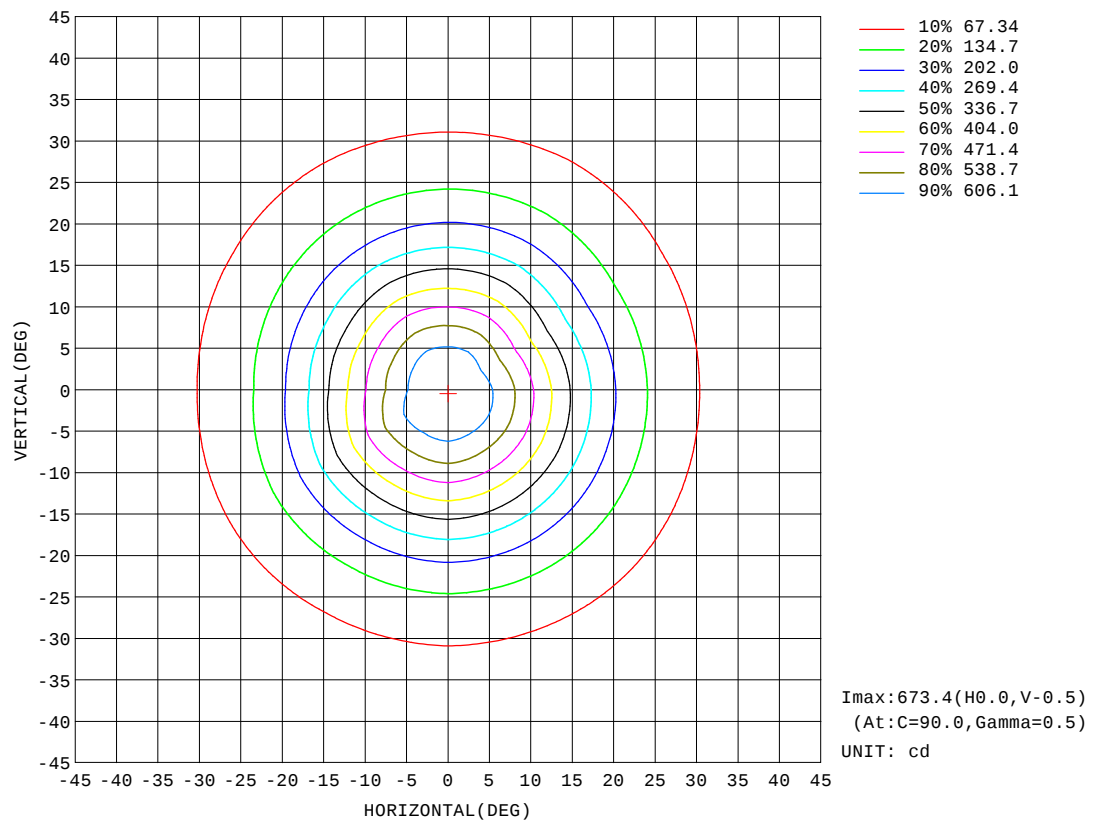


H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Blazeline Max-598mm-RGBW DS-RED-30D-Rev1	TYPE:RGBW DS-RED	WEIGHT:
SPEC.:30 DEG	DIM.:598MM	SERIAL No.:IES001825
MFR.:	SUR.:	Shielding Angle:

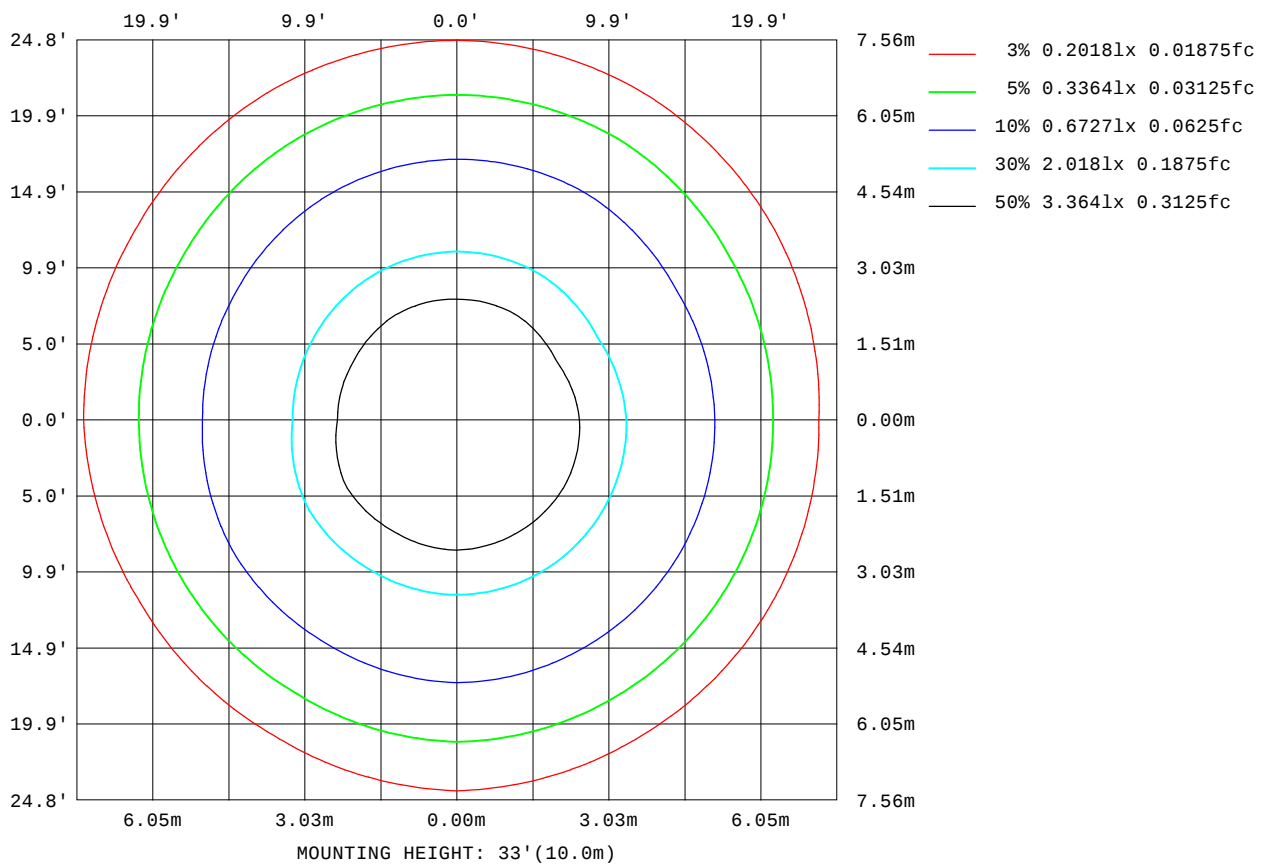

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

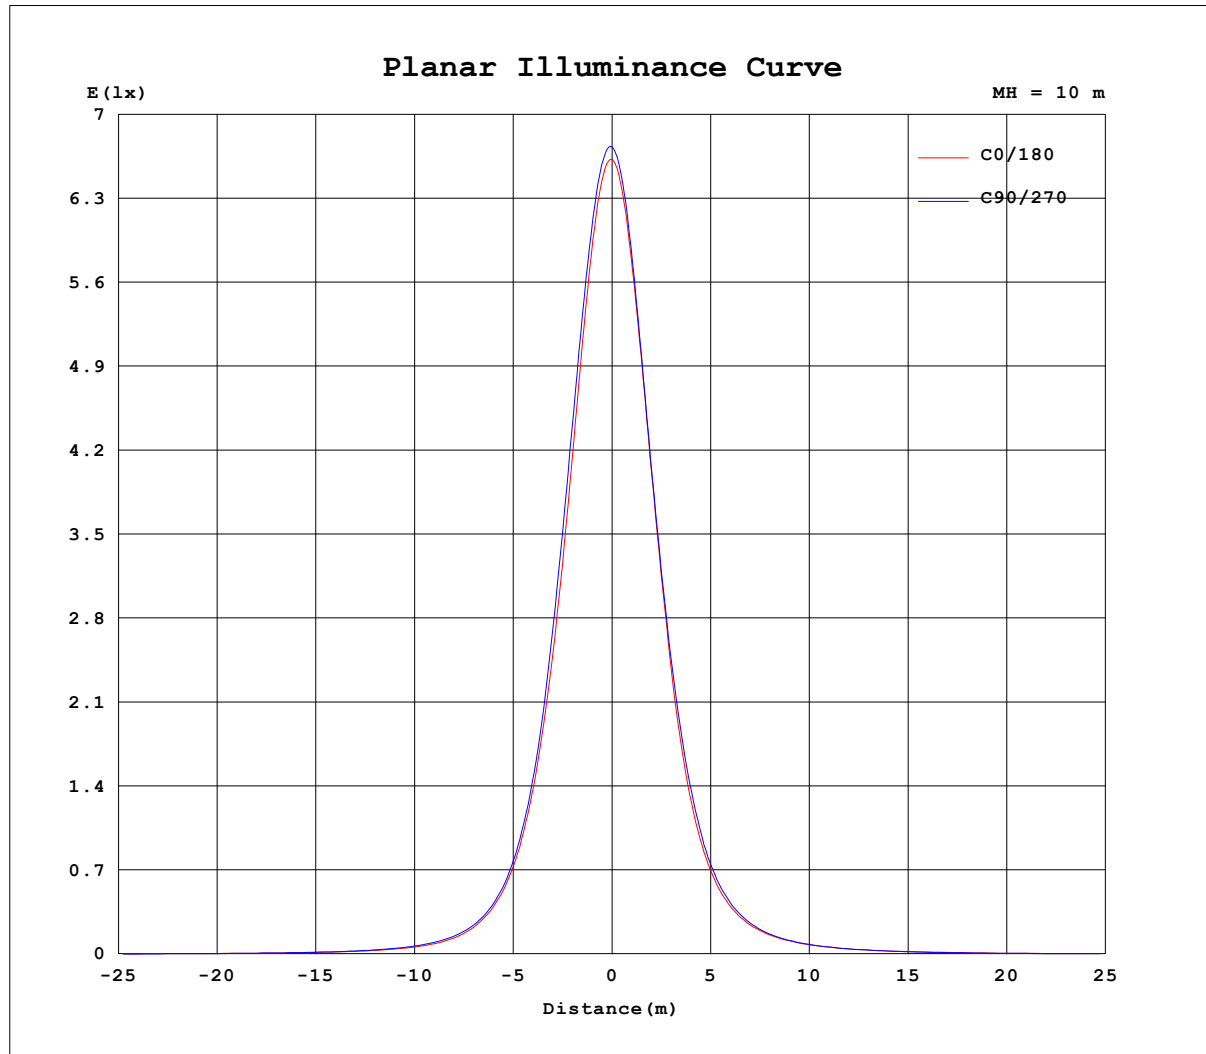


H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Blazeline Max-598mm-RGBW DS-RED-30D-Rev1	TYPE:RGBW DS-RED	WEIGHT:
SPEC.:30 DEG	DIM.:598MM	SERIAL No.:IES001825
MFR.:	SUR.:	Shielding Angle:

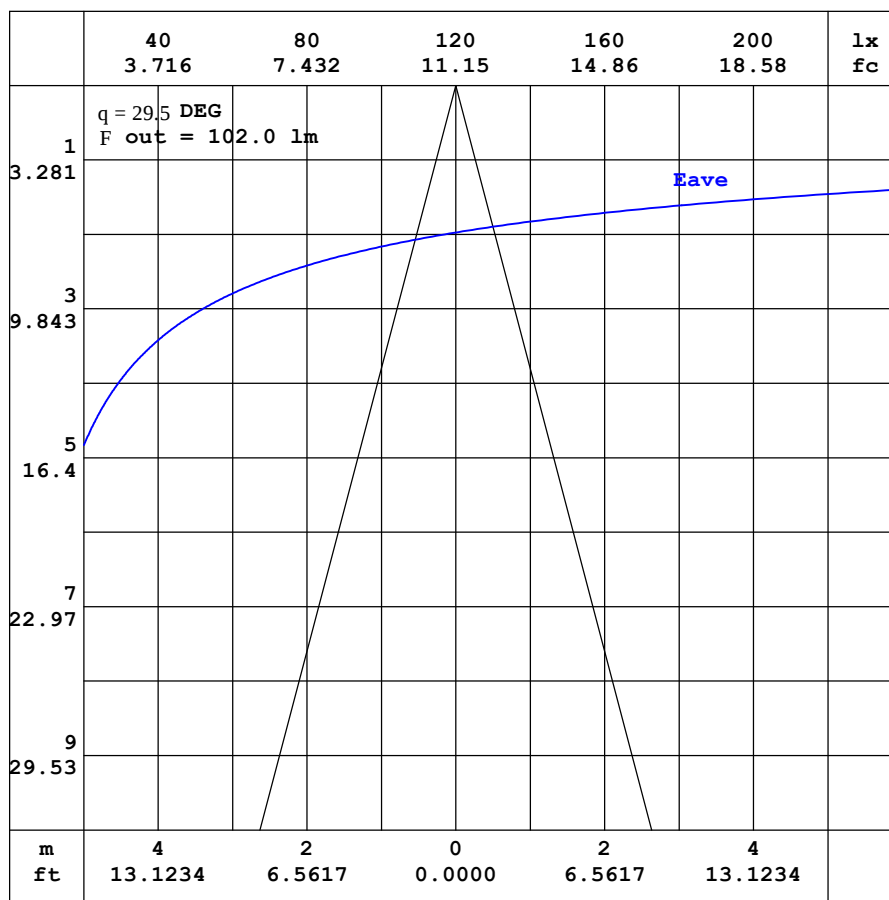

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Max-598mm-RGBW DS-RED-30D-Rev1	TYPE:RGBW DS-RED	WEIGHT:
SPEC.:30 DEG	DIM.:598MM	SERIAL No.:IES001825
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.99	0.91	0.82	0.82	0.82	0.89	1.01	1.19	1.42	1.67	1.87	2.02	2.10	2.09	2.08	2.04	1.99	1.93	2.00
-170	0.99	0.89	0.80	0.78	0.77	0.80	0.88	1.00	1.16	1.33	1.50	1.61	1.51	1.53	1.52	1.55	1.65	1.72	1.79
-160	0.99	0.88	0.79	0.74	0.72	0.72	0.74	0.79	0.87	0.95	1.06	1.14	1.20	1.10	1.28	1.42	1.47	1.52	1.57
-150	0.99	0.87	0.76	0.71	0.67	0.64	0.62	0.61	0.58	0.59	0.62	0.75	0.87	0.96	1.03	1.10	1.16	1.18	1.16
-140	0.99	0.86	0.75	0.68	0.63	0.58	0.53	0.48	0.42	0.39	0.44	0.48	0.54	0.58	0.62	0.69	0.72	0.74	0.74
-130	0.99	0.85	0.75	0.66	0.59	0.53	0.47	0.41	0.38	0.39	0.39	0.39	0.39	0.39	0.40	0.41	0.43	0.44	0.45
-120	0.99	0.85	0.75	0.65	0.57	0.50	0.43	0.38	0.38	0.39	0.39	0.39	0.39	0.39	0.39	0.38	0.37	0.37	0.36
-110	0.99	0.86	0.75	0.66	0.56	0.48	0.41	0.39	0.39	0.39	0.39	0.39	0.39	0.39	0.39	0.38	0.37	0.36	0.35
-100	0.99	0.87	0.76	0.65	0.56	0.48	0.39	0.38	0.38	0.37	0.37	0.37	0.37	0.37	0.37	0.37	0.36	0.36	0.36
-90	0.99	0.88	0.77	0.66	0.56	0.45	0.34	0.33	0.33	0.33	0.32	0.32	0.32	0.31	0.31	0.31	0.30	0.30	0.30
-80	0.99	0.89	0.79	0.69	0.58	0.47	0.34	0.33	0.36	0.39	0.42	0.45	0.47	0.49	0.50	0.52	0.53	0.54	0.54
-70	0.99	0.91	0.85	0.80	0.75	0.74	0.72	0.84	1.03	1.21	1.41	1.61	1.79	2.01	2.23	2.43	2.59	2.71	2.77
-60	0.99	0.95	0.96	1.04	1.20	1.41	1.61	1.88	2.38	2.94	3.53	4.11	4.66	5.18	5.73	6.20	6.58	6.85	7.00
-50	0.99	0.98	1.10	1.41	1.87	2.36	2.89	3.49	4.34	5.35	6.38	7.48	8.60	9.69	10.8	11.8	12.7	13.3	13.6
-40	0.99	1.04	1.31	1.86	2.65	3.47	4.49	5.58	6.63	8.05	9.84	11.9	14.2	16.9	19.6	22.6	25.1	27.1	28.1
-30	0.99	1.10	1.52	2.38	3.42	4.69	6.22	7.83	9.55	11.5	14.2	18.3	23.8	30.9	39.8	50.4	61.5	70.3	74.5
-20	0.99	1.15	1.72	2.85	4.14	5.85	7.88	10.0	12.5	15.8	20.5	27.8	40.0	59.7	88.4	127	169	205	221
-10	0.99	1.19	1.89	3.21	4.75	6.83	9.27	11.9	15.1	19.7	26.9	38.9	60.4	99.5	166	266	378	467	508
0	0.99	1.22	1.99	3.45	5.16	7.48	10.2	13.2	16.8	22.2	30.6	44.2	69.1	114	193	319	467	602	662
10	0.99	1.22	1.95	3.32	4.94	7.12	9.74	12.6	16.1	21.0	28.4	40.2	60.6	95.7	155	241	346	439	470
20	0.99	1.20	1.84	3.07	4.49	6.40	8.73	11.3	14.3	18.1	23.4	31.1	42.7	60.7	86.8	122	161	192	205
30	0.99	1.17	1.69	2.69	3.89	5.41	7.31	9.42	11.7	14.5	17.8	22.2	27.8	35.0	44.0	54.3	64.0	71.4	74.5
40	0.99	1.13	1.52	2.22	3.21	4.29	5.66	7.26	8.94	10.9	13.1	15.5	18.1	21.0	24.0	26.9	29.3	31.1	31.8
50	0.99	1.09	1.35	1.82	2.48	3.22	4.05	5.05	6.25	7.56	8.92	10.3	11.6	13.0	14.2	15.3	16.1	16.6	16.8
60	0.99	1.07	1.23	1.46	1.82	2.25	2.74	3.24	3.87	4.60	5.38	6.16	6.91	7.60	8.19	8.70	9.09	9.34	9.45
70	0.99	1.04	1.12	1.24	1.37	1.54	1.73	1.95	2.21	2.47	2.74	3.02	3.28	3.55	3.80	4.00	4.16	4.26	4.30
80	0.99	1.02	1.05	1.10	1.14	1.20	1.24	1.27	1.31	1.35	1.38	1.43	1.46	1.51	1.55	1.59	1.61	1.63	1.64
90	0.99	1.00	1.02	1.03	1.04	1.06	1.07	1.06	1.05	1.04	1.03	1.02	1.00	1.01	1.01	1.02	1.02	1.02	1.03
100	0.99	0.98	0.98	0.97	0.96	0.96	0.95	0.93	0.91	0.89	0.87	0.86	0.85	0.85	0.85	0.85	0.85	0.85	0.86
110	0.99	0.97	0.94	0.92	0.90	0.89	0.88	0.86	0.84	0.83	0.83	0.83	0.83	0.83	0.83	0.82	0.82	0.81	0.81
120	0.99	0.94	0.92	0.88	0.86	0.84	0.84	0.84	0.84	0.84	0.86	0.88	0.89	0.92	0.94	0.95	0.97	0.97	0.96
130	0.99	0.93	0.88	0.86	0.83	0.83	0.83	0.85	0.87	0.93	1.00	1.08	1.19	1.27	1.33	1.36	1.39	1.40	1.39
140	0.99	0.93	0.87	0.83	0.83	0.83	0.85	0.91	1.00	1.13	1.32	1.45	1.63	1.77	1.87	1.91	1.94	1.92	1.88
150	0.99	0.92	0.85	0.82	0.82	0.84	0.90	1.01	1.18	1.41	1.66	1.88	2.06	2.16	2.18	2.19	2.21	2.21	2.22
160	0.99	0.91	0.85	0.82	0.83	0.86	0.96	1.12	1.35	1.61	1.89	2.14	2.29	2.14	2.18	2.21	2.23	2.25	2.29
170	0.99	0.91	0.83	0.82	0.82	0.88	1.00	1.19	1.43	1.69	1.95	2.12	2.10	2.13	2.14	2.13	2.09	2.06	2.14
180	0.99	0.91	0.82	0.82	0.82	0.89	1.01	1.19	1.42	1.67	1.87	2.02	2.10	2.09	2.08	2.04	1.99	1.93	2.02

H_b Range:-90 - 90DEGH_b Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-10-07

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Max-598mm-RGBW DS-RED-30D-Rev1	TYPE:RGBW DS-RED	WEIGHT:
SPEC.:30 DEG	DIM.:598MM	SERIAL No.:IES001825
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	1.75	1.64	1.53	1.39	1.23	1.04	0.83	0.64	0.48	0.36	0.34	0.34	0.34	0.34	0.34	0.34	0.30	0.27	
-170	1.68	1.62	1.53	1.39	1.21	1.01	0.81	0.62	0.47	0.37	0.34	0.34	0.34	0.34	0.34	0.34	0.30	0.27	
-160	1.52	1.43	1.32	1.19	1.03	0.87	0.69	0.55	0.43	0.36	0.34	0.34	0.34	0.34	0.34	0.34	0.29	0.27	
-150	1.13	1.06	0.96	0.85	0.74	0.62	0.52	0.44	0.37	0.34	0.33	0.34	0.34	0.34	0.34	0.34	0.29	0.27	
-140	0.71	0.66	0.59	0.51	0.46	0.41	0.37	0.35	0.34	0.33	0.33	0.34	0.34	0.34	0.34	0.33	0.28	0.27	
-130	0.42	0.39	0.37	0.34	0.33	0.33	0.33	0.33	0.33	0.33	0.34	0.34	0.34	0.34	0.34	0.31	0.28	0.27	
-120	0.35	0.34	0.34	0.34	0.34	0.34	0.34	0.34	0.34	0.34	0.34	0.34	0.34	0.34	0.34	0.33	0.31	0.28	0.27
-110	0.35	0.35	0.35	0.35	0.35	0.35	0.35	0.35	0.34	0.34	0.34	0.34	0.34	0.34	0.33	0.32	0.29	0.28	0.27
-100	0.36	0.35	0.35	0.35	0.34	0.34	0.34	0.33	0.33	0.33	0.34	0.34	0.34	0.32	0.30	0.29	0.28	0.27	0.27
-90	0.29	0.29	0.28	0.28	0.27	0.27	0.27	0.27	0.28	0.28	0.28	0.28	0.28	0.28	0.27	0.27	0.27	0.27	0.27
-80	0.54	0.53	0.51	0.49	0.46	0.44	0.42	0.40	0.36	0.33	0.29	0.27	0.28	0.28	0.28	0.27	0.27	0.27	0.27
-70	2.71	2.59	2.43	2.23	2.00	1.78	1.60	1.40	1.21	1.01	0.83	0.67	0.55	0.42	0.34	0.29	0.27	0.27	0.27
-60	6.78	6.45	6.02	5.51	4.95	4.46	3.98	3.49	2.96	2.43	1.90	1.45	1.12	0.83	0.53	0.36	0.28	0.27	0.27
-50	13.1	12.4	11.4	10.3	9.13	8.08	7.03	6.06	5.13	4.25	3.41	2.62	1.89	1.31	0.87	0.47	0.29	0.27	0.27
-40	27.0	24.9	22.1	18.9	16.0	13.3	11.0	9.17	7.54	6.16	5.00	3.88	2.82	1.87	1.19	0.61	0.31	0.27	0.27
-30	70.8	62.3	51.3	40.1	30.5	22.8	17.0	12.9	10.2	8.15	6.49	5.07	3.70	2.47	1.50	0.80	0.34	0.27	0.27
-20	206	172	129	89.6	60.0	39.6	26.3	18.0	13.1	10.0	7.77	6.04	4.46	2.99	1.77	0.96	0.37	0.27	0.27
-10	464	371	261	167	101	60.2	36.4	23.0	15.6	11.4	8.68	6.70	4.99	3.35	1.97	1.06	0.39	0.27	0.27
0	614	481	330	208	121	70.1	41.0	25.0	16.7	12.0	9.08	7.02	5.25	3.53	2.08	1.11	0.40	0.27	0.27
10	435	339	236	156	96.9	59.9	37.5	24.2	16.8	12.3	9.31	7.13	5.27	3.52	2.08	1.12	0.42	0.27	0.27
20	193	163	123	87.4	60.2	41.6	29.0	20.5	15.2	11.6	8.92	6.82	4.97	3.31	1.97	1.08	0.42	0.27	0.27
30	71.7	64.4	54.5	43.6	34.0	26.4	20.5	16.3	12.9	10.2	7.94	6.09	4.38	2.91	1.78	0.97	0.42	0.27	0.27
40	30.9	28.9	26.1	23.0	19.8	16.9	14.3	12.1	10.1	8.27	6.56	4.98	3.58	2.40	1.54	0.82	0.41	0.27	0.27
50	16.4	15.7	14.7	13.5	12.2	10.9	9.63	8.39	7.20	6.05	4.87	3.70	2.68	1.89	1.28	0.72	0.40	0.27	0.27
60	9.24	8.88	8.41	7.84	7.21	6.57	5.92	5.23	4.52	3.82	3.15	2.50	1.93	1.44	0.96	0.63	0.40	0.27	0.27
70	4.25	4.14	3.97	3.76	3.51	3.23	2.96	2.68	2.41	2.15	1.91	1.66	1.33	1.03	0.78	0.56	0.39	0.27	0.27
80	1.63	1.61	1.58	1.55	1.50	1.45	1.41	1.37	1.32	1.28	1.23	1.19	1.01	0.85	0.68	0.53	0.39	0.27	0.27
90	1.02	1.01	1.00	0.99	0.99	0.98	0.99	1.00	1.01	1.02	1.03	1.04	0.91	0.78	0.65	0.52	0.39	0.27	0.27
100	0.85	0.84	0.84	0.83	0.83	0.82	0.84	0.86	0.88	0.90	0.92	0.93	0.83	0.72	0.62	0.51	0.39	0.27	0.27
110	0.81	0.81	0.81	0.82	0.82	0.81	0.81	0.81	0.82	0.83	0.85	0.84	0.77	0.69	0.60	0.49	0.39	0.27	0.27
120	0.96	0.96	0.95	0.93	0.92	0.89	0.86	0.83	0.82	0.82	0.83	0.77	0.71	0.65	0.57	0.48	0.37	0.27	0.27
130	1.39	1.37	1.34	1.28	1.21	1.14	1.05	0.97	0.89	0.85	0.79	0.72	0.66	0.60	0.54	0.46	0.36	0.27	0.27
140	1.88	1.87	1.82	1.75	1.64	1.50	1.36	1.22	1.08	0.93	0.77	0.67	0.61	0.55	0.51	0.44	0.35	0.27	0.27
150	2.21	2.18	2.14	2.07	1.97	1.83	1.67	1.49	1.19	0.93	0.75	0.62	0.55	0.51	0.47	0.43	0.34	0.27	0.27
160	2.26	2.25	2.22	2.19	2.13	2.02	1.72	1.40	1.09	0.84	0.67	0.55	0.49	0.46	0.43	0.40	0.33	0.27	0.27
170	2.08	2.15	2.18	2.05	1.84	1.61	1.35	1.08	0.84	0.63	0.52	0.46	0.42	0.40	0.39	0.37	0.31	0.27	0.27
180	1.75	1.64	1.53	1.39	1.23	1.04	0.83	0.64	0.48	0.36	0.34	0.34	0.34	0.34	0.34	0.34	0.30	0.27	0.27

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-10-07

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: