

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	805.6 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	---

Beam Spread	At 10% of Imax	107.0V x 110.5H
	At 50% of Imax	66.0V x 66.0H
	At 90% of Imax	25.9V x 21.5H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	890.8 lumens per klm.
	To 50% of Imax	576.1 lumens per klm.
	To 90% of Imax	103.1 lumens per klm.

Upward LOR	2.3 %
Downward LOR	97.7 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-08

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Blazeline Max-598mm-RGBW DS-3000K-60D-Rev1	TYPE:RGBW DS-3000K	WEIGHT:
SPEC.:60 DEG	DIM.:598MM	SERIAL No.:IES001833
MFR.:	SUR.:	Shielding Angle:

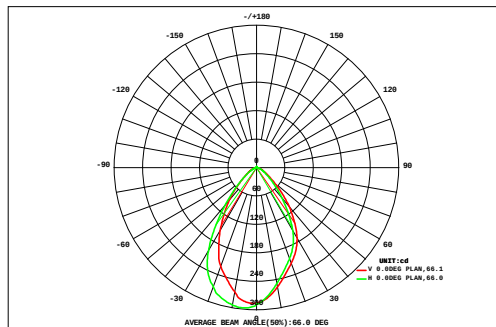

DATA OF LAMP		Eff:52.17lm/W	
MODEL		Imax(cd)	298.0
NOMINAL POWER(W)	7.08	AVAILABILITY(%)	89.1
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	329.5
NOMINAL FLUX(lm)	369.9	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	369.9
TEST VOLTAGE(V)	220	q @50%(H,V)	66,66DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		F t	F a
	0.00	0.01	0.02	0.03	0.04	0.05	0.05	0.06	0.06	0.06	0.06	0.05	0.05	0.04	0.03	0.02	0.01	0.00	0.65	0.00
90	0.00	0.01	0.03	0.04	0.06	0.09	0.12	0.14	0.16	0.16	0.15	0.13	0.11	0.08	0.05	0.03	0.01	0.00	1.37	0.00
80	0.00	0.02	0.04	0.08	0.13	0.20	0.26	0.33	0.37	0.38	0.36	0.30	0.23	0.16	0.10	0.04	0.01	0.00	3.02	0.00
70	0.00	0.02	0.06	0.13	0.23	0.36	0.51	0.67	0.79	0.81	0.73	0.59	0.43	0.28	0.16	0.07	0.02	0.00	5.86	0.90
60	0.00	0.03	0.09	0.19	0.37	0.64	0.98	1.38	1.69	1.74	1.51	1.13	0.77	0.46	0.24	0.10	0.03	0.00	11.3	8.83
50	0.01	0.03	0.12	0.27	0.57	1.07	1.84	2.77	3.43	3.49	2.97	2.12	1.30	0.71	0.33	0.14	0.04	0.00	21.2	19.7
40	0.01	0.04	0.15	0.35	0.81	1.66	3.08	4.62	5.41	5.39	4.72	3.47	2.03	1.01	0.42	0.16	0.04	0.00	33.4	32.2
30	0.01	0.05	0.17	0.43	1.09	2.36	4.21	5.93	6.74	6.67	5.97	4.66	2.82	1.34	0.51	0.19	0.05	0.00	43.2	42.2
20	0.01	0.05	0.18	0.48	1.31	2.87	5.02	6.85	8.01	7.91	6.73	5.26	3.36	1.59	0.57	0.20	0.05	0.00	50.5	49.5
10	0.01	0.05	0.18	0.48	1.32	2.96	5.33	7.48	8.84	8.47	7.00	5.44	3.46	1.61	0.57	0.20	0.05	0.00	53.5	52.5
0	0.01	0.05	0.16	0.42	1.10	2.55	4.92	7.33	8.54	8.22	6.93	5.19	3.08	1.38	0.51	0.18	0.05	0.00	50.6	49.6
-10	0.01	0.04	0.14	0.33	0.81	1.82	3.67	5.93	7.15	7.06	5.96	4.13	2.28	1.04	0.41	0.15	0.04	0.00	41.0	39.8
-20	0.00	0.03	0.11	0.24	0.53	1.10	2.08	3.41	4.41	4.50	3.71	2.48	1.41	0.70	0.30	0.12	0.03	0.00	25.2	23.7
-30	0.00	0.02	0.08	0.16	0.32	0.60	0.98	1.50	1.95	2.03	1.70	1.21	0.76	0.42	0.20	0.09	0.02	0.00	12.0	9.66
-40	0.00	0.02	0.05	0.10	0.18	0.30	0.45	0.63	0.78	0.81	0.71	0.54	0.38	0.23	0.13	0.06	0.01	0.00	5.39	0.99
-50	0.00	0.01	0.02	0.05	0.09	0.14	0.20	0.27	0.32	0.33	0.29	0.24	0.18	0.12	0.06	0.03	0.01	0.00	2.36	0.00
-60	0.00	0.01	0.01	0.02	0.03	0.05	0.07	0.09	0.10	0.11	0.10	0.08	0.06	0.04	0.02	0.01	0.00	0.00	0.80	0.00
-70	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.00	0.00	0.18	0.00
-80	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.00	0.00	0.18	0.00
-90	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.00	0.00	0.18	0.00
-90 -80 -70 -60 -50 -40 -30 -20 HORIZONTAL (DEG) 20 30 40 50 60 70 80 90																				
F t	0.09	0.50	1.60	3.82	8.99	18.8	33.8	49.4	58.8	58.2	49.6	37.0	22.7	11.2	4.62	1.79	0.49	0.05	361	---
F a	0.00	0.00	0.00	0.65	6.53	16.7	31.7	47.4	56.8	56.2	47.6	35.0	20.6	8.97	1.48	0.00	0.00	0.00	---	330

one-half-peak spread: U:29.5,D:36.4 , L:30.2,R:36.2


NEMA Beam Type: Type 6

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-10-08

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:Blazeline Max-598mm-RGBW DS-3000K-60D-Rev1	TYPE:RGBW DS-3000K	WEIGHT:
SPEC.:60 DEG	DIM.:598MM	SERIAL No.:IES001833
MFR.:	SUR.:	Shielding Angle:

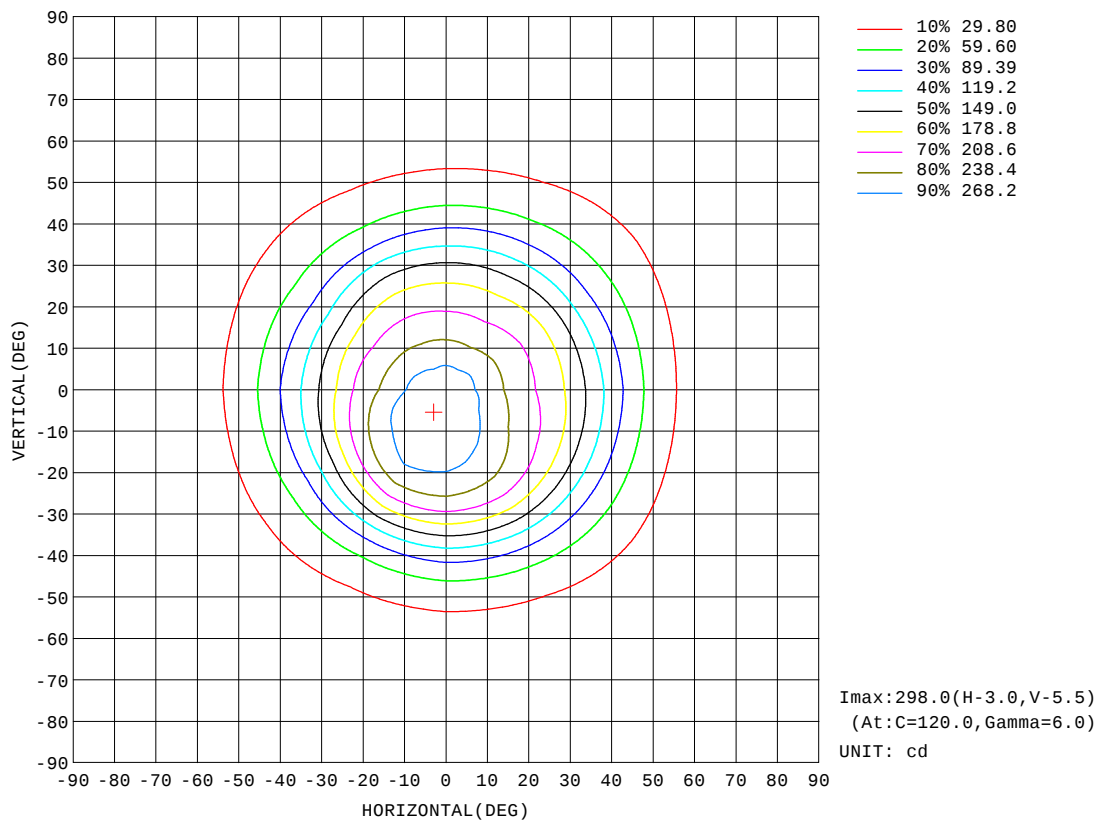


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-08

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Blazeline Max-598mm-RGBW DS-3000K-60D-Rev1	TYPE:RGBW DS-3000K	WEIGHT:
SPEC.:60 DEG	DIM.:598MM	SERIAL No.:IES001833
MFR.:	SUR.:	Shielding Angle:

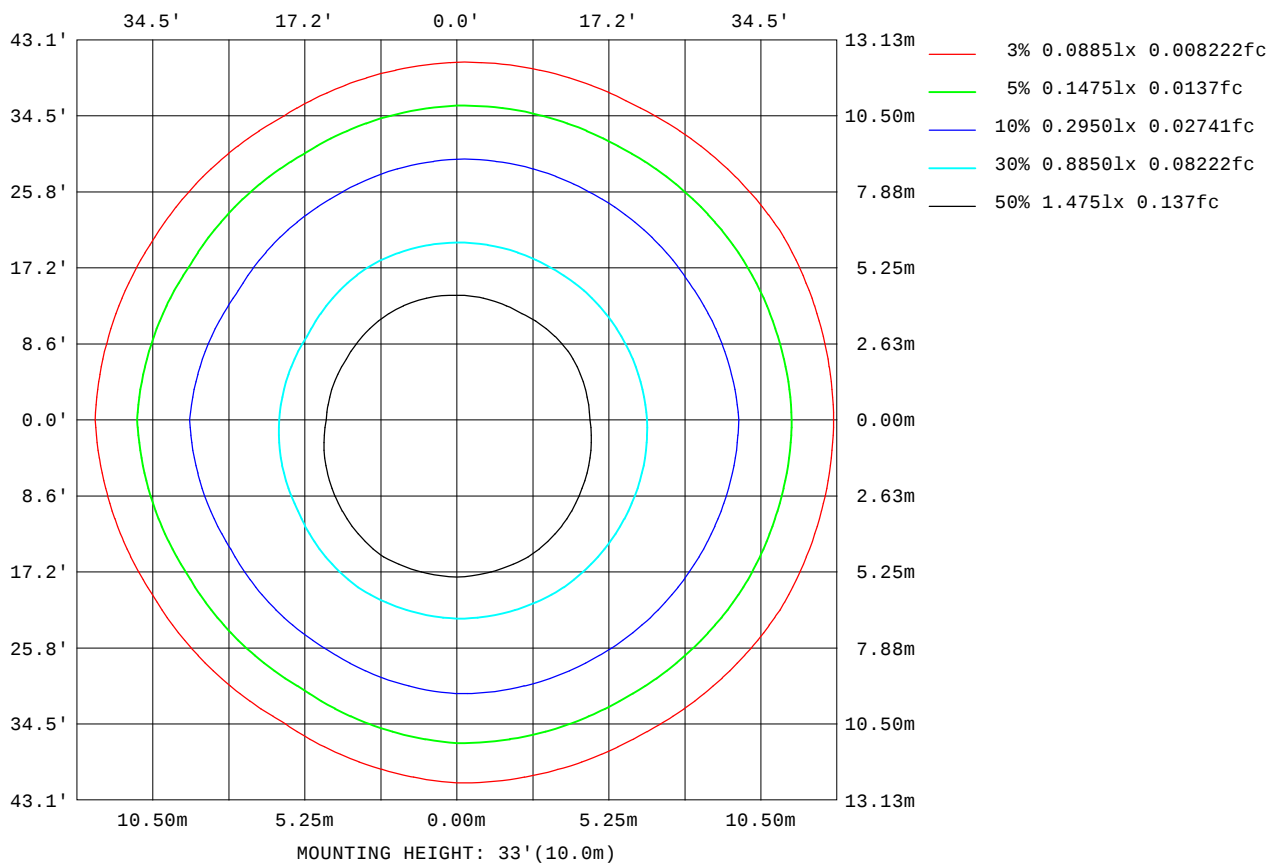

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-08

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

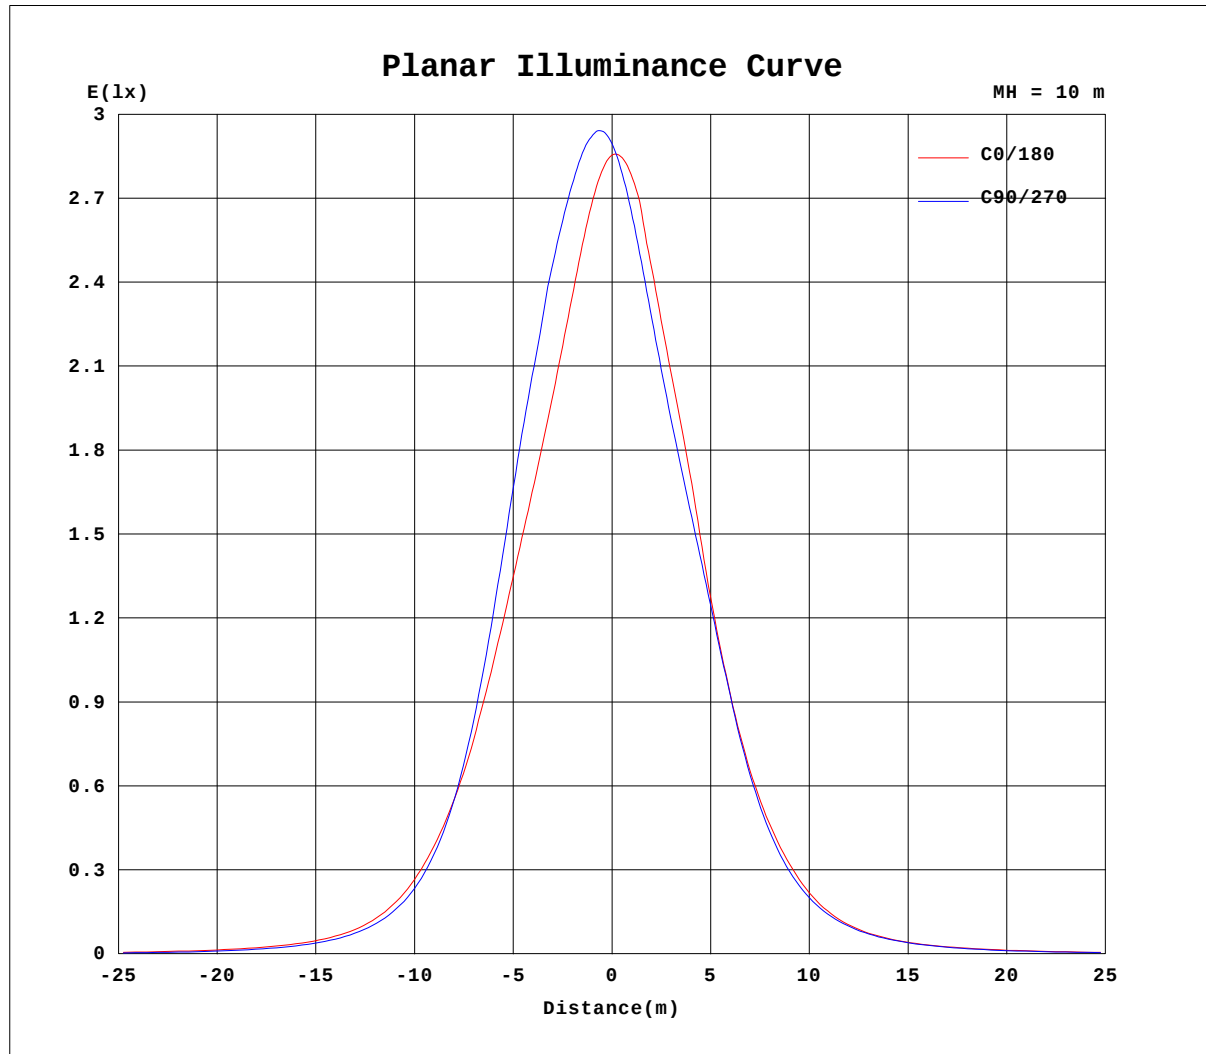


H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-08

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Blazeline Max-598mm-RGBW DS-3000K-60D-Rev1	TYPE:RGBW DS-3000K	WEIGHT:
SPEC.:60 DEG	DIM.:598MM	SERIAL No.:IES001833
MFR.:	SUR.:	Shielding Angle:

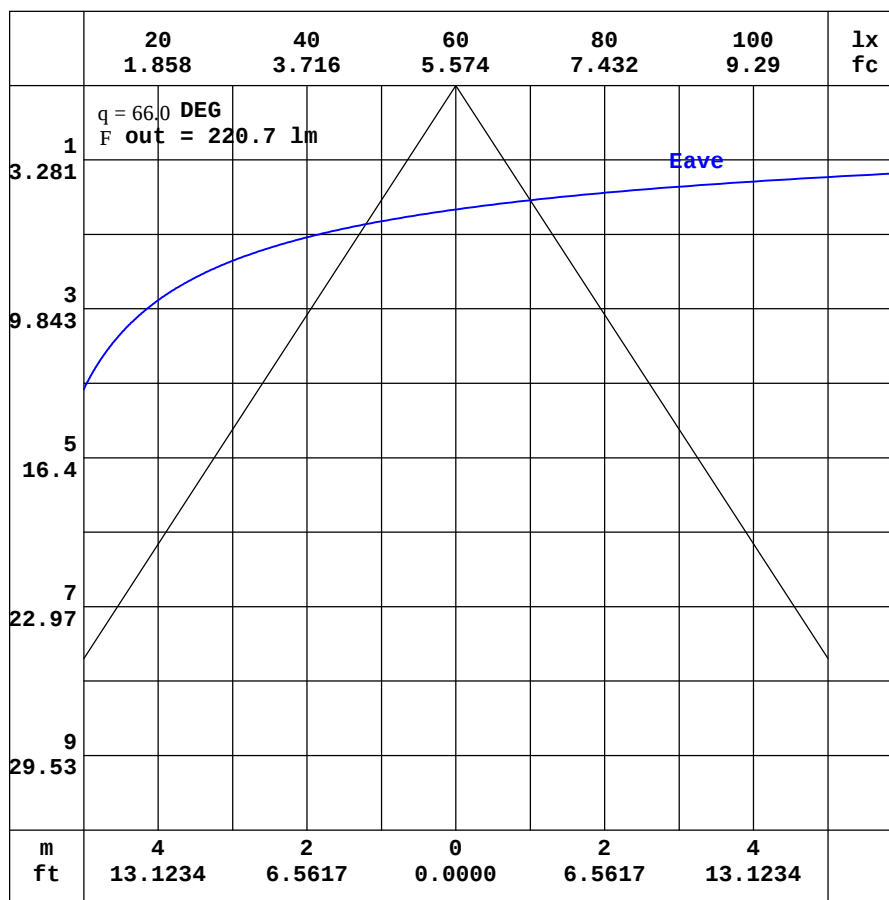

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-08

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Max-598mm-RGBW DS-3000K-60D-Rev1	TYPE:RGBW DS-3000K	WEIGHT:
SPEC.:60 DEG	DIM.:598MM	SERIAL No.:IES001833
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	1.59	1.49	1.48	1.48	1.55	1.63	1.74	1.88	2.03	2.19	2.34	2.50	2.62	2.72	2.79	2.80	2.79	2.79	2.74
-170	1.59	1.46	1.41	1.39	1.41	1.46	1.52	1.59	1.67	1.74	1.81	1.86	1.88	1.88	1.86	1.90	2.08	2.22	2.35
-160	1.59	1.42	1.35	1.30	1.27	1.27	1.28	1.29	1.30	1.29	1.27	1.23	1.19	1.31	1.44	1.56	1.67	1.78	1.84
-150	1.59	1.40	1.29	1.21	1.14	1.09	1.05	1.01	0.96	0.89	0.83	0.91	0.99	1.08	1.15	1.22	1.31	1.36	1.39
-140	1.59	1.38	1.23	1.12	1.02	0.94	0.85	0.77	0.67	0.65	0.70	0.75	0.80	0.86	0.89	0.95	1.01	1.04	1.06
-130	1.59	1.36	1.19	1.05	0.92	0.79	0.68	0.56	0.53	0.55	0.59	0.60	0.63	0.65	0.69	0.73	0.75	0.78	0.80
-120	1.59	1.35	1.16	0.98	0.83	0.68	0.53	0.44	0.46	0.47	0.48	0.49	0.50	0.50	0.53	0.55	0.58	0.59	0.60
-110	1.59	1.35	1.13	0.94	0.76	0.59	0.42	0.37	0.38	0.38	0.38	0.38	0.39	0.41	0.43	0.44	0.45	0.46	0.46
-100	1.59	1.35	1.14	0.92	0.72	0.53	0.34	0.32	0.32	0.32	0.31	0.31	0.30	0.31	0.32	0.33	0.34	0.35	0.36
-90	1.59	1.37	1.15	0.94	0.72	0.50	0.28	0.28	0.28	0.28	0.27	0.27	0.27	0.27	0.28	0.28	0.28	0.29	0.29
-80	1.59	1.40	1.19	0.98	0.77	0.57	0.37	0.44	0.52	0.61	0.70	0.79	0.86	0.96	1.05	1.14	1.22	1.29	1.33
-70	1.59	1.43	1.25	1.15	1.15	1.20	1.27	1.62	2.13	2.63	3.12	3.55	3.93	4.40	4.93	5.42	5.85	6.18	6.42
-60	1.59	1.46	1.41	1.62	2.00	2.61	3.32	4.06	5.07	6.10	7.21	8.35	9.47	10.7	12.3	13.7	15.0	16.0	16.7
-50	1.59	1.51	1.70	2.29	3.34	4.68	5.95	7.13	8.86	11.1	13.7	16.7	20.0	23.4	27.6	32.1	36.2	39.6	41.7
-40	1.59	1.57	2.04	3.21	4.98	6.95	8.91	11.2	14.2	18.7	24.8	32.0	40.6	50.7	62.3	76.2	88.6	98.1	104
-30	1.59	1.65	2.40	4.10	6.63	9.19	12.1	16.0	21.7	29.9	41.0	56.4	76.7	102	132	163	184	198	203
-20	1.59	1.72	2.75	4.99	8.07	11.3	15.2	20.9	29.8	43.2	62.2	87.0	119	159	201	236	260	266	267
-10	1.59	1.79	3.06	5.71	9.21	12.9	17.8	25.0	36.8	55.6	81.2	112	149	192	230	258	282	294	294
0	1.59	1.85	3.25	6.13	9.94	14.0	19.3	27.2	40.5	62.0	89.5	119	154	189	222	244	266	283	286
10	1.59	1.84	3.14	5.84	9.44	13.3	18.2	25.5	37.1	54.9	78.5	106	137	171	200	219	235	244	248
20	1.59	1.81	2.92	5.25	8.51	11.9	16.0	21.9	30.7	43.1	59.4	79.6	104	133	162	184	197	203	204
30	1.59	1.77	2.65	4.45	7.22	10.1	13.3	17.4	23.3	31.2	40.7	53.1	68.7	87.3	108	128	142	150	153
40	1.59	1.73	2.36	3.68	5.67	7.98	10.3	13.0	16.3	20.8	26.5	32.9	40.1	48.0	56.4	65.8	74.1	80.2	83.3
50	1.59	1.69	2.08	2.87	4.07	5.74	7.41	9.02	11.0	13.3	16.0	18.9	22.0	25.1	28.5	31.9	34.9	37.1	38.4
60	1.59	1.66	1.84	2.26	2.88	3.64	4.66	5.77	6.98	8.16	9.37	10.6	11.9	13.1	14.5	15.7	16.8	17.6	18.1
70	1.59	1.64	1.71	1.85	2.08	2.37	2.70	3.10	3.63	4.28	4.92	5.49	6.01	6.53	7.05	7.50	7.89	8.18	8.38
80	1.59	1.62	1.65	1.67	1.73	1.79	1.84	1.91	1.99	2.09	2.20	2.32	2.43	2.54	2.64	2.72	2.78	2.82	2.84
90	1.59	1.59	1.59	1.60	1.60	1.60	1.60	1.59	1.58	1.57	1.56	1.55	1.54	1.55	1.56	1.56	1.57	1.58	1.59
100	1.59	1.57	1.56	1.54	1.52	1.51	1.51	1.48	1.47	1.46	1.45	1.44	1.43	1.43	1.43	1.43	1.43	1.43	1.43
110	1.59	1.55	1.51	1.50	1.49	1.47	1.46	1.46	1.45	1.45	1.45	1.46	1.47	1.47	1.48	1.48	1.48	1.48	1.47
120	1.59	1.53	1.50	1.48	1.47	1.46	1.46	1.46	1.47	1.51	1.54	1.59	1.63	1.66	1.68	1.71	1.72	1.72	1.72
130	1.59	1.52	1.49	1.47	1.47	1.47	1.48	1.51	1.58	1.68	1.74	1.80	1.87	1.93	1.98	2.02	2.05	2.06	2.06
140	1.59	1.51	1.48	1.47	1.47	1.49	1.54	1.64	1.74	1.83	1.92	2.02	2.11	2.21	2.29	2.34	2.38	2.39	2.39
150	1.59	1.50	1.48	1.48	1.49	1.54	1.63	1.74	1.86	1.97	2.08	2.20	2.32	2.41	2.50	2.56	2.59	2.60	2.59
160	1.59	1.49	1.48	1.48	1.51	1.59	1.70	1.82	1.94	2.08	2.21	2.33	2.44	2.52	2.61	2.67	2.71	2.73	2.73
170	1.59	1.49	1.48	1.48	1.53	1.62	1.74	1.87	2.01	2.16	2.31	2.44	2.54	2.62	2.67	2.73	2.78	2.80	2.79
180	1.59	1.49	1.48	1.48	1.55	1.63	1.74	1.88	2.03	2.19	2.34	2.50	2.62	2.72	2.79	2.80	2.79	2.79	2.78

H_b Range:-90 - 90DEGH_b Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-10-08

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Max-598mm-RGBW DS-3000K-60D-Rev1	TYPE:RGBW DS-3000K	WEIGHT:
SPEC.:60 DEG	DIM.:598MM	SERIAL No.:IES001833
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	2.58	2.39	2.17	1.95	1.72	1.50	1.29	1.06	0.88	0.74	0.63	0.52	0.44	0.38	0.34	0.32	0.29	0.30
-170	2.27	2.17	2.02	1.82	1.62	1.43	1.24	1.04	0.88	0.75	0.63	0.52	0.45	0.39	0.35	0.32	0.29	0.30
-160	1.81	1.73	1.64	1.53	1.41	1.27	1.12	0.97	0.84	0.72	0.61	0.52	0.45	0.39	0.35	0.31	0.30	0.30
-150	1.39	1.35	1.30	1.22	1.14	1.05	0.96	0.86	0.76	0.66	0.58	0.50	0.44	0.38	0.35	0.32	0.30	0.30
-140	1.06	1.03	0.99	0.93	0.88	0.82	0.77	0.71	0.66	0.60	0.53	0.47	0.41	0.37	0.35	0.31	0.30	0.30
-130	0.79	0.76	0.74	0.70	0.66	0.64	0.61	0.58	0.55	0.51	0.48	0.43	0.39	0.37	0.33	0.31	0.30	0.30
-120	0.59	0.58	0.56	0.53	0.50	0.50	0.48	0.47	0.45	0.44	0.42	0.40	0.37	0.35	0.32	0.31	0.30	0.30
-110	0.46	0.44	0.43	0.42	0.40	0.39	0.38	0.38	0.37	0.37	0.37	0.37	0.35	0.33	0.32	0.31	0.30	0.30
-100	0.35	0.35	0.34	0.33	0.33	0.33	0.33	0.33	0.34	0.34	0.34	0.34	0.33	0.32	0.32	0.31	0.30	0.30
-90	0.29	0.30	0.30	0.31	0.31	0.32	0.32	0.32	0.33	0.33	0.33	0.33	0.33	0.32	0.32	0.31	0.30	0.30
-80	1.33	1.31	1.26	1.20	1.14	1.07	1.02	0.94	0.86	0.77	0.67	0.59	0.54	0.48	0.44	0.39	0.31	0.30
-70	6.37	6.21	5.95	5.59	5.17	4.72	4.32	3.83	3.31	2.76	2.21	1.75	1.41	1.08	0.78	0.54	0.39	0.30
-60	16.5	16.0	15.2	14.1	12.8	11.6	10.3	9.06	7.77	6.49	5.23	4.13	3.02	2.08	1.39	0.82	0.47	0.30
-50	41.2	39.3	36.3	32.5	28.5	24.8	21.0	17.5	14.3	11.5	9.17	7.24	5.40	3.61	2.14	1.19	0.55	0.30
-40	102	95.6	86.4	74.7	62.6	51.2	41.0	32.2	24.6	18.5	14.0	10.7	7.97	5.44	3.09	1.60	0.64	0.30
-30	199	187	170	146	119	94.4	72.1	53.8	39.2	27.7	19.6	14.3	10.4	7.17	4.16	1.98	0.73	0.30
-20	259	247	228	204	175	141	108	78.9	55.1	37.4	25.3	17.6	12.6	8.67	5.11	2.30	0.83	0.30
-10	281	260	239	219	198	169	133	99.4	69.2	45.4	29.7	20.1	14.2	9.77	5.80	2.55	0.90	0.30
0	275	256	234	215	195	171	140	107	75.6	48.8	31.4	21.3	15.0	10.4	6.16	2.67	0.93	0.30
10	241	232	220	204	185	158	125	95.1	67.4	45.1	29.9	20.5	14.5	10.0	5.97	2.64	0.94	0.30
20	201	194	186	172	151	123	96.9	73.4	53.3	37.4	25.9	18.4	13.2	9.15	5.42	2.48	0.91	0.30
30	151	144	132	118	100	82.0	65.1	51.0	38.9	28.7	20.9	15.5	11.4	7.84	4.58	2.24	0.86	0.30
40	82.6	78.8	72.4	64.2	55.9	47.6	39.9	32.7	26.1	20.4	15.8	12.2	9.11	6.25	3.61	1.93	0.80	0.30
50	38.2	37.0	34.8	31.9	28.9	25.9	22.7	19.4	16.5	13.8	11.2	8.86	6.62	4.47	2.75	1.58	0.74	0.30
60	18.1	17.7	17.1	16.2	15.1	13.9	12.7	11.4	9.97	8.59	7.16	5.71	4.22	3.00	2.05	1.26	0.69	0.30
70	8.40	8.31	8.10	7.79	7.37	6.87	6.36	5.83	5.19	4.49	3.83	3.24	2.62	2.03	1.50	1.01	0.62	0.30
80	2.87	2.89	2.87	2.84	2.78	2.69	2.59	2.49	2.38	2.28	2.19	2.08	1.78	1.47	1.17	0.87	0.55	0.30
90	1.59	1.59	1.60	1.60	1.60	1.61	1.63	1.64	1.66	1.68	1.70	1.72	1.48	1.24	1.01	0.77	0.53	0.30
100	1.43	1.43	1.43	1.44	1.44	1.44	1.45	1.47	1.48	1.51	1.54	1.55	1.36	1.16	0.95	0.74	0.52	0.30
110	1.47	1.48	1.48	1.48	1.48	1.48	1.47	1.46	1.46	1.46	1.48	1.43	1.25	1.07	0.89	0.71	0.51	0.30
120	1.73	1.72	1.71	1.69	1.67	1.63	1.59	1.55	1.50	1.48	1.47	1.34	1.17	1.00	0.83	0.66	0.49	0.30
130	2.07	2.06	2.03	1.99	1.94	1.87	1.79	1.71	1.64	1.57	1.44	1.25	1.08	0.93	0.77	0.61	0.46	0.30
140	2.39	2.38	2.35	2.30	2.22	2.12	2.02	1.91	1.80	1.63	1.38	1.17	0.98	0.84	0.71	0.56	0.43	0.30
150	2.61	2.60	2.57	2.51	2.43	2.32	2.21	2.08	1.82	1.54	1.28	1.06	0.89	0.74	0.63	0.51	0.40	0.30
160	2.73	2.72	2.68	2.63	2.55	2.44	2.17	1.87	1.60	1.35	1.12	0.92	0.76	0.63	0.54	0.44	0.37	0.30
170	2.77	2.76	2.73	2.56	2.31	2.05	1.79	1.52	1.28	1.08	0.90	0.73	0.62	0.51	0.44	0.38	0.33	0.30
180	2.58	2.39	2.17	1.95	1.72	1.50	1.29	1.06	0.88	0.74	0.63	0.52	0.44	0.38	0.34	0.32	0.29	0.30

H_(b) Range: -90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-10-08

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: