

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	1054.1 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	--

Beam Spread	At 10% of Imax	95.7V x 99.1H
	At 50% of Imax	54.1V x 58.0H
	At 90% of Imax	22.3V x 27.5H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	872.4 lumens per klm.
	To 50% of Imax	527.2 lumens per klm.
	To 90% of Imax	115.4 lumens per klm.

Upward LOR	2.3 %
Downward LOR	97.7 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-08

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Blazeline Max-598mm-RGBW DS-GREEN-60D-Rev1	TYPE:RGBW DS-GREEN	WEIGHT:
SPEC.:60 DEG	DIM.:598MM	SERIAL No.:IES001831
MFR.:	SUR.:	Shielding Angle:

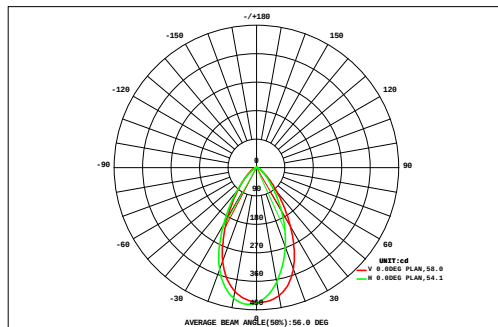

DATA OF LAMP		Eff:72.32lm/W	
MODEL		Imax(cd)	433.0
NOMINAL POWER(W)	6.72	AVAILABILITY(%)	87.2
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	358.2
NOMINAL FLUX(lm)	410.8	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	410.8
TEST VOLTAGE(V)	220	q @50%(H,V)	58,54DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		F t	F a
	0.02	0.03	0.05	0.07	0.10	0.12	0.15	0.16	0.18	0.18	0.17	0.15	0.13	0.08	0.04	0.02	0.02	0.02	1.66	0.00
72	0.02	0.03	0.05	0.07	0.10	0.12	0.15	0.16	0.18	0.18	0.17	0.15	0.13	0.08	0.04	0.02	0.02	0.02	1.66	0.00
64	0.02	0.04	0.08	0.12	0.17	0.21	0.26	0.30	0.32	0.32	0.31	0.27	0.23	0.17	0.09	0.02	0.01	0.01	2.95	0.00
56	0.03	0.07	0.11	0.18	0.26	0.35	0.44	0.52	0.57	0.58	0.55	0.48	0.36	0.27	0.19	0.09	0.02	0.01	5.08	0.00
48	0.04	0.09	0.16	0.26	0.40	0.57	0.76	0.95	1.06	1.09	1.03	0.86	0.57	0.32	0.23	0.16	0.06	0.02	8.63	4.61
40	0.05	0.11	0.21	0.36	0.60	0.93	1.32	1.72	1.97	2.04	1.91	1.54	1.10	0.53	0.22	0.19	0.10	0.02	14.9	12.8
32	0.06	0.14	0.27	0.50	0.88	1.46	2.21	2.92	3.40	3.54	3.26	1.99	1.44	1.06	0.35	0.20	0.12	0.04	23.8	22.2
24	0.07	0.16	0.33	0.66	1.23	2.15	3.35	4.38	5.06	5.28	4.89	2.51	0.63	1.35	0.67	0.25	0.14	0.05	33.1	31.4
	0.08	0.18	0.39	0.81	1.60	2.90	4.49	5.83	6.62	6.80	5.80	4.90	1.40	1.40	0.89	0.32	0.15	0.05	44.6	43.2
	0.08	0.20	0.42	0.93	1.88	3.48	5.42	6.92	7.77	6.81	5.57	5.98	3.46	1.93	1.01	0.39	0.16	0.06	52.5	51.3
	0.08	0.19	0.39	0.92	1.84	3.31	5.82	4.31	5.94	8.25	7.55	6.10	4.07	2.21	1.01	0.41	0.16	0.06	52.6	51.4
	0.08	0.18	0.29	0.76	1.56	2.36	5.11	6.29	7.67	7.75	6.93	5.48	3.60	1.96	0.91	0.38	0.15	0.06	51.5	50.3
-24	0.07	0.16	0.21	0.47	1.30	1.82	3.48	5.74	6.54	6.47	5.65	4.34	2.82	1.55	0.74	0.32	0.13	0.05	41.9	40.6
-32	0.05	0.13	0.17	0.14	0.84	1.64	2.63	3.93	4.55	4.54	3.94	2.97	1.92	1.09	0.55	0.25	0.11	0.04	29.5	28.2
-40	0.04	0.10	0.18	0.09	0.31	1.02	1.66	2.25	2.62	2.63	2.29	1.73	1.16	0.69	0.38	0.19	0.09	0.04	17.5	15.7
-48	0.03	0.06	0.14	0.20	0.22	0.49	0.88	1.15	1.32	1.32	1.17	0.91	0.64	0.41	0.24	0.13	0.06	0.03	9.42	6.40
-56	0.02	0.04	0.08	0.15	0.23	0.32	0.46	0.56	0.63	0.63	0.56	0.46	0.34	0.24	0.15	0.08	0.05	0.02	5.03	0.16
-64	0.02	0.02	0.04	0.08	0.13	0.19	0.24	0.28	0.30	0.30	0.28	0.23	0.18	0.13	0.09	0.05	0.03	0.01	2.59	0.00
-72	0.01	0.01	0.02	0.04	0.06	0.09	0.11	0.13	0.14	0.14	0.13	0.11	0.09	0.07	0.05	0.03	0.02	0.01	1.26	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)	16	24	32	40	48	56	64	72			
F t	0.86	1.92	3.53	6.73	13.6	23.4	38.8	48.3	56.7	58.7	52.0	41.0	24.1	15.5	7.79	3.47	1.54	0.60	399	---
F a	0.00	0.00	0.09	4.03	11.3	21.0	36.5	46.1	54.5	56.5	49.8	38.8	21.4	13.1	5.09	0.13	0.00	0.00	---	358

one-half-peak spread: U:26.2,D:28.2 , L:30.0,R:28.3


NEMA Beam Type: Type 5

$H(b)$ Range: -90 - 90DEG
 $H(b)$ Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-10-08

$V(B)$ Range: -180 - 180DEG
 $V(B)$ Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:Blazeline Max-598mm-RGBW DS-GREEN-60D-Rev1	TYPE:RGBW DS-GREEN	WEIGHT:
SPEC.:60 DEG	DIM.:598MM	SERIAL No.:IES001831
MFR.:	SUR.:	Shielding Angle:

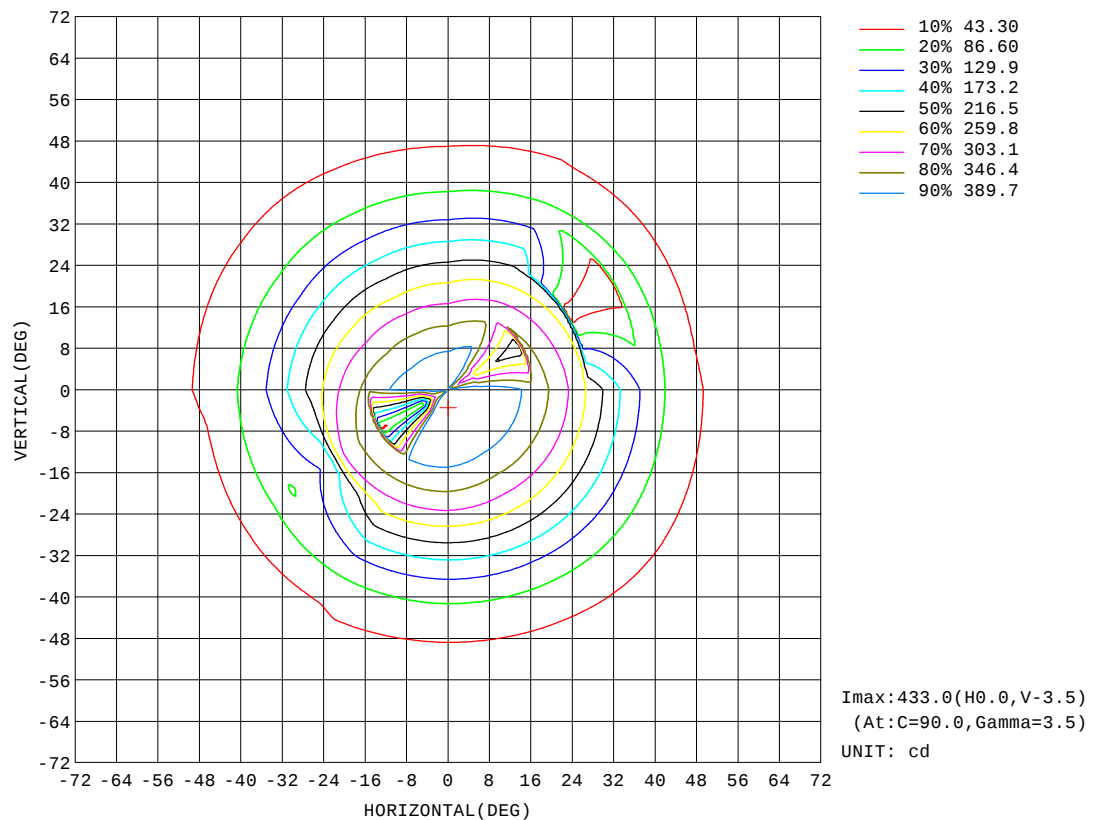


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-08

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Blazeline Max-598mm-RGBW DS-GREEN-60D-Rev1	TYPE:RGBW DS-GREEN	WEIGHT:
SPEC.:60 DEG	DIM.:598MM	SERIAL No.:IES001831
MFR.:	SUR.:	Shielding Angle:

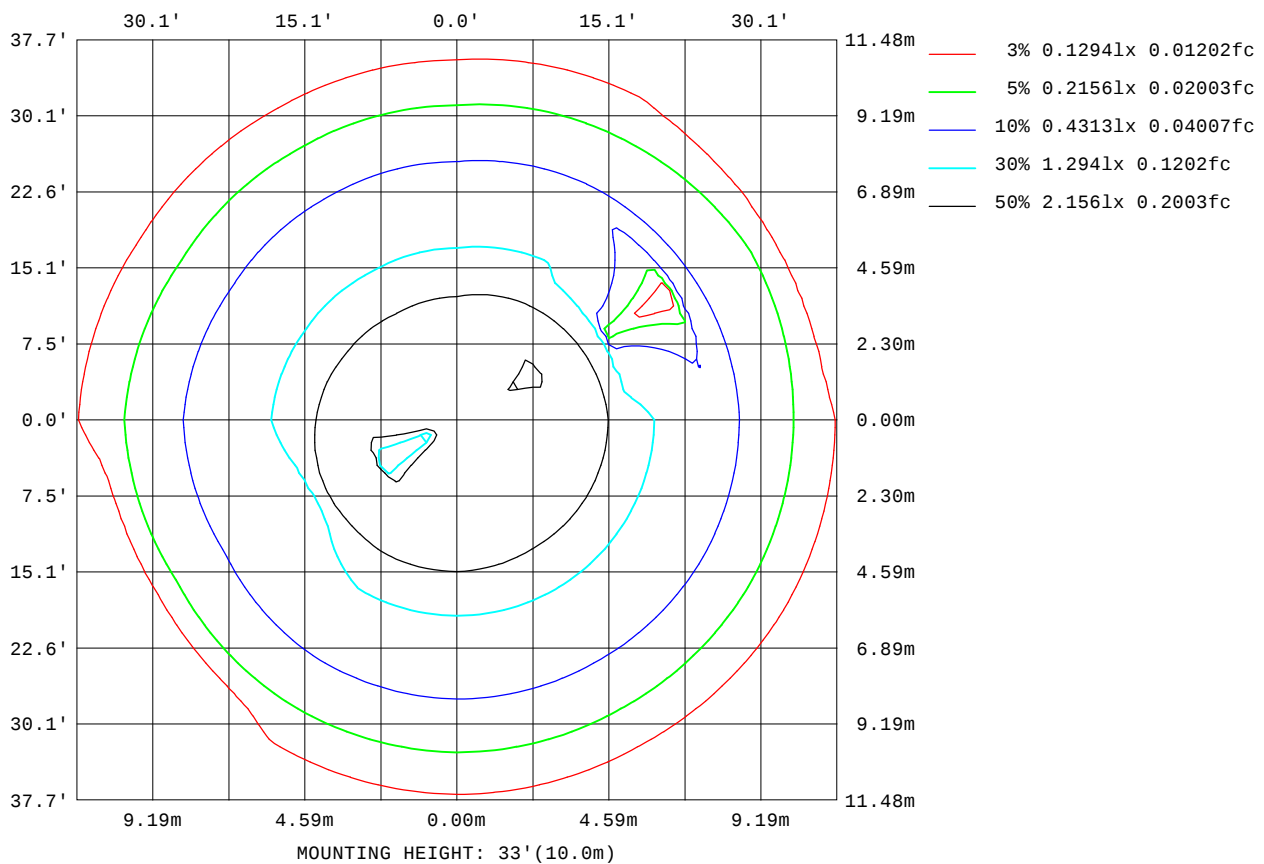

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-08

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

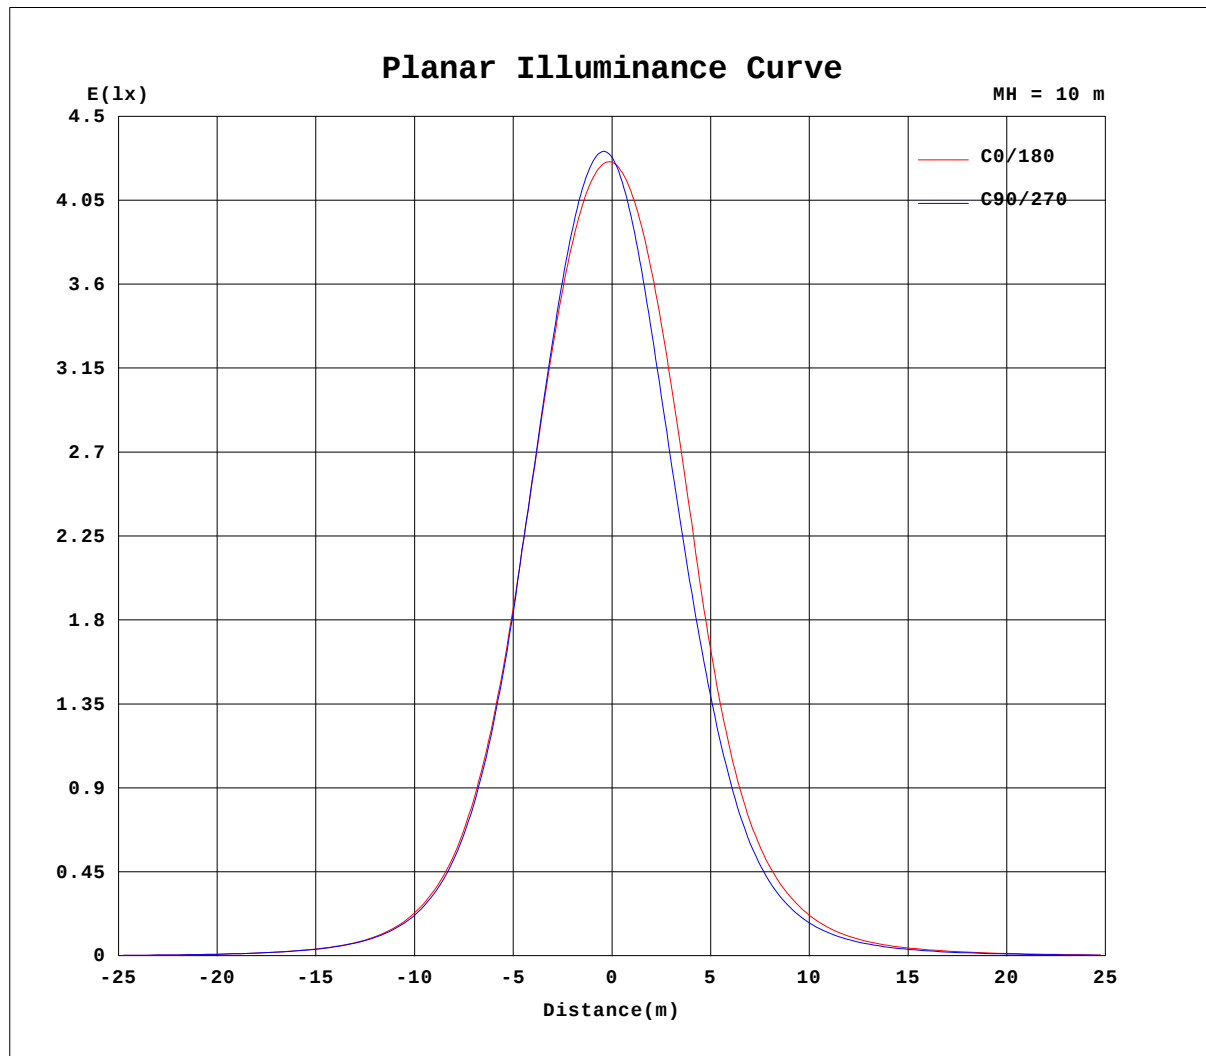


H(b) Range: -90 - 90DEG
H(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-10-08

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Blazeline Max-598mm-RGBW DS-GREEN-60D-Rev1	TYPE:RGBW DS-GREEN	WEIGHT:
SPEC.:60 DEG	DIM.:598MM	SERIAL No.:IES001831
MFR.:	SUR.:	Shielding Angle:

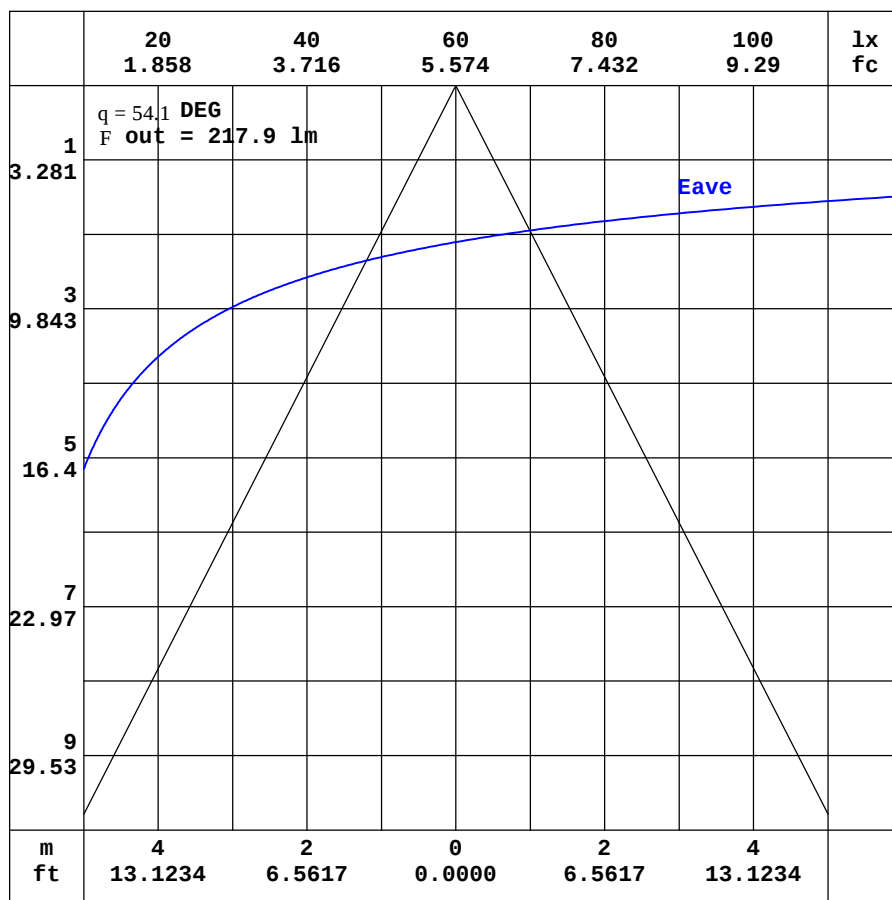

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-08

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Max-598mm-RGBW DS-GREEN-60D-Rev1	TYPE:RGBW DS-GREEN	WEIGHT:
SPEC.:60 DEG	DIM.:598MM	SERIAL No.:IES001831
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	1.80	1.69	1.64	1.66	1.71	1.83	1.99	2.18	2.39	2.61	2.80	2.99	3.13	3.22	3.22	3.21	3.18	3.12	3.03
-170	1.80	1.65	1.58	1.57	1.55	1.59	1.67	1.81	1.91	1.74	1.71	2.33	2.20	1.68	1.87	1.81	1.23	2.49	2.57
-160	1.80	1.60	1.52	1.47	1.45	1.35	1.34	1.44	1.45	0.93	0.72	1.40	1.64	1.57	1.36	1.78	1.98	2.04	2.08
-150	1.80	1.56	1.39	1.39	1.32	1.13	1.05	1.01	1.02	0.91	0.05	0.24	0.50	1.46	1.55	1.64	1.68	1.67	1.62
-140	1.80	1.53	1.29	1.31	1.22	1.12	0.80	0.64	0.47	0.66	0.74	0.81	0.61	0.88	1.16	1.22	1.27	1.30	1.31
-130	1.80	1.50	1.24	1.23	1.11	1.00	0.87	0.42	0.37	0.44	0.53	0.71	0.78	0.85	0.88	0.91	0.93	0.94	0.95
-120	1.80	1.48	1.20	0.93	1.03	0.89	0.76	0.65	0.65	0.44	0.50	0.57	0.65	0.70	0.70	0.71	0.71	0.71	0.71
-110	1.80	1.48	1.18	0.89	0.62	0.35	0.64	0.60	0.61	0.60	0.60	0.59	0.60	0.59	0.60	0.60	0.59	0.59	0.58
-100	1.80	1.48	1.18	0.88	0.59	0.30	0.02	0.08	0.16	0.25	0.33	0.42	0.51	0.52	0.51	0.51	0.50	0.50	0.49
-90	1.80	1.50	1.20	0.90	0.60	0.30	0.00	0.08	0.17	0.25	0.33	0.41	0.50	0.48	0.46	0.44	0.43	0.41	0.39
-80	1.80	1.53	1.30	1.09	0.85	0.61	0.37	0.46	0.57	0.68	0.79	0.88	0.96	1.03	1.09	1.15	1.19	1.22	1.24
-70	1.80	1.59	1.42	1.30	1.24	1.27	1.27	1.61	1.53	2.03	2.62	3.26	3.95	4.50	4.94	5.29	5.57	5.76	5.85
-60	1.80	1.66	1.60	1.77	2.12	2.22	2.22	2.55	3.57	4.76	6.94	8.84	10.1	11.4	12.7	13.7	14.6	15.2	15.4
-50	1.80	1.72	1.89	2.50	2.91	3.60	4.32	4.78	9.24	11.7	14.6	17.8	16.8	24.1	29.0	32.6	35.7	37.9	38.8
-40	1.80	1.80	2.28	3.26	4.20	5.66	8.18	11.7	15.0	14.0	8.55	16.3	28.1	53.4	65.9	77.6	87.4	94.5	97.5
-30	1.80	1.89	2.71	3.87	5.76	7.99	12.5	16.8	8.11	6.98	5.86	57.2	77.9	104	128	167	191	206	211
-20	1.80	1.98	3.06	4.67	7.27	11.4	15.8	20.8	17.1	20.5	62.3	87.3	83.6	125	182	275	318	338	343
-10	1.80	2.06	3.33	5.34	8.62	13.2	18.5	21.3	29.3	55.6	81.6	111	135	171	314	366	211	415	420
0	1.80	2.12	3.52	5.81	9.58	14.3	20.0	28.2	41.3	62.0	91.1	131	186	249	315	363	397	417	426
10	1.80	2.11	3.43	5.58	9.09	13.4	18.8	26.2	37.6	55.0	79.4	113	158	210	261	303	336	357	367
20	1.80	2.08	3.26	5.11	8.14	11.9	16.4	22.3	30.9	43.1	59.8	81.7	110	146	183	215	239	259	266
30	1.80	2.04	3.00	4.46	6.89	9.95	13.5	17.7	23.3	30.8	40.4	53.0	68.5	86.6	106	125	142	153	158
40	1.80	1.98	2.65	3.79	5.40	7.72	10.3	13.1	16.4	20.7	26.0	32.2	39.1	46.6	54.2	62.2	68.7	73.3	75.0
50	1.80	1.94	2.34	3.16	4.11	5.48	7.23	9.02	11.1	13.4	16.0	18.7	21.6	24.4	27.3	30.0	32.2	33.5	34.0
60	1.80	1.90	2.12	2.53	3.12	3.73	4.51	5.62	6.87	8.13	9.39	10.6	11.9	13.0	14.1	15.0	15.7	16.2	16.3
70	1.80	1.87	1.97	2.13	2.35	2.63	2.90	3.23	3.65	4.16	4.73	5.33	5.86	6.32	6.75	7.10	7.36	7.53	7.60
80	1.80	1.84	1.89	1.93	1.99	2.06	2.13	2.17	2.23	2.29	2.36	2.43	2.50	2.58	2.65	2.71	2.76	2.79	2.80
90	1.80	1.81	1.83	1.84	1.85	1.86	1.87	1.86	1.84	1.82	1.80	1.78	1.77	1.77	1.76	1.76	1.76	1.76	1.76
100	1.80	1.79	1.77	1.77	1.76	1.76	1.75	1.72	1.70	1.67	1.65	1.63	1.61	1.61	1.60	1.60	1.59	1.59	1.58
110	1.80	1.76	1.74	1.72	1.70	1.69	1.68	1.65	1.64	1.63	1.63	1.65	1.65	1.66	1.65	1.64	1.63	1.63	1.62
120	1.80	1.74	1.71	1.67	1.67	1.65	1.65	1.69	1.73	1.76	1.79	1.82	1.86	1.91	1.94	1.96	1.97	1.96	1.94
130	1.80	1.73	1.68	1.66	1.65	1.66	1.73	1.81	1.85	1.95	2.05	2.14	2.23	2.31	2.37	2.41	2.41	2.43	2.42
140	1.80	1.72	1.66	1.65	1.65	1.73	1.81	1.92	2.05	2.20	2.35	2.49	2.64	2.76	2.88	2.92	2.95	2.95	2.94
150	1.80	1.71	1.65	1.65	1.69	1.77	1.89	2.04	2.22	2.44	2.65	2.81	2.96	3.08	3.18	3.22	3.21	3.22	3.22
160	1.80	1.70	1.65	1.65	1.71	1.81	1.95	2.13	2.36	2.58	2.79	2.99	3.14	3.12	3.16	3.20	3.21	3.23	3.27
170	1.80	1.70	1.65	1.66	1.72	1.83	1.99	2.18	2.41	2.63	2.84	3.03	3.10	3.15	3.16	3.16	3.15	3.12	3.19
180	1.80	1.69	1.64	1.66	1.71	1.83	1.99	2.18	2.39	2.61	2.80	2.99	3.13	3.22	3.22	3.21	3.18	3.12	3.07

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-10-08

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Max-598mm-RGBW DS-GREEN-60D-Rev1	TYPE:RGBW DS-GREEN	WEIGHT:
SPEC.:60 DEG	DIM.:598MM	SERIAL No.:IES001831
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	2.79	2.56	2.34	2.13	1.90	1.67	1.45	1.24	1.06	0.89	0.75	0.63	0.55	0.50	0.44	0.42	0.36	0.36
-170	2.45	2.34	2.20	2.01	1.80	1.59	1.39	1.19	1.01	0.87	0.73	0.63	0.55	0.50	0.44	0.42	0.37	0.36
-160	2.03	1.93	1.83	1.71	1.55	1.40	1.24	1.07	0.93	0.80	0.70	0.61	0.54	0.49	0.45	0.42	0.36	0.36
-150	1.59	1.53	1.43	1.33	1.24	1.13	1.02	0.92	0.82	0.72	0.64	0.58	0.53	0.48	0.44	0.41	0.36	0.36
-140	1.25	1.17	1.09	0.99	0.93	0.88	0.81	0.76	0.70	0.65	0.59	0.54	0.50	0.46	0.43	0.40	0.36	0.36
-130	0.91	0.86	0.80	0.74	0.70	0.66	0.65	0.62	0.60	0.57	0.55	0.51	0.48	0.45	0.43	0.38	0.36	0.36
-120	0.68	0.65	0.62	0.59	0.57	0.54	0.54	0.53	0.52	0.51	0.50	0.48	0.45	0.43	0.40	0.38	0.36	0.36
-110	0.56	0.54	0.52	0.50	0.48	0.46	0.46	0.46	0.46	0.46	0.45	0.44	0.43	0.40	0.38	0.37	0.36	0.36
-100	0.47	0.46	0.45	0.43	0.42	0.41	0.40	0.40	0.40	0.40	0.40	0.40	0.39	0.38	0.37	0.37	0.36	0.36
-90	0.39	0.38	0.37	0.37	0.36	0.35	0.35	0.35	0.36	0.36	0.36	0.36	0.36	0.36	0.36	0.36	0.36	0.36
-80	1.21	1.18	1.12	1.06	0.99	0.92	0.87	0.81	0.74	0.67	0.58	0.49	0.44	0.41	0.39	0.37	0.36	0.36
-70	5.74	5.54	5.24	4.87	4.43	3.95	3.48	3.01	2.56	2.13	1.72	1.36	1.12	0.85	0.58	0.44	0.37	0.36
-60	15.1	14.5	13.6	12.5	11.2	9.87	8.53	7.16	5.92	4.80	3.80	2.97	2.23	1.59	1.09	0.59	0.40	0.36
-50	38.0	36.0	32.9	29.2	25.2	21.4	17.8	14.5	11.4	8.66	6.49	5.03	3.71	2.56	1.63	0.88	0.44	0.36
-40	95.4	89.1	79.8	68.2	56.6	45.4	35.4	26.9	20.1	14.7	10.5	7.40	5.37	3.64	2.25	1.23	0.50	0.36
-30	206	192	170	143	115	88.3	65.3	46.7	32.6	22.4	15.2	10.2	6.97	4.72	2.84	1.50	0.56	0.36
-20	332	310	279	238	192	145	104	71.4	47.2	30.7	20.1	12.9	8.43	5.65	3.37	1.73	0.60	0.36
-10	409	389	357	313	255	195	139	93.0	60.1	37.6	23.8	14.9	9.47	6.30	3.73	1.91	0.63	0.36
0	424	411	385	341	281	215	153	102	65.6	40.5	25.2	15.7	9.91	6.63	3.91	2.00	0.64	0.36
10	376	269	340	296	153	96.1	80.3	91.2	60.9	32.5	21.4	15.4	9.86	5.77	3.52	2.03	0.68	0.36
20	274	267	245	99.1	47.3	15.4	97.5	71.4	32.8	23.0	16.4	13.8	9.20	4.71	2.98	1.96	0.69	0.36
30	161	156	144	101	102	82.3	65.4	23.8	18.7	15.1	17.0	11.5	7.89	3.56	2.37	1.81	0.69	0.36
40	76.4	74.5	69.6	62.5	54.4	35.3	25.3	17.9	12.6	17.4	12.5	9.14	3.12	2.50	1.78	1.61	0.67	0.36
50	34.4	33.8	32.3	29.8	26.2	20.8	17.7	17.2	14.0	11.2	8.86	1.86	1.88	1.62	2.39	1.31	0.64	0.36
60	16.4	16.1	15.5	14.7	13.8	12.4	11.0	9.66	3.87	2.07	0.88	0.88	1.01	2.75	1.85	1.07	0.62	0.36
70	7.59	7.49	7.28	6.98	6.57	5.79	4.45	3.26	2.22	1.36	0.69	3.25	2.55	1.91	1.35	0.93	0.60	0.36
80	2.82	2.83	2.82	2.79	2.73	2.67	2.61	2.53	2.44	2.34	2.22	2.09	1.76	1.44	1.13	0.85	0.60	0.36
90	1.77	1.77	1.77	1.77	1.78	1.78	1.66	1.54	1.42	1.30	1.18	1.06	0.94	0.83	0.71	0.59	0.48	0.36
100	1.59	1.59	1.60	1.60	1.60	1.60	1.48	1.36	1.24	1.13	1.03	0.91	0.83	0.74	0.65	0.56	0.46	0.36
110	1.63	1.63	1.64	1.64	1.64	1.63	1.62	1.61	1.60	1.60	1.60	0.86	0.78	0.70	0.63	0.54	0.46	0.36
120	1.95	1.94	1.92	1.90	1.87	1.61	1.29	0.97	1.30	1.63	1.60	1.46	1.28	0.69	0.61	0.53	0.45	0.36
130	2.42	2.39	2.35	2.30	2.21	2.07	1.92	0.88	0.55	0.27	0.15	1.39	1.20	1.03	0.60	0.51	0.43	0.36
140	2.93	2.91	2.87	2.78	2.38	2.26	2.15	1.97	1.82	0.15	0.20	0.25	1.12	0.95	0.80	0.50	0.42	0.36
150	3.22	3.21	3.17	3.08	2.96	2.05	1.70	1.91	1.81	1.55	0.30	0.32	0.34	0.86	0.72	0.48	0.41	0.36
160	3.24	3.23	2.43	1.57	3.07	2.95	1.55	1.38	1.49	1.40	1.19	0.42	0.41	0.75	0.64	0.47	0.39	0.36
170	3.12	2.45	2.60	2.45	0.76	2.40	2.11	1.34	1.16	1.18	0.99	0.53	0.48	0.63	0.54	0.45	0.38	0.36
180	2.79	2.56	2.34	2.13	1.90	1.67	1.45	1.24	1.06	0.89	0.75	0.63	0.55	0.50	0.44	0.42	0.36	0.36

H_b Range: -90 - 90DEGH_b Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-10-08

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: