

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		1032.6 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	96.7V x 96.6H
	At 50% of Imax	55.6V x 51.9H
	At 90% of Imax	22.9V x 21.5H
Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	869.3 lumens per klm.
	To 50% of Imax	518.2 lumens per klm.
	To 90% of Imax	114.2 lumens per klm.
Upward LOR		2.2 %
Downward LOR		97.8 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(B) Range:-90 - 90DEG
H(B) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:Blazeline Max-598mm-RGBW DS-RED-60D-Rev1	TYPE:RGBW DS-RED	WEIGHT:
SPEC.:60 DEG	DIM.:598MM	SERIAL No.:IES001830
MFR.:	SUR.:	Shielding Angle:

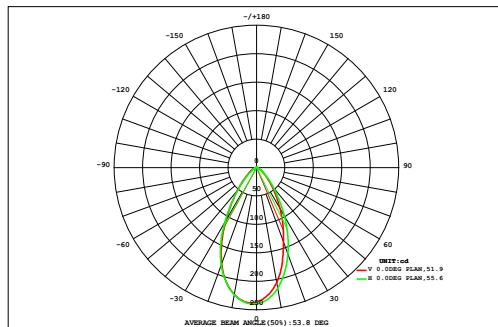

DATA OF LAMP		Eff:32.85lm/W	
MODEL		Imax(cd)	240.8
NOMINAL POWER(W)	5.55	AVAILABILITY(%)	86.9
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	202.5
NOMINAL FLUX(lm)	233.2	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	233.2
TEST VOLTAGE(V)	220	q @50%(H,V)	52,56DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		F t	F a
	0.01	0.02	0.03	0.04	0.06	0.08	0.09	0.10	0.10	0.10	0.10	0.08	0.07	0.05	0.04	0.03	0.02	0.01	1.03	0.00
72	0.01	0.02	0.03	0.04	0.06	0.08	0.09	0.10	0.10	0.10	0.10	0.08	0.07	0.05	0.04	0.03	0.02	0.01	1.03	0.00
64	0.02	0.03	0.05	0.07	0.10	0.13	0.16	0.18	0.19	0.19	0.17	0.15	0.12	0.09	0.07	0.04	0.03	0.01	1.81	0.00
56	0.02	0.04	0.07	0.11	0.16	0.22	0.28	0.33	0.36	0.35	0.31	0.25	0.19	0.14	0.10	0.06	0.03	0.02	3.05	0.00
48	0.03	0.05	0.10	0.16	0.25	0.37	0.50	0.62	0.68	0.65	0.56	0.43	0.31	0.22	0.14	0.08	0.04	0.02	5.22	3.12
40	0.03	0.07	0.13	0.23	0.39	0.61	0.89	1.14	1.26	1.22	1.02	0.75	0.51	0.32	0.19	0.11	0.06	0.02	8.96	7.64
32	0.04	0.08	0.16	0.31	0.57	0.97	1.48	1.94	2.15	2.08	1.74	1.24	0.79	0.46	0.26	0.13	0.06	0.03	14.5	13.5
24	0.04	0.10	0.20	0.40	0.78	1.40	2.19	2.86	3.15	3.03	2.54	1.79	1.10	0.62	0.32	0.16	0.07	0.03	20.8	20.0
	0.05	0.11	0.23	0.49	0.99	1.82	2.83	3.63	4.00	3.85	3.18	2.23	1.39	0.77	0.38	0.18	0.08	0.03	26.2	25.5
	0.05	0.11	0.25	0.54	1.11	2.07	3.20	4.08	4.51	4.34	3.59	2.52	1.58	0.86	0.42	0.18	0.08	0.03	29.5	28.8
	0.05	0.11	0.24	0.54	1.13	2.12	3.28	4.18	4.61	4.42	3.68	2.58	1.61	0.87	0.42	0.18	0.08	0.03	30.1	29.4
	0.05	0.10	0.22	0.49	1.02	1.92	3.03	3.87	4.26	4.08	3.39	2.40	1.47	0.79	0.38	0.17	0.07	0.03	27.7	27.0
	0.04	0.09	0.19	0.40	0.81	1.51	2.39	3.14	3.50	3.38	2.81	1.97	1.18	0.63	0.31	0.15	0.07	0.03	22.6	21.8
-24	0.03	0.08	0.15	0.30	0.57	1.02	1.59	2.14	2.45	2.37	1.96	1.37	0.83	0.46	0.24	0.12	0.06	0.02	15.7	14.8
-32	0.03	0.06	0.11	0.21	0.37	0.61	0.92	1.22	1.40	1.36	1.12	0.79	0.51	0.30	0.17	0.09	0.05	0.02	9.33	8.07
-40	0.02	0.05	0.08	0.14	0.23	0.34	0.48	0.62	0.70	0.68	0.56	0.41	0.28	0.19	0.11	0.06	0.03	0.02	4.99	2.98
-48	0.02	0.03	0.05	0.09	0.13	0.19	0.25	0.30	0.33	0.32	0.28	0.21	0.16	0.11	0.07	0.04	0.02	0.01	2.63	0.00
-56	0.01	0.02	0.03	0.05	0.08	0.10	0.13	0.15	0.16	0.16	0.14	0.11	0.09	0.06	0.04	0.03	0.02	0.01	1.39	0.00
-64	0.01	0.01	0.02	0.03	0.04	0.05	0.06	0.07	0.08	0.07	0.07	0.06	0.04	0.03	0.02	0.01	0.01	0.00	0.68	0.00
-72	0.01	0.01	0.02	0.03	0.04	0.05	0.06	0.07	0.08	0.07	0.07	0.06	0.04	0.03	0.02	0.01	0.01	0.00	0.68	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)	16	24	32	40	48	56	64	72			
F t	0.54	1.16	2.31	4.59	8.79	15.5	23.8	30.6	33.9	32.6	27.2	19.4	12.2	7.00	3.70	1.83	0.88	0.38	226	---
F a	0.00	0.00	0.16	2.89	7.37	14.2	22.5	29.4	32.7	31.4	25.9	18.0	10.8	5.46	1.58	0.00	0.00	0.00	---	203

one-half-peak spread: U:27.7,D:28.2 , L:26.2,R:26.1


NEMA Beam Type: Type 5

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:Blazeline Max-598mm-RGBW DS-RED-60D-Rev1	TYPE:RGBW DS-RED	WEIGHT:
SPEC.:60 DEG	DIM.:598MM	SERIAL No.:IES001830
MFR.:	SUR.:	Shielding Angle:

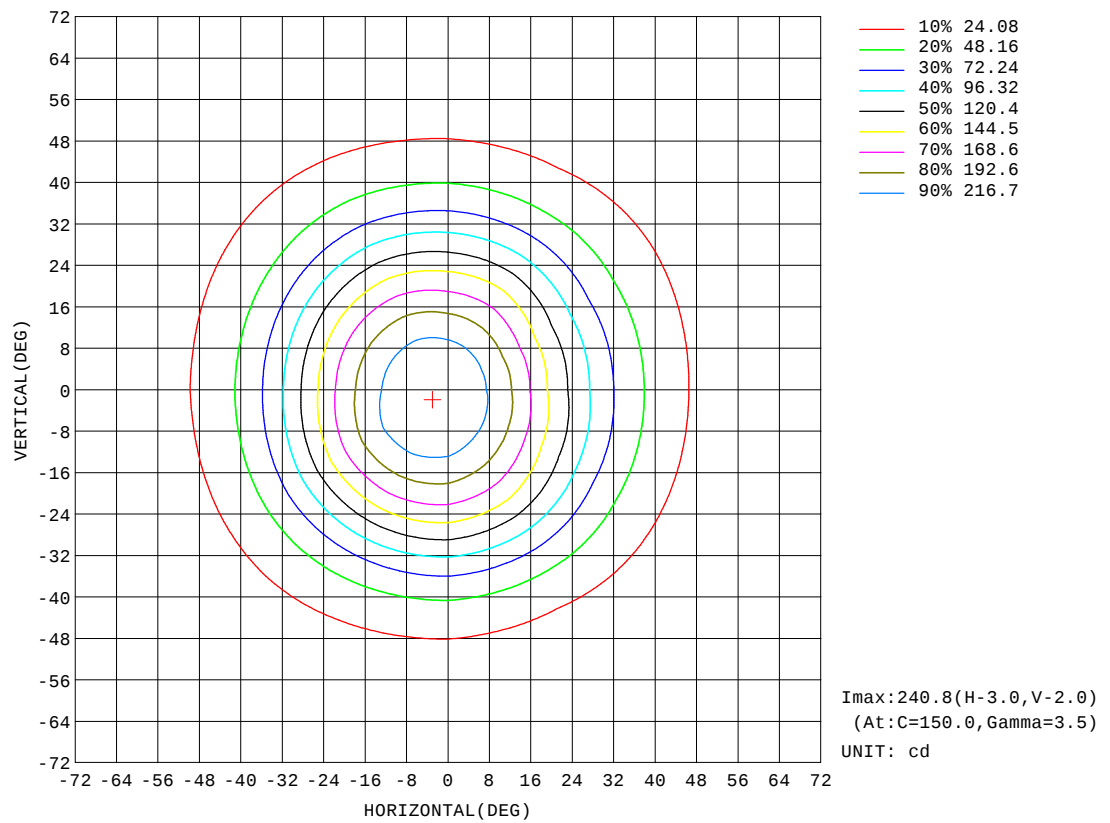


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:Blazeline Max-598mm-RGBW DS-RED-60D-Rev1	TYPE:RGBW DS-RED	WEIGHT:
SPEC.:60 DEG	DIM.:598MM	SERIAL No.:IES001830
MFR.:	SUR.:	Shielding Angle:

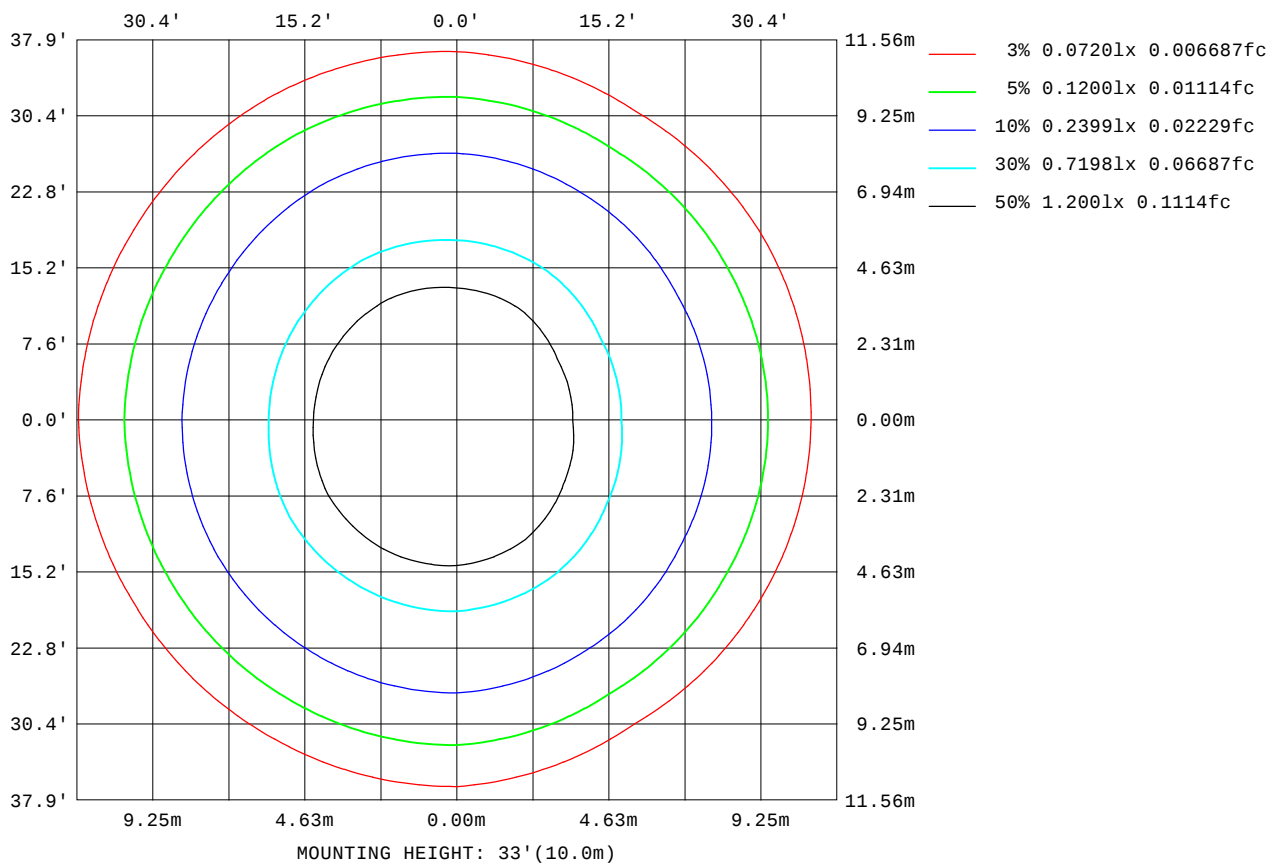

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

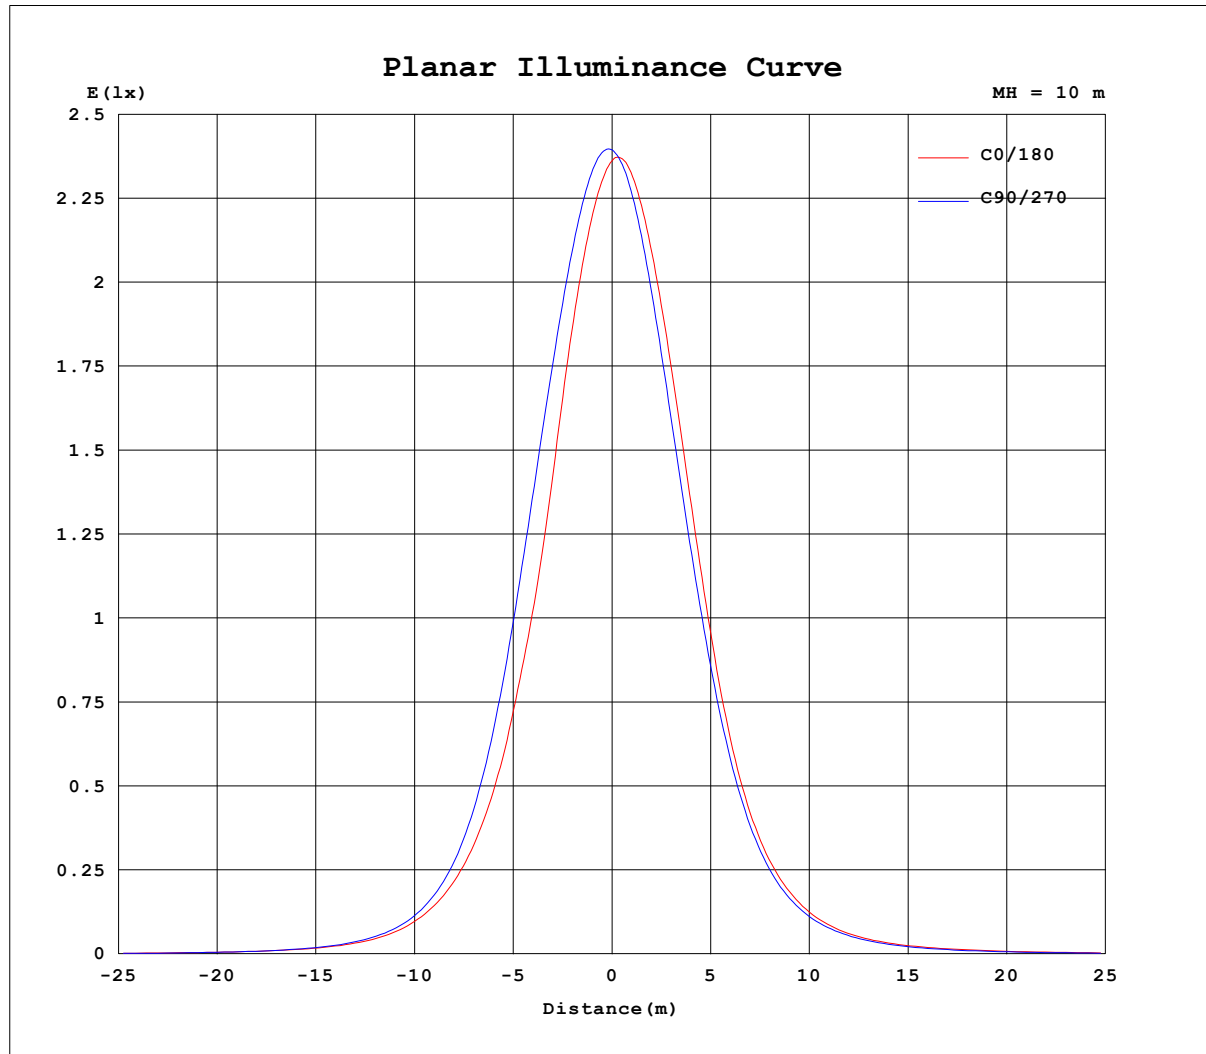


H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:Blazeline Max-598mm-RGBW DS-RED-60D-Rev1	TYPE:RGBW DS-RED	WEIGHT:
SPEC.:60 DEG	DIM.:598MM	SERIAL No.:IES001830
MFR.:	SUR.:	Shielding Angle:

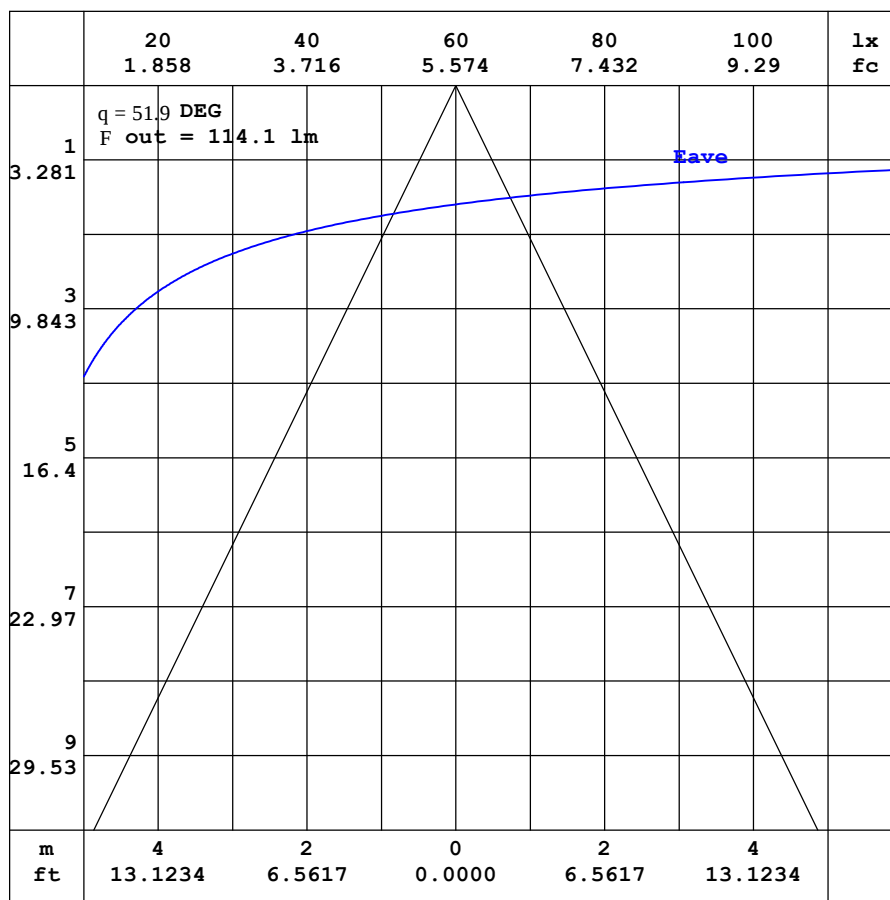

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-10-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Max-598mm-RGBW DS-RED-60D-Rev1	TYPE:RGBW DS-RED	WEIGHT:
SPEC.:60 DEG	DIM.:598MM	SERIAL No.:IES001830
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.94	0.87	0.82	0.82	0.83	0.88	0.97	1.07	1.19	1.33	1.45	1.55	1.65	1.69	1.69	1.68	1.65	1.64	1.66
-170	0.94	0.85	0.79	0.77	0.77	0.79	0.84	0.91	1.00	1.07	1.17	1.26	1.17	1.18	1.16	1.18	1.28	1.34	1.42
-160	0.94	0.83	0.76	0.73	0.70	0.70	0.72	0.74	0.79	0.82	0.84	0.91	0.97	0.84	0.95	1.01	1.05	1.11	1.15
-150	0.94	0.82	0.73	0.68	0.64	0.61	0.60	0.59	0.57	0.59	0.58	0.59	0.72	0.79	0.85	0.88	0.91	0.92	0.90
-140	0.94	0.81	0.71	0.64	0.58	0.54	0.49	0.46	0.41	0.40	0.46	0.50	0.54	0.56	0.60	0.64	0.67	0.69	0.69
-130	0.94	0.81	0.69	0.60	0.54	0.47	0.41	0.35	0.34	0.35	0.37	0.38	0.41	0.42	0.44	0.46	0.48	0.49	0.50
-120	0.94	0.81	0.69	0.59	0.49	0.42	0.34	0.29	0.30	0.30	0.31	0.31	0.32	0.33	0.34	0.35	0.35	0.36	0.37
-110	0.94	0.81	0.69	0.57	0.47	0.38	0.29	0.27	0.27	0.26	0.27	0.27	0.27	0.27	0.28	0.28	0.29	0.29	0.30
-100	0.94	0.81	0.69	0.58	0.46	0.35	0.26	0.24	0.24	0.24	0.23	0.23	0.23	0.23	0.23	0.23	0.24	0.24	0.24
-90	0.94	0.82	0.71	0.59	0.47	0.35	0.23	0.23	0.23	0.23	0.23	0.23	0.23	0.22	0.22	0.21	0.21	0.20	0.20
-80	0.94	0.84	0.74	0.63	0.52	0.40	0.26	0.29	0.34	0.38	0.42	0.46	0.49	0.51	0.53	0.55	0.56	0.57	0.56
-70	0.94	0.87	0.80	0.76	0.74	0.75	0.75	0.93	1.19	1.46	1.73	1.99	2.21	2.45	2.66	2.84	2.98	3.06	3.08
-60	0.94	0.89	0.93	1.03	1.24	1.53	1.88	2.35	2.98	3.63	4.29	4.97	5.66	6.32	6.95	7.48	7.87	8.12	8.19
-50	0.94	0.94	1.09	1.44	1.98	2.70	3.50	4.30	5.36	6.68	8.18	9.93	11.8	13.8	15.8	17.6	19.1	20.0	20.3
-40	0.94	1.01	1.31	1.92	2.89	4.07	5.35	6.77	8.51	11.2	14.7	19.0	24.2	30.0	36.1	42.1	47.0	50.3	51.3
-30	0.94	1.08	1.55	2.47	3.84	5.47	7.30	9.59	12.9	17.8	24.7	34.2	46.3	60.7	76.1	91.3	103	111	113
-20	0.94	1.13	1.76	2.96	4.70	6.75	9.14	12.5	17.7	25.7	37.5	54.4	77.0	104	131	155	172	181	182
-10	0.94	1.17	1.92	3.36	5.38	7.77	10.7	15.0	21.7	32.5	48.5	71.4	102	138	172	200	218	227	227
0	0.94	1.20	2.03	3.61	5.81	8.41	11.6	16.2	23.7	35.5	52.7	76.5	108	145	180	207	226	237	236
10	0.94	1.20	1.99	3.46	5.54	8.01	11.0	15.4	22.1	32.5	47.8	69.3	97.6	131	163	188	206	216	215
20	0.94	1.18	1.88	3.15	4.99	7.19	9.80	13.4	18.6	26.3	37.2	52.3	72.0	95.8	120	141	157	163	162
30	0.94	1.15	1.72	2.74	4.24	6.07	8.17	10.7	14.3	19.2	25.7	34.3	45.0	57.8	71.4	84.2	93.2	98.0	98.1
40	0.94	1.11	1.53	2.26	3.39	4.76	6.30	8.10	10.2	13.0	16.5	20.6	25.4	30.8	36.3	41.2	45.0	47.1	47.4
50	0.94	1.06	1.34	1.85	2.54	3.44	4.47	5.60	6.89	8.37	10.0	11.8	13.8	15.8	17.7	19.2	20.4	21.1	21.2
60	0.94	1.02	1.21	1.47	1.85	2.31	2.88	3.51	4.26	5.03	5.82	6.63	7.40	8.09	8.74	9.27	9.64	9.86	9.89
70	0.94	1.00	1.09	1.22	1.37	1.56	1.76	2.00	2.30	2.63	2.96	3.30	3.60	3.87	4.11	4.29	4.42	4.48	4.49
80	0.94	0.98	1.02	1.06	1.11	1.17	1.22	1.26	1.30	1.35	1.40	1.45	1.50	1.54	1.58	1.61	1.63	1.64	1.64
90	0.94	0.96	0.97	0.98	1.00	1.01	1.03	1.01	1.00	0.99	0.97	0.96	0.95	0.95	0.95	0.95	0.96	0.96	0.96
100	0.94	0.94	0.94	0.94	0.93	0.93	0.93	0.91	0.89	0.87	0.86	0.84	0.83	0.84	0.84	0.84	0.84	0.84	0.84
110	0.94	0.93	0.91	0.90	0.88	0.88	0.86	0.85	0.85	0.84	0.84	0.84	0.84	0.84	0.84	0.84	0.84	0.83	0.82
120	0.94	0.92	0.88	0.87	0.85	0.85	0.84	0.84	0.84	0.85	0.87	0.90	0.92	0.96	0.99	1.00	1.01	1.01	1.00
130	0.94	0.90	0.86	0.84	0.84	0.83	0.84	0.85	0.87	0.94	1.01	1.07	1.14	1.19	1.23	1.23	1.23	1.24	1.23
140	0.94	0.89	0.85	0.83	0.83	0.83	0.85	0.90	0.98	1.07	1.21	1.28	1.37	1.44	1.47	1.49	1.50	1.52	1.52
150	0.94	0.87	0.83	0.83	0.83	0.85	0.89	0.98	1.09	1.25	1.38	1.49	1.57	1.62	1.67	1.67	1.68	1.68	1.67
160	0.94	0.87	0.83	0.82	0.83	0.86	0.94	1.04	1.19	1.33	1.47	1.64	1.83	1.64	1.67	1.70	1.71	1.71	1.72
170	0.94	0.87	0.82	0.82	0.83	0.88	0.96	1.07	1.22	1.36	1.50	1.66	1.62	1.66	1.67	1.69	1.69	1.68	1.73
180	0.94	0.87	0.82	0.82	0.83	0.88	0.97	1.07	1.19	1.33	1.45	1.55	1.65	1.69	1.69	1.68	1.65	1.64	1.69

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-10-07

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:Blazeline Max-598mm-RGBW DS-RED-60D-Rev1	TYPE:RGBW DS-RED	WEIGHT:
SPEC.:60 DEG	DIM.:598MM	SERIAL No.:IES001830
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	1.49	1.37	1.26	1.14	1.02	0.88	0.74	0.62	0.51	0.41	0.34	0.28	0.26	0.23	0.22	0.20	0.18	0.18
-170	1.33	1.28	1.21	1.11	0.99	0.86	0.73	0.61	0.51	0.42	0.35	0.29	0.27	0.23	0.22	0.20	0.19	0.18
-160	1.11	1.06	1.01	0.94	0.87	0.77	0.66	0.56	0.47	0.39	0.34	0.29	0.26	0.23	0.22	0.20	0.19	0.18
-150	0.89	0.86	0.79	0.74	0.68	0.61	0.55	0.49	0.42	0.37	0.32	0.29	0.25	0.23	0.22	0.21	0.19	0.18
-140	0.67	0.63	0.59	0.54	0.50	0.46	0.43	0.38	0.36	0.33	0.30	0.27	0.25	0.23	0.21	0.20	0.19	0.18
-130	0.48	0.46	0.42	0.38	0.35	0.34	0.32	0.31	0.30	0.29	0.27	0.26	0.24	0.23	0.21	0.20	0.19	0.18
-120	0.35	0.33	0.31	0.29	0.28	0.27	0.27	0.26	0.26	0.26	0.25	0.25	0.23	0.22	0.21	0.19	0.19	0.18
-110	0.29	0.27	0.26	0.24	0.23	0.22	0.22	0.22	0.23	0.23	0.23	0.23	0.22	0.21	0.20	0.19	0.19	0.18
-100	0.23	0.23	0.22	0.21	0.20	0.19	0.20	0.20	0.20	0.21	0.21	0.22	0.20	0.20	0.19	0.19	0.19	0.18
-90	0.20	0.19	0.19	0.19	0.18	0.18	0.18	0.18	0.18	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.18
-80	0.55	0.54	0.52	0.49	0.46	0.43	0.40	0.37	0.33	0.29	0.24	0.20	0.20	0.20	0.20	0.19	0.19	0.18
-70	2.98	2.83	2.63	2.41	2.17	1.93	1.74	1.52	1.28	1.05	0.82	0.63	0.52	0.40	0.28	0.22	0.19	0.18
-60	7.86	7.38	6.78	6.09	5.33	4.73	4.17	3.60	3.06	2.54	2.03	1.56	1.14	0.79	0.52	0.30	0.20	0.18
-50	19.3	17.6	15.7	13.5	11.5	9.84	8.27	6.83	5.55	4.45	3.52	2.76	2.04	1.36	0.84	0.45	0.23	0.18
-40	48.6	43.7	37.6	30.7	24.8	19.8	15.6	12.1	9.24	6.99	5.35	4.05	3.00	2.04	1.18	0.60	0.26	0.18
-30	107	96.1	81.8	65.7	50.7	37.8	27.6	20.0	14.4	10.3	7.40	5.42	3.91	2.69	1.58	0.78	0.29	0.18
-20	173	157	134	108	81.8	59.5	42.6	29.7	20.3	13.8	9.46	6.65	4.72	3.22	1.91	0.92	0.32	0.18
-10	215	195	167	135	106	77.6	55.2	38.0	25.4	16.6	11.0	7.62	5.32	3.61	2.15	1.02	0.34	0.18
0	225	205	174	139	110	82.1	59.2	41.2	27.6	17.8	11.7	8.05	5.62	3.81	2.27	1.07	0.35	0.18
10	205	185	156	127	100	74.4	53.8	37.7	25.6	17.0	11.5	7.96	5.57	3.77	2.25	1.08	0.36	0.18
20	155	142	121	98.1	75.3	56.2	41.5	29.9	21.1	14.7	10.3	7.31	5.18	3.53	2.10	1.04	0.37	0.18
30	93.6	85.0	73.3	60.1	47.6	36.8	28.0	21.2	15.9	11.7	8.58	6.29	4.55	3.11	1.85	0.94	0.36	0.18
40	45.2	41.2	36.2	30.4	25.6	21.2	17.4	14.0	11.1	8.70	6.69	5.06	3.73	2.54	1.52	0.80	0.35	0.18
50	20.4	19.0	17.3	15.5	13.5	11.9	10.2	8.69	7.31	6.03	4.88	3.80	2.80	1.91	1.22	0.68	0.34	0.18
60	9.61	9.17	8.61	7.96	7.22	6.55	5.87	5.19	4.52	3.87	3.23	2.55	1.90	1.37	0.92	0.56	0.32	0.18
70	4.41	4.27	4.07	3.84	3.58	3.32	3.04	2.74	2.44	2.14	1.85	1.58	1.27	0.97	0.71	0.49	0.31	0.18
80	1.62	1.60	1.56	1.51	1.47	1.41	1.36	1.30	1.24	1.19	1.14	1.09	0.93	0.77	0.60	0.45	0.32	0.18
90	0.95	0.94	0.93	0.92	0.91	0.90	0.91	0.92	0.93	0.93	0.94	0.95	0.82	0.70	0.57	0.44	0.31	0.18
100	0.84	0.83	0.83	0.83	0.83	0.83	0.83	0.84	0.85	0.86	0.87	0.88	0.77	0.66	0.55	0.43	0.31	0.18
110	0.83	0.84	0.85	0.85	0.85	0.85	0.84	0.83	0.83	0.84	0.84	0.82	0.72	0.62	0.52	0.41	0.30	0.18
120	1.00	1.01	0.99	0.99	0.97	0.95	0.92	0.89	0.86	0.85	0.84	0.77	0.67	0.58	0.49	0.39	0.29	0.18
130	1.25	1.24	1.24	1.21	1.18	1.13	1.07	1.01	0.96	0.91	0.82	0.72	0.62	0.54	0.45	0.36	0.28	0.18
140	1.52	1.52	1.50	1.47	1.42	1.34	1.26	1.17	1.09	0.96	0.80	0.67	0.57	0.49	0.41	0.34	0.26	0.18
150	1.68	1.69	1.68	1.65	1.59	1.51	1.42	1.31	1.12	0.93	0.75	0.62	0.50	0.43	0.37	0.31	0.24	0.18
160	1.70	1.70	1.71	1.70	1.67	1.61	1.41	1.19	0.99	0.81	0.66	0.53	0.44	0.37	0.32	0.27	0.23	0.18
170	1.66	1.69	1.71	1.62	1.47	1.30	1.13	0.94	0.78	0.64	0.52	0.42	0.36	0.30	0.27	0.24	0.21	0.18
180	1.49	1.37	1.26	1.14	1.02	0.88	0.74	0.62	0.51	0.41	0.34	0.28	0.26	0.23	0.22	0.20	0.18	0.18

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-10-07

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: