

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	3241.2 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	--

Beam Spread	At 10% of Imax	41.9V x 67.4H
	At 50% of Imax	15.8V x 38.4H
	At 90% of Imax	5.9V x 16.6H

Beam Flux	Total	1000.2 lumens per klm.
	To 10% of Imax	720.4 lumens per klm.
	To 50% of Imax	346.2 lumens per klm.
	To 90% of Imax	76.0 lumens per klm.

Upward LOR	2.2 %
Downward LOR	97.8 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-08-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:DecoBody-330mm-RGBW 3000K-1540D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:15x40 DEG	DIM.:330mm	SERIAL No.:IES001528
MFR.:	SUR.:	Shielding Angle:

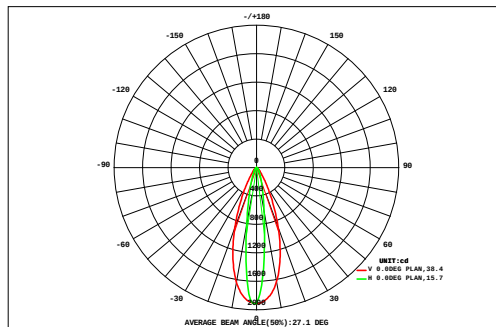

DATA OF LAMP		Eff:54.70lm/W	
MODEL	DLF RGBW 330MM	Imax(cd)	1915
NOMINAL POWER(W)	10.8	AVAILABILITY(%)	72.1
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	425.9
NOMINAL FLUX(lm)	590.8	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	590.8
TEST VOLTAGE(V)	221.4	q @50%(H,V)	38,16DEG

		AREA FLUX DIAGRAM														UNIT:lm				F t	F a
VERTICAL (DEG)	45	0.12	0.15	0.18	0.21	0.24	0.27	0.29	0.30	0.30	0.30	0.30	0.28	0.26	0.24	0.21	0.18	0.15	0.12	4.08	0.00
	40	0.14	0.18	0.23	0.27	0.31	0.35	0.39	0.41	0.41	0.41	0.40	0.38	0.34	0.31	0.27	0.22	0.18	0.14	5.35	0.00
	35	0.17	0.23	0.29	0.36	0.43	0.48	0.53	0.57	0.57	0.57	0.56	0.52	0.46	0.41	0.35	0.28	0.22	0.17	7.16	0.00
	30	0.21	0.28	0.37	0.48	0.59	0.68	0.75	0.82	0.82	0.82	0.80	0.73	0.65	0.57	0.46	0.36	0.27	0.20	9.87	0.00
	25	0.25	0.35	0.48	0.66	0.86	1.03	1.12	1.23	1.25	1.24	1.20	1.08	0.97	0.80	0.62	0.46	0.33	0.23	14.2	0.71
	20	0.30	0.44	0.64	0.91	1.25	1.62	1.85	1.97	2.04	2.02	1.91	1.76	1.52	1.16	0.85	0.61	0.41	0.27	21.5	14.3
	15	0.35	0.55	0.86	1.35	1.92	2.59	3.30	3.52	3.63	3.60	3.43	3.14	2.42	1.79	1.27	0.82	0.51	0.31	35.3	30.7
	10	0.40	0.66	1.12	1.94	3.09	4.41	5.76	6.84	7.06	7.06	6.78	5.59	4.25	2.99	1.87	1.07	0.61	0.35	61.9	58.3
	5	0.44	0.75	1.38	2.56	4.42	6.82	9.29	11.3	12.4	12.5	11.4	9.22	6.75	4.37	2.50	1.32	0.70	0.39	98.6	95.5
	0	0.43	0.75	1.38	2.57	4.46	6.95	9.62	12.0	13.5	13.7	12.4	9.88	7.06	4.49	2.54	1.33	0.70	0.38	104	101
	-5	0.39	0.65	1.12	1.96	3.19	4.71	6.43	7.87	8.69	8.94	8.43	7.01	5.00	3.29	1.96	1.10	0.61	0.35	71.7	68.1
	-10	0.33	0.53	0.85	1.36	2.01	2.83	3.68	4.06	4.46	4.56	4.28	3.99	3.07	2.12	1.38	0.84	0.50	0.31	41.2	36.9
	-15	0.28	0.42	0.62	0.90	1.28	1.72	2.01	2.20	2.38	2.41	2.26	2.11	1.82	1.34	0.93	0.62	0.40	0.26	24.0	17.9
	-20	0.22	0.32	0.45	0.63	0.84	1.03	1.16	1.31	1.36	1.37	1.32	1.18	1.07	0.86	0.64	0.46	0.32	0.21	14.8	2.55
	-25	0.18	0.25	0.34	0.45	0.56	0.65	0.73	0.81	0.83	0.84	0.82	0.73	0.66	0.57	0.45	0.34	0.25	0.18	9.61	0.00
	-30	0.14	0.19	0.25	0.32	0.38	0.43	0.49	0.53	0.54	0.54	0.53	0.49	0.43	0.39	0.32	0.26	0.19	0.14	6.59	0.00
-35	0.11	0.15	0.19	0.23	0.27	0.31	0.34	0.37	0.37	0.37	0.37	0.34	0.31	0.27	0.24	0.19	0.15	0.11	4.70	0.00	
-40	0.09	0.12	0.15	0.17	0.20	0.22	0.25	0.26	0.26	0.26	0.26	0.25	0.22	0.20	0.18	0.15	0.12	0.09	3.44	0.00	
-45	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)				10	15	20	25	30	35	40	45	
F t	4.55	6.96	10.9	17.3	26.3	37.1	48.0	56.4	60.9	61.5	57.4	48.7	37.3	26.2	17.0	10.6	6.62	4.21	538	---	
F a	0.00	0.00	2.73	10.8	20.0	31.2	42.0	50.4	55.1	55.7	51.4	42.7	31.4	19.9	10.4	2.30	0.00	0.00	---	426	


one-half-peak spread: U:7.9,D:8.0 , L:19.3,R:19.3 Beam Type: Type 4 x 3 (H x V)

H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-08-14

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:DecoHody-330mm-RGBW 3000K-1540D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:15x40 DEG	DIM.:330mm	SERIAL No.:IES001528
MFR.:	SUR.:	Shielding Angle:

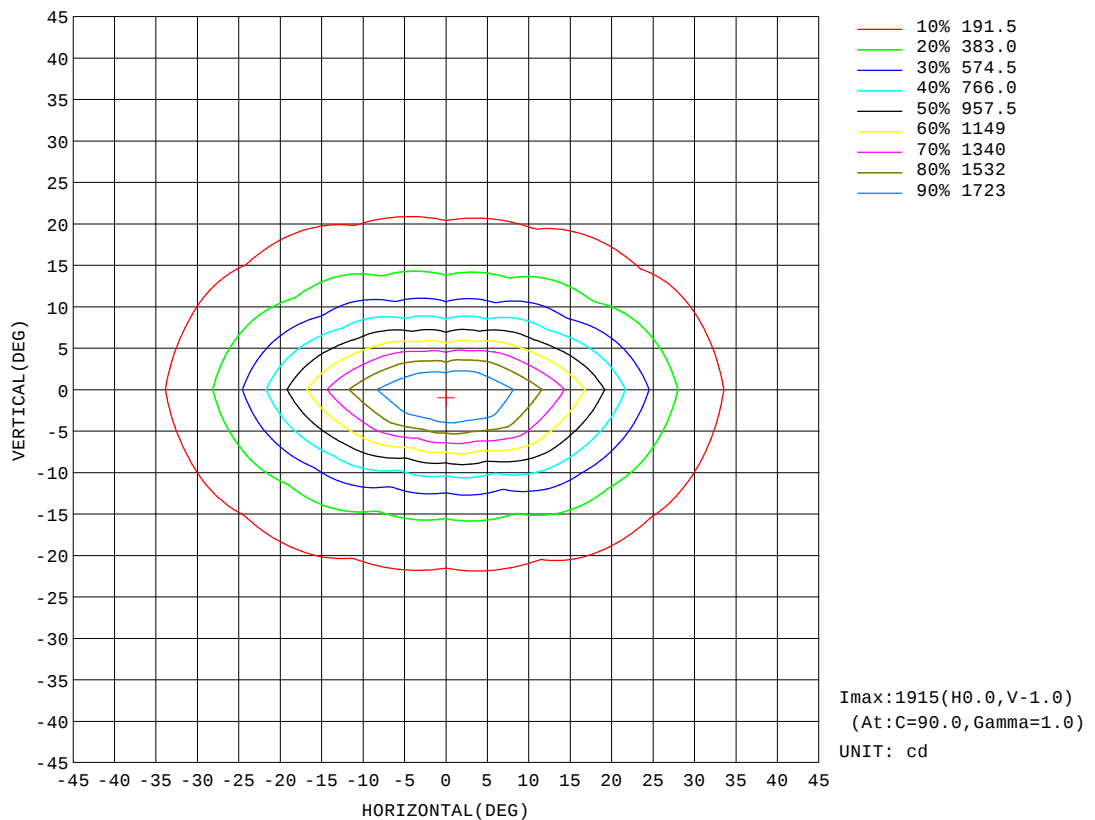


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-08-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:DecoHody-330mm-RGBW 3000K-1540D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:15x40 DEG	DIM.:330mm	SERIAL No.:IES001528
MFR.:	SUR.:	Shielding Angle:

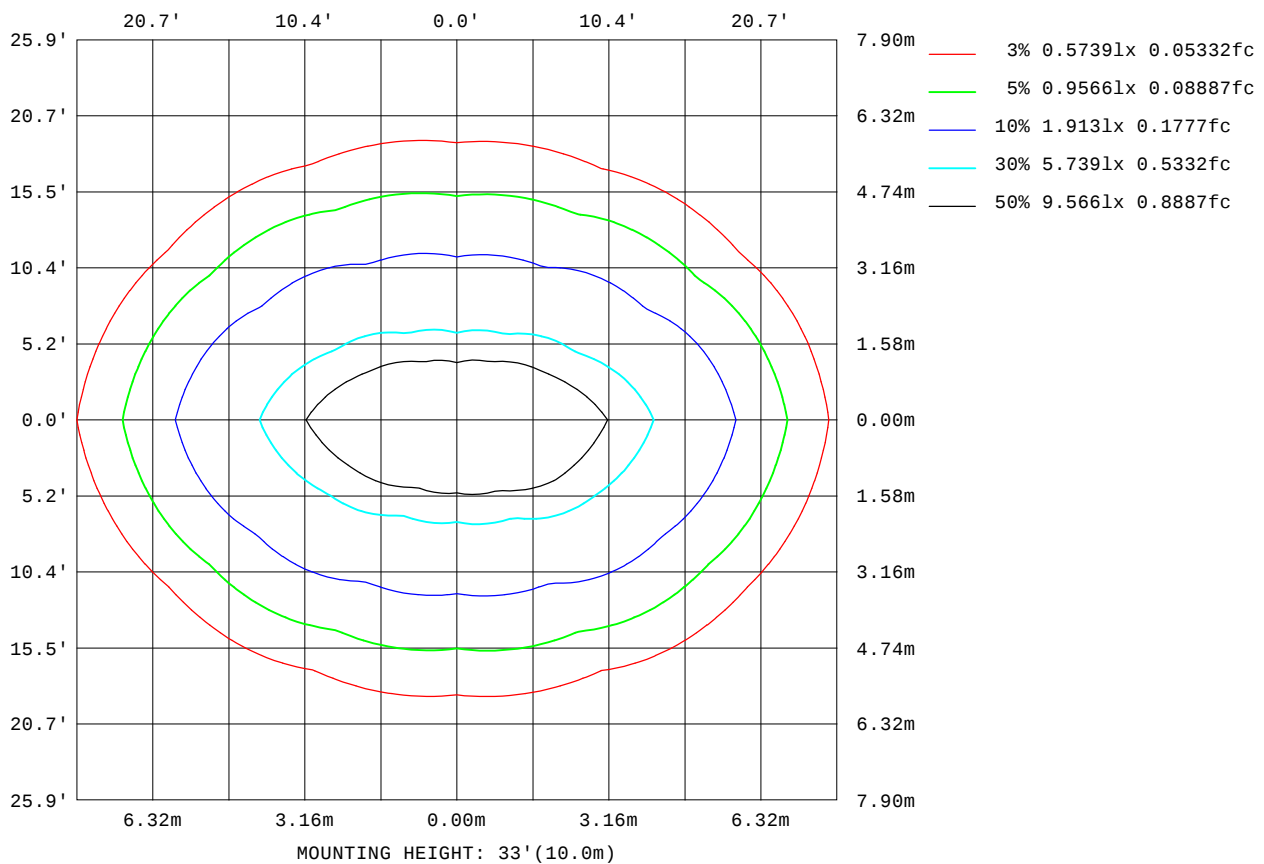

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-08-14

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

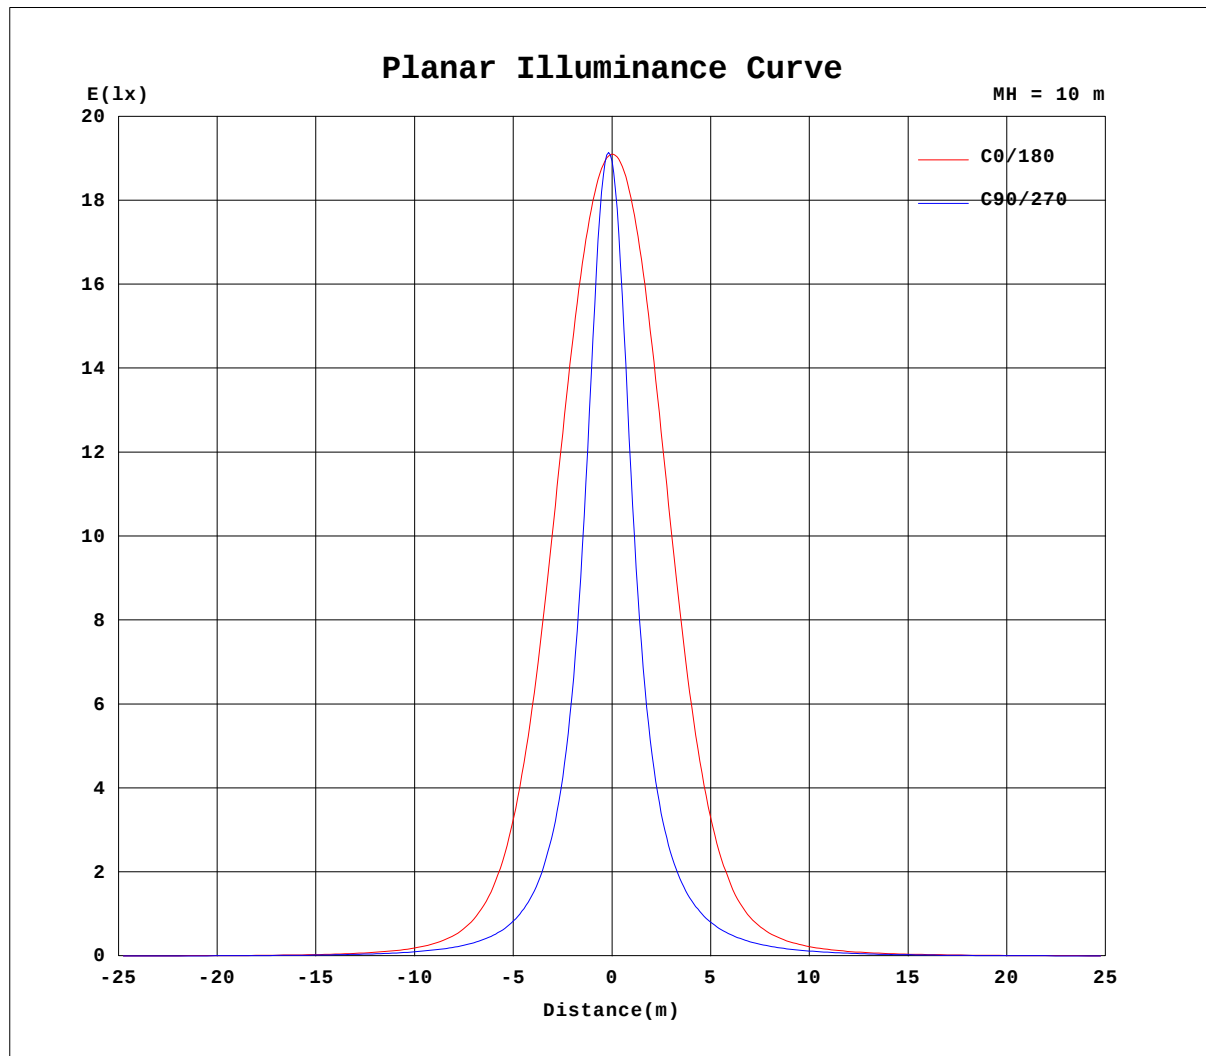


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-08-14

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:DecoHody-330mm-RGBW 3000K-1540D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:15x40 DEG	DIM.:330mm	SERIAL No.:IES001528
MFR.:	SUR.:	Shielding Angle:

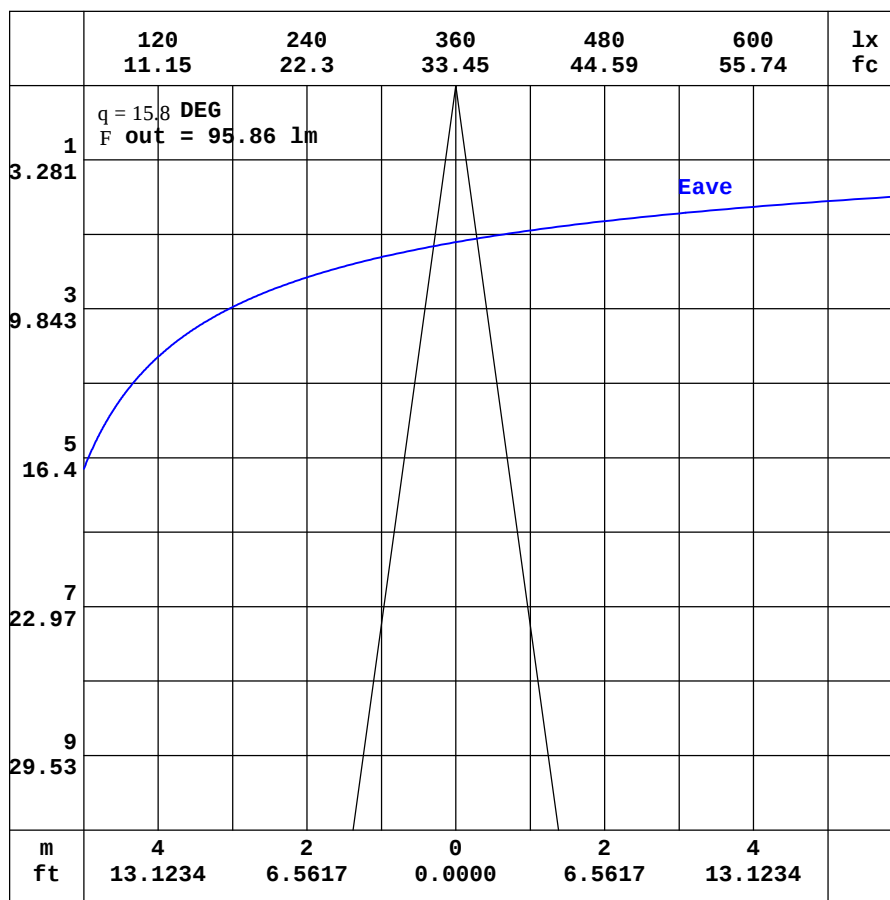

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-08-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:DecoHody-330mm-RGBW 3000K-1540D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:15x40 DEG	DIM.:330mm	SERIAL No.:IES001528
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	2.29	2.07	1.92	1.88	1.92	2.08	2.36	2.74	3.16	3.60	3.97	4.25	4.41	4.41	4.34	4.20	4.03	3.88	3.87
-170	2.29	2.04	1.86	1.79	1.79	1.88	2.04	2.26	2.50	2.75	2.96	3.13	3.25	3.31	3.36	3.46	3.68	3.90	4.10
-160	2.29	2.01	1.81	1.71	1.66	1.66	1.71	1.77	1.84	1.88	1.90	1.91	1.96	2.32	2.68	3.01	3.29	3.49	3.59
-150	2.29	1.99	1.77	1.63	1.54	1.47	1.42	1.37	1.27	1.14	1.02	1.18	1.38	1.62	1.85	2.08	2.29	2.43	2.48
-140	2.29	1.98	1.75	1.56	1.44	1.32	1.21	1.07	0.90	0.81	0.81	0.82	0.88	0.96	1.05	1.18	1.28	1.35	1.38
-130	2.29	1.98	1.72	1.52	1.36	1.23	1.07	0.91	0.82	0.80	0.76	0.72	0.69	0.65	0.64	0.64	0.66	0.67	0.67
-120	2.29	1.98	1.71	1.51	1.31	1.15	0.99	0.88	0.87	0.86	0.85	0.82	0.78	0.74	0.70	0.66	0.62	0.60	0.57
-110	2.29	1.99	1.73	1.49	1.28	1.11	0.93	0.88	0.89	0.90	0.91	0.92	0.93	0.94	0.92	0.91	0.90	0.89	0.88
-100	2.29	2.01	1.75	1.50	1.27	1.04	0.85	0.84	0.86	0.88	0.89	0.90	0.91	0.92	0.93	0.93	0.93	0.93	0.93
-90	2.29	2.04	1.79	1.53	1.28	1.02	0.77	0.77	0.77	0.77	0.77	0.77	0.78	0.77	0.77	0.76	0.76	0.76	0.75
-80	2.29	2.08	1.85	1.62	1.39	1.19	1.01	1.10	1.26	1.41	1.52	1.62	1.72	1.81	1.89	1.96	2.01	2.05	2.08
-70	2.29	2.13	2.00	1.95	2.05	2.10	2.21	2.58	3.04	3.43	3.77	4.07	4.35	4.68	5.00	5.27	5.47	5.61	5.67
-60	2.29	2.20	2.26	2.61	3.09	3.64	4.17	4.67	5.47	6.33	7.20	8.08	8.86	9.57	10.3	10.8	11.2	11.4	11.4
-50	2.29	2.31	2.68	3.45	4.42	5.48	6.46	7.39	8.75	10.5	12.3	14.1	15.8	17.3	18.8	20.0	20.8	21.2	21.1
-40	2.29	2.41	3.11	4.32	5.88	7.55	9.25	11.2	13.4	16.3	20.0	23.9	27.8	31.4	34.1	37.4	39.8	40.9	40.6
-30	2.29	2.50	3.55	5.24	7.42	9.74	12.5	16.0	20.1	25.2	31.5	40.4	50.5	60.7	68.9	74.5	82.9	87.2	85.7
-20	2.29	2.61	4.01	6.06	8.82	11.9	15.9	21.2	28.4	38.1	51.7	70.3	94.4	128	165	195	207	230	226
-10	2.29	2.71	4.34	6.72	9.94	13.8	19.0	26.3	36.8	52.8	78.1	120	192	298	429	575	721	761	811
0	2.29	2.78	4.54	7.14	10.7	15.1	21.1	29.8	42.9	63.8	100	168	309	547	894	1292	1636	1846	1910
10	2.29	2.76	4.45	6.93	10.3	14.3	19.8	27.3	38.2	54.7	80.3	122	192	292	402	516	632	636	620
20	2.29	2.71	4.24	6.45	9.50	12.9	17.4	23.3	31.0	41.6	56.0	74.9	97.9	130	162	186	193	207	199
30	2.29	2.66	3.88	5.78	8.35	11.1	14.5	18.6	23.6	29.7	37.1	46.3	56.3	66.5	74.8	80.4	87.5	90.2	87.7
40	2.29	2.61	3.51	4.98	6.95	9.17	11.5	14.2	17.3	20.8	24.8	29.2	33.4	37.2	40.1	43.4	45.5	46.3	45.6
50	2.29	2.54	3.14	4.23	5.51	7.13	8.77	10.4	12.2	14.2	16.4	18.5	20.4	22.2	23.7	25.0	25.9	26.2	25.9
60	2.29	2.46	2.78	3.41	4.25	5.16	6.26	7.30	8.32	9.30	10.3	11.3	12.2	13.0	13.9	14.5	14.9	15.1	15.0
70	2.29	2.40	2.58	2.81	3.19	3.64	4.11	4.62	5.18	5.70	6.15	6.56	6.88	7.25	7.59	7.84	8.02	8.12	8.13
80	2.29	2.35	2.42	2.50	2.60	2.70	2.81	2.93	3.07	3.21	3.37	3.52	3.64	3.74	3.82	3.89	3.94	3.97	3.97
90	2.29	2.31	2.32	2.33	2.35	2.36	2.37	2.35	2.33	2.31	2.29	2.27	2.25	2.24	2.23	2.22	2.22	2.21	2.20
100	2.29	2.26	2.23	2.20	2.17	2.13	2.10	2.04	1.99	1.95	1.91	1.87	1.83	1.81	1.80	1.80	1.79	1.79	1.79
110	2.29	2.22	2.16	2.08	2.02	1.96	1.92	1.87	1.83	1.80	1.77	1.75	1.74	1.73	1.73	1.72	1.71	1.71	1.70
120	2.29	2.18	2.08	2.00	1.92	1.87	1.85	1.83	1.82	1.81	1.82	1.84	1.86	1.88	1.90	1.91	1.92	1.90	1.87
130	2.29	2.15	2.02	1.92	1.87	1.85	1.85	1.87	1.93	2.03	2.14	2.26	2.41	2.55	2.70	2.83	2.95	3.02	3.05
140	2.29	2.13	1.99	1.89	1.86	1.87	1.91	2.04	2.22	2.44	2.69	2.97	3.27	3.57	3.83	4.06	4.24	4.35	4.41
150	2.29	2.10	1.95	1.88	1.87	1.91	2.05	2.28	2.57	2.91	3.27	3.64	4.00	4.32	4.58	4.75	4.85	4.89	4.91
160	2.29	2.08	1.93	1.88	1.89	1.99	2.20	2.50	2.88	3.29	3.70	4.08	4.42	4.68	4.86	4.98	5.05	5.10	5.15
170	2.29	2.07	1.92	1.88	1.91	2.05	2.31	2.67	3.08	3.52	3.93	4.28	4.53	4.67	4.75	4.74	4.67	4.65	4.87
180	2.29	2.07	1.92	1.88	1.92	2.08	2.36	2.74	3.16	3.60	3.97	4.25	4.41	4.41	4.34	4.20	4.03	3.88	3.87

H_b Range:-90 - 90DEGH_b Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-08-14

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:DecoHody-330mm-RGBW 3000K-1540D-Rev1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:15x40 DEG	DIM.:330mm	SERIAL No.:IES001528
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(DEC) V(DEC)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	3.51	3.34	3.15	2.94	2.65	2.32	1.98	1.63	1.33	1.08	0.93	0.86	0.86	0.86	0.86	0.83	0.76	0.69	
-170	3.97	3.74	3.50	3.16	2.76	2.34	1.94	1.57	1.27	1.05	0.91	0.85	0.85	0.86	0.86	0.83	0.76	0.69	
-160	3.51	3.33	3.06	2.75	2.41	2.05	1.69	1.38	1.14	0.97	0.88	0.85	0.85	0.86	0.85	0.84	0.76	0.69	
-150	2.46	2.35	2.17	1.95	1.72	1.49	1.28	1.12	0.98	0.89	0.85	0.85	0.85	0.86	0.86	0.82	0.75	0.69	
-140	1.38	1.33	1.25	1.15	1.05	0.97	0.90	0.87	0.86	0.85	0.85	0.85	0.86	0.86	0.86	0.81	0.75	0.69	
-130	0.69	0.70	0.69	0.68	0.70	0.74	0.77	0.79	0.83	0.84	0.85	0.86	0.87	0.87	0.85	0.80	0.74	0.69	
-120	0.60	0.63	0.68	0.72	0.76	0.80	0.83	0.85	0.86	0.87	0.87	0.88	0.87	0.86	0.83	0.79	0.73	0.69	
-110	0.89	0.90	0.91	0.92	0.93	0.93	0.92	0.91	0.90	0.90	0.89	0.89	0.88	0.87	0.84	0.81	0.76	0.72	0.69
-100	0.93	0.93	0.93	0.92	0.92	0.92	0.91	0.90	0.90	0.89	0.87	0.85	0.82	0.80	0.77	0.73	0.70	0.69	
-90	0.76	0.77	0.78	0.79	0.79	0.80	0.80	0.79	0.79	0.79	0.78	0.78	0.76	0.75	0.73	0.72	0.70	0.69	
-80	2.04	1.99	1.92	1.84	1.76	1.67	1.58	1.49	1.39	1.28	1.13	1.02	0.92	0.84	0.81	0.77	0.71	0.69	
-70	5.62	5.51	5.31	5.05	4.73	4.37	4.03	3.68	3.33	2.97	2.59	2.13	1.70	1.38	1.05	0.84	0.76	0.69	
-60	11.4	11.2	10.9	10.4	9.72	8.98	8.15	7.23	6.30	5.36	4.48	3.72	2.98	2.17	1.56	1.04	0.80	0.69	
-50	21.2	20.9	20.1	19.0	17.6	16.0	14.3	12.5	10.5	8.69	7.06	5.60	4.33	3.23	2.11	1.33	0.83	0.69	
-40	40.9	39.8	37.4	34.2	31.6	28.1	24.1	20.1	16.4	13.2	10.3	7.87	5.85	4.22	2.79	1.64	0.87	0.69	
-30	87.5	83.4	74.8	69.4	61.2	50.9	40.8	31.8	24.6	18.7	14.1	10.4	7.46	5.17	3.42	1.87	0.94	0.69	
-20	233	211	203	171	132	96.3	69.7	49.6	35.2	25.2	18.0	12.8	8.92	6.02	3.91	2.08	1.00	0.69	
-10	798	782	633	455	305	191	116	72.2	46.7	31.3	21.5	14.7	10.0	6.65	4.23	2.23	1.04	0.69	
0	1839	1629	1290	893	542	299	160	89.9	54.6	35.1	23.4	15.7	10.6	6.94	4.38	2.29	1.05	0.69	
10	628	613	486	380	279	183	115	73.1	48.1	32.6	22.5	15.5	10.6	6.99	4.44	2.35	1.09	0.69	
20	203	185	176	152	121	92.1	70.8	52.2	38.0	27.6	19.9	14.2	9.90	6.68	4.32	2.29	1.11	0.69	
30	88.9	85.2	77.6	71.9	63.9	54.3	44.9	36.3	28.5	22.0	16.6	12.2	8.79	6.07	3.98	2.19	1.09	0.69	
40	46.0	44.9	42.6	39.4	36.6	32.9	28.8	24.6	20.6	16.8	13.1	10.0	7.41	5.29	3.44	2.04	1.06	0.69	
50	26.1	25.8	24.9	23.6	22.0	20.3	18.3	16.2	14.1	12.0	9.94	7.81	5.95	4.35	2.84	1.79	1.06	0.69	
60	15.1	14.9	14.5	13.9	13.1	12.3	11.3	10.3	9.19	8.11	7.04	5.82	4.52	3.28	2.36	1.56	1.05	0.69	
70	8.13	8.04	7.87	7.61	7.27	6.88	6.49	6.06	5.62	5.14	4.58	3.94	3.21	2.50	1.90	1.41	1.03	0.69	
80	3.95	3.91	3.85	3.77	3.68	3.58	3.47	3.34	3.19	3.05	2.93	2.80	2.41	2.03	1.68	1.34	0.98	0.69	
90	2.21	2.23	2.24	2.25	2.27	2.28	2.30	2.33	2.35	2.37	2.40	2.42	2.13	1.84	1.55	1.26	0.97	0.69	
100	1.79	1.80	1.80	1.80	1.81	1.83	1.87	1.91	1.96	2.01	2.06	2.09	1.90	1.69	1.47	1.22	0.96	0.69	
110	1.71	1.72	1.73	1.74	1.75	1.76	1.77	1.78	1.80	1.83	1.86	1.86	1.72	1.57	1.40	1.19	0.95	0.69	
120	1.91	1.93	1.93	1.92	1.90	1.88	1.87	1.84	1.83	1.82	1.83	1.72	1.60	1.46	1.32	1.15	0.93	0.69	
130	3.04	2.98	2.88	2.75	2.61	2.45	2.31	2.18	2.06	1.97	1.81	1.63	1.50	1.37	1.26	1.10	0.91	0.69	
140	4.38	4.29	4.15	3.94	3.67	3.36	3.05	2.76	2.50	2.19	1.83	1.57	1.40	1.29	1.18	1.05	0.89	0.69	
150	4.90	4.88	4.81	4.65	4.41	4.10	3.74	3.36	2.75	2.20	1.78	1.49	1.30	1.19	1.10	1.00	0.86	0.69	
160	5.14	5.13	5.05	4.93	4.75	4.50	3.85	3.17	2.55	2.02	1.61	1.35	1.18	1.09	1.02	0.96	0.83	0.69	
170	4.83	4.85	4.91	4.64	4.14	3.62	3.08	2.54	2.05	1.63	1.32	1.13	1.03	0.97	0.94	0.89	0.80	0.69	
180	3.51	3.34	3.15	2.94	2.65	2.32	1.98	1.63	1.33	1.08	0.93	0.86	0.86	0.86	0.86	0.83	0.76	0.69	

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-08-14

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks: