

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	3014.9 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	45.0V x 69.5H
	At 50% of Imax	16.8V x 38.9H
	At 90% of Imax	6.1V x 16.7H

Beam Flux	Total	1000.2 lumens per klm.
	To 10% of Imax	728.7 lumens per klm.
	To 50% of Imax	346.0 lumens per klm.
	To 90% of Imax	75.3 lumens per klm.

Upward LOR	1.8 %
Downward LOR	98.2 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-08-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:DecoBody-330mm-RGBW BLUE-1540D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:15x40 DEG	DIM.:330mm	SERIAL No.:IES001527
MFR.:	SUR.:	Shielding Angle:

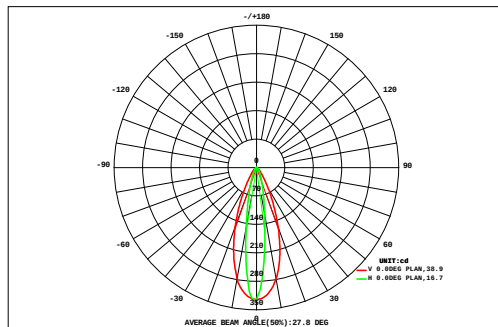

DATA OF LAMP		Eff:9.62lm/W	
MODEL	DLF RGBW 330MM	Imax(cd)	325.0
NOMINAL POWER(W)	11.3	AVAILABILITY(%)	72.9
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	78.59
NOMINAL FLUX(lm)	107.8	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	107.8
TEST VOLTAGE(V)	221.4	q @50%(H,V)	39,17DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm				F t	F a
	45	0.02	0.03	0.03	0.04	0.05	0.05	0.06	0.06	0.06	0.06	0.06	0.06	0.05	0.05	0.04	0.03	0.03	0.02	0.79	0.00	
	40	0.03	0.04	0.04	0.05	0.06	0.07	0.08	0.08	0.08	0.08	0.08	0.07	0.07	0.06	0.05	0.04	0.03	0.03	1.04	0.00	
	35	0.03	0.04	0.06	0.07	0.08	0.09	0.10	0.11	0.11	0.11	0.11	0.10	0.09	0.08	0.07	0.06	0.04	0.03	1.40	0.00	
	30	0.04	0.06	0.07	0.10	0.12	0.13	0.15	0.16	0.16	0.16	0.16	0.14	0.13	0.11	0.09	0.07	0.05	0.04	1.94	0.00	
	25	0.05	0.07	0.10	0.13	0.17	0.20	0.22	0.24	0.24	0.24	0.24	0.21	0.19	0.16	0.12	0.09	0.07	0.05	2.78	0.59	
	20	0.06	0.09	0.13	0.18	0.24	0.31	0.36	0.38	0.39	0.39	0.37	0.34	0.29	0.23	0.17	0.12	0.08	0.05	4.18	3.12	
	15	0.07	0.11	0.17	0.26	0.36	0.49	0.62	0.66	0.69	0.68	0.65	0.59	0.46	0.34	0.24	0.16	0.10	0.06	6.70	5.97	
	10	0.08	0.13	0.21	0.36	0.56	0.80	1.04	1.23	1.27	1.28	1.23	1.02	0.78	0.55	0.35	0.21	0.12	0.07	11.3	10.7	
	5	0.08	0.14	0.26	0.46	0.78	1.18	1.60	1.96	2.13	2.15	1.96	1.60	1.19	0.78	0.46	0.25	0.14	0.08	17.2	16.7	
	0	0.08	0.14	0.26	0.47	0.79	1.20	1.64	2.05	2.30	2.33	2.11	1.70	1.23	0.80	0.47	0.25	0.14	0.08	18.0	17.5	
	-5	0.08	0.13	0.21	0.36	0.58	0.85	1.15	1.39	1.54	1.58	1.48	1.23	0.90	0.60	0.37	0.21	0.12	0.07	12.8	12.3	
	-10	0.06	0.10	0.17	0.26	0.38	0.53	0.69	0.76	0.84	0.85	0.80	0.73	0.57	0.40	0.27	0.16	0.10	0.06	7.73	7.04	
	-15	0.05	0.08	0.12	0.18	0.25	0.33	0.39	0.43	0.46	0.47	0.44	0.40	0.35	0.26	0.18	0.12	0.08	0.05	4.65	3.71	
	-20	0.04	0.06	0.09	0.13	0.17	0.20	0.23	0.26	0.27	0.27	0.26	0.23	0.21	0.17	0.13	0.09	0.06	0.04	2.91	1.00	
	-25	0.04	0.05	0.07	0.09	0.11	0.13	0.14	0.16	0.17	0.17	0.16	0.14	0.13	0.11	0.09	0.07	0.05	0.04	1.91	0.00	
-30	0.03	0.04	0.05	0.06	0.08	0.09	0.10	0.10	0.11	0.11	0.11	0.10	0.09	0.08	0.06	0.05	0.04	0.03	1.31	0.00		
-35	0.02	0.03	0.04	0.05	0.05	0.06	0.07	0.07	0.07	0.07	0.07	0.07	0.06	0.05	0.05	0.04	0.03	0.02	0.93	0.00		
-40	0.02	0.02	0.03	0.03	0.04	0.04	0.05	0.05	0.05	0.05	0.05	0.05	0.04	0.04	0.03	0.03	0.02	0.02	0.68	0.00		
-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)				10	15	20	25	30	35	40	45			
F t	0.88	1.35	2.11	3.27	4.87	6.77	8.67	10.2	10.9	11.0	10.3	8.80	6.82	4.86	3.23	2.06	1.30	0.84	98	---		
F a	0.00	0.00	0.74	2.13	3.81	5.76	7.65	9.13	9.91	10.0	9.30	7.78	5.83	3.79	2.09	0.65	0.00	0.00	---	79		


one-half-peak spread: U:8.4,D:8.5 , L:19.5,R:19.5 IESNA Beam Type: Type 4 x 3 (H x V)

H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-08-14

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME:DecoHody-330mm-RGBW BLUE-1540D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:15x40 DEG	DIM.:330mm	SERIAL No.:IES001527
MFR.:	SUR.:	Shielding Angle:

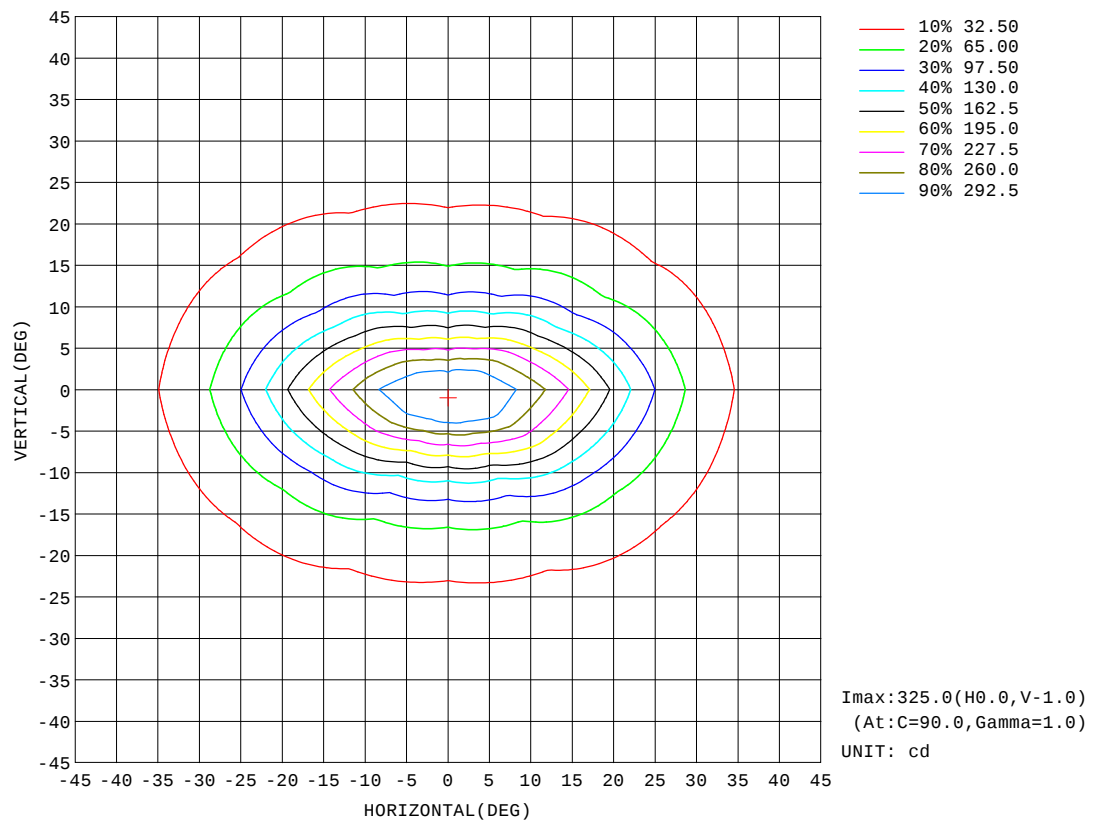


H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-08-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME:DecoHody-330mm-RGBW BLUE-1540D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:15x40 DEG	DIM.:330mm	SERIAL No.:IES001527
MFR.:	SUR.:	Shielding Angle:

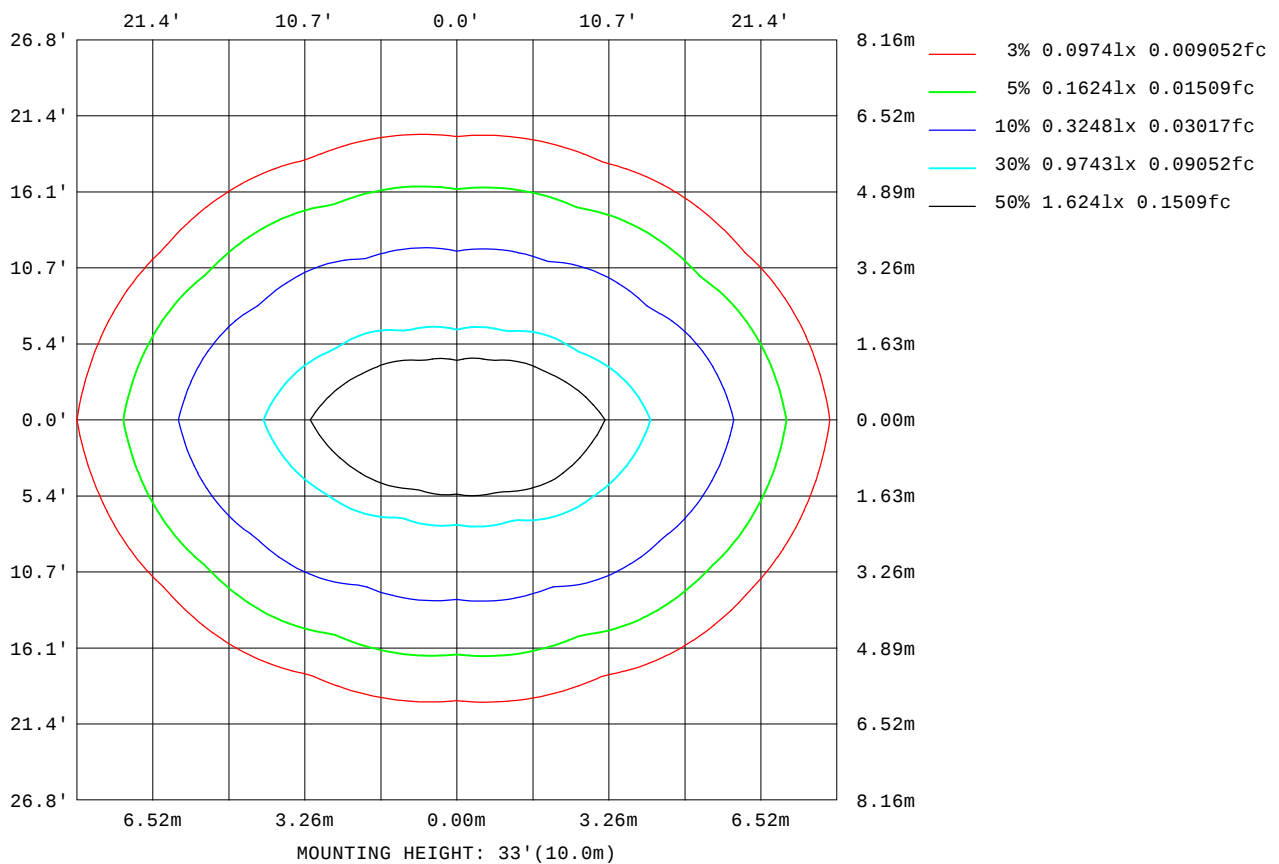

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-08-14

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

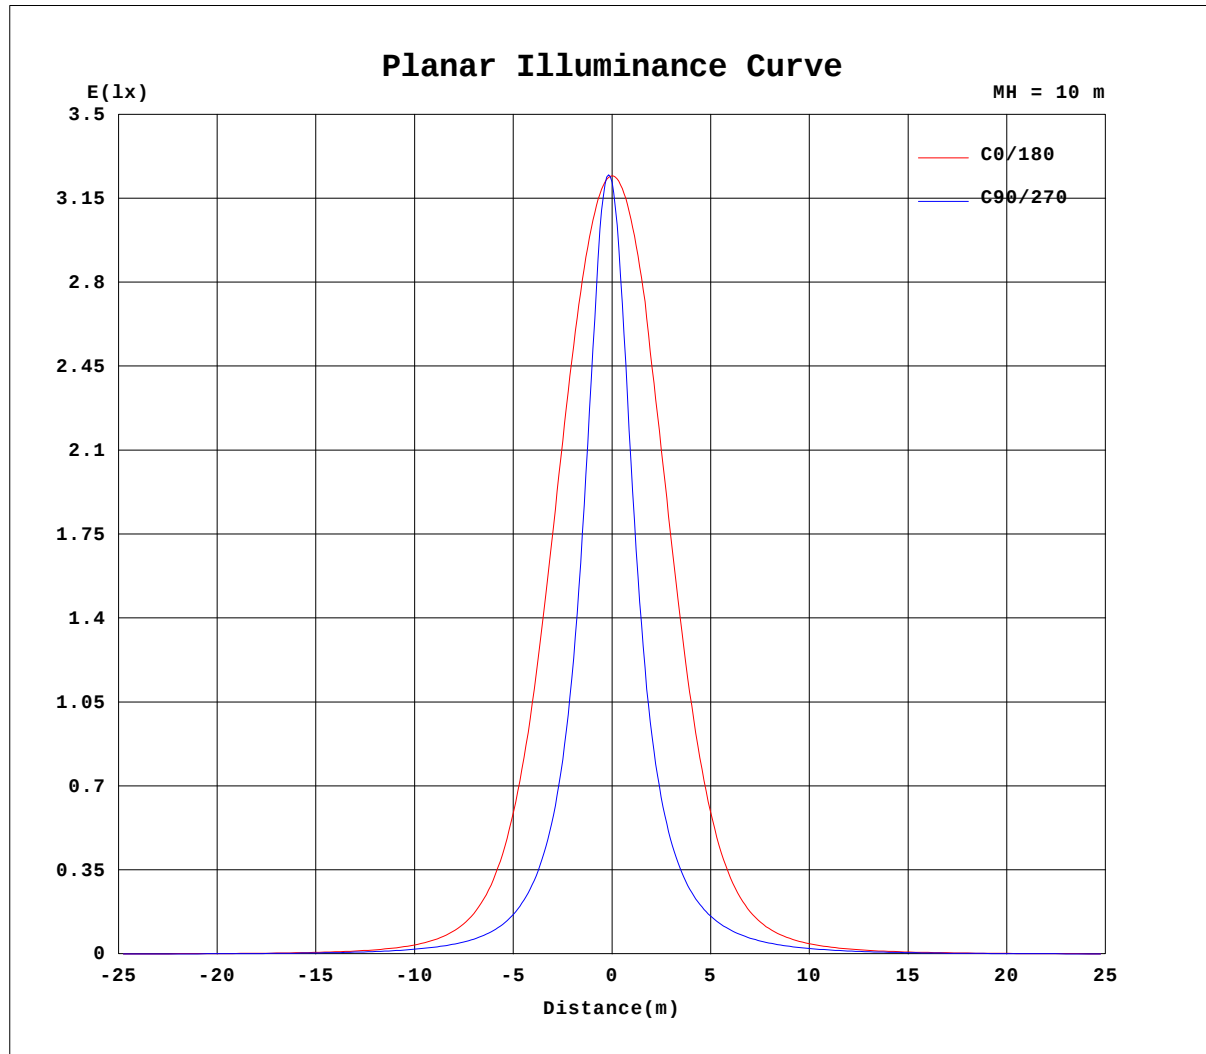


H(b) Range: -90 - 90DEG
H(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-08-14

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME:DecoHody-330mm-RGBW BLUE-1540D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:15x40 DEG	DIM.:330mm	SERIAL No.:IES001527
MFR.:	SUR.:	Shielding Angle:

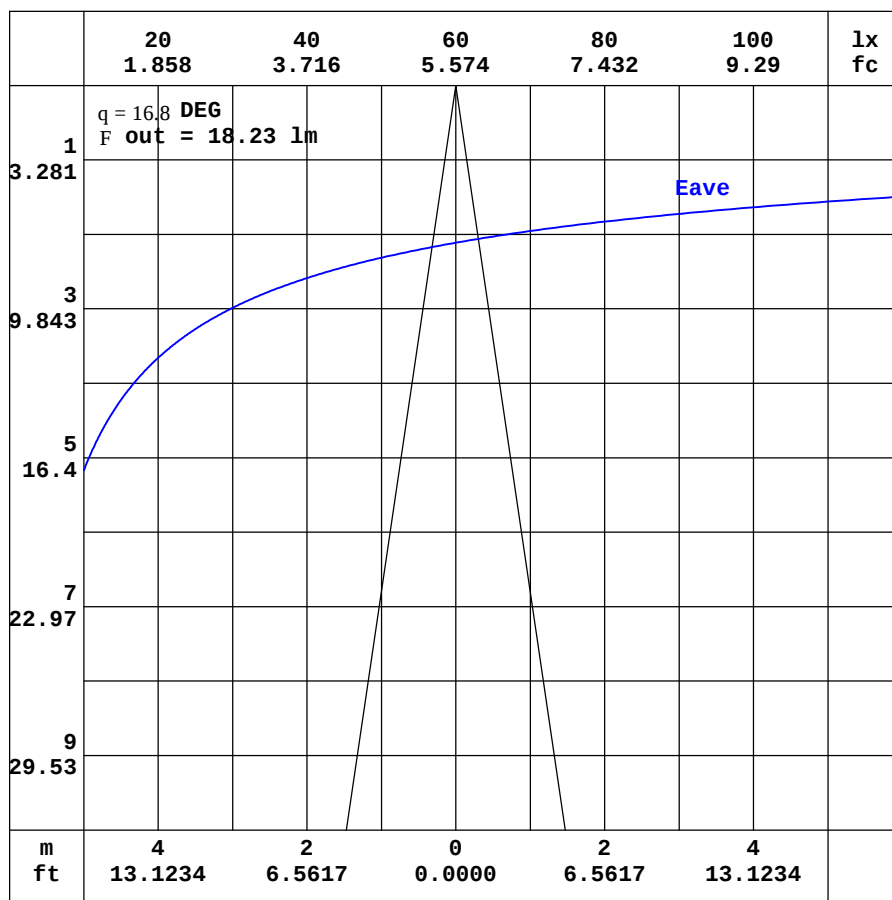

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-08-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:DecoHody-330mm-RGBW BLUE-1540D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:15x40 DEG	DIM.:330mm	SERIAL No.:IES001527
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.38	0.34	0.32	0.32	0.32	0.34	0.38	0.45	0.52	0.60	0.67	0.71	0.71	0.71	0.70	0.68	0.64	0.64	0.64
-170	0.38	0.33	0.30	0.29	0.29	0.30	0.32	0.36	0.40	0.45	0.48	0.51	0.52	0.53	0.54	0.56	0.59	0.60	0.64
-160	0.38	0.33	0.29	0.27	0.26	0.25	0.26	0.27	0.27	0.28	0.29	0.29	0.30	0.35	0.42	0.46	0.50	0.55	0.59
-150	0.38	0.32	0.28	0.25	0.23	0.21	0.20	0.18	0.17	0.15	0.12	0.15	0.18	0.22	0.25	0.28	0.34	0.37	0.40
-140	0.38	0.32	0.27	0.24	0.21	0.18	0.15	0.12	0.09	0.08	0.09	0.09	0.08	0.09	0.10	0.13	0.16	0.18	0.19
-130	0.38	0.32	0.27	0.22	0.19	0.16	0.12	0.09	0.07	0.07	0.06	0.06	0.06	0.05	0.05	0.05	0.06	0.06	0.06
-120	0.38	0.31	0.26	0.22	0.17	0.14	0.10	0.07	0.07	0.07	0.07	0.07	0.06	0.06	0.06	0.05	0.05	0.04	0.04
-110	0.38	0.32	0.26	0.21	0.17	0.13	0.08	0.07	0.07	0.07	0.07	0.07	0.06	0.06	0.06	0.06	0.06	0.06	0.05
-100	0.38	0.33	0.27	0.21	0.16	0.11	0.08	0.07	0.07	0.07	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.06
-90	0.38	0.33	0.27	0.22	0.17	0.11	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.05
-80	0.38	0.34	0.30	0.24	0.19	0.13	0.07	0.10	0.14	0.18	0.21	0.24	0.27	0.28	0.30	0.31	0.32	0.32	0.32
-70	0.38	0.36	0.31	0.28	0.30	0.31	0.33	0.41	0.51	0.60	0.67	0.74	0.81	0.88	0.94	1.00	1.03	1.05	1.06
-60	0.38	0.36	0.35	0.42	0.51	0.61	0.72	0.83	1.00	1.18	1.36	1.55	1.71	1.86	2.00	2.11	2.18	2.22	2.22
-50	0.38	0.38	0.44	0.59	0.77	0.98	1.18	1.37	1.65	2.02	2.39	2.76	3.11	3.41	3.70	3.94	4.11	4.19	4.17
-40	0.38	0.40	0.53	0.76	1.06	1.39	1.72	2.13	2.58	3.17	3.91	4.71	5.49	6.17	6.69	7.36	7.86	8.07	8.00
-30	0.38	0.41	0.61	0.94	1.36	1.81	2.36	3.04	3.89	4.94	6.24	7.98	10.0	12.0	13.6	14.7	16.4	17.3	17.0
-20	0.38	0.44	0.70	1.10	1.63	2.22	3.01	4.06	5.48	7.42	10.1	13.9	18.7	25.3	32.4	37.9	40.3	45.1	44.7
-10	0.38	0.46	0.77	1.23	1.84	2.57	3.59	5.01	7.06	10.2	15.1	23.4	36.7	56.0	79.5	106	131	141	149
0	0.38	0.47	0.81	1.31	1.99	2.81	3.98	5.69	8.16	12.3	19.3	32.2	56.4	97.2	154	219	278	313	324
10	0.38	0.47	0.80	1.27	1.91	2.68	3.74	5.22	7.33	10.6	15.5	23.6	36.5	54.5	74.6	95.8	117	118	116
20	0.38	0.46	0.76	1.19	1.77	2.42	3.29	4.45	5.97	8.07	10.9	14.7	19.3	25.3	31.6	36.3	37.9	40.6	38.7
30	0.38	0.45	0.69	1.06	1.56	2.09	2.74	3.56	4.56	5.78	7.26	9.08	11.1	13.1	14.7	15.8	17.1	17.7	17.1
40	0.38	0.44	0.62	0.90	1.30	1.72	2.17	2.71	3.33	4.03	4.82	5.68	6.52	7.27	7.83	8.47	8.87	9.01	8.87
50	0.38	0.43	0.55	0.77	1.02	1.34	1.66	1.97	2.33	2.73	3.15	3.56	3.94	4.28	4.59	4.85	5.02	5.07	5.01
60	0.38	0.42	0.49	0.61	0.78	0.96	1.18	1.39	1.57	1.76	1.95	2.15	2.32	2.48	2.65	2.77	2.86	2.90	2.90
70	0.38	0.42	0.45	0.50	0.58	0.67	0.77	0.86	0.96	1.06	1.14	1.21	1.27	1.35	1.42	1.47	1.52	1.54	1.55
80	0.38	0.41	0.43	0.44	0.46	0.49	0.52	0.53	0.56	0.58	0.59	0.61	0.63	0.66	0.68	0.70	0.72	0.73	0.74
90	0.38	0.39	0.40	0.41	0.42	0.43	0.44	0.43	0.42	0.41	0.40	0.39	0.38	0.38	0.39	0.39	0.39	0.40	0.40
100	0.38	0.39	0.38	0.38	0.39	0.38	0.38	0.36	0.34	0.32	0.30	0.29	0.28	0.28	0.28	0.29	0.29	0.29	0.29
110	0.38	0.38	0.37	0.36	0.35	0.34	0.34	0.32	0.31	0.29	0.28	0.28	0.27	0.27	0.27	0.27	0.27	0.27	0.27
120	0.38	0.36	0.35	0.34	0.33	0.32	0.31	0.30	0.29	0.29	0.29	0.29	0.29	0.30	0.30	0.30	0.29	0.28	0.27
130	0.38	0.36	0.35	0.32	0.32	0.31	0.30	0.30	0.30	0.31	0.33	0.35	0.38	0.42	0.43	0.45	0.46	0.47	0.47
140	0.38	0.35	0.33	0.32	0.31	0.31	0.31	0.31	0.33	0.36	0.41	0.46	0.53	0.58	0.63	0.67	0.69	0.70	0.70
150	0.38	0.35	0.33	0.32	0.31	0.31	0.32	0.35	0.39	0.44	0.50	0.57	0.65	0.70	0.76	0.80	0.80	0.79	0.78
160	0.38	0.34	0.32	0.31	0.31	0.32	0.35	0.39	0.45	0.52	0.59	0.65	0.70	0.75	0.79	0.80	0.81	0.83	0.85
170	0.38	0.34	0.32	0.31	0.31	0.34	0.37	0.42	0.49	0.57	0.65	0.70	0.73	0.76	0.77	0.78	0.76	0.74	0.82
180	0.38	0.34	0.32	0.32	0.32	0.34	0.38	0.45	0.52	0.60	0.67	0.71	0.71	0.71	0.70	0.68	0.64	0.64	0.65

H_b Range: -90 - 90DEGH_b Interval: 0.5DEG

Test Speed: LOW

Temperature: 25.3DEG

Operators: Fan

Test Date: 2023-08-14

V(B) Range: -180 - 180DEG

V(B) Interval: 0.5DEG

Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity: 65.0%

Test Distance: 8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:DecoHody-330mm-RGBW BLUE-1540D-Rev1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:15x40 DEG	DIM.:330mm	SERIAL No.:IES001527
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	0.56	0.51	0.49	0.44	0.39	0.35	0.26	0.20	0.14	0.11	0.06	0.06	0.06	0.06	0.06	0.05	0.05	0.05
-170	0.64	0.60	0.57	0.51	0.43	0.35	0.28	0.21	0.15	0.10	0.07	0.07	0.07	0.06	0.06	0.05	0.05	0.05
-160	0.56	0.51	0.47	0.42	0.38	0.32	0.24	0.18	0.14	0.09	0.08	0.07	0.07	0.06	0.06	0.05	0.05	0.05
-150	0.37	0.35	0.30	0.27	0.24	0.20	0.17	0.14	0.11	0.09	0.08	0.07	0.07	0.06	0.06	0.05	0.05	0.05
-140	0.19	0.17	0.14	0.13	0.10	0.09	0.10	0.10	0.09	0.08	0.08	0.07	0.07	0.07	0.06	0.05	0.05	0.05
-130	0.06	0.06	0.06	0.06	0.06	0.07	0.07	0.07	0.08	0.08	0.08	0.07	0.07	0.07	0.06	0.05	0.05	0.05
-120	0.04	0.05	0.05	0.06	0.06	0.07	0.07	0.07	0.07	0.07	0.08	0.07	0.07	0.07	0.06	0.05	0.05	0.05
-110	0.06	0.06	0.06	0.06	0.07	0.07	0.07	0.07	0.07	0.07	0.08	0.08	0.07	0.07	0.06	0.05	0.05	0.05
-100	0.06	0.06	0.06	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.06	0.05	0.05	0.05
-90	0.06	0.06	0.06	0.06	0.07	0.07	0.07	0.07	0.07	0.06	0.06	0.06	0.06	0.06	0.05	0.05	0.05	0.05
-80	0.32	0.32	0.31	0.30	0.28	0.27	0.24	0.21	0.18	0.15	0.11	0.08	0.07	0.07	0.07	0.06	0.05	0.05
-70	1.06	1.05	1.01	0.97	0.91	0.84	0.76	0.68	0.60	0.51	0.42	0.33	0.23	0.17	0.11	0.07	0.06	0.05
-60	2.23	2.21	2.14	2.04	1.91	1.76	1.59	1.41	1.21	1.01	0.82	0.66	0.50	0.34	0.21	0.11	0.07	0.05
-50	4.20	4.13	3.97	3.74	3.46	3.18	2.84	2.47	2.08	1.70	1.36	1.05	0.79	0.56	0.33	0.17	0.07	0.05
-40	8.07	7.87	7.39	6.70	6.24	5.59	4.83	4.03	3.28	2.61	2.02	1.52	1.10	0.77	0.48	0.24	0.08	0.05
-30	17.3	16.5	14.8	13.8	12.2	10.2	8.19	6.45	4.95	3.74	2.78	2.02	1.43	0.97	0.61	0.29	0.10	0.05
-20	45.7	41.2	39.2	33.5	26.1	19.2	14.0	9.95	7.08	5.02	3.56	2.50	1.72	1.13	0.71	0.33	0.11	0.05
-10	147	140	115	83.7	57.4	36.6	22.7	14.4	9.32	6.24	4.23	2.89	1.94	1.26	0.78	0.37	0.12	0.05
0	313	278	222	157	97.0	55.6	30.8	17.8	10.8	6.97	4.59	3.08	2.05	1.31	0.81	0.38	0.13	0.05
10	117	114	91.2	71.0	52.2	34.8	22.3	14.4	9.50	6.43	4.39	3.01	2.03	1.32	0.82	0.39	0.13	0.05
20	39.8	36.6	34.4	29.6	23.6	18.0	13.9	10.3	7.46	5.38	3.87	2.74	1.90	1.26	0.80	0.38	0.14	0.05
30	17.4	16.7	15.3	14.1	12.5	10.6	8.79	7.06	5.54	4.26	3.20	2.35	1.67	1.15	0.73	0.37	0.13	0.05
40	8.96	8.77	8.33	7.71	7.14	6.40	5.59	4.75	3.97	3.22	2.52	1.91	1.39	0.99	0.62	0.34	0.13	0.05
50	5.06	5.00	4.82	4.57	4.25	3.92	3.53	3.11	2.69	2.29	1.88	1.47	1.12	0.81	0.50	0.29	0.13	0.05
60	2.90	2.86	2.78	2.66	2.50	2.33	2.14	1.94	1.73	1.52	1.33	1.10	0.84	0.60	0.41	0.24	0.13	0.05
70	1.54	1.52	1.47	1.41	1.34	1.26	1.19	1.12	1.04	0.96	0.86	0.74	0.59	0.44	0.32	0.21	0.12	0.05
80	0.73	0.72	0.70	0.68	0.65	0.62	0.61	0.60	0.58	0.56	0.54	0.52	0.44	0.35	0.27	0.19	0.12	0.05
90	0.40	0.40	0.39	0.39	0.39	0.38	0.39	0.40	0.41	0.42	0.43	0.44	0.38	0.31	0.24	0.18	0.11	0.05
100	0.29	0.29	0.28	0.28	0.28	0.27	0.29	0.30	0.31	0.34	0.36	0.37	0.32	0.27	0.22	0.17	0.11	0.05
110	0.27	0.27	0.27	0.27	0.27	0.27	0.28	0.28	0.29	0.30	0.31	0.31	0.28	0.24	0.20	0.15	0.10	0.05
120	0.29	0.30	0.30	0.30	0.30	0.29	0.29	0.29	0.29	0.29	0.29	0.27	0.24	0.21	0.18	0.14	0.10	0.05
130	0.47	0.47	0.46	0.44	0.42	0.39	0.36	0.33	0.30	0.29	0.28	0.24	0.21	0.19	0.16	0.13	0.09	0.05
140	0.70	0.70	0.68	0.66	0.60	0.54	0.49	0.42	0.37	0.31	0.25	0.22	0.19	0.16	0.14	0.11	0.08	0.05
150	0.80	0.81	0.81	0.77	0.73	0.66	0.59	0.52	0.40	0.31	0.23	0.19	0.16	0.14	0.12	0.10	0.07	0.05
160	0.85	0.85	0.83	0.81	0.77	0.71	0.60	0.48	0.37	0.27	0.20	0.16	0.13	0.11	0.10	0.08	0.06	0.05
170	0.77	0.80	0.80	0.73	0.65	0.56	0.46	0.37	0.28	0.20	0.14	0.11	0.10	0.09	0.08	0.07	0.05	0.05
180	0.56	0.51	0.49	0.44	0.39	0.35	0.26	0.20	0.14	0.11	0.06	0.06	0.06	0.06	0.06	0.05	0.05	0.05

H_b Range: -90 - 90DEGH_b Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-08-14

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: